



HAL
open science

Preconditioning a coupled model for reactive transport in porous media

Laila Amir, Michel Kern

► **To cite this version:**

Laila Amir, Michel Kern. Preconditioning a coupled model for reactive transport in porous media. 2016. hal-01327307v1

HAL Id: hal-01327307

<https://inria.hal.science/hal-01327307v1>

Preprint submitted on 6 Jun 2016 (v1), last revised 9 Oct 2018 (v4)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

PRECONDITIONING A COUPLED MODEL FOR REACTIVE TRANSPORT IN POROUS MEDIA *

LAILA AMIR[†] AND MICHEL KERN[‡]

Key words. Reactive transport, porous media, preconditioning, non-linear systems

AMS subject classifications. 76S05, 65H10, 65F10, 65N22,

Abstract. We study numerical methods for solving reactive transport problems in porous media that allow a separation of transport and chemistry at the software level, while keeping a tight numerical coupling between both subsystems. After recalling how each individual subsystem can be solved, we give a formulation that eliminates the local chemical concentrations, and keeps the total concentrations as unknowns. The block structure of the model is exploited both at the nonlinear level, by eliminating some unknowns, and at the linear level by using block Gauss-Seidel or block Jacobi preconditioning. The methods are applied to the easy 1D case of the MoMaS benchmark.

1. Introduction. Reactive transport in porous media studies the coupling of reacting chemical species with mass transport in the subsurface, see [5, sec. 7.9] for an introduction, or [3, 6, 7] for more comprehensive references. It plays an important role in several applications when modeling subsurface flow [49, 50, 57] :

- chemical trapping is one of the mechanism by which the safety of geological sequestration of carbon dioxide in deep saline aquifers can be ensured [4, 22, 32, 39, 44]
- nuclear waste storage is based on a multiple barrier concept so as to delay the arrival of radionuclides in the bio-sphere. The concrete barrier that seals the repository may be attacked by oxidized compounds, and again its safety needs to be assessed [19, 34, 45];
- bio-geochemistry involves interactions with organic chemicals, and is important for studies of soil pollution, and also for implementing bio-remediation [15, 36, 54];

This paper studies numerical methods for the simulation of reactive transport for one phase flow in porous media. We consider only a simplified physical and chemical setup (one phase flow, no mineral reactions, no kinetic reactions) so as to concentrate on the numerical issues related to the coupling between transport and chemistry.

The numerical simulation of reactive transport has been the topic of numerous work. The survey by Yeh and Tripathi [55] has been very influential in establishing a mathematical formalism for setting up models, and also for establishing the “operator splitting” approach (see below) as a standard. More recent surveys, detailing several widely used computer codes and their applications, can be found in the book[57] and the article [50].

It has been traditional to distinguish two main approaches for solving reactive transport problems:

Operator splitting approaches (also known as Sequential Iterative Approach, or SIA) where transport and chemistry are solved alternatively [14, 33, 46, 56]. This has the advantage that a code for reactive transport can be built from pre-existing transport and chemistry codes, and that no global system of equations has to be solved. On the other hand, the splitting between chemistry and transport may restrict the time step in order to ensure convergence of the method, and the splitting may also introduce mass errors, that need to be controlled [52]. As the above references show, the

*This work was partially supported by GNR MoMaS, CNRS-2439 (PACEN/CNRS, ANDRA, BRGM, CEA, EDF, IRSN), and by the Hydromed (3+3) project

[†]Faculté des sciences et techniques, UCAM, Marrakech, Morocco, lamir@fstg-marrakech.ac.ma

[‡]Centre de recherche Inria de Paris, 2 rue Simone Iff, 75012 Paris, France, michel.kern@inria.fr

method can be quite successful if it is implemented carefully.

Direct substitution approaches (known as DSA) where the chemical mass action laws are substituted into the transport equations [22, 23, 53]. Here the balance is the opposite of what it was for SIA: the method does not introduce spurious mass errors, and can converge with large time steps, but it leads to a large and difficult to solve system of non-linear equations coupling all the chemical species at all grid points. This system needs to be solved efficiently for DSA to be a viable option (for instance, the code PFLOTRAN, described in [23], uses PETSc to solve the non-linear system in parallel, resulting to highly efficient parallel implementation).

However, several methods have recently been introduced that do not easily fall in the above categories: they do solve the coupled problem globally (and as such have to solve a large non-linear problem), but they do not substitute the mass action law into the transport equation. Instead they solve some form of the local chemical system, and use that solution as an additional term in a transformed form of the transport. The method by Knabner et al. [24, 30, 31] starts by a reduction step, so as to obtain as small a linear system as possible. The chemical concentrations are then eliminated locally. Erhel et al. [16, 17, 20] formulate the coupled problem as a Differential Algebraic system, so that the high quality software for such system can be used. Work by Amir and Kern[2] that forms the basis of the present work tries to combine the best features of SIA (separate software modules for chemistry and transport) and DSA (global numerical coupling).

In addition to the surveys mentioned above, the methods have been compared in several studies or benchmarks [11, 35, 43]. It is fair to say that no method or code emerges as a clear winner for all situations.

We finish this short (and far from exhaustive) review of the literature by noting that most of the work cited deal with one-phase flow and transport. The methods have recently been extended to the case of two-phase flow [1, 22, 48, 44].

In previous work [2], we introduced a global approach that couples chemistry and transport, but the equations of chemistry are not directly substituted in the transport equation. Rather, a function is used to represent the effect of the chemistry, so the chemistry is treated as a block box. The transport and chemistry codes remain separate, which leads to a natural block structure in the Jacobian matrix. The coupled problem is solved by a Newton-Krylov method, but Krylov solvers can stagnate, resulting in slow convergence. This is why we compare several methods to accelerate the convergence of the basic method: by eliminating variables involved in the transport step, we get rid of the main source of ill conditioning. We will see that this is related to a block preconditioning of the Jacobian of the full system by Jacobi or Gauss-Seidel methods. This provides an extension to multi-component transport of previous work by Kern and Taakili [28] that deals with preconditioning the model of one species undergoing sorption.

We investigate some strategies for preconditioning the system, we distinguish between two types of preconditioning :

- Linear preconditioning where the linear system is preconditioned respecting the block structure of the Jacobian matrix
- Nonlinear preconditioning where the original nonlinear system is replaced by a new one by eliminating some unknowns.

An outline for the rest of this paper is as follows: we set up the mathematical model in section 2, and show how to reduce the problem by eliminating the chemical concentrations. Numerical methods for solving the local chemical equilibrium problem and the advection-diffusion equations for transport are the topic of sections 3.1 and 3.2 respectively. Section 4 deals with the formulation of the coupled problem, and its solution by a Newton-Krylov

method. Elimination methods for the non-linear system and preconditioners for the linear system, are detailed in section 5.2 and 5.1. Finally, in section 6 the methods are validated on the 1D MoMaS reactive transport benchmark, which is a fairly difficult test case for reactive transport [11].

2. Reactive transport model. We consider a set of species subject to transport by advection and diffusion and to chemical reactions in a porous medium. Transport of a chemical species in a domain $\Omega \subset \mathbf{R}^d$ ($d = 1, 2, 3$), though in this work we only consider the 1D case) is described by an advection–diffusion equation for its concentration $c : \Omega \times]0, T[\rightarrow \mathbf{R}$ (dispersion could also be included) :

$$(2.1) \quad \frac{\partial c}{\partial t} + \nabla \cdot (uc - D\nabla c) = q \quad \text{on } \Omega \times]0, T[,$$

where u is the Darcy velocity (we assume here permanent flow, so that u has been pre-computed), and D is a diffusion–dispersion coefficient. We assume that this coefficient is independent of the species. This is a strong restriction on the model, but one that is commonly assumed to hold [2, 30], most often implicitly [55, 42]. The model has to be completed by appropriate initial and boundary conditions. We denote by \mathcal{L} the spatial part of the advection–diffusion operator:

$$\mathcal{L}c = \nabla \cdot (uc - D\nabla c).$$

The chemical phenomena will involve both homogeneous and heterogeneous reactions. Homogeneous reactions, in the aqueous phase, include water dissociation, acid–base reactions and oxydo–reduction, whereas heterogeneous reactions occur between the aqueous and solid phases, and include surface complexation, ion exchange and precipitation and dissolution of minerals (see [3] for details on the modeling of specific chemical phenomena). Accordingly, we assume there are N_s mobile species $(X_j)_{j=1, \dots, N_s}$ in the aqueous phase and \bar{N}_s immobile species in the solid phase $(\bar{X}_j)_{j=1, \dots, \bar{N}_s}$, and that there are N_r homogeneous reactions, and \bar{N}_r heterogeneous reactions.

In this work, we only consider equilibrium reactions, which means that the chemical phenomena occur on a much faster scale than transport phenomena, see [40]. This assumption is justified for aqueous phase and ion–exchange reactions, but may not hold for reactions involving minerals. Such reactions should be modeled as kinetic reactions, with specific rate laws.

We can write the chemical system as

$$(2.2) \quad \begin{aligned} \sum_{j=1}^{N_s} (S_{cc})_{ij} X_j &\rightleftharpoons 0 \quad i = 1, \dots, N_r, \\ \sum_{j=1}^{N_s} (S_{\bar{c}c})_{ij} X_j + \sum_{j=1}^{\bar{N}_s} (S_{\bar{c}\bar{c}})_{ij} \bar{X}_j &\rightleftharpoons 0 \quad i = 1, \dots, \bar{N}_r, \end{aligned}$$

or in condensed form

$$(2.3) \quad \begin{pmatrix} S_{cc} & 0 \\ S_{\bar{c}c} & S_{\bar{c}\bar{c}} \end{pmatrix} \begin{pmatrix} X \\ \bar{X} \end{pmatrix} \rightleftharpoons \begin{pmatrix} 0 \\ 0 \end{pmatrix},$$

where

$$(2.4) \quad S = \begin{pmatrix} S_{cc} & 0 \\ S_{\bar{c}c} & S_{\bar{c}\bar{c}} \end{pmatrix}$$

is the stoichiometric matrix, with the submatrices $S_{cc} \in \mathbf{R}^{N_r \times N_s}$, $S_{\bar{c}c} \in \mathbf{R}^{\bar{N}_r \times N_s}$ and $S_{\bar{c}\bar{c}} \in \mathbf{R}^{\bar{N}_r \times \bar{N}_s}$.

We assume that both the global stoichiometric matrix S and the ‘‘aqueous’’ stoichiometric matrix S_{cc} are full rank. As there will usually be more species than reactions, this just means that all reactions are ‘‘independent’’ (in the linear algebra sense !), and that this is also true of the reactions in the aqueous phase.

Each reaction gives rise to a mass action law, linking the activities of the species. For simplicity, we assume all species follow an ideal model, so that their activity is equal to their concentration. We denote by c_j (resp. \bar{c}_j) the concentration of species X_j (resp. \bar{X}_j). It will be convenient to write the mass action law in logarithmic form, so for a vector c with positive entries, we denote by $\log c$ the vector with entries $\log c_j$. We then have

$$(2.5) \quad \begin{pmatrix} S_{cc} & 0 \\ S_{\bar{c}c} & S_{\bar{c}\bar{c}} \end{pmatrix} \begin{pmatrix} \log c \\ \log \bar{c} \end{pmatrix} = \begin{pmatrix} \log K \\ \log \bar{K} \end{pmatrix},$$

where $K \in \mathbf{R}^{N_r}$ and $\bar{K} \in \mathbf{R}^{\bar{N}_r}$ are the equilibrium constants for their respective reactions.

We write the mass conservation for each species, considering both transport by advection and diffusion and chemical reaction terms:

$$(2.6) \quad \begin{aligned} \phi \partial_t c + \mathcal{L}c &= S_{cc}^T r + S_{\bar{c}c}^T \bar{r}, \\ \phi \partial_t \bar{c} &= S_{\bar{c}\bar{c}}^T \bar{r}, \end{aligned}$$

where ϕ is the porosity of the medium, and $r \in \mathbf{R}^{N_r}$ and $\bar{r} \in \mathbf{R}^{\bar{N}_r}$ are vectors containing the reaction rates. Since we assumed that all reactions are at equilibrium, these rates are unknown and we now show how they can be eliminated.

2.1. Elimination of the reaction rates – the coupled problem. We follow the approach of Saaltink et al.[42] (see also a more general approach in [30, 31]) by introducing a *kernel matrix* U such that $US^T = 0$, i.e. such that columns of U^T form of basis for the null-space of S . This can be done in several ways (see the above references, and section 3.1). Here we outline how one can compute such a matrix with the same structure as that of S .

LEMMA 2.1. *Assume that the matrix S is as defined in equation (2.4), that it has full rank, and that the submatrix S_{cc} also has full rank. Then there exists a matrix*

$$(2.7) \quad U = \begin{pmatrix} U_{cc} & U_{c\bar{c}} \\ 0 & U_{\bar{c}\bar{c}} \end{pmatrix}, \quad \begin{aligned} U_{cc} &\in \mathbf{R}^{(N_r - N_s) \times N_s}, \quad U_{c\bar{c}} \in \mathbf{R}^{(N_r - N_s) \times \bar{N}_s} \\ U_{\bar{c}\bar{c}} &\in \mathbf{R}^{(\bar{N}_r - \bar{N}_s) \times \bar{N}_s} \end{aligned}$$

such that $US^T = 0$.

Proof.

The existence of a kernel matrix U is well known (see any standard text on linear algebra, such as [51] or [37]). The content of the lemma is that the kernel matrix can be chosen with a block upper triangular structure.

To see that this is the case, we compute the product US^T . This gives the 3 block equations

$$\begin{aligned} U_{cc} S_{cc}^T &= 0 \\ U_{cc} S_{\bar{c}c}^T + U_{c\bar{c}} S_{\bar{c}\bar{c}}^T &= 0 \\ U_{\bar{c}\bar{c}} S_{\bar{c}\bar{c}}^T &= 0. \end{aligned}$$

Since we have assumed that both the whole matrix S and the submatrix S_{cc} are of full rank, the submatrix $S_{\bar{c}\bar{c}}$ must also be of full rank (because S is block triangular). Thus, kernel

matrices U_{cc} and $U_{\bar{c}\bar{c}}$ with the indicated dimension exist (a specific example will be given in section 3.1), and there remains to check that we can define $U_{c\bar{c}}$ satisfying the second equation above. But this is true because $S_{\bar{c}\bar{c}}$ is of full rank, and because we assume that $\bar{N}_s \geq \bar{N}_r$, this matrix is surjective so that the transpose of the second equation can be solved for $U_{c\bar{c}}$. \square

With the kernel matrix constructed in lemma 2.1, we can eliminate the reaction terms in equation (2.6). We multiply the system on the left by U , to obtain

$$(2.8) \quad \begin{aligned} \phi \partial_t (U_{cc} c + U_{c\bar{c}} \bar{c}) + U_{cc} \mathcal{L} c &= 0 \\ \phi \partial_t U_{\bar{c}\bar{c}} \bar{c} &= 0. \end{aligned}$$

It is natural to define the quantities suggested by the above transformation

$$(2.9) \quad \begin{pmatrix} T \\ \bar{T} \end{pmatrix} = \begin{pmatrix} U_{cc} & U_{c\bar{c}} \\ 0 & U_{\bar{c}\bar{c}} \end{pmatrix} \begin{pmatrix} c \\ \bar{c} \end{pmatrix}.$$

T and \bar{T} are the total analytical concentration for the mobile and immobile species respectively (these are the same as various total quantities defined in the classical survey by Yeh and Tripathi [55]). We also define the total mobile and immobile concentrations for the species in the aqueous phase

$$(2.10) \quad C = U_{cc} c, \quad \bar{C} = U_{\bar{c}\bar{c}} \bar{c},$$

so that the total concentrations are given by

$$(2.11) \quad T = C + \bar{C} = U_{cc} c + U_{\bar{c}\bar{c}} \bar{c}.$$

These new unknowns are all of dimension N_c , where $N_c = N_s - N_r$. The system can be rewritten as

$$(2.12) \quad \begin{aligned} \phi \partial_t C + \phi \partial_t \bar{C} + \mathcal{L} C &= 0, \\ \phi \partial_t \bar{T} &= 0. \end{aligned}$$

The coupled system consists of the $(N_s - N_r) + (\bar{N}_s - \bar{N}_r)$ conservation PDEs and ODEs (2.12), with the $N_r + \bar{N}_r$ mass action laws (2.5) and the relations connecting concentration and totals (2.10), for the $N_s + \bar{N}_s$ concentrations and $2(N_s - N_r) + \bar{N}_s - \bar{N}_r$ totals. Note that the ODEs for \bar{T} are decoupled from the rest of the system. In section 4, we show how to eliminate the individual concentrations from the system, so that only the totals C and \bar{C} remain as unknowns.

REMARK 2.1. *The formulation for the chemical system given in equations (2.5) and (2.9) generalizes the well Morel formulation [38], where a set of “principal” species is identified, and the remaining “secondary” species are written in terms of the principal ones.*

The stoichiometric matrix S is split naturally in blocks, the mass action laws allow the elimination of the secondary unknowns, and the conservation laws lead to a non-linear system of equations for the principal species.

In the next section, we show that the “local chemical system” (2.5)–(2.9) can be solved in a similar way, without having first to explicitly identify the principal and secondary species.

3. Methods for solving chemistry and transport. We briefly recall in this section how the chemical equilibrium system, and the transport equation are solved.

3.1. The chemical equilibrium problem. The subsystem formed by the mass action laws (2.5) and the definition of the totals (2.9) is a closed system that enables computation of the individual concentrations c and \bar{c} given the totals T and \bar{T} . This is actually the same system that would be obtained in a closed chemical system where now T and \bar{T} would be known as the input total concentrations. This subsystem is what we call in the following the *chemical equilibrium problem*. It is a small (its size is the number of species) nonlinear system, that is notoriously difficult to solve numerically (see for example [13, 18, 24]).

It will be convenient in this subsection to temporarily ignore the distinction between mobile and immobile species. We thus define the vectors

$$\xi = \begin{pmatrix} c \\ \bar{c} \end{pmatrix} \in \mathbf{R}^{N_\xi}, \quad \kappa = \begin{pmatrix} \log K \\ \log \bar{K} \end{pmatrix} \in \mathbf{R}^{N_\kappa} \quad \tau = \begin{pmatrix} T \\ \bar{T} \end{pmatrix} \in \mathbf{R}^{(N_\xi - N_\kappa)}$$

($N_\xi = N_s + \bar{N}_s$ is the total number of species and $N_\kappa = N_r + \bar{N}_r$ is the total number of reactions), and write the problem for the chemical equilibrium as

$$(3.1) \quad \begin{aligned} S \log \xi &= \kappa, \\ U \xi &= \tau, \end{aligned}$$

with the stoichiometric matrix $S \in \mathbf{R}^{N_\kappa \times N_\xi}$, and the kernel matrix $U \in \mathbf{R}^{(N_\kappa - N_\xi) \times N_\xi}$ is such that $US^T = 0$.

It has been shown by several authors [2, 13, 24] that taking the logarithms of the concentrations as new unknowns in (3.1) is beneficial from the numerical point of view, as it automatically ensure that all concentrations will be positive (which might otherwise be difficult to enforce), and it makes all the unknowns to be of comparable size (in some cases, such as oxydo–reduction reactions, the concentrations have been seen to vary over several orders of magnitude). We take the same convention to define the exponential of a vector as for the logarithm: for a vector z the vector $\exp(z)$ is defined so that its i th entry is $\exp(z_i)$. By defining $z = \log(\xi) \in \mathbf{R}^{N_\xi}$, system (3.1) thus becomes

$$(3.2) \quad \begin{aligned} Sz &= \kappa, \\ U \exp(z) &= \tau, \end{aligned}$$

In order to solve system (3.2), we take a clue from the solution of constrained least squares problem (see [8, chap. 5]): we consider the first equation as a constraint, and determine its general solution as the sum of a particular solution, and an unknown of smaller dimension, that will be found by substituting it into the second equation. Following the reference, we first compute a QR decomposition of S^T , as $Q^T S^T = \begin{pmatrix} R \\ 0 \end{pmatrix}$, with $Q = (Q_1, Q_2) \in \mathbf{R}^{N_\xi \times N_\xi}$ orthogonal and $R \in \mathbf{R}^{N_\kappa \times N_\kappa}$ upper triangular (and invertible, as S is assumed to be of full rank).

The columns of $Q_1 \in \mathbf{R}^{N_\xi \times N_\kappa}$ form an orthonormal basis of range S^T , while those of $Q_2 \in \mathbf{R}^{N_\xi \times (N_\xi - N_\kappa)}$ form an orthonormal basis of $\text{Ker } S$. A first consequence is that one may choose $U = Q_2^T$ in the second equation of (3.2).

Now, any $z \in \mathbf{R}^{N_\xi}$ may be written uniquely as $z = Q_1 y_1 + Q_2 y_2$, with $y_1 \in \mathbf{R}^{N_\kappa}$ and $y_2 \in \mathbf{R}^{N_\xi - N_\kappa}$. If we substitute this expression in the first equation of (3.2), we obtain

$$R^T y_1 = \kappa,$$

which determines y_1 uniquely. We set $b_1 = Q_1 R^{-T} \kappa$, so that $z = b_1 + Q_2 y_2$.

We now use the expression for z in the second equation of (3.2), and we obtain a non-linear system of size $N_\xi - N_\kappa$ for $y_2 \in \mathbf{R}^{N_\xi - N_\kappa}$:

$$(3.3) \quad H(y_2) \stackrel{\text{def}}{=} Q_2^T \exp(b_1 + Q_2 y_2) - \tau = 0.$$

This is the system that is to be solved numerically, and that is analogous to the non-linear system for the principal species obtained via the Morel formalism. The number of unknowns has been reduced from the number of species to the number of species minus the number of reactions, that is the number of principal species.

As a side remark, let us notice that the Jacobian matrix for this reduced chemical system has the form

$$J_c = Q_2^T \text{diag}(c) Q_2, \quad c = b_1 + Q_2 y_2,$$

and this form is again the same as that obtained from the Morel formulation, with the difference that matrix Q_2 is orthogonal.

To solve the reduced chemical problem (3.3), we used a variant of Newton's method. As is well known, Newton's is not always convergent, and especially for a code that is designed to be used in coupling applications, it is essential to ensure that the solver "always" works. We have found that using a globalized version of Newton's method (using a line search, cf. [26]) was effective in making the algorithm converge from an arbitrary initial guess.

We now return to the context of solving a coupled problem, where it is important to distinguish between mobile and immobile species. Indeed, what is needed is the repartition of the species between their mobile and immobile forms, rather than the individual concentrations (which are still needed as intermediate quantities). The totals can be computed a posteriori using their definitions in equation (2.10).

It will be convenient to condense the chemical sub-problem by a function

$$(3.4) \quad \begin{aligned} \psi_C : \mathbf{R}^{N_c} &\rightarrow \mathbf{R}^{N_c} \\ T &\mapsto \psi_C(T) = \bar{C} = U_{c\bar{c}} \bar{c} \end{aligned}$$

where \bar{c} is obtained by solving the chemical problem (3.2), given T (and \bar{T} , which we take as a constant) for ξ , and computing \bar{C} as indicated above.

3.2. Transport model. The transport of a single species through a 1D porous media $\Omega =]0, L[$, subject to advection and diffusion phenomena, follows the 1D version of the general advection-diffusion equation (2.1):

$$(3.5) \quad \phi \frac{\partial c}{\partial t} + \frac{\partial}{\partial x} \left(-D \frac{\partial c}{\partial x} + uc \right) = q, \quad 0 < x < L, \quad 0 < t < T$$

where ϕ is the porosity, D is the diffusion-dispersion, u is Darcy velocity, and q is the term source. With this specialization to 1D, the advection-diffusion operator becomes $\mathcal{L}(c) = \frac{\partial}{\partial x} \left(-D \frac{\partial c}{\partial x} + uc \right)$.

The initial condition is $c(x, 0) = c_0(x)$ and, in view of the applications, the boundary conditions are a Dirichlet condition (given concentration) $c(0, t) = c_d(t)$ at the left boundary ($x = 0$) and zero diffusive flux $\frac{\partial c}{\partial x} = 0$ at the right boundary ($x = L$). We could easily take into account more general boundary conditions.

3.2.1. Discretization in space. We treat the space and time discretization separately, as we will use different time discretizations for the different parts of the transport operator.

For space discretization we use a cell-centered finite volume scheme [21]. The interval $]0, L[$ is divided into N intervals $[x_{i-\frac{1}{2}}, x_{i+\frac{1}{2}}]$ of length h_i , where $x_{\frac{1}{2}} = 0, x_{N+\frac{1}{2}} = L$. For $i = 1, \dots, N_h$ we denote by x_i the center and $x_{i+1/2}$ the extremity of the element i . We denote by $c_i, i = 1, \dots, N_h$ the approximate solution in cell i .

We write equation (3.5) in the form

$$(3.6) \quad \phi \frac{\partial c}{\partial t} + \frac{\partial \varphi}{\partial x} = q,$$

and we split the flux $\varphi(x, t) = -D \frac{\partial c}{\partial x} + uc = \varphi_d + \varphi_a$ as the sum of a diffusive flux $\varphi_d = -D \frac{\partial c}{\partial x}$ and an advective flux $\varphi_a = uc$.

We integrate equation (3.6) over a cell $]x_{i-1/2}, x_{i+1/2}[$, to obtain

$$(3.7) \quad \phi_i h_i \frac{dc_i}{dt} + \varphi_{d,i+\frac{1}{2}} + \varphi_{a,i+\frac{1}{2}} - \varphi_{d,i-\frac{1}{2}} - \varphi_{a,i-\frac{1}{2}} = h_i q_i, \quad i = 2, \dots, N_h.$$

Our flux approximations come from finite differences. For the diffusive flux, we use harmonic averages for the diffusion coefficient (as used in mixed finite element methods) :

$$(3.8) \quad \varphi_{d,i+\frac{1}{2}} = -D_{i+\frac{1}{2}} \left(\frac{c_{i+1} - c_i}{h_{i+\frac{1}{2}}} \right)$$

with

$$D_{i+\frac{1}{2}} = \frac{2D_i D_{i+1}}{D_i + D_{i+1}}, \quad D_{\frac{1}{2}} = D_1, \quad D_{N_h+\frac{1}{2}} = D_{N_h} \quad \text{and} \quad h_{i+\frac{1}{2}} = \frac{h_i + h_{i+1}}{2}$$

For the advective flux, we use an upwind approximation, so that (assuming $u > 0$), $\varphi_{a,i+\frac{1}{2}} = uc_i$

These approximations are corrected to take into account the boundary conditions, both at $x = 0$ and at $x = L$. We give a matrix formulation, keeping time continuous for now. Since we will be using different discretizations for the diffusive and advective parts (see next section), we keep the matrices for advection and diffusion separate. With the notation:

$$\alpha_i = \frac{D_{i+\frac{1}{2}}}{h_{i+\frac{1}{2}}} + \frac{D_{i-\frac{1}{2}}}{h_{i-\frac{1}{2}}}, \quad \beta_i = \frac{D_{i-\frac{1}{2}}}{h_{i-\frac{1}{2}}}, \quad \gamma_i = \frac{D_{i+\frac{1}{2}}}{h_{i+\frac{1}{2}}} \Delta t, \quad i = 2, \dots, N_h - 1,$$

we define the matrices (with appropriate modifications for the boundary terms)

$$A_d = \text{tridiag}(\beta_i, \alpha_i, \gamma_i), \quad A_a = \text{tridiag}(-u, u, 0)$$

as well as $M = \text{diag}(\phi_i h_i)$ and $N = \text{diag}(h_i)$.

The semi-discrete system can be written as

$$(3.9) \quad M \frac{dc}{dt} + (A_d + A_a)c = Nq,$$

with the initial condition $c_i = \frac{1}{h_i} \int_{x_{i-1/2}}^{x_{i+1/2}} c_0(x) dx$.

3.2.2. Time discretization. As the transport operator contains both advective and diffusive terms, it makes sense to use different time discretization methods for the different terms. Specifically, the diffusive terms should be treated implicitly, and the advective terms are better handled explicitly. Similarly to what was done above, we discretize the interval $[0, T]$ with a time step Δt , which we take as a constant for simplicity, and we denote by c_i^n the (approximate) value of $c_i(n\Delta t)$, and by c^n the corresponding vector.

We compare several methods for discretization in time.

Fully implicit : both the diffusive and advective terms are treated implicitly: at each time step, we solve a linear system

$$(M + \Delta t(A_d + A_a))c^{n+1} = Mc^n + N\Delta tq^n.$$

Explicit advection and implicit diffusion : the diffusive terms are treated implicitly, and advective terms are handled explicitly under a CFL condition. With this scheme, the system to be solved at each time step is

$$(M + \Delta tA_d)c^{n+1} = (M - \Delta tA_a)c^n + N\Delta tq^n.$$

As it has an explicit part, the scheme just defined is stable under the CFL condition $u\Delta t \leq \max_i h_i$.

As this may be too severe a restriction (some of our applications require integration over a very large time interval), we will use an operator splitting scheme proposed by Siegel et al. [47] (see also [25]) that is both unconditionally stable, and has a good behavior in advection dominated situations.

Splitting (Explicit advection and implicit diffusion), with sub-time steps : this scheme works by taking several small time steps of advection, controlled by CFL condition within a large time step of diffusion. Thus CFL impacts advection, and larger time steps can be taken for diffusion.

More precisely, the time step Δt will be used as the diffusion time step, it is divided into N_a time steps of advection Δt_a such that $\Delta t = N_a\Delta t_a$ where $N_a \geq 1$, the advection time step will be controlled by CFL condition. We will solve equation (3.6) over the time step $[t^n, t^{n+1}]$ by first solving the advection equation $\phi \frac{\partial c}{\partial t} + \frac{\partial}{\partial x}(uc) = 0$ over N_a steps of size Δt_a each, and then solve the diffusion equation $\phi \frac{\partial c}{\partial t} + \frac{\partial}{\partial x}(-D \frac{\partial c}{\partial x}) = q$ starting from the value at the end of the advection step.

Advection step. Denote the intermedidate times by $t^{n,m}$, $m = 0, \dots, N_a$, with $t^{n,0} = t^n$, $t^{n,N_a} = t^{n+1}$. Each interval $[t^n, t^{n+1}]$ is then divided into N_a intervals $[t^{n,m}, t^{n,m+1}]$, $m = 0, \dots, N_a - 1$. Let $c^{n,m}$ be the approximate concentration c at time $t^{n,m}$ and $c^{n,0} = c^n$. We discretize the advection equation in time, using the explicit Euler method, we obtain

$$(3.10) \quad Mc^{n,m+1} = (M + \Delta t_a A_a)c^{n,m}, \quad m = 0, \dots, N_a - 1.$$

Diffusion step. The diffusion part is discretized by an implicit Euler scheme, starting from c^{n,N_a} :

$$(3.11) \quad (M + \Delta tA_d)c^{n+1} = Mc^{n,N_a} + N\Delta tq^n.$$

For further use, we note that all three discretizations methods can be written in a similar way, as

$$(3.12) \quad Ac^{n+1} = Bc^n + N\Delta tq^n,$$

where the non-singular matrix A is defined in each case as:

- $A = M + \Delta t(A_d + A_a)$ and $B = M$ for the fully implicit case,
- $A = M + \Delta t A_d$ and $B = M - \Delta t A_a$ for the implicit–explicit case,
- $A = M + \Delta t A_d$ and B is defined implicitly by (3.10) for splitting.

Alternatively, we may want to follow the pattern begun in section 3.1, and abstract one transport step as a mapping from c^n to c^{n+1} under the action of the source q^n . We define

$$(3.13) \quad \begin{aligned} \psi_T : \mathbf{R}^{N_h} \times \mathbf{R}^{N_h} &\rightarrow \mathbf{R}^{N_h} \\ (c, q) &\mapsto \psi_T(c, q) = A^{-1}(Bc + N\Delta tq) \end{aligned}$$

4. Methods for solving the coupled system. In this section, we discuss methods for solving the coupled transport–chemistry system. Because it may be difficult to compute and store the Jacobian matrix (it may be very large, and contains a block that is the inverse of the chemical solution operator, that may be difficult to compute) we advocate a Newton–Krylov approach, as this requires only the multiplication of the Jacobian matrix by a given vector, the Jacobian matrix itself does not have to be stored. By exploiting the block structure of the matrix, the matrix–vector product can be computed in terms of the individual Jacobians.

The efficiency of the Newton–Krylov method rests on the choice of an adequate preconditioning. In this paper, we show that block preconditioners for the Jacobian can be related to physics–based approximations, and also that a block Gauss–Seidel preconditioner is closely related to an elimination method at the non-linear level.

4.1. Formulation of the coupled system. We start with the coupled system that was obtained at the end of section 2. We remind that it consists of the (transformed) transport equations (2.12), together with the mass action laws (2.5). They are linked by the definition of the transformed variables T , C and \bar{C} in equations (2.10) and (2.11).

Because chemistry is local, we can eliminate the individual concentrations at each point by using the “chemical solution” operator Ψ_C defined in equation (3.4). This only leaves C , \bar{C} , T and \bar{T} as unknowns, that are solution of the following system

$$(4.1) \quad \begin{aligned} \phi \partial_t C + \phi \partial_t \bar{C} + \mathcal{L}C &= 0, \\ \phi \partial_t \bar{T} &= 0, \\ T &= C + \bar{C}, \\ \bar{C} &= \Psi_C(T). \end{aligned}$$

As is clear from the second equation, \bar{T} is constant in time (we will see that it is simply the cationic exchange capacity in the example below). To simplify the notation, the equation for \bar{T} will be omitted in the sequel, and it has been dropped from the definition of Ψ_C .

The next step is to discretize the transport equations in space and time, using any of the methods that were discussed in section 3.2. For ease of notation, we denote the discrete unknowns (vectors of size N_h) by the same letter as their continuous counterpart in bold typeface. Moreover, all quantities at time t^n will be indicated by a superscript n .

It will be convenient to introduce the matrix $\mathcal{A} = M + \Delta t A$, and the right hand side $\mathbf{b}^n = B\mathbf{C}^n + N\bar{\mathbf{C}}^n$.

We make use of a notational device, inspired from Matlab, that was introduced in [2] to take into account the dependence of the unknowns both on the grid cell index and the chemical species index. For a block vector u_{ij} , where $i \in [1, N_c]$ represents the spatial index and $j \in [1, N_h]$ represents the chemical index, we shall denote by

- $u_{:,j}$ the column vector of concentrations of all chemical species in grid cell j .
- $u_{i,:}$ the row vector of concentrations of species i at all grid points;

The unknowns are thus numbered first by chemical species, then by grid points. Thus all the unknowns for a single grid point are numbered contiguously.

With these conventions, the coupled system (4.1) becomes

$$(4.2) \quad \begin{aligned} \mathcal{A}(\mathbf{C}_{i,:}^{n+1})^T + N(\bar{\mathbf{C}}_{i,:}^{n+1})^T - (\mathbf{b}_{i,:}^n)^T &= 0, & i = 1, \dots, N_c \\ \mathbf{T}_{ij}^{n+1} - \mathbf{C}_{ij}^{n+1} - \bar{\mathbf{C}}_{ij}^{n+1} &= 0, & i = 1, \dots, N_c, j = 1, \dots, N_h \\ \bar{\mathbf{C}}_{:,j}^{n+1} - \Psi_C(\mathbf{T}_{:,j}^{n+1}) &= 0, & j = 1, \dots, N_h. \end{aligned}$$

As proposed by Erhel et al. [20], we make use of the Kronecker product and the vec notation. We also extend the solution operators ψ_C (defined in (3.4)) and ψ_T (defined in (3.13)) to operate on the global vector:

$$(4.3) \quad \begin{aligned} \Psi_C : \mathbf{R}^{N_c \times N_h} &\mapsto \mathbf{R}^{N_c \times N_h} \\ \mathbf{T} &\rightarrow \Psi_C(\mathbf{T}), \quad \text{with } \Psi_C(\mathbf{T})_{:,j} = \psi_C(\mathbf{T}_{:,j}), \text{ for } j = 1, \dots, N_h \end{aligned}$$

and

$$(4.4) \quad \begin{aligned} \Psi_T : \mathbf{R}^{N_c \times N_h} \times \mathbf{R}^{N_c \times N_h} &\mapsto \mathbf{R}^{N_c \times N_h} \\ (\mathbf{C}, \mathbf{Q}) &\rightarrow \Psi_T(\mathbf{C}, \mathbf{Q}), \quad \text{with } \Psi_T(\mathbf{C}, \mathbf{Q})_{i,:} = \psi_T(\mathbf{C}_{i,:}, \mathbf{Q}_{i,:}), \text{ for } i = 1, \dots, N_c. \end{aligned}$$

With these notation, the non-linear system to be solved at each time step for the three unknowns $(\mathbf{C}^{n+1}, \mathbf{T}^{n+1}, \bar{\mathbf{C}}^{n+1}) \in \mathbf{R}^{3N_c N_h}$ is defined by the function $f : \mathbf{R}^{3N_c N_h} \mapsto \mathbf{R}^{3N_c N_h}$, such that

$$(4.5) \quad f \begin{pmatrix} \mathbf{C} \\ \mathbf{T} \\ \bar{\mathbf{C}} \end{pmatrix} = \begin{pmatrix} (\mathcal{A} \otimes I)\mathbf{C} + (N \otimes I)\bar{\mathbf{C}} - \mathbf{b}^n \\ \mathbf{T} - \mathbf{C} - \bar{\mathbf{C}} \\ \bar{\mathbf{C}} - \Psi_C(\mathbf{T}) \end{pmatrix} = 0$$

4.2. Solution of the coupled system by Sequential Iterative Approach. The most classical method for solving the coupled problem (4.5) is the Sequential Iterative Approach (SIA) that consists of separately solving the transport equations and the chemical equations cf. [14, 33, 42, 55].

More precisely, at each time step, for each iteration k , we first solve the transport equations:

$$(4.6) \quad \mathbf{C}^{n+1,k+1} = \Psi_T \left(\mathbf{C}^n, \frac{(\bar{\mathbf{C}}^{n+1,k} - \bar{\mathbf{C}}^n)}{\Delta t} \right) = -(\mathcal{A}^{-1} \otimes I) ((N \otimes I)\bar{\mathbf{C}}^{n+1,k} - \mathbf{b}^n)$$

for $\mathbf{C}^{n+1,k+1}$ (there is one transport equation for each species). The new mobile total concentrations is added to the immobile concentrations $\bar{\mathbf{C}}^{n+1,k}$ (from the previous iteration) to obtain $\mathbf{T}^{n+1,k+1}$, and this last concentrations provides the data for the local chemistry problems

$$(4.7) \quad \bar{\mathbf{C}}^{n+1,k+1} = \Psi_C(\mathbf{T}^{n+1,k+1}).$$

The iterations are stopped when the difference between the solutions in the iterations k and $k+1$ is small enough, relative to a specified tolerance

$$(4.8) \quad \frac{\|\mathbf{C}^{n+1,k+1} - \mathbf{C}^{n+1,k}\|}{\|\mathbf{C}^{n+1,k+1}\|} + \frac{\|\bar{\mathbf{C}}^{n+1,k+1} - \bar{\mathbf{C}}^{n+1,k}\|}{\|\bar{\mathbf{C}}^{n+1,k+1}\|} < \epsilon$$

In order both to control the errors due to the splitting, and to ensure convergence, this method requires a small time step.

4.3. Solution of the non-linear system by a Newton-Krylov methods. In the geochemical literature, the SIA method is known as an operator splitting approach, but it is more properly a block Gauss-Seidel methods on the coupled system. This suggests that other, potentially more efficient, methods could be used to solve system (4.5). A natural candidate is Newton’s method. Since the system is large, and also because it involves implicitly defined functions, we turn to the Newton-Krylov variant.

Recall that at each step of the “pure” form of Newton’s method for solving $f(Z) = 0$, one should compute the Jacobian matrix $J = f'(Z^k)$, solve the linear system (usually by Gaussian elimination)

$$(4.9) \quad J \delta Z = -f(Z^k)$$

and then set $Z^{k+1} = Z^k + \delta Z$. In practice, one should use some form of globalization procedure in order to ensure convergence from an arbitrary starting point. If a line search is used, the last step should be replaced by $Z^{k+1} = \delta Z + \lambda Z^k$, where λ is determined by the line search procedure.

The Newton–Krylov method (see [26, 29] and [23], to which our work is closely related) is a variant of Newton’s method where the linear system that arises at each step of Newton’s method is solved by an *iterative* method (of Krylov type), for instance GMRES [41]. As the linear system is not solved exactly, the convergence theory for Newton’s method does not apply directly. However, the theory has been extended to the class of Inexact Newton methods, of which the Newton–Krylov methods are representatives (see [26] or the short discussion in [2]).

The main advantage of this type of method is that the full (potentially very large) Jacobian is not needed, one just needs to be able to compute the product of the Jacobian with a vector. As this Jacobian matrix vector product is a directional derivative, this leads to Jacobian free methods, where this product is approximated by finite differences. However, for the system considered here, it was shown in [2] how this computation could be performed exactly. This is both cheaper and more accurate.

The coupled system (4.2) has a natural block structure where the transport equations and the chemical equations can be clearly seen. Moreover, each block of the unknown vector has itself a $N_c \times N_h$ block structure. It was shown in [2] how this structure can be exploited to efficiently compute the residual.

To compute the Jacobian matrix times vector product, one start from equation (4.5). The Jacobian matrix of f has the following block form

$$(4.10) \quad J_f = \begin{pmatrix} \mathcal{A} \otimes I & 0 & N \otimes I \\ -I & I & -I \\ 0 & J_C & I \end{pmatrix},$$

where J_C is a block diagonal matrix, whose j th block is $-\psi'_C(T:j)$, for $j = 1, \dots, N_h$, and the action of the Jacobian on a vector $v = (v_C^T, v_T^T, v_{\bar{C}}^T)^T$ can be computed as

$$(4.11) \quad J_f \begin{pmatrix} v_C \\ v_T \\ v_{\bar{C}} \end{pmatrix} = \begin{pmatrix} (\mathcal{A} \otimes I)v_C + (N \otimes I)v_{\bar{C}} \\ -v_C + v_T - v_{\bar{C}} \\ v_{\bar{C}} + J_C v_T \end{pmatrix}.$$

Since the Krylov solvers can stagnate, resulting in slow convergence, possible strategies for preconditioning the linear system will be investigated in the next section.

5. Non linear and linear preconditioning. Since the Jacobian matrix is not explicitly computed (it will just be used as a theoretical device in what follows), the only available options for preconditioning the system are those that respect the block structure of the matrix. We introduce two preconditioners derived from classical block-iterative methods, and we show that these methods have strong links to the SIA method from section 4.2, and also to a non-linear elimination method, to be introduced in section 5.2.

5.1. Block preconditioning for the coupled system. Using a preconditioner means that instead of solving, at each Newton iteration, the system

$$(5.1) \quad J_f \delta Z = -f(Z^k)$$

one solves one of the (mathematically equivalent) systems:

right preconditioning $J_f P^{-1} \delta y = -f(Z^k)$, and then $\delta Z^k = P^{-1} \delta y$,

left preconditioning $P^{-1} J_f \delta Z = -P^{-1} f(Z^k)$.

The matrix P is called a preconditioner, and it should be chosen so as to fulfill the often conflicting goals :

- P should be close to J_f so that GMRES converges faster for the preconditioned system than for the original one,
- P is “easy” to invert, so that each iteration is not much more expensive than an iteration for J_f alone.

As already mentioned, in the context of the coupled problem (4.5), the Jacobian matrix J_f is not known explicitly, so that methods that depend on the entries of the matrix (such as incomplete factorization methods) cannot be used. On the other hand, we know the block structure of J_f (see (4.10)), and we can invert the upper left diagonal block (see remark 5.1). These two facts can be exploited by resorting to block preconditioners that will respect the block structure of the Jacobian. Specifically, we investigate block methods derived from classical iterative methods, namely Jacobi and Gauss–Seidel.

Block Jacobi preconditioning The preconditioning matrix \mathbf{P} for block Jacobi is:

$$\mathbf{P}_{\text{BJ}} = \begin{pmatrix} \mathcal{A} \otimes I & 0 & 0 \\ 0 & I & 0 \\ 0 & 0 & I \end{pmatrix},$$

so that the action of the left-preconditioned matrix on a vector $v = (v_C, v_T, v_{\bar{C}})$ is :

$$(5.2) \quad \mathbf{P}_{\text{BJ}}^{-1} \mathbf{J}_f \mathbf{v} = \begin{pmatrix} v_C + (\mathcal{A}^{-1} \otimes I)(N \otimes I)v_{\bar{C}} \\ v_C + v_T - v_{\bar{C}} \\ J_C v_T \end{pmatrix},$$

Block Gauss–Seidel preconditioning The preconditioning matrix \mathbf{P} for block Gauss Seidel and its inverse are :

$$\mathbf{P}_{\text{BGS}} = \begin{pmatrix} \mathcal{A} \otimes I & 0 & 0 \\ -I & I & 0 \\ 0 & J_C & I \end{pmatrix}, \quad \mathbf{P}_{\text{BGS}}^{-1} = \begin{pmatrix} \mathcal{A}^{-1} \otimes I & 0 & 0 \\ \mathcal{A}^{-1} \otimes I & I & 0 \\ -J_C(\mathcal{A}^{-1} \otimes I) & -J_C & I \end{pmatrix},$$

so that the action of the left-preconditioned matrix on a vector $v = (v_C, v_T, v_{\bar{C}})$ is :

$$(5.3) \quad \mathbf{P}_{\text{BGS}}^{-1} \mathbf{J}_f \mathbf{v} = \begin{pmatrix} v_C + (\mathcal{A}^{-1} \otimes I)(N \otimes I)v_{\bar{C}} \\ v_T + (\mathcal{A}^{-1} \otimes I)(N \otimes I)v_{\bar{C}} \\ v_{\bar{C}} + J_C v_{\bar{C}} - J_C(\mathcal{A}^{-1} \otimes I)(N \otimes I)v_{\bar{C}} \end{pmatrix},$$

REMARK 5.1. *In both cases, notice that P^{-1} involve the inverse of the transport block. In our 1D case, this is not a difficulty, as this block can be easily inverted. When we move to 2D or 3D problems, this step would become more problematic. However, the preconditioners could then be defined by replacing the matrix J_T in the definition of J_f by the application of a (spectrally equivalent) matrix, such as several iterations of a multi-grid solver.*

REMARK 5.2. *In both cases (exact or inexact transport solver), one should expect mesh independent convergence, as the operator being solved by GMRES becomes bounded independently of the mesh. This expectation will be confirmed by the numerical results in section 6.5.*

5.2. Elimination of unknown as non-linear preconditioning. In this section, we consider alternative solution strategies, based on eliminating some of the unknowns from the system (4.5). We group these strategies under the heading of “non-linear preconditioning” because the elimination is done before the linearization, but it must be noted that we take advantage of the fact that the first (block) equation of (4.5) is linear and can be solved species by species. In this context, this strategy should be reminiscent of the “non-linear preconditioning” as introduced by Cai and Keyes [9], where block of unknowns are eliminated locally.

We first eliminate \mathbf{T} from the original system (4.5), leading to a system with only \mathbf{C} and $\bar{\mathbf{C}}$ as unknowns

$$g \begin{pmatrix} \mathbf{C} \\ \bar{\mathbf{C}} \end{pmatrix} = 0$$

with

$$(5.4) \quad g \begin{pmatrix} \mathbf{C} \\ \bar{\mathbf{C}} \end{pmatrix} = \begin{pmatrix} (\mathcal{A} \otimes I)\mathbf{C} + (N \otimes I)\bar{\mathbf{C}} - \mathbf{b}^n \\ \bar{\mathbf{C}} - \Psi_C(\mathbf{C} + \bar{\mathbf{C}}) \end{pmatrix}.$$

The Jacobian of the new system can be written as :

$$J_g = \begin{pmatrix} \mathcal{A} \otimes I & N \otimes I \\ J_C & I + J_C \end{pmatrix}.$$

The Jacobian by vector product is :

$$(5.5) \quad J_g \begin{pmatrix} v_C \\ v_{\bar{C}} \end{pmatrix} = \begin{pmatrix} (\mathcal{A} \otimes I)v_C + (N \otimes I)v_{\bar{C}} \\ J_C(v_C + v_{\bar{C}}) + v_{\bar{C}} \end{pmatrix},$$

One can even go one step further, by eliminating both the unknowns \mathbf{T} and \mathbf{C} , to obtain a system with $\bar{\mathbf{C}}$ as the single unknown:

$$(5.6) \quad \begin{aligned} h(\bar{\mathbf{C}}) &= \bar{\mathbf{C}} - \Psi_C \left(\Psi_T \left(\mathbf{C}^n, \frac{\bar{\mathbf{C}} - \bar{\mathbf{C}}^n}{\Delta t} \right) + \bar{\mathbf{C}} \right) \\ &= \bar{\mathbf{C}} - \Psi_C \left((\mathcal{A}^{-1} \otimes I) (\mathbf{b}^n - (N \otimes I)\bar{\mathbf{C}}) + \bar{\mathbf{C}} \right) = 0. \end{aligned}$$

If we denote by $J_T = I - (\mathcal{A}^{-1} \otimes I)(N \otimes I)$ the Jacobian matrix of Ψ_T , which is a linear mapping, we easily see that the and the Jacobian by vector product for h is:

$$(5.7) \quad J_h v = v + J_C J_T v = v + J_C v - J_C (\mathcal{A}^{-1} \otimes I) (N \otimes I) v.$$

Both the alternative formulation and its Jacobian involve the resolution of transport at each Newton step. One expects that convergence becomes independent of the mesh size [28].

5.3. Links between block preconditioning and elimination. The main advantage of the SIA approach is that it allows the reuse of existing software modules for solving transport and chemistry. This is an important practical issue, as these modules may have been developed independently, even by different groups. This advantage is offset by the possibly slower convergence when compared to the Direct Substitution Approach (DSA, see for example [23]). The methods proposed in section 5.2 (in particular the last method that keeps only \bar{C} as unknown) aims at combining the advantages of SIA and DSA:

- it allows to keep transport and chemistry as separate modules. Equation (5.6) show that the evaluation of the residual when solving the system with h requires solving a transport step for each species, and then solving a local chemical equilibrium system at each grid cell.
- it is a global method, in the sense that it solves both chemistry and transport in a single iteration. This method is in the same spirit as the one proposed by P. Knabner and his group [24, 30, 31]. The reduction method proposed in these papers is more general than the formulation in section 4.1, but their “resolution function” is identical to the chemical solution operator Ψ_C .

The cost for evaluating the non-linear residual is the same as one iteration of SIA. One then has to balance the added cost of solving a linear system at each iteration with the benefit of taking a smaller number of iterations.

It is interesting to note that both the SIA method and the “ h ” function method from section 5.2 can be interpreted in terms of the block preconditioners introduced in section 5.1.

Equation (5.2) show that the main operations of the block Jacobi preconditioner for the full system (4.5) are the computation of $J_T v_{\bar{C}}$ and $J_C v_T$. These are also the building blocks for the SIA formulation, so that SIA can be interpreted as a Jacobi preconditioned iteration for the full system. This is not strictly true, as we noted earlier that SIA is more properly a block Gauss-Seidel iteration. The explanation is that block Jacobi does not reuse the result for solving the other two equations, so the analogy is only partial.

There is an even closer link between the non-linear elimination method from section 5.2 and block Gauss-Seidel preconditioning in (5.3): indeed, the Jacobian of h is none other than the Schur complement of the Jacobian of f . In both cases, one needs to compute $(J_C J_T)v$. Of course, we are once again taking advantage of the fact that one of the operator is linear !

The numerical results in section section 6.5 (cf. figure 6.10) will confirm that the performance of SIA and block Jacobi on the one hand and the elimination method and block Gauss-Seidel on the other hand are very similar.

6. Numerical results.

6.1. MoMaS Benchmark : 1D easy advective case. The MoMaS Benchmark has been designed to compare numerical methods for reactive transport model in 1D and 2D. Different methods for coupling have been used to solve this benchmark. The definition has been published in [12] and the results of participants are compared in the synthesis article [11].

The geometry of the test case is show in Figure 6.1. For the 1D test case, the domain is heterogeneous composed of two porous media A and B. Medium A is highly permeable with low porosity and low reactivity in comparison with medium B. Their physical properties are given in Table 6.1. The pore velocity is constant over the domain and is equal to $\phi u = 5.5 \cdot 10^{-3} \text{LT}^{-1}$.

The chemical reactions are summarized in Table 6.2. The 7 reactions involve 9 mobile species (in the aqueous phase) and 3 immobile species (in the solid phase).

The characteristic feature of this chemical system is that it contains very high stoichiometric coefficients that range from -4 to 4 and a large variation of equilibrium constants

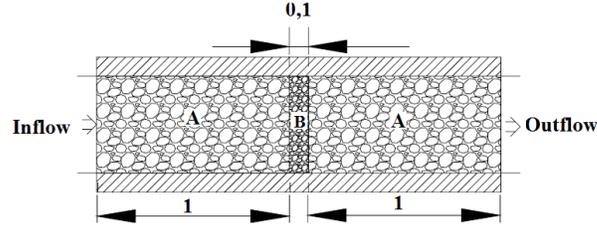


FIG. 6.1. Geometry of the domain

	Medium A	Medium B
Porosity ϕ (-)	0.25	0.5
Total immobile concentration T_S	1	10

TABLE 6.1

Physical properties of the materials

between 10^{-12} and 10^{35} .

Boundary and initial conditions are presented in Table 6.3. The simulation involves an injection period followed by a leaching period, so that the system is returned to its initial state. Note that the total for the immobile species is given in Table 6.1.

	X_1	X_2	X_3	X_4	S	K
C_1	0	-1	0	0	0	10^{-12}
C_2	0	1	1	0	0	1
C_3	0	-1	0	1	0	1
C_4	0	-4	1	3	0	10^{-1}
C_5	0	4	3	1	0	10^{+35}
CS_1	0	3	1	0	1	10^{+6}
CS_2	0	-3	0	1	2	10^{-1}

TABLE 6.2

Morel tableau for Chemical equilibrium

Total Conc.	T_1	T_2	T_3	T_4
	0	-2	0	2
Injection $t \in [0, 5000]$	0.3	0.3	0.3	0
Leaching $t \in [5000, \dots]$	0	-2	0	2

TABLE 6.3

Boundary conditions

6.2. Sample results. The results obtained in [11] that one needs to refine the mesh around medium B if one is to obtain accurate results. For all test cases, we use a mesh such that $h_A = 4h_B$.

Figure 6.2 shows profiles of the concentrations of several species. The left and middle images show concentrations of (a part of) mobile species C_1 and immobile species S at an early time $t = 10$, whereas the right image shows concentration of aqueous species C_2 on a smaller interval during the leaching period, at $t = 5010$. The middle image highlights the effect of the heterogeneity at $x = 1$.

Figure 6.3 shows elution curves, that is evolution of the concentrations at the end of the domain ($x = 2.1$) as a function of time, for a mesh with 384 elements. Notice that the evolution of C_5 follows a fairly complex pattern. It turns out that the accuracy for both species X_3 and C_5 is quite sensitive to the mesh size used. We come back to this point in detail in the next subsection.

The results shown on these figures are in good agreement with those showed by various groups in the comparison paper[11].

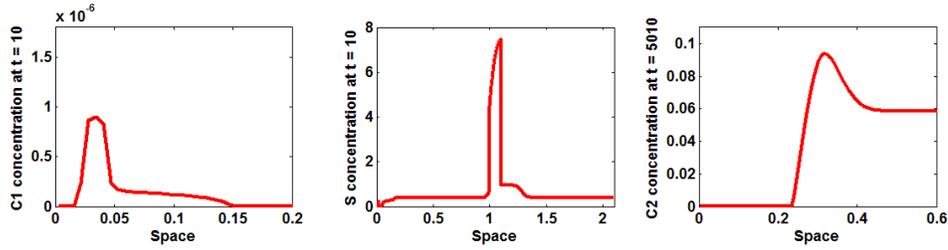


FIG. 6.2. Concentrations profiles. Left figure: C_1 at $t = 10$, middle figure S at $t = 10$, right figure C_2 at $t = 5010$.

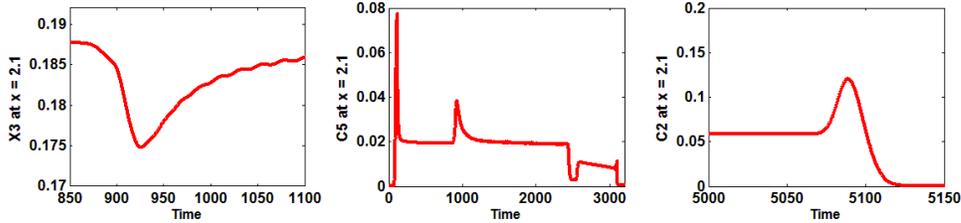


FIG. 6.3. Elution curves (concentrations at right end of the domain as a function of time). Left image: species X_3 , middle image: species C_5 , right image: species C_2

6.3. Influence of spatial and temporal discretizations. As mentioned above, some of the species show a very sensitive dependence on the mesh and time step used. It has proven necessary to use very fine meshes, as well as small time steps, in order to resolve these species accurately.

6.3.1. Influence of spatial discretization. The evolution of species X_3 and C_5 , as a function of time, exhibits unphysical oscillations. The origin of these oscillations has been explained in [33], and is due to the interplay between the very stiff reactions and the spatial discretizations. They should decrease as the mesh is refined.

Figures 6.4 shows that this is indeed what happens as we increase the number of discretization points. A mesh with 384 points gives qualitatively correct results, but we have also made use a finer meshes in order to obtain more accurate results.

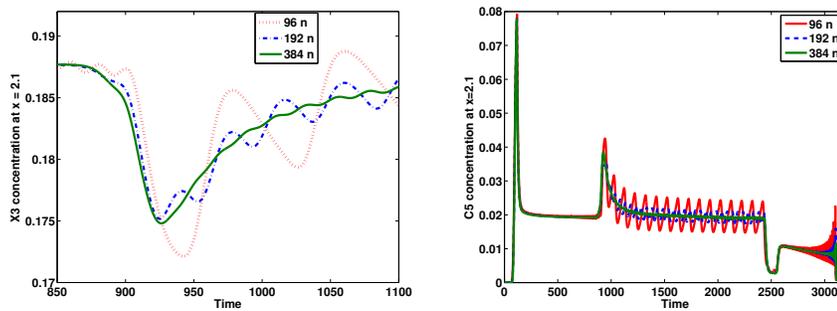


FIG. 6.4. Elution curves of X_3 (left) and C_5 (right) concentration, for various mesh resolutions

The effect of the mesh size on the accuracy of the results is also shown by looking in detail at two specific species: mobile species C_1 and immobile species S , both at time $t = 10$. They both exhibit a sharp peak, and we focus on the accuracy with which the location and amplitude of the peak can be determined. These elements were part of the comparison criteria for the benchmark, and were examined in detail in [11].

We will also discuss the influence of the discretization scheme, by comparing the three schemes introduced in section 3.2 from the point of view of accuracy. We will discuss their relative efficiencies in section 6.4.

Figure 6.5 compares the concentrations of species C_1 on the interval $[0, 0.2]$, at time $t = 10$, as computed by the three discretization schemes on increasingly refined meshes. As soon as the mesh has sufficiently many points to successfully resolve the solution, all three schemes give identical solutions. On the other hand, one needs at least 384 points (and preferably 768) to obtain a satisfactory solution.

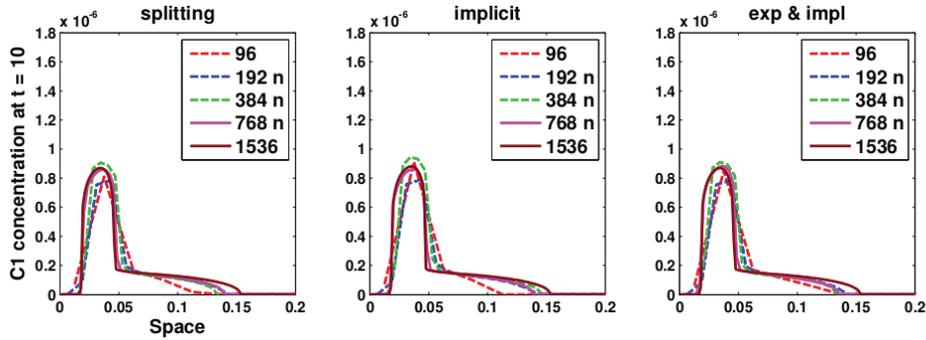


FIG. 6.5. Concentration of species C_1 at $t = 10$ for the different discretization schemes and various mesh resolutions

Figure 6.6 compares the concentration of species S (a sorbed species) on the interval bracketing the location of the peak $[0, 0.15]$, at time $t = 10$, as computed by the three discretization schemes on increasingly refined meshes. Here also, the three schemes give identical solutions when the mesh is fine enough. This time, one needs at least 768 mesh points to obtain a converged solution. One should compare Figure 6 in [11], and also refer to Table 4 there, where the location and amplitude of the peak are tabulated for all the methods used in the benchmark. We have obtained values of $x = 0.0175$ for the location of the peak, and $S = 0.985$ for its height. These values are in the range reported by the other teams, but are different from the “mean” values as reported in [11]. They are however very close to the “reference” values found in [10].

6.3.2. Influence of temporal discretization. We now discuss the influence of the time step, or more precisely the value of the CFL coefficient (given by $CFL = u\phi\Delta t/h_{\min}$ on the accuracy.

The three schemes used for time discretization have different behavior with respect to the choice of time step:

The splitting method allows the use of different time steps (and different numerical methods) for the advection and the diffusion step. The advection time step is restricted by the CFL condition (it is an explicit sub-step), whereas the time step for diffusion is not restricted by stability. We have used three different choices: chose the same time step for advection and diffusion (respecting the CFL condition), once with a

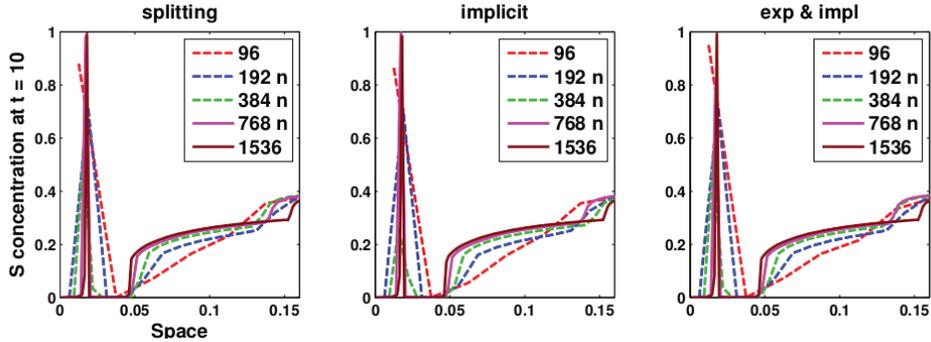


FIG. 6.6. Concentration of species S at $t = 10$ for the different discretization schemes and various mesh resolutions

CFL condition of 1, and once with a CFL condition of 0.1, and choose a diffusion time step 3 times larger than the advection time step (the latter chosen by the CFL condition).

The fully implicit method here there is only one time step, and no stability restriction. We have compared three time steps, corresponding to CFL coefficients of 0.1, 1 and 3 respectively.

The explicit-implicit method this method also imposes a single time step, and in addition it is subject to the stability condition of the explicit method, so the time step is restricted to $CFL \leq 1$. We compare 2 time steps, corresponding to CFL coefficients of 0.1 and 1 respectively.

Figure 6.7 and 6.8 compares the concentration of species S as computed by the three methods, for the time step sizes chosen as explained above, for 2 different mesh resolutions.

For all 3 methods, it is necessary to use a small time step ($CFL = 0.1$) if one wishes to obtain accurate results. Indeed, for larger values of the time step, the location of the peak was correctly determined, but its amplitude was underestimated. For the finest mesh resolution, all 3 methods gave identical results, provided a small time step was used. However, for the coarser mesh resolution (768 points), both the fully implicit and the splitting methods gave comparable results, with the former being slightly less sensitive to the choice of time step.

The explicit-implicit method was the most sensitive to the mesh size, as it needs a finer mesh to obtain the correct amplitude for the peak.

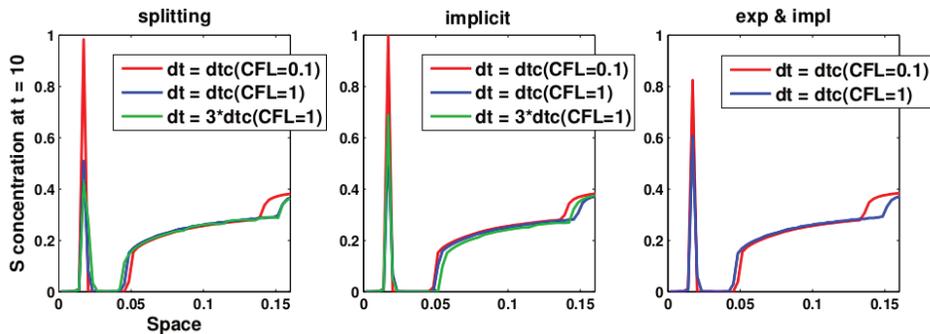


FIG. 6.7. the effect of CFL condition on the concentrations in S (768 nodes)

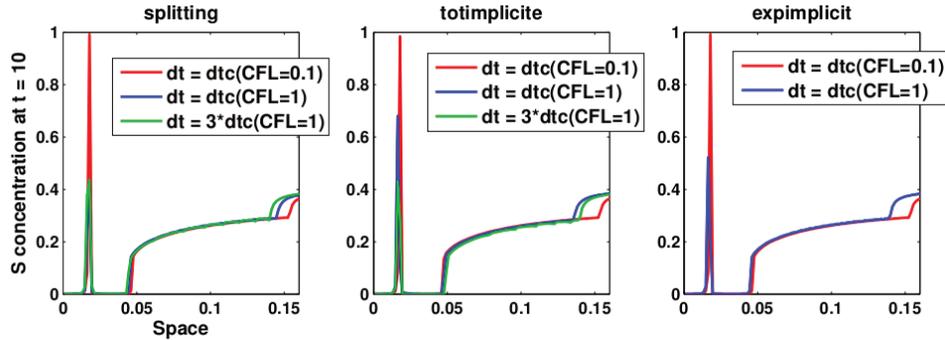


FIG. 6.8. the effect of CFL condition on the concentrations in S (1536 nodes)

6.4. CPU time. We now compare the relative efficiency of the three time discretization methods. One should keep in mind that the problem under study is a 1D model, so that solving a linear system is a not very time consuming. The conclusions reached below would have to be re-examined for a 2D (and even more for a 3D !) model.

We have also compared the effect of using the fully implicit method with a variable time step (albeit not an adaptive choice, a sequence of pre-computed time steps is used for different phases of the solution evolution).

Figure 6.9 compares the times required by the different methods. As expected, using a variable time step results in large savings (while maintaining the accuracy). Among the 3 schemes with fixed time step, the explicit–implicit method is the most expensive, with the fully implicit and the splitting methods leading to comparable costs.

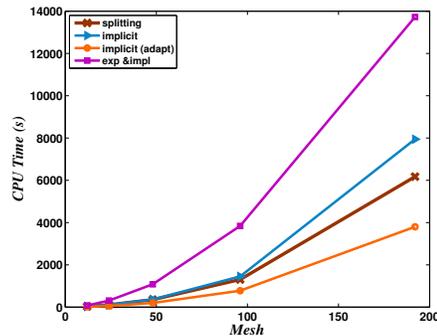


FIG. 6.9. CPU time required by the time discretization methods

6.5. Influence of preconditioning strategy. In this section, we compare the various preconditioning strategies discussed in section 5. Our main criteria will be the number of linear and non-linear iterations. We have not tried to optimize the inexact Newton strategy, but have just relied on the default choices as provided in the Newton–Krylov code (we use the `nsoli` code from the book by C. T. Kelley [27]).

Figure 6.10 shows these numbers as the mesh is refined. The various linear preconditioning strategies (applied to the coupled system) are compared with the elimination, or nonlinear preconditioning, strategy. As predicted, the nonlinear elimination strategy has the

smallest number both for non-linear and for linear iterations. It also shows a behavior that is independent of the mesh size.

The unpreconditioned method is unsurprisingly non scalable, at least as far as the linear iterations are concerned. The number of non-linear iterations grows only weakly with the number of mesh points. The same is true for Jacobi preconditioning.

Gauss-Seidel preconditioning, on the other hand, show only a modest increase in the number of linear iterations, and a behavior for the non-linear iterations that is in between that of the unpreconditioned and the elimination strategies.

As explained in section 5, a limitation of the elimination strategy is that it requires an exact solution of the transport step. In this case, the Gauss-Seidel preconditioner might prove useful: replacing the transport solve step by an approximation, such as several iterations of a multi-grid solver, should lead to a more efficient solution method, with similar convergence behavior. We plan to explore this strategy in a forthcoming work.

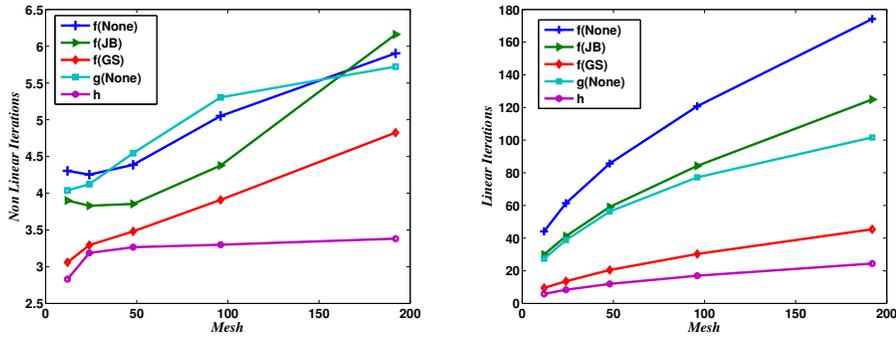


FIG. 6.10. Non-linear (left) and linear (right) iterations for different preconditioning strategies

Last, figure 6.11 shows the time required by the various methods. Since the cost of the methods is comparable, the ordering is the same as that in the previous figure. It confirms the good efficiency of the elimination strategy, with Gauss-Seidel preconditioning as a distant second.

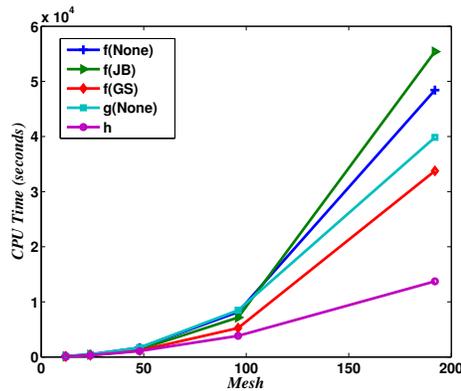


FIG. 6.11. CPU time

7. Conclusion and perspectives. In this work, several methods for improving the efficiency of a global approach for coupling transport and chemistry based on a Newton-Krylov method were studied.

An alternative formulation and block preconditioners for linear system were used to accelerate the convergence of the Krylov method and to reduce CPU time. The results show that the alternative formulation require less CPU time than other preconditioners, and the number of linear and non linear iterations becomes almost independent of the mesh.

The reactive transport benchmark 1D problem proposed by GDR MoMaS was used to demonstrate the efficiency of the method.

Natural extensions of this work to multidimensional situations are under way, as well as extensions to handle kinetic reactions.

REFERENCES

- [1] E. AHUSBORDE, M. KERN, AND V. VOSTRIKOV, *Numerical simulation of two-phase multicomponent flow with reactive transport in porous media: application to geological sequestration of CO₂*, ESAIM: Proc., 50 (2015), pp. 21–39.
- [2] L. AMIR AND M. KERN, *A global method for coupling transport with chemistry in heterogeneous porous media*, Computational Geosciences, 14 (2010), pp. 465–481. [10.1007/s10596-009-9162-x](https://doi.org/10.1007/s10596-009-9162-x).
- [3] C. A. J. APPELO AND D. POSTMA, *Geochemistry, Groundwater and Pollution*, CRC Press, 2nd ed., 2005.
- [4] P. AUDIGANE, I. GAUS, I. CZERNICHOWSKI-LAURIOL, K. PRUESS, AND T. XU, *Two-Dimensional reactive transport modeling of CO₂ injection in a saline aquifer at the Sleipner site, North sea*, American journal of science, 307 (2007), pp. 974–1008.
- [5] J. BEAR AND A. H.-D. CHENG, *Modeling Groundwater Flow and Contaminant Transport*, vol. 23 of Theory and Applications of Transport in Porous Media, Springer, 2010.
- [6] B. BERKOWITZ, I. DROR, AND B. YARON, *Contaminant Geochemistry. Interactions and Transport in the Subsurface Environment*, Springer, 2008.
- [7] C. M. BETHKE, *Geochemical and Biogeochemical Reaction Modeling*, Cambridge University Press, 2nd ed., 2008.
- [8] Å. BJÖRCK, *Numerical methods for least squares problems*, Society for Industrial and Applied Mathematics, Philadelphia, 1996.
- [9] X.-C. CAI AND D. E. KEYES, *Nonlinearly preconditioned inexact newton algorithms*, SIAM Journal on Scientific Computing, 24 (2002), pp. 183–200.
- [10] J. CARRAYROU, *Looking for some reference solutions for the reactive transport benchmark of MoMaS with SPECY*, Computational Geosciences, 14 (2010), pp. 393–403.
- [11] J. CARRAYROU, J. HOFFMANN, P. KNABNER, S. KRÄUTLE, C. DE DIEULEVEULT, J. ERHEL, J. VAN DER LEE, V. LAGNEAU, K. U. MAYER, AND K. T. B. MACQUARRIE, *Comparison of numerical methods for simulating strongly nonlinear and heterogeneous reactive transport problems-the MoMaS benchmark case*, Computational Geosciences, 14 (2010), pp. 483–502.
- [12] J. CARRAYROU, M. KERN, AND P. KNABNER, *Reactive transport benchmark of MoMaS*, Computational Geosciences, 14 (2010), pp. 385–392. [10.1007/s10596-009-9157-7](https://doi.org/10.1007/s10596-009-9157-7).
- [13] J. CARRAYROU, R. MOSÉ, AND P. BEHRA, *New efficient algorithm for solving thermodynamic chemistry*, AIChE Journal, 48 (2002), pp. 894–904.
- [14] J. CARRAYROU, R. MOSÉ, AND P. BEHRA, *Operator-splitting procedures for reactive transport and comparison of mass balance errors*, Journal of Contaminant Hydrology, 68 (2004), pp. 239–268.
- [15] A. CHILAKAPATI, T. GINN, AND J. SZECSDY, *An analysis of complex reaction networks in groundwater modeling*, Water Resources Research, 34 (1998), pp. 1767–1780.
- [16] C. DE DIEULEVEULT AND J. ERHEL, *A numerical model for coupling chemistry and transport*, in International Conference on Scientific Computation And Differential Equations, SciCADE 2007, 2007.
- [17] C. DE DIEULEVEULT AND J. ERHEL, *A global approach to reactive transport: application to the MoMas benchmark*, Computational Geosciences, 14 (2010), pp. 451–464.
- [18] C. DE DIEULEVEULT, J. ERHEL, AND M. KERN, *A global strategy for solving reactive transport equations*, Journal of Computational Physics, 228 (2009), pp. 6395–6410.
- [19] L. DE WINDT, PELLEGRINI, AND J. D., VAN DER LEE, *Coupled modeling of cement/claystone interactions and radionuclides migration*, Journal of Contaminant Hydrology, 68 (2004), pp. 165–182.
- [20] J. ERHEL, S. SABIT, AND C. DE DIEULEVEULT, *Solving partial differential algebraic equations and reactive transport models*, in Developments in Parallel, Distributed, Grid and Cloud Computing for Engineering, B. H. V. Topping and P. Iványi, eds., Computational Science, Engineering and Technology Series, Saxe Coburg Publications, 2013, pp. 151–169.

- [21] R. EYMARD, T. GALLOUËT, AND R. HERBIN, *Finite volume methods*, in Handbook of Numerical Analysis, P. G. Ciarlet and J. L. Lions, eds., vol. VII, North-Holland, 2000, pp. 713–1020.
- [22] Y. FAN, L. J. DURLOFSKY, AND H. A. TCHELEPI, *A fully-coupled flow-reactive-transport formulation based on element conservation, with application to CO₂ storage simulations*, Advances in Water Resources, 42 (2012), pp. 47–61.
- [23] G. E. HAMMOND, A. VALOCCHI, AND P. LICHTNER, *Application of Jacobian-free Newton–Krylov with physics-based preconditioning to biogeochemical transport*, Advances in Water Resources, 28 (2005), pp. 359–376.
- [24] J. HOFFMANN, S. KRAEUTLE, AND P. KNABNER, *A parallel global-implicit 2-D solver for reactive transport problems in porous media based on a reduction scheme and its application to the momas benchmark problem*, Comput Geosci, 14 (2009), pp. 421–433.
- [25] H. HOTEIT, P. ACKERER, AND R. MOSE, *Nuclear waste disposal simulations: Couplex test cases: Simulation of transport around a nuclear waste disposal site: The COUPLEX test cases (editors: Alain Bourgeat and Michel Kern)*, Computational Geosciences, 8 (2004), pp. 99–124.
- [26] C. T. KELLEY, *Iterative methods for linear and nonlinear equations*, vol. 16 of Frontiers in Applied Mathematics, Society for Industrial and Applied Mathematics (SIAM), Philadelphia, PA, 1995. With separately available software.
- [27] ———, *Solving Nonlinear Equations with Newton’s Method*, vol. 1 of Fundamentals of Algorithms, Society for Industrial and Applied Mathematics (SIAM), Philadelphia, PA, 2003. With separately available software.
- [28] M. KERN AND A. TAAKILI, *Linear and nonlinear preconditioning for reactive transport*, in XVIII Conference on Computational Methods in Water Resources CMWR XVIII, J. Carrera, P. Binning, and G. F. Pinder, eds., 2010. <http://congress.cimne.upc.es/cmwr2010/Proceedings/docs/p30.pdf>.
- [29] D. A. KNOLL AND D. E. KEYES, *Jacobian-free Newton-Krylov methods: a survey of approaches and applications*, J. Comput. Phys., 193 (2004), pp. 357–397.
- [30] S. KRAEUTLE AND P. KNABNER, *A new numerical reduction scheme for fully coupled multicomponent transport-reaction problems in porous media*, Water Resources Research, 41 (2005).
- [31] ———, *A reduction scheme for coupled multicomponent transport-reaction problems in porous media: Generalization to problems with heterogeneous equilibrium reactions*, Water Resources Research, 43 (2007).
- [32] E. T. L. TRENTY, A. MICHEL AND Y. L. GALLO, *A sequential splitting strategy for co₂ storage modelling*, in ECMOR X - 10th European Conference on the Mathematics of Oil Recovery, EAGE, 2006.
- [33] V. LAGNEAU AND J. VAN DER LEE, *HYTEC results of the MoMas reactive transport benchmark*, Computational Geosciences, 14 (2010), pp. 435–449.
- [34] N. C. MARTY, C. TOURNASSAT, A. BURNOL, E. GIFFAUT, AND E. C. GAUCHER, *Influence of reaction kinetics and mesh refinement on the numerical modelling of concrete/clay interactions*, Journal of Hydrology, 364 (2009), pp. 58–72.
- [35] N. C. M. MARTY, O. BILDSTEIN, P. BLANC, F. CLARET, B. COCHEPIN, E. C. GAUCHER, D. JACQUES, J.-E. LARTIGUE, S. LIU, K. U. MAYER, J. C. L. MEEUSSEN, I. MUNIER, I. POINTEAU, D. SU, AND C. I. STEEFEL, *Benchmarks for multicomponent reactive transport across a cement/clay interface*, Computational Geosciences, 19 (2015), pp. 635–653.
- [36] P. MARZAL, A. SECO, J. FERRER, AND C. GABALÓN, *Modeling multiple reactive solute transport with adsorption under equilibrium and nonequilibrium conditions*, Advances in Water Resources, 17 (1994), pp. 363–374.
- [37] C. D. MEYER, *Matrix Analysis and Applied Linear Algebra*, SIAM, 2000.
- [38] F. M. M. MOREL AND J. G. HERING, *Principles and Applications of Aquatic Chemistry*, Wiley, New-York, 1993.
- [39] G. S. OF CO₂. MODELING APPROACHES FOR LARGE-SCALE SIMULATION, *Jan M. Nordbotten and Michael A. Celia*, Wiley, 2012.
- [40] J. RUBIN, *Transport of reacting solutes in porous media: Relation between mathematical nature of problem formulation and chemical nature of reactions*, Water Resources Research, 19 (1983), pp. 1231–1252.
- [41] Y. SAAD AND M. H. SCHULTZ, *GMRES: a generalized minimal residual algorithm for solving nonsymmetric linear systems*, SIAM J. Sci. Statist. Comput., 7 (1986), pp. 856–869.
- [42] M. SAALTINK, C. AYORA, AND J. CARRERA, *A mathematical formulation for reactive transport that eliminates mineral concentrations*, Water Resources Research, 34 (1998), pp. 1649–1656.
- [43] M. SAALTINK, J. CARRERA, AND C. AYORA, *A comparison of two approaches for reactive transport modelling*, Journal of Geochemical Exploration, 69-70 (2000), pp. 97–101.
- [44] M. SAALTINK, V. VILARRASA, F. DE GASPARI, O. SILVA, J. CARRERA, AND T. ROETTING, *A method for incorporating equilibrium chemical reactions into multiphase flow models for CO₂ storage*, Advances in water resources, 62 (2013), pp. 431–441.
- [45] J. SAMPER, H. MA, J. L. CORMENZANA, C. LU, L. MONTENEGRO, AND M. . A. CUÑADO, *Testing K_d models of Cs+ in the near field of a HLW repository in granite with a reactive transport model*, Physics and Chemistry of the Earth, Parts A/B/C, 35 (2010), pp. 278–283. MIGRATION 2009, 12th

- International Conference on the Chemistry and Migration Behaviour of Actinides and Fission Products in the Geosphere.
- [46] J. SAMPER, T. XU, AND C. YANG, *A sequential partly iterative approach for multicomponent reactive transport with CORE2D*, Computational Geosciences, 13 (2008), pp. 301–316.
 - [47] P. SIEGEL, R. MOSÉ, P. ACKERER, AND J. JAFFRÉ, *Solution of the advection-dispersion equation using a combination of discontinuous and mixed finite elements*, Journal for Numerical Methods in Fluids, 24 (1997), pp. 595–613.
 - [48] I. SIN, *Numerical simulation of compressible two-phase flow and reactive transport in porous media - Applications to the study of CO2 storage and natural gas reservoir*, theses, Ecole Nationale Supérieure des Mines de Paris, Dec. 2015.
 - [49] C. STEEFEL, D. DEPAOLO, AND P. LICHTNER, *Reactive transport modeling: An essential tool and a new research approach for the earth sciences*, Earth and Planetary Science Letters, 240 (2005), pp. 539–558.
 - [50] C. I. STEEFEL, C. A. J. APPELO, B. ARORA, D. JACQUES, T. KALBACHER, O. KOLDITZ, V. LAGNEAU, P. C. LICHTNER, K. U. MAYER, J. C. L. MEEUSSEN, S. MOLINS, D. MOULTON, H. SHAO, J. ŠIMŮNEK, N. SPYCHER, S. B. YABUSAKI, AND G. T. YEH, *Reactive transport codes for subsurface environmental simulation*, Computational Geosciences, 19 (2015), pp. 445–478.
 - [51] G. STRANG, *Introduction to Linear Algebra*, Wellesley-Cambridge Press, 4th ed., 2009.
 - [52] A. J. VALOCCHI AND M. MALMSTEAD, *Accuracy of operator splitting for advection-dispersion-reaction problems*, Water Resources Research, 28 (1992), pp. 1471–1476.
 - [53] S. P. WHITE, *Multiphase nonisothermal transport of systems of reacting chemicals*, Water Resources Research, 31 (1995), pp. 1761–1772.
 - [54] G.-T. YEH, Y. FANG, F. ZHANG, J. SUN, Y. LI, M.-H. LI, AND M. D. SIEGEL, *Numerical modeling of coupled fluid flow and thermal and reactive biogeochemical transport in porous and fractured media*, Computational Geosciences, 14 (2010), pp. 149–170.
 - [55] G. T. YEH AND V. S. TRIPATHI, *A critical evaluation of recent developments in hydrogeochemical transport models of reactive multichemical components*, Water Resources Research, 25 (1989), pp. 93–108.
 - [56] G.-T. YEH AND V. S. TRIPATHI, *A model for simulating transport of reactive multispecies components: Model development and demonstration*, Water Resources Research, 27 (1991), pp. 3075–3094.
 - [57] F. ZHANG, G. YEH, AND J. PARKER, eds., *Groundwater Reactive Transport Models*, Behtham Publishers, 2012.