

# Performance Evaluation in Sustainability Conscious Manufacturing Companies by Using TOPSIS Method

Merve Kiliç, Seren Özmehmet Taşan

## ▶ To cite this version:

Merve Kiliç, Seren Özmehmet Taşan. Performance Evaluation in Sustainability Conscious Manufacturing Companies by Using TOPSIS Method. 19th Advances in Production Management Systems (APMS), Sep 2012, Rhodes, Greece. pp.224-231, 10.1007/978-3-642-40352-1\_29. hal-01472246

# HAL Id: hal-01472246 https://inria.hal.science/hal-01472246

Submitted on 20 Feb 2017

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

## Performance Evaluation in Sustainability Conscious Manufacturing Companies by Using TOPSIS Method

Merve Kılıç<sup>1</sup>, Seren Özmehmet Taşan<sup>2</sup>

Dokuz Eylul University, Department of Industrial Engineering, Izmir, Turkey <sup>1</sup> mervekilic\_35\_50yahoo.com <sup>2</sup> seren.ozmehmet@deu.edu.tr

Abstract: In a manufacturing environment, managing limited resources has always been a main issue for engineers. Recently, the idea of managing limited resources without harming ecological environment adopted by manufacturing sector and sustainable manufacturing has become a key issue. While the concept of sustainability has been recognized, companies need to measure how sustainable they perform. Therefore, sustainability indicators are developed and used in order to assess companies' production activities expediently to sustainable manufacturing. This paper presents a research indicating the application of TOPSIS method on sustainability indicators related to production for two different multi-criteria decision making problems in a sustainability conscious manufacturing company.

Keywords: Sustainability, Indicator, Manufacturing, TOPSIS, Performance Evaluation

#### 1 Introduction

In ecology, sustainability is defined as the providing the continuousness of biological systems' variety and productivity. Considering this definition, the term of sustainability is used for managing the resources via long term maintenance of responsibility for environment, economy and society. Sustainability can be evaluated as a problem statement that seeks ways for human and other forms of life will flourish on the planet forever. With the ever increasing interest in sustainability, the companies started to realize the importance and impact of manufacturing their products in a more sustainable way. Sustainable manufacturing refers to that decreasing the negative effects of a product and its production processes on environment, health and welfare of community to minimum level. From raw material to the finished good and even at the recycling phase, the product should cause no or minimum damage to environment and during its production process, environmental resources should be used efficiently. The objectives of sustainable manufacturing are defined by the European Union as creating more value for more (growth) and better jobs, increasing the competition of European industries and the communities in the knowledge century and sustainable development of economies [1]. Since the importance of the sustainable manufacturing has been increased rapidly, companies show tendency to adopt this concept. Similar to companies' approach which uses financial indicators to determining the business success, there has been needed to measure and evaluate sustainability. However, sustainability can be thought as an abstract concept which is hard to measure. Therefore sustainability indicators are developed and used in order to measure how a company succeeds in the concept of sustainability and sustainable production.

Several researchers have focus on determining indicators for sustainable manufacturing [2-4]. These researchers gave utmost importance to create and define new sustainable manufacturing indicators. However, due to difficulties in determining suitable indicator baseline, there has been a lack of research concerning performance evaluations by using indicators. Practically, various indicators should be considered simultaneously while evaluating the sustainability performance of a manufacturing system. In order to fill this gap, the contribution of this study focuses on the application of TOPSIS method that makes us able to consider various sustainability indicators simultaneously. The remainder of this paper is organized as follows; Section 2 presents the necessary background information regarding to sustainability indicators while focusing on the product indicators. Following, section 3 consists of the brief explanation of the TOPSIS method. Later, section 4 includes the application of TOPSIS method on two different case studies. Finally, conclusions and directions for future researches are given in section 5.

## 2 Sustainability Indicators Related to Manufacturing


The indicator has significance that extends beyond the properties directly associated with the parameter values. Indicators possess a synthetic meaning and are developed for a specific purpose [2]. United Nations (UN) defined indicators for sustainable development considering sociological field of development problems as well as the physical problems [5]. UN grouped indicators according to fields such as poverty, governance, health, education, demographics, natural hazards, atmosphere, land, oceans, seas and coasts, freshwater, biodiversity, economic development, global economic partnership, consumption, and production. In literature, sustainability indicators related to manufacturing are evaluated in three differently named groups such as product, process and management [3]; social, environmental and economic [4] or inputs, operations and products [2]. This paper presents only the indicators related to product. Indicators related with product generally state the impacts of materials used for producing the product, consumption and renewability of the resources used for production and recyclability of a product.


Neto et al. [3] defined nine indicator related to product considering the material usage and renewability, usage of resources such as energy and water and transportation of material and products. Similar to this study, OECD [2] defined product indicators related to materials with the aspects of renewable and non-renewable and also with the content of restricted substance. Energy consumption is also included in to indicators and as an addition; greenhouse gas emission intensity is mentioned. Krajnc and Glavic [4] defined product indicators under the output indicators which is a branch of the main title of the environmental indicators. Additionally, they considered the recyclable materials.

## **3** TOPSIS Method

TOPSIS stands for technique for order preference by similarity to ideal solution developed by Hwang and Yoon [6]. TOPSIS method has several advantages; one of which is the application convenience and simplicity when identifying the suitable alternative quickly. Additionally, it performs similar to various methods that use additive weights and performs better than other methods in most cases.

The TOPSIS method based on the selected alternative should to be found at the shortest distance from the positive ideal solution and farthest from the negative ideal solution. Positive ideal solution represents the best criteria values and conversely the negative ideal solution represents the worst criteria values attainable from all alternatives. TOPSIS can be summarized in six steps (Fig.1). In first step, evaluation matrix is built by listing alternative horizontally and criterions vertically. Second step consists of dividing each center values by the norm of the total outcome vector in order to non-dimensionalize the center values in the evaluation matrix. Third step includes multiplying the matrix's values by normalized weights of each criterion and establishing the relative importance matrix. The fourth step consists of building positive and negative ideal solutions to compare the alternatives with each other. After determining the positive and negative ideal solutions, the separation of each matrix value from the ideals are measured as Euclidean distances in the fifth step. At the sixth step, these distances are transformed into a single metric called relative closeness to the ideal solution.

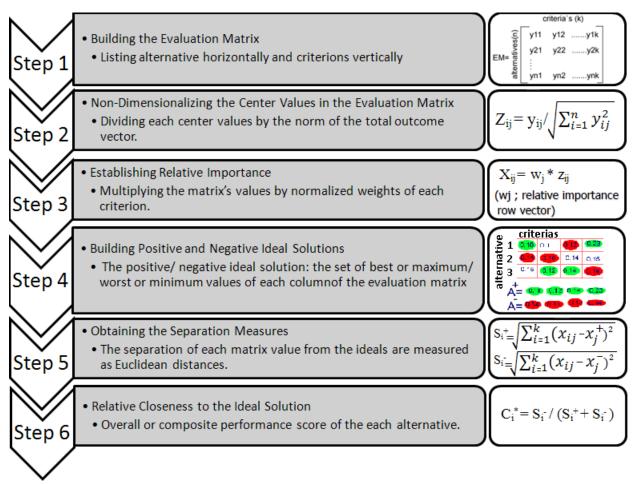



### 4 Case Studies

In order to present the applications of multi-criteria decision making process for evaluating sustainability indicators in the concept of manufacturing, two different case studies are formed and examined according to company's perception of sustainability. The first case study includes the application of TOPSIS method on the decision making regarding six production period of the company concentrating on three sustainability indicators: product durability, revenues from eco-products and reusable packaging mass. After applying steps mentioned in section 3, the most appropriate period with the strategy that fits to the company's criterions are determined. The second case study includes determining that which product is matched with the firm's philosophy of sustainability. Six eco-products are examined based on the four criterions and the most preferable product with the maximum revenue, shortest production time, involves larger amount of recyclable material and with minimum amount of carbon emission is determined as a result of the study. After applying steps mentioned in section 3, the most appropriate eco-product that fits to the company's perception of sustainability is determined. Finally, results for both case studies are discussed in detail.

#### 4.1 Case Study I

This case study concerns with the sustainability performance in Company X over time periods. While producing their ordinary goods the firm decided to enlarge its product range to the new segment: eco-products. During 6 time periods they have been trying to develop a production strategy related to their sustainability perception. Now Company X wants to eliminate the production of ordinary products and focus on the eco-products. The firm concentrates on 3 sustainability indicators: product durability (I<sub>1</sub>), revenues from eco-products (I<sub>2</sub>) and reusable packaging mass (I<sub>3</sub>). They observed the information related these indicators and examined the 6 time periods (see Fig. 2, step 1). There were 6 different strategies in 6 time periods and now the firm wants to evaluate that which strategy is better. According to sustainability policy of Company X, it is better if a product has maximum durability, consists of more reusable package and with the maximum revenue.

Using the information gathered by Company X for 3 sustainability indicators over 6 time periods, TOPSIS method was applied as shown in Fig. 2 and summarized in Fig. 3. The results of TOPSIS showed that the strategy applied on the 6<sup>th</sup> period fits best to the Company X's sustainability perception and the firm decided to continue its production activities with this strategy. Performance criterion of 5<sup>th</sup> period is very close to period 6. From Fig. 3, it is seen that the durability is achieved in 5<sup>th</sup> and 6<sup>th</sup> period to 8 years and revenue obtained from eco-products shows small decrease. It is also seen that the reusable packaging mass is doubled from period 5 to 6. If the firm concentrates on only first 4 periods, it would be difficult to make a choice because the results provided from these periods are very close to each other while data belongs to these periods were varied.

#### 4.2 Case Study II

This case study concerns with the sustainability performance in Company X for various products. Company X wants to determine that which product is matched with the firm's policy of sustainability. The relevant data regarding to six products A, B, C, D, E and F are shown in Table 1. Data related to production of the six ecoproducts: annual revenue calculated as multiplication of yearly demand and price per product. For example, from product A: 300\*5000 = 1500000. Revenue from eco-product determined as 10500000 and total revenue of the firm recorded as 19500000. The firm produces 12 hour in a day and 5 days in a week. Recycled material costs 600 and normal material costs 1000. According to Company X, the product with the maximum revenue, shortest production time, involves larger amount of recyclable material and with minimum amount of carbon emission is preferable.

Step 1	l: Building	the Evaluat	ion Matrix					p 2: Non-D luation Ma		ing the Center	Values in the
	[	I <sub>1</sub> (years)	$I_2$ (million	\$) <b>I</b> <sub>3</sub>	(tones)					$Z_{ij} = y_i$	$\sqrt{\sum_{i=1}^{n} y_{ij}^2}$
1	l. Period	5	100	75	5				I <sub>1</sub> (years)	<b>I</b> <sub>2</sub> (million \$)	I <sub>3</sub> (tones)
2	2. Period	б	230	12	2		l r	1. Period	0.30	0.16	0.35
3	3. Period	7	170	48	8			2. Period	0.30	0.10	0.05
4	I. Period	6	170	69	)			2. Teriod 3. Period	0.30	0.37	0.03
5	5. Period	8	400	80	)			4. Period	0.42	0.27	0.22
6	5. Period	8	300	16	50			5. Period		0.27	0.32
	1							6. Period	0.48	0.03	0.75
								o. Period	0.48	0.49	0.73
consis norma	sts of malized weig criterions Points N out of 1 10 N 6 0 8 0 5 0	lative impo ultiplication ghts for each are found w Norma- ized Values 0.32 0.42 0.42 0.26	the mature	rix va Norma int scal 11 0.096 0.115 0.134 0.115 0.153	lues t lized v le.	y the veights <b>I</b> <sub>3</sub> 0.091 0.013 0.057 0.083 0.096	max idea valu and	imum value 1 solution les of each	es of each co constitutes r column of th set of maxim $I_1$ (years) 0.096 0.115 0.134 0.115	lumn. Convers the set of wor he evaluation n	the set of best or ely, the negative rst or minimum natrix where A+ um values of the 13 (tones) 0.091 0.091 0.013 0.057 0.083 0.096
			6. Period	0.153	0.205	0.195		6. Period	0.153	0.205	0.195
				-			A	$^{+} = \{ 0.153, $	0.273, 0.195	$\mathbf{A}^{-} = \{ 0.09 \}$	6, 0.67, 0.013 }
		$x_{j} the Separation for each alternation of each alternation each distance. \overline{(x_{j}^{+})^{2}} ar$			eal one $(x_{ij} - $	is $\overline{x_j}$ ) <sup>2</sup>				to the Ideal Solution matrix re of the each a $C_3 = 0.2$ $C_6 = 0.7$	

Fig. 2. Applying TOPSIS steps to the case-1

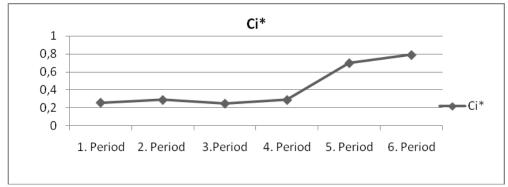


Fig. 3. Performance Values for Each Period

	Demand	Price	Production Duration	Recyclability	$\rm CO_2Emission$
	(yearly)	(per product)	(of 1 product)	(%)	(yearly)
А	300	5000	8 hr	75%	25
В	400	3000	11 hr	85%	40
С	200	5000	5 hr	70%	30
D	300	10000	8 hr	50%	45
Е	100	20000	12 hr	68%	20
F	600	3000	6 hr	90%	32

Table 1. Product Data

Using the information gathered by Company X for 6 products, TOPSIS method was applied as shown in Fig. 4 and summarized in Fig. 5. In the third step, weights are determined according to following calculations; Revenue from eco-products: revenue from eco-products / total revenue = 10.5/19.5 = 0.54; 12 hr production in a day and 5 days in a week, 50 hr production of eco-products : 50 / 60= 0.83; Recycled material costs 600, normal material costs 1000 : 1000/600= 1.66; It means that if the firm spends 1000 on normal material, they produce 1 product; if they spend same value on recycled material they produce 1.66 products; Mass fraction of greenhouse gases: total mass of CO2 equivalents/ total mass of products = 192 / 1900 = 0.10. The results of TOPSIS revealed that product F is more suitable for Company X's policy of sustainability. If the data is reviewed, it is seen that the product F shows highest performance in production time and recyclability out of remaining products. Moreover production time and recyclability have the highest weights out of the other criterions. It is also seen from the graph that products A, B and C shows similar performance according to the firm's philosophy of sustainability.

### 5 Conclusion

Since importance of sustainability has been increased, companies have shown more tend to manufacture their products in sustainable way. As a result of this tendency to sustainable manufacturing, the creation of sustainability indicators became a hot topic among researchers. Hence the need to measure and evaluate become prominent, the application of indicators in performance evaluation has been ignored. Specifically, this study focused on usage of sustainable manufacturing indicators for performance evaluation and case studies concerning the application of the TOPSIS method which provides advantages of sufficiency and simplicity while identifying the most suitable alternative quickly in case of the conflicting criterion. Future studies will include complex case studies that contain multi-criteria decision making problem of a real company with the real data. Additionally, to reflect the vagueness

concept of sustainability, fuzzy TOPSIS will be applied on sustainability indicators and to analyze the outputs of the fuzzy TOPSIS, sensitivity analysis will be used.

	Revenue (I <sub>1</sub> )	Time (I <sub>2</sub> )	Recycling (I <sub>3</sub> )	CO <sub>2</sub> Emission (I <sub>4</sub> )	1					$Z_{ij}\!=\!y_{ij}$	$\sqrt{\sum_{i=1}^{n}}$
4	15	8	75	25	-			I <sub>1</sub>	I <sub>2</sub>	I <sub>3</sub>	$I_4$
B	12	11	85	40	_		A	0.33	0.37	0.41	0.31
с С	10	5	70	30			B	0.26	0.52	0.47	0.49
)	30	8	50	45	_	-	С	0.22	0.23	0.38	0.37
E	20	12	50 68	20			D	0.66	0.37	0.27	0.55
F	18	6	90	32		-	E	0.44	0.56	0.37	0.25
	10	0	90	32			F	0.39	0.28	0.49	0.39
ts of lized	weights for	ation t each c $I_1$	he matrix riterion. $I_2  I_3$	values by	y the	or max negativ minimu	kimu re id um va A+ a	m values eal soluti alues of ea nd A- are	of eacl on cons ach colu	n column. titutes the mn of the of best an	set of v evaluation
s of lized	multiplica weights for ated Weights lized Values	ation t each c $I_1$ s 0,54 s 0,17	he matrix riterion. <u>I2</u> <u>I3</u> 0,83 <u>1,66</u> 0,27 0,53	Values         by           I4         Tor           0,1         3,1           0,03         1	y the	or max negativ minimu where	ximux e id um va A+ a eria's A	m values eal soluti alues of ea nd A- are s. I1 0.050	of each on constant colution the set $I_2$ $\overline{I_2}$ $\overline{0.09}$	h column. titutes the mn of the of best an $I_3$ $\overline{99}$ 0.217	Converse of v evaluation d worst v $I_4$ 7 0.009
as of lized	multiplica weights for ated Weights lized Values	ation t each c $I_1$ $I_1$ $I_1$ $I_1$ $I_1$ $I_2$ $I_2$	he matrix riterion. $I_2$ $I_3$ 0,83 1,66 0,27 0,53 $I_3$	values by I <sub>4</sub> Too 0,1 3,1 0,03 1 I <sub>4</sub>	y the	or max negativ minimu where	kimu e id um va A+ a eria's A B	m values eal soluti- alues of ea nd A- are s. <b>I</b> 1 0.050 0.04	of each on constant colution the set $I_2$ $0.09$ $4$ $0.14$	n column. titutes the mn of the of best an I 3 9 0.217 40 0.249	Converse set of v evaluation d worst v <u>I4</u> 7 0.009 0 0.014
as of lized	multiplica weights for ated Weights dized Values <b>I</b> 1 0.056	ation t each c $I_1$ s 0,54 s 0,54 s 0,17 $I_2$ 0.09	he matrix riterion. $I_2$ $I_3$ 0,83 1,66 0,27 0,53 <b>I_3</b> 9 0.217	Values     by       I4     Tot       0,1     3,1       0,03     1       I4     O       0.009	y the	or max negativ minimu where	ximu re id um va A+ a eria's A B C	m values eal soluti alues of ea nd A- are s. <b>I</b> 1 0.050 0.044 0.03	of each on constant colution the set $I_2$ $I_2$ $0.09$ $1.00$	n column. titutes the mn of the of best an <b>I</b> <sub>3</sub> 29 0.217 40 0.249 52 0.201	Converse set of v evaluation d worst v 7 0.009 0 0.014 1 0.011
as of lized	multiplication weights for ated Weights ated Values International Intern	ation t each c $I_1$ s 0,54 s 0,54 s 0,17 $I_2$ 0.09 0.14	he matrix riterion. $I_2$ $I_3$ 0,83 1,66 0,27 0,53 $I_3$ 9 0.217 0 0.249	Values     by       I4     Tor       0,1     3,1       0,03     1       I     I       0.009     0.014	y the	or max negativ minimu where	kimu re id um va A+ a eria's A B C D	m values eal soluti alues of ea nd A- are s. <b>I</b> 1 0.050 0.044 <b>0.03</b> 0.114	of each colust the set $I_2$ $0.09$ $1.00$ $I_2$ $0.09$ $1.00$ $I_2$ $0.09$ $I_2$ $0.09$ $I_3$ $0.09$ $I_4$ $0.14$ $0.09$ $I_4$ $I$	n column. titutes the mn of the of best an I3 29 0.217 40 0.249 52 0.201 29 0.143	Converse set of v evaluation d worst v <b>I</b> <sub>4</sub> 7 0.009 9 0.014 1 0.011 <b>2</b> ,016
ts of lized Calcul Norma	multiplica weights for ated Weights dized Values <b>I</b> 1 0.056	ation t each c $I_1$ s 0,54 s 0,54 s 0,17 $I_2$ 0.09	he matrix riterion. I <sub>2</sub> I <sub>3</sub> 0,83 1,66 0,27 0,53 I <sub>3</sub> 9 0.217 0 0.249 2 0.201	Values     by       I4     Tot       0,1     3,1       0,03     1       I4     O       0.009	y the	or max negativ minimu where	ximu re id um va A+ a eria's A B C	m values eal soluti alues of ea nd A- are s. <b>I</b> 1 0.050 0.044 0.03	of each colust the set $I_2$ $0.09$ $1.00$	n column. titutes the mn of the of best an <b>I</b> 3 29 0.217 40 0.249 52 0.201 29 0.144 51 0.196	Converse set of v evaluation d worst v <b>I</b> 4 7 0.009 9 0.014 1 0.011 5 0.007
The second secon	Image: multiplication           weights for           ated Weights           ated Values           Ized Values           0.056           0.044           0.037           0.112           0.074	ation t each c $I_1$ s 0,54 s 0,54 s 0,17 $I_2$ 0.09 0.14 0.06 0.09 0.15	he matrix riterion. I <sub>2</sub> I <sub>3</sub> 0,83 1,66 0,27 0,53 I <sub>3</sub> 9 0.217 0 0.249 2 0.201 9 0.143 1 0.196	I4     Tor       0,1     3,1       0,03     1       I     0.009       0.014     0.011       0.016     0.007	y the	or max negativ minimu where <i>L</i> the crite	kimu e id um v. A+ a eria's A B C D E F	m values eal soluti alues of ea nd A- are s. 0.050 0.044 0.03 0.044 0.03 0.044 0.03 0.044 0.03 0.044	of each         on cons         ach colu         the set $I_2$ $5$ $0.09$ $4$ $0.14$ $0.09$ $4$ $0.09$ $4$ $0.09$ $4$ $0.09$ $4$ $0.09$	n column. titutes the mn of the of best an <b>I</b> <sub>3</sub> 29 0.217 40 0.249 52 0.201 52 0.201 51 0.196 75 0.255	Converse set of v evaluation d worst v <b>I</b> 4 7 0.009 9 0.014 1 0.011 5 0.007
ts of lized Calcul Norma A B C D	multiplication         weights for         ated Weights         ated Values         Ized Values         0.056         0.044         0.037         0.112	ation t each c $I_1$ s 0,54 s 0,54 s 0,17 $I_2$ 0.09 0.14 0.06 0.09	he matrix riterion. I <sub>2</sub> I <sub>3</sub> 0,83 1,66 0,27 0,53 I <sub>3</sub> 9 0.217 0 0.249 2 0.201 9 0.143 1 0.196	I4     Tor       0,1     3,1       0,03     1       I4     0.009       0.014     0.011       0.016	y the	or max negativ minimu where a the crite	kimu: e id um v. A+ a eria': A B C D E F F	m values eal soluti alues of ea nd A- are s. <b>I</b> 1 0.050 0.044 0.03 0.111 0.074	of         each           on         cons           ach         colu           ach         colu           ach         colu           ach         colu           ach         colu           ach         colu           b $0.09$ 4 $0.14$ 5 $0.09$ 4 $0.14$ 5 $0.07$ 52, $0.259$	n column. titutes the mn of the of best an <b>I</b> <sub>3</sub> 29 0.217 40 0.249 52 0.201 29 0.145 51 0.196 75 0.255	Converse set of v evaluation d worst v <b>I</b> 4 7 0.009 9 0.014 1 0.011 5 0.007
is of lized Calcul Vorma $A$ $B$ $C$ $D$ $E$ $F$ $F$	multiplication weights for a set weights for a set $I_1$ and $I_1$ and $I_1$ and $I_2$ and $I_2$ and $I_1$ and $I_2$	ation       t         I1 $6$ S $0,54$ $3$ $0,17$ I2 $0.09$ $0.14$ $0.06$ $0.09$ $0.15$ $0.07$ $0.07$ Separatt       alterna	he matrix riterion. I <sub>2</sub> I <sub>3</sub> 0,83 1,66 0,27 0,53 I <sub>3</sub> 9 0.217 0 0.249 2 0.201 9 0.143 1 0.196	I4     Tor       0,1     3,1       0,03     1       I4     0.009       0.014     0.011       0.016     0.007       0.012     0.012	y the	or max negativ minimu where L the crite A <sup>+</sup> A <sup>-</sup> Step 6: Relativ	kimu: e id m v. A+ a eria': A B C D E F = { 0 Relative classical Relative classical Relativ	m values eal soluti alues of ea nd A- are s. 0.056 0.044 0.037 0.066 0.112, 0.066 0.037, 0.15 0.037, 0.15 0.037, 0.15	of each on constant column the set $I_2$ $I_2$ $I_2$ $I_3$ $I_4$ $I_2$ $I_2$ $I_2$ $I_3$ $I_2$	n column. titutes the mn of the of best an <b>I</b> <sub>3</sub> 29 0.217 40 0.249 52 0.201 29 0.145 51 0.196 75 0.255	Converse set of v evaluation d worst v $I_4$ 7 0.009 0 0.014 1 0.011 2 0.016 5 0.007 2 0.012 0 0.012
s of ized Calcul Korma A B C D E F F	multiplication weights for ated Weights ated Weights ated Values $I_1$ 0.056 0.044 0.037 0.112 0.074 0.066 atining the States atining the States ates at the states of th	ation       t         I1 $I_1$ S       0,54         G       0,17         I2       0.09         0.14       0.06         0.09       0.15         0.09       0.15         0.07       0.07         Separat       alterna         tance.       1	he matrix riterion. $I_2$ $I_3$ 0,83 1,66 0,27 0,53 $I_3$ 9 0.217 0 0.249 2 0.201 9 0.143 1 0.196 5 0.259 <i>ion Measure</i> tive from the	I4     Tor       0,1     3,1       0,03     1       I4     0.009       0.014     0.011       0.016     0.007       0.012     0.012	y the tal 3	or max negativ minimu where <i>L</i> the crite <i>A</i> <sup>+</sup> <i>A</i> <sup>+</sup> <i>A</i> <sup>-</sup> <i>Step 6:</i> Relativ or comp	kimu: e id m v. A+ a eria': A B C D E F = { 0 Relations Relatio	m values eal soluti- alues of ea nd A- are s. 0.050 0.044 0.054 0.044 0.054 0.044 0.056 0.044 0.074 0.066 0.112, 0.06 0.077 0.066 0.015 0.077 0.066 0.015 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.066 0.077 0.077 0.066 0.077 0.077 0.066 0.077 0.077 0.066 0.077 0.066 0.077 0.077 0.077 0.077 0.077 0.077 0.077	of each on constant column to the set $I_2$ $I_2$ $I_2$ $I_2$ $I_2$ $I_3$ $I_4$ $I_$	n       column.         titutes       the         mn       of the         of best       an $I_3$ $0.245$ $0.2017$ $0.249$ $0.249$ $0.245$ $0.201$ $0.196$ $0.196$ $0.196$ $0.007$ $0.007$ $0.016$ $0.016$ the Ideal So $0.1010$	Converse set of v evaluation d worst v 7 0.009 0 0.014 1 0.011 0.016 0 0.007 2 0.012

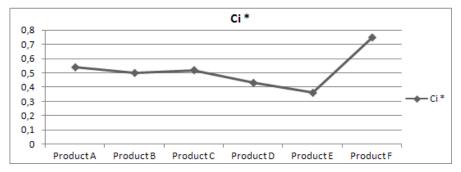


Fig. 5. Performance Values of Each Product

#### References

- 1. Westkamper, E. (2008). Manufuture and Sustainable Manufacturing. *Manufacturing Systems and Technologies for the New Frontier, The 41st CIRP Conference on Manufacturing Systems*, 11-14.
- OECD, Organization for Economic Co-operation and Development. Sustainable Manufacturing Indicators. http://www.oecd.org/document/48/0,3746,en\_21571361\_47075996\_47855728\_1\_1\_ 1\_1,00.html
- Raizer Neto. E.; Mariotte, M.T.; Hinz, R.T. P. (2006). Indicators to Measure Sustainability of an Industrial Manufacturing. *Innovation in Life Cycle Engineering* and Sustainable Development, 111-122.
- Krajnc, D.; Glavic, P. (2003). Indicators of Sustainable Production. *Clean Techn Environ Policy* 5, 279-288. Doi:10.1007/S10098-003-0221-Z
- United Nations (2007). Indicators of Sustainable Development: Guidance and Methodologies Third Edition United Nations Publication, Sales No. E.08.II.A.2, ISBN 978-92-1-104577-2
- 6. Hwang, C.L.; Yoon, K. (1981). Multiple Attribute Decision Making: Methods and Applications, *Springer-Verlag*, New York.