



**HAL**  
open science

## On soft errors in the Conjugate Gradient method: sensitivity and robust numerical detection -revised

Emmanuel Agullo, Siegfried Cools, Emrullah Fatih-Yetkin, Luc Giraud, Nick Schenkels, Wim Vanroose

► **To cite this version:**

Emmanuel Agullo, Siegfried Cools, Emrullah Fatih-Yetkin, Luc Giraud, Nick Schenkels, et al.. On soft errors in the Conjugate Gradient method: sensitivity and robust numerical detection -revised. [Research Report] RR-9330, Inria Bordeaux Sud-Ouest. 2020, pp.31. hal-02495301v1

**HAL Id: hal-02495301**

**<https://inria.hal.science/hal-02495301v1>**

Submitted on 1 Mar 2020 (v1), last revised 4 Sep 2020 (v3)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



# On soft errors in the Conjugate Gradient method: sensitivity and robust numerical detection - revised

Emmanuel Agullo, Siegfried Cools, Emrullah Fatih-Yetkin, Luc Giraud, Nick Schenkel, Wim Vanroose

**RESEARCH  
REPORT**

**N° 9330**

February 2020

Project-Team HiePACS





## On soft errors in the Conjugate Gradient method: sensitivity and robust numerical detection - revised

Emmanuel Agullo\*, Siegfried Cools<sup>†</sup>, Emrullah Fatih-Yetkin<sup>‡</sup>,  
Luc Giraud\*, Nick Schenkel\*, Wim Vanroose<sup>†</sup>

Project-Team HiePACS

Research Report n° 9330 — February 2020 — 31 pages

**Abstract:** The conjugate gradient (CG) method is the most widely used iterative scheme for the solution of large sparse systems of linear equations when the matrix is symmetric positive definite. Although more than sixty year old, it is still a serious candidate for extreme-scale computation on large computing platforms. On the technological side, the continuous shrinking of transistor geometry and the increasing complexity of these devices affect dramatically their sensitivity to natural radiation, and thus diminish their reliability. One of the most common effects produced by natural radiation is the single event upset which consists in a bit-flip in a memory cell producing unexpected results at application level. Consequently, the future computing facilities at extreme scale might be more prone to errors of any kind including bit-flip during calculation. These numerical and technological observations are the main motivations for this work, where we first investigate through extensive numerical experiments the sensitivity of CG to bit-flips in its main computationally intensive kernels, namely the matrix-vector product and the preconditioner application. We further propose numerical criteria to detect the occurrence of such soft errors; we assess their robustness through extensive numerical experiments.

**Key-words:** Soft-error, bit-flip, Conjugate Gradient method, numerical detection, sensitivity, robustness, exascale

---

\* Inria, France

<sup>†</sup> Applied Mathematics Group, University of Antwerpen, Belgium

<sup>‡</sup> Kadir Has University, Turkey

**RESEARCH CENTRE  
BORDEAUX – SUD-OUEST**

200 avenue de la Vielle Tour  
33405 Talence Cedex

## Sur les soft-erreurs dans la méthode du Gradient Conjugué: sensibilité et détection numérique robuste - révision

**Résumé :** La méthode du gradient conjugué (CG) est la méthode itérative la plus utilisée pour résoudre des systèmes linéaires creux de grande taille lorsque la matrice est symétrique définie positive. Bien que vieille de soixante ans, cette méthode reste une candidate sérieuse pour être mise en œuvre pour la résolution de très grands systèmes linéaires sur des plateformes de calcul de très grande taille. Sur le plan technologique, la réduction permanente de la taille et la complexité croissante des composants électroniques de ces calculateurs affecte dramatiquement leur sensibilité aux radiations cosmiques ce qui réduit leur fiabilité. L'un des effets les plus courants des rayonnements naturels est la perturbation due à un événement unique qui consiste en un retournement de bit dans une cellule mémoire produisant des résultats inattendus au niveau de l'application. Par conséquent, les futures installations informatiques à très grande échelle pourraient être plus sujettes à des erreurs de toute sorte, y compris le basculement de bit pendant le calcul. Ces observations numériques et technologiques sont les suivantes les principales motivations de ce travail, pour lequel nous étudions d'abord par le biais d'études approfondies et approfondies la sensibilité de la CG aux sauts de bits dans ses principaux domaines d'application, à forte intensité de calcul, à savoir le produit matrice-vecteur et le produit application du préconditionneur. Nous proposons en outre des critères numériques pour détecter l'apparition de tels défauts ; nous évaluons leur robustesse à travers des expériences numériques approfondies.

**Mots-clés :** Soft-erreur, bit-flip, Gradient Conjugué, détection numérique, sensibilité, robustesse, exascale

## Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
<b>2</b>	<b>Background</b>	<b>6</b>
2.1	Preconditioned Conjugate Gradient algorithm . . . . .	6
2.2	Double Modular Redundancy . . . . .	6
2.3	Checksum techniques . . . . .	7
2.4	Round-off and soft error models . . . . .	8
2.4.1	Round-off errors . . . . .	8
2.4.2	Soft errors . . . . .	8
<b>3</b>	<b>Study of the sensitivity of PCG to soft errors</b>	<b>10</b>
3.1	Propagation of bit-flips in PCG . . . . .	10
3.2	Bit-flip injection protocol . . . . .	10
3.3	Numerical experiments . . . . .	12
3.3.1	Effect of the bit-flip value . . . . .	14
3.3.2	Soft errors in the matrix-vector product . . . . .	14
3.3.3	Soft errors in the preconditioner application . . . . .	14
3.3.4	Concluding remarks . . . . .	20
<b>4</b>	<b>Numerical criteria for detecting soft errors in PCG</b>	<b>20</b>
4.1	Numerical criteria . . . . .	20
4.1.1	Residual gap-based detection . . . . .	20
4.1.2	$\alpha$ -based detection . . . . .	21
4.2	Numerical experiments . . . . .	21
4.2.1	Checksum-based detection . . . . .	22
4.2.2	Residual gap-based detection . . . . .	23
4.2.3	$\alpha$ -based detection . . . . .	27
4.2.4	Concluding remarks . . . . .	27
<b>5</b>	<b>Conclusion and perspectives</b>	<b>28</b>

## Foreword

This report is an updated version of [1] but based on a fully redesigned experimental framework to allow for reproducible science and considered a larger set matrices that are also of larger sizes. All the results presented in the revision correspond to a new set of experiments while the general observations remain unchanged. We would like to point out that three Jupyter notebooks have been made available on the HAL-repository as additional material. The first one illustrates how to generate the raw data, the second one how this raw data can be analysed, and the third one how we generated the figures displayed in the paper. We would also like to make the raw data used to generate the final results presented in the paper available, but they are too large to be stored on the HAL-repository. This foreword will be updated to indicate the location of the data once we will have found a sustainable solution.

## 1 Introduction

The flexibility offered by Von Neumann machines for programming complex algorithms motivated the quest for the design of many innovative numerical algorithms in the late 40's. Computers being considered as unreliable machines, it was not rare that the presentation of those algorithms was accompanied with advanced numerical considerations for distinguishing “normal rounding-off errors” due to digital computation from “errors of the computers”, using the expressions from [17], which introduced the Conjugate Gradient (CG) algorithm, a seminal paper of that unprecedented fertile period. This numerical technique is still a method of choice for solving large sparse linear systems of equations involving a symmetric positive definite (SPD) matrix. While the study of numerical correctness since led to a continuous, productive research field [18], the tremendous progress in hardware design progressively reduced the interest of detecting *soft* errors (using the modern expression for characterizing errors that do not lead to an immediate failure of a program). At some extra energy cost, hardware mechanisms such as Error Correcting Codes (ECC) were indeed able to correct most soft errors so that, from a numerical design point of view, they could almost be considered as – and indeed often were – a non-existent problem.

The advent of distributed-memory platforms and network of heterogeneous workstations in the 90's once again drew the attention of the computational science community to faults leading to errors, as long running parallel executions were regularly aborted because of the crash or the non response of only a single processing unit. For this reason, early high-level parallel libraries for programming these parallel platforms such as the Parallel Virtual Machine (PVM) [11] proposed primitives (`hostfailentry()` in the revision 3 of the PVM standard for instance) allowing an application to design tailored schemes for recovering from such *hard* errors (using modern terminology). From the numerical perspective, one major breakthrough was the introduction of algorithm-based fault tolerance (ABFT) schemes [20] to detect and correct errors when matrix operations such as addition, multiplication, scalar product, LU-decomposition, and transposition are performed using multiple processor systems. The proposed method could “detect and correct any failure within a single processor in a multiple processor system”, using the words of the authors. On the other hand, the operating system community developed efficient checkpoint-restart (CPR) mechanisms. Together with the progress of interconnect network technologies, their ability to handle those faults in a transparent way for the application once again allowed programmers to view (parallel) computers as reliable computing platforms. As a consequence, in spite of solid proposals (such as [3]), the most widely employed interface for programming distributed-memory machines today, the Message Passing Interface (MPI) standard, does not provide support allowing applications to design customized resilient schemes, even in its revision 3.1 [9], the most recent standard at the time of writing the present article.

As the size of transistors continues to reduce and the number of components continues to increase, soft errors in supercomputers become more and more common. In the fault tolerance literature, many techniques have been proposed to detect and/or correct soft errors. The best-known general technique to detect soft errors is the double modular redundancy (DMR) approach. This approach either uses two different pieces of hardware to perform the same computation at the same time or performs the same computation on the same hardware twice, then compares the two results to detect whether errors occur or not. The most well-known general technique to correct single soft errors is the triple modular redundancy (TMR) approach. TMR either performs the same computation on three different pieces of hardware or uses the same hardware to perform the same computation three times, then compares and selects the results obtained consistently at least twice as the correct result. While DMR and TMR are very general, their overhead is high - up to 100% overhead to detect errors and 200% overhead to correct errors. To protect memory against corruption, ECC memory has been widely used by many computer vendors. Although today's ECC memory can detect and correct bit flips in memory, it brings significant overhead in space, time, and energy. Furthermore, ECC memory is not able to handle computational (*i.e.*, arithmetic) errors that are caused by faults in logic units. New types of unreliable hardware, such as *in-memory* computers [10] (which are no longer Von Neumann machines), are emerging as serious competitors (or, more likely, accelerators) to traditional processors, as they are expected to achieve a much higher energy efficiency.

As the preconditioned version of CG, PCG, remains the Krylov subspace method of choice for solving large sparse SPD linear systems, the goal of this paper is to study its sensitivity to soft errors and propose numerical remedies to detect them. Although much truncated, the above very brief journey through half a dozen decades of the modern computing era shows that our concern for the reliability of machines has been slowly but constantly evolving. This motivates us to characterize these errors from a high-level point of view, disregarding low-level hardware details, may the underneath silicon be an exascale machine, the initial motivation for this work, or, potentially, an embedded computer in high altitude [32] or any type of unreliable digital computer (such as [10]). We therefore only assume that soft errors may occur, corrupting data or computation, without the hardware or system detecting them and notifying the application that an error occurred. We call this type of soft error, "silent data corruption" (SDC) (after [7]), which may cause a simulation to silently return an incorrect answer that does not reflect any sensitivity of the solution to the input data and consequently could lead to a misleading analysis of the computation outcome. We focus on such errors in the present study and we refer the reader to [16] and the references therein for a recent overview on the resilience and fault tolerance issues in HPC.

The first contribution of this paper is to study the sensitivity of PCG to such soft errors. We mainly focus on its main computational kernels, *i.e.*, the matrix-vector product and the preconditioner application. In particular, we investigate the sensitivity to soft errors for various space and time locations.

The second contribution is the proposition of two numerical criteria to detect those soft errors. The PCG method is a very sophisticated and elegant numerical scheme that has many properties induced by the symmetric positive definiteness of the matrix  $A$ . Unfortunately, most characteristic properties are no longer valid in finite precision calculation. On the other hand, a lot of work has been devoted to study PCG in finite precision [21, 22]. We therefore consider some of the finite precision results to define a first possible numerical soft error detection mechanism based on the residual gap. We consider an additional criterion, which was already proposed in the original paper on CG [17, Thm 5.5], based on a bound (as opposed to a strict equality), hence expected to be less prone to defection due to finite precision calculation. We study the respective quality of both these criteria and show that, combined together, they are extremely efficient to detect



soft errors, occurring not only in the matrix-vector product and preconditioner application, but also in all the operations involved in PCG.

The rest of the paper is organized as follows. In Section 2, we briefly present the PCG algorithm, we review the main classical error detection techniques and we detail round-off and soft error modelling. In Section 3, we then study the sensitivity of PCG to soft errors occurring in its main computational kernels that are the matrix-vector product and the preconditioner application. In particular, we investigate the dependency on the bit and temporal location of the error. In Section 4, we propose numerical criteria to detect soft errors in those two kernels and assess their robustness through extensive numerical experiments. Finally, we summarize the contributions of this paper in Section 5 and draw up some perspectives for future works.

## 2 Background

### 2.1 Preconditioned Conjugate Gradient algorithm

PCG is a Krylov subspace method for solving a large linear system

$$Ax = b$$

where  $A \in \mathbb{R}^{n \times n}$  is symmetric positive definite (SPD), the right-hand side  $b \in \mathbb{R}^n$  and the solution  $x \in \mathbb{R}^n$ . In exact arithmetic, the method converges within at most  $n$  iterations. In practice with finite precision calculation, this property does not hold and preconditioning [25, 30] is often needed to accelerate the convergence. While in the context of Krylov subspace methods, PCG is a sophisticated, elegant and powerful numerical algorithm [22, 25, 30], its algorithm looks fairly simple and can be written as depicted in Algorithm 1, where  $M$  defines the preconditioner.

---

#### Algorithm 1 Preconditioned Conjugate Gradient

---

```

1:  $r_0 := b - Ax_0$ ;  $u_0 = M^{-1}r_0$ ;  $p_0 := u_0$ ;  $\gamma_0 := r_0^T u_0$ 
2: for  $i = 0, \dots$  do
3:    $s_i := Ap_i$ 
4:    $\alpha_i := \gamma_i / s_i^T p_i$ 
5:    $x_{i+1} := x_i + \alpha_i p_i$ 
6:    $r_{i+1} := r_i - \alpha_i s_i$ 
7:    $u_{i+1} := M^{-1}r_{i+1}$ 
8:    $\gamma_{i+1} := r_{i+1}^T u_{i+1}$ 
9:    $\beta_{i+1} := \gamma_{i+1} / \gamma_i$ 
10:   $p_{i+1} := u_{i+1} + \beta_{i+1} p_i$ 
11: end for

```

---

### 2.2 Double Modular Redundancy

Although potentially costly, DMR is certainly the best-known general agnostic technique for detecting soft errors. It consists in duplicating both the operations and data, and checking the equality of the output of the redundant calculations. For classical PCG, soft error detection with such a full duplication technique can be implemented as described in Algorithm 2.

This duplication process is simple, generic and effective. However, the price for this detection technique may not be affordable with respect to computational and storage costs. Level-1 BLAS operations have a moderate computational cost so that their duplication may be considered

**Algorithm 2** Preconditioned Conjugate Gradient with DMR detection

---

```

1:  $r_0^1 := b - Ax_0$ ;  $p_0^1 := r_0^1$ ;  $r_0^2 := b - Ax_0$ ;  $p_0^2 := r_0^2$ 
2: for  $i = 0, \dots$  do
3:    $s^1 := Ap_i^1$ ;  $s^2 := Ap_i^2$ ; check( $s^1 == s^2$ )
4:    $\alpha^1 := (r_i^1, r_i^1)/(s^1, p_i^1)$ ;  $\alpha^2 := (r_i^2, r_i^2)/(s^2, p_i^2)$ ; check( $\alpha^1 == \alpha^2$ )
5:    $x_{i+1}^1 := x_i^1 + \alpha^1 p_i^1$ ;  $x_{i+1}^2 := x_i^2 + \alpha^2 p_i^2$ ; check( $x_{i+1}^1 == x_{i+1}^2$ )
6:    $r_{i+1}^1 := r_i^1 - \alpha^1 s^1$ ;  $r_{i+1}^2 := r_i^2 - \alpha^2 s^2$ ; check( $r_{i+1}^1 == r_{i+1}^2$ )
7:    $u_{i+1}^1 := M^{-1} r_{i+1}^1$ ;  $u_{i+1}^2 := M^{-1} r_{i+1}^2$ ; check( $u_{i+1}^1 == u_{i+1}^2$ )
8:    $\beta^1 := (r_{i+1}^1, u_{i+1}^1)/(r_i^1, u_i^1)$ ;  $\beta^2 := (r_{i+1}^2, u_{i+1}^2)/(r_i^2, u_i^2)$ ; check( $\beta^1 == \beta^2$ )
9:    $p_{i+1}^1 := u_{i+1}^1 + \beta^1 p_i^1$ ;  $p_{i+1}^2 := u_{i+1}^2 + \beta^2 p_i^2$ ; check( $p_{i+1}^1 == p_{i+1}^2$ )
10: end for

```

---

acceptable under certain conditions. On the other hand, duplication of the two most computationally intensive kernels that are the matrix-vector product and preconditioning may not be affordable. Alternatively, checksum techniques can be employed to protect and check the correctness of these last two kernels.

### 2.3 Checksum techniques

Detecting soft errors in matrix calculation with checksum techniques was first proposed in [20] and further investigated for applications with iterative methods in [27]. To protect a matrix-vector product the main idea relies on the following equality that holds in exact arithmetic for any vector  $v \in \mathbb{R}^n$ :

$$\mathbb{I}^T(Av) = (\mathbb{I}^T A)v$$

where  $\mathbb{I}$  is the vector of  $\mathbb{R}^n$  with all entries equal to one. Each entry  $\ell$  of the row vector  $c^T = (\mathbb{I}^T A)$  is the checksum of the  $\ell^{th}$  column of  $A$  that can be securely computed before starting PCG. At each PCG iteration, checking the correctness of the matrix-vector product reduces to test the equality:

$$c^T p_{i-1} = \mathbb{I}^T s_{i-1}.$$

The left-hand side requires an extra dot-product calculation and the right-hand side is simply the sum of all the entries of the output vector  $s_{i-1}$ . Because of the symmetry of  $A$  the checksum vector can also be computed by  $c = A\mathbb{I}$  so that the idea can be applied in a matrix-free context as well as for the preconditioner application calculation.

In finite precision arithmetic, there may not be a bitwise equality between  $c^T p_{i-1}$  and  $\mathbb{I}^T s_{i-1}$  because of the non-associativity of the sum in presence of round-off errors [18]. To assess the correctness of the matrix-vector product, we cannot simply check the bitwise equality and instead need to consider that the calculation is correct if

$$\frac{|c^T p_{i-1} - \mathbb{I}^T s_{i-1}|}{|c^T p_{i-1}|} \leq \tau, \quad (1)$$

where the threshold  $\tau$  has to be safely defined. To prevent the occurrence of too many false detection instances (referred to as false-positives), the threshold  $\tau$  needs to be chosen large enough. However,  $\tau$  cannot be chosen arbitrarily large; otherwise actual errors would be missed. Consequently, the checksum-based detection methods need some tuning of the threshold  $\tau$  with respect to round-off effects to achieve effectiveness, as further discussed in Section 4.2.1.




Figure 1: IEEE 754 double-precision binary floating-point format.

## 2.4 Round-off and soft error models

### 2.4.1 Round-off errors

Round-off errors are conservatively modelled with the IEEE 754 specification. In particular, we rely on the IEEE 754 double-precision binary floating-point format, referred to as binary64 and illustrated in Figure 1. Let us denote  $(b_i)_{i=0}^{63}$  the sequence of bits defining a double-precision number  $d$  where  $(b_i)_{i=0}^{51}$  defines the mantissa/fraction,  $(b_i)_{i=52}^{62}$  the exponent and  $b_{63}$  the sign so that

$$d = (-1)^{b_{63}} 2^{e-1023} (1 + m), \text{ with } e = \sum_{i=52}^{62} b_i 2^{i-52} \text{ and } m = \sum_{i=0}^{51} b_i 2^{i-52}. \quad (2)$$

The accuracy and stability of numerical algorithms in the presence of round-off errors is still an intense field of research [18] and we will rely on such finite precision results to define a first possible soft error detection mechanism in Section 4.1.1.

### 2.4.2 Soft errors

In addition to round-off errors (the “normal rounding-off errors” in [17]), soft errors (the “errors of the computers” in [17]) may occur. As discussed in the introduction of the present paper, a brief journey through the modern computing era motivates us to characterize soft errors from a high-level point of view, disregarding low-level hardware details. While there is a substantial literature for characterizing errors based on their hardware characteristics, much less effort has been devoted to characterize them from a high-level point of view. However, quoted in [24], Rees argued back in 1997 that “failure is a matter of function only [and is thus] related to purpose, not to whether an item is physically intact or not”. M. Hoemmen and M. Heroux proposed a fault characterization in that perspective [19]. In [7], J. Elliot, M. Hoemmen and F. Mueller also consider a type of fault they do characterize from a high-level point of view, *i.e.*, in their case, “a fault that silently introduces bad data, while not persistently tainting the data that was used in the calculation. For example, let  $a = 2$  and  $b = 2$ , then  $c = a + b = 10$ .” They acknowledge that “while simplistic, this model presumes no knowledge of the nature of the fault, only that  $c$  is incorrect. This model assumes that the machine is unreliable in an unpredictable way, and therefore [they] are skeptical of the output it presents.”

We consider that model referred to as silent data corruption (SDC) in [7] and refine it, depending on (1) whether the input data also gets tainted once the operation has completed, (2) at which stage the perturbation occurs and (3) how the perturbation is incurred. First, we distinguish whether the input data ( $a$  and  $b$  in the above example) is tainted or not once the operation has completed. Assume, for instance, that  $a$  gets tainted (say,  $a = 8$  instead of 2) during the execution of the operation, eventually leading to the perturbation of  $c$  ( $c = 10$ ). If the perturbation on  $a$  occurred while  $a$  was in a *persistent* memory (such as the main memory),  $a$  remains tainted once the operation has completed. We refer to this case as a *persistent* soft error. In the above example, the final state would be:  $c = 10$ ,  $a = 8$ ,  $b = 2$ . This type of error

original value	$ \delta d / d $		
	$\ell = 63$	$52 \leq \ell \leq 62$	$0 \leq \ell \leq 51$
$b_\ell = 0$	2	$2^{2^{\ell-52}} - 1$	$\frac{2^{\ell-52}}{1+m} \leq \frac{1}{2}$
$b_\ell = 1$	2	$\frac{1}{2} \leq 1 - 2^{-2^{\ell-52}} < 1$	$\frac{-2^{\ell-52}}{1+m} \leq \frac{1}{2}$

Table 1: Relative perturbation and associated bounds with a bit-flip on the  $\ell^{\text{th}}$  bit depending on its original value  $b_\ell$ .

can be detected if the input data have been stored redundantly without the need of performing the computation redundantly. On the contrary, if the perturbation on  $a$  occurred while  $a$  was in *transient* memory (such as a cache),  $a$  does not remain tainted once the operation has completed. Following [6, 19] terminology, we refer to this case as a *transient* soft error. In the example, the final state would be:  $c = 10$ ,  $a = 2$ ,  $b = 2$ . This second type of error cannot be detected relying only on input data redundancy and is thus more critical. We therefore focus only on such transient soft errors in the remainder of the paper (and we present results for an analogous study on persistent soft errors in [1, Appendix C]).

The second refinement we make explicit with respect to the model proposed in [7] is the stage at which the perturbation occurs. As we do not aim at considering low-level details, we consider the logical operation at which an error occurs as opposed to an hardware instruction or a floating point operation. In our case, we thus refer to an instruction in Algorithm 1 such as the matrix-vector product (step 3) or the application of the preconditioner (step 7). We will focus mainly on both these operations as they are the most time consuming and DMR may thus be expensive to apply. Nonetheless, we will eventually cover all CG steps in the concluding remarks of our study on detection mechanisms (see Section 4.2.4 and Figure 14 in particular).

Third, we consider soft errors occurring as bit-flips on the operands of the considered step. Note that this choice introduces a bias as the considered steps may be composed of multiple atomic hardware operations. A bit-flip occurring on the input data ( $a$  and  $b$  in the above example) may thus be viewed as an early error while a bit-flip occurring on the output data ( $c$ ) may be viewed as a late error. In our model, we thus do not consider the intermediates between those. Note once again that in the case of transient errors (focus of this paper), an early bit-flip on  $a$  (for instance changing  $a = 2$  into  $a = 8$ ) will affect the output data ( $c = 10$ ) and the input data  $a$  is set back to its original value. We have studied both such early and late errors and obtained similar results. We therefore focus on early errors in the core of the paper and report the study on late errors in [1, Appendix B]. Note that a single transient bit-flip injected on the input data is likely to induce multiple bit-flips on the output data.

We now provide a brief overview on bit-flip arithmetic. If a bit-flip occurs on an operand of value  $d$ , its value becomes  $d + \delta d$  with a relative perturbation that depends both on the index  $\ell$  of the affected bit and on the original value  $b_\ell$  of this  $\ell^{\text{th}}$  bit in the definition of  $d$  in (2). The possible relative perturbation  $|\delta d|/|d|$  and associated bounds are summarized in Table 1 (see [1, Appendix A] for details).

Note that the largest relative perturbations are obtained when the bit-flip affects a bit in the exponent that was originally equal to zero ( $b_\ell = 0$ ).

### 3 Study of the sensitivity of PCG to soft errors

#### 3.1 Propagation of bit-flips in PCG

As discussed above, we are interested in the possible impact of a transient bit-flip that might occur on data computed by the algorithm. Because the most computationally intensive numerical kernels are the matrix-vector product and the preconditioner application we only consider bit-flip in these two key steps of the algorithm. An additional motivation to focus on those two kernels is that the other calculations are mainly cheaper BLAS-1 operations that could be protected by DMR at an affordable extra computational cost. The propagation of the bit-flip in Algorithm 1 is as follows:

1. **Transient error in the matrix-vector calculation.** Assuming a transient error occurs at step 3 of Algorithm 1 during iteration  $i$ , after that step, the quantity  $s_i$  gets altered, while  $A$  and  $p_i$  are not. It implies that the current iterate  $(x_{i+1})$  is computed using a corrupted scalar  $(\alpha_i)$  and a non-corrupted vector  $(p_i)$  whereas the computed residual  $(r_{i+1})$  is computed using both a corrupted scalar  $(\alpha_i)$  and vector  $(s_i)$ .
2. **Transient error in the preconditioner application.** Assuming a transient error at step 7 of Algorithm 1 during iteration  $i$ , the next updated iterate  $(x_{i+2})$  in iteration  $i + 1$  is computed using a corrupted scalar  $(\alpha_{i+1})$  and a consistently corrupted vector  $(p_{i+1})$ . Similarly, the iteratively computed residual  $(r_{i+2})$  is updated using the corrupted scalar  $(\alpha_{i+1})$  and corrupted vector  $(s_{i+1})$ .

The propagation of transient errors located in the matrix-vector product and in the preconditioner application have therefore a different impact on the quantities computed by CG, possibly introducing different effects on its numerical behavior.

Figure 2 shows the data flow in the main PCG loop as well as associated corrupted quantities when a transient soft error appears in the matrix-vector product (left) or preconditioning (right). In these graphs a vertex corresponds to a computing task and an edge to data dependencies between those. The orange color indicates that the task is performed with one corrupted input variable and red is used when more than one input variable is affected by a previous error.

#### 3.2 Bit-flip injection protocol

We use the following protocol in order to create a database of PCG runs with and without the injection of a bit-flip:

1. Given a SPD  $A \in \mathbb{R}^{n \times n}$ , we generate a vector  $x \in \mathbb{R}^n$  with random entries in  $[-1, 1]$  and calculate the corresponding right-hand side  $b$ .
2. We solve the resulting linear system  $Ax = b$  for  $x$ : once without the injection of a bit-flip and once with the injection of a bit-flip.
3. The injected bit-flip is randomly generated by varying the following parameters:
  - The iteration at which the error occurs: we use nine sample locations ranging from 10% up to 90% of the iterations required for PCG to converge without bit-flip.
  - The vector affected by the bit-flip: either  $s_i$  or  $u_{i+1}$  in order to model either a bit-flip in the matrix-vector product or in the preconditioner.
  - The entry of the vector that is affected by the bit-flip.

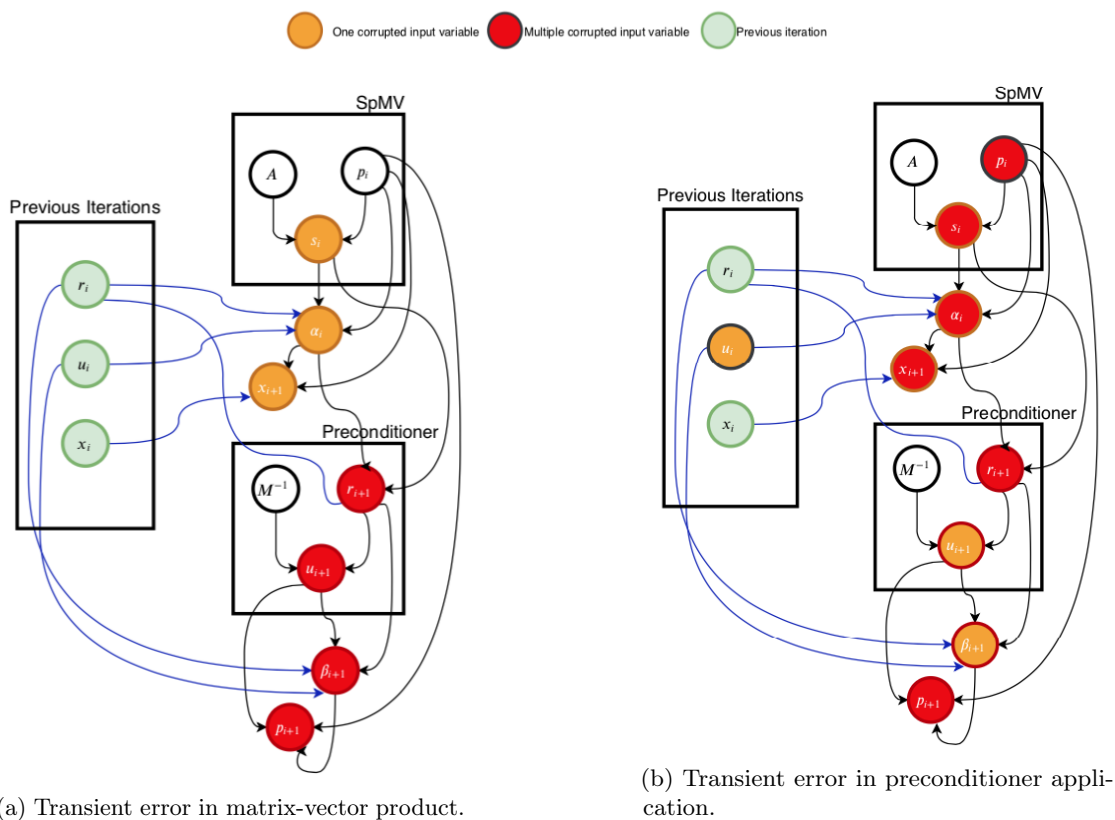


Figure 2: Propagation of transient errors in the PCG algorithm.

ID	Name	Size	Norm	Cond	Iter. ( $10^{-5}$ )	Iter. ( $10^{-10}$ )
1	bodyy5	18,589	8.04e3	7.87e3	137( 2)	434( 4)
3	bundle1	10,581	6.43e12	1.00e3	28( 0)	56( 0)
5	crystm02	13,965	1.76e-12	2.50e2	26( 0)	56( 0)
7	crystm03	24,696	9.79e-13	2.64e2	26( 0)	56( 0)
9	Dubcova1	16,129	4.80	9.97e2	75( 8)	168( 1)
11	fv1	9,604	4.51	8.81	15( 0)	31( 0)
13	fv3	9,801	4.00	2.03e3	81(10)	216( 2)
15	jnlbrng1	40,000	1.84e1	1.83e2	50( 0)	124( 0)
17	Kuu	7,102	5.41e1	1.58e4	175(24)	565(12)
19	minsurfo	40,806	8.10	81.11	37( 0)	88( 0)
21	obstclae	40,000	8.20	4.10e1	29( 0)	65( 0)
23	torsion1	40,000	8.20	4.10e1	29( 0)	65( 0)
25	wathen100	30,401	3.70e2	5.82e3	24( 0)	47( 0)
27	wathen120	36,441	3.69e2	2.58e3	24( 0)	47( 0)

Table 2: Some numerical properties of the matrices used in the experiments. The matrices with even IDs  $2n$  correspond to the normalized versions of the matrices with IDs  $2n - 1$ . We also list the average number of iterations (and standard deviation) required by the linear systems in order to converge with a Jacobi preconditioner when no fault occurs.

- The bit in the 64-bit sequence of the IEEE-754 double precision representation that will be flipped.
4. For the given matrix  $A$ , this process will be repeated multiple times – each time with a new random vector  $x$ , corresponding right-hand side  $b$  and new random bit-flip.

A sketch of this protocol is given in Figure 3. We mention that we also performed experiments where transient bit-flip were injected in the right-hand side operands of these two computational kernels; we haven’t observed noticeable differences and have kept bit-flip in the left-hand side which makes the experimental setup slightly simpler.

The matrices we use in order to generate our database are listed in Table 2. In order to see the effect of the norm of  $A$ , we also consider the versions of these matrices scaled by  $\|A\|_2$ . Furthermore, we will consider CG runs without a preconditioner and PCG runs with a Jacobi diagonal preconditioning (JAC) [25] and use the stopping criterium

$$\frac{\|b - Ax_{i+1}\|_2}{\|b\|_2} \leq \varepsilon_{\ell=1,2} \quad (3)$$

with two threshold values: low accuracy with  $\varepsilon_1 = 10^{-5}$  and high accuracy with  $\varepsilon_2 = 10^{-10}$ . Finally, per combination of matrix, preconditioner, and  $\varepsilon_\ell$ , we performed 100,000 runs without a bit-flip, and the 100,000 corresponding runs with a bit-flip.

### 3.3 Numerical experiments

We now study the sensitivity of PCG algorithm with respect to soft error locations in time and space. As bit-flip injections impact the convergence behavior of PCG, the stopping criterion may be reached in a different number of iterations or even be prevented. We thus consider that a faulty execution converges if it achieves the same stopping criterion as the non-faulty execution with some authorized delay in term of number of iterations. In this work, we allow for 50% extra

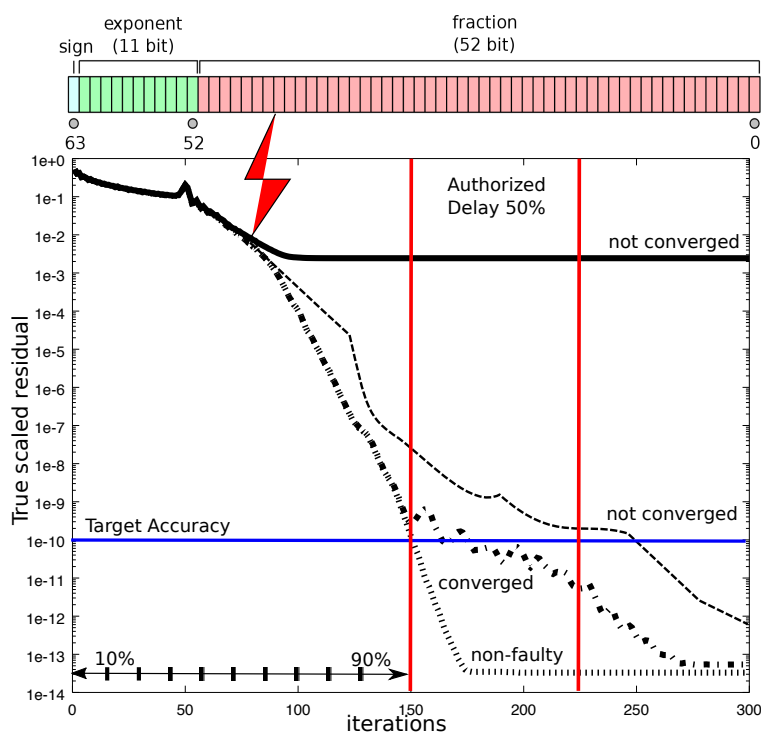


Figure 3: The error is injected in the input vector at any entry, any bit and at any time in the iterative process for either the matrix-vector product or the preconditioner calculation.



iterations (with respect to the non-faulty execution) to decide whether or not the soft error has prevented PCG to converge, see also Figure 3. We mention that we varied this extra iteration bound and it did not significantly change the statistical results as the number of non converging cases would remain roughly the same. Some of the bit-flips translate into NaN (Not a Number). Such a situation is accounted for as a non-converged run in the proposed sensitivity analysis (Section 3) and will be considered as a detected fault in the study of detection mechanisms (Section 4).

### 3.3.1 Effect of the bit-flip value

Figure 4 shows the percentage of successfully converged executions of PCG when a soft error is injected in the matrix-vector product as a function of the index of the flipped bit in the 64-bit sequence of a double precision floating point number for JAC (left) or non preconditioned (right) cases. We display in different rows the experiments associated with bit-flips where the value of the bit was originally zero (one), referred to as “0 → 1” (resp. “1 → 0”) in this figure. As it could have been expected from the bound on the relative perturbation size reported in Table 1, one can notice that flipping a bit in the exponent from zero to one damages convergence more than a bit moving from one to zero. This trend is particularly visible in the first two rows of the graphs, for the less stringent stopping criterion.

### 3.3.2 Soft errors in the matrix-vector product

Figure 5 shows the percentage of successfully converged executions of PCG when a soft error is injected in the matrix-vector product as a function of the index of the flipped bit. We report both results on low ( $\varepsilon = 10^{-5}$  in (3), top row of the figure) and high ( $\varepsilon = 10^{-10}$ , bottom row) target accuracy. The bits flipped in the exponent or in high order bits of the mantissa very often prevent CG to converge, especially when a high accuracy is targeted. We also observe that bit-flips in the low-order bits in the mantissa do not prevent CG to converge for any of the two threshold values  $\varepsilon_\ell$ ; of course the index of the bit from which no effect is observed is lower for large value of  $\varepsilon_\ell$ .

We also depict the influence of the bit-flip injection time in Figure 6. Those results show that early errors have a larger impact than late ones; this behavior is somehow coherent with the results presented in [4, 5, 28] in the context of inexact Krylov solvers where the inexactness in the matrix-vector calculation can grow as the inverse of the residual norm.

### 3.3.3 Soft errors in the preconditioner application

A similar experimental study was conducted for assessing the impact of transient errors in the preconditioner application. The impact of the index of the flipped bit is reported in Figure 7, while the influence of the bit-flip injection time is reported in Figure 8.

One interesting observation is the lower negative impact of soft errors in the preconditioner application compared to errors in the matrix-vector product. For most of the experiments, a flipped bit in the mantissa does not prevent PCG to converge. To confirm this observation, we performed experiments using the identity as a preconditioner, which reduces to unpreconditioned CG when no bit-flip is injected. Comparing the subsequent results, reported in the last column of Figure 7 with those displayed in the last column of Figure 5, it can be seen that the two graphs exhibit very different behavior. The reason for this significant difference is that the propagation flows of a transient error occurring in the matrix-vector product and in the preconditioner application are very different (see Figure 2 and related discussion, above). A deeper theoretical analysis would certainly deserve to be undertaken to better understand this behavior; however, this analysis is out of the scope of the present study. Finally, applying PCG on matrices having

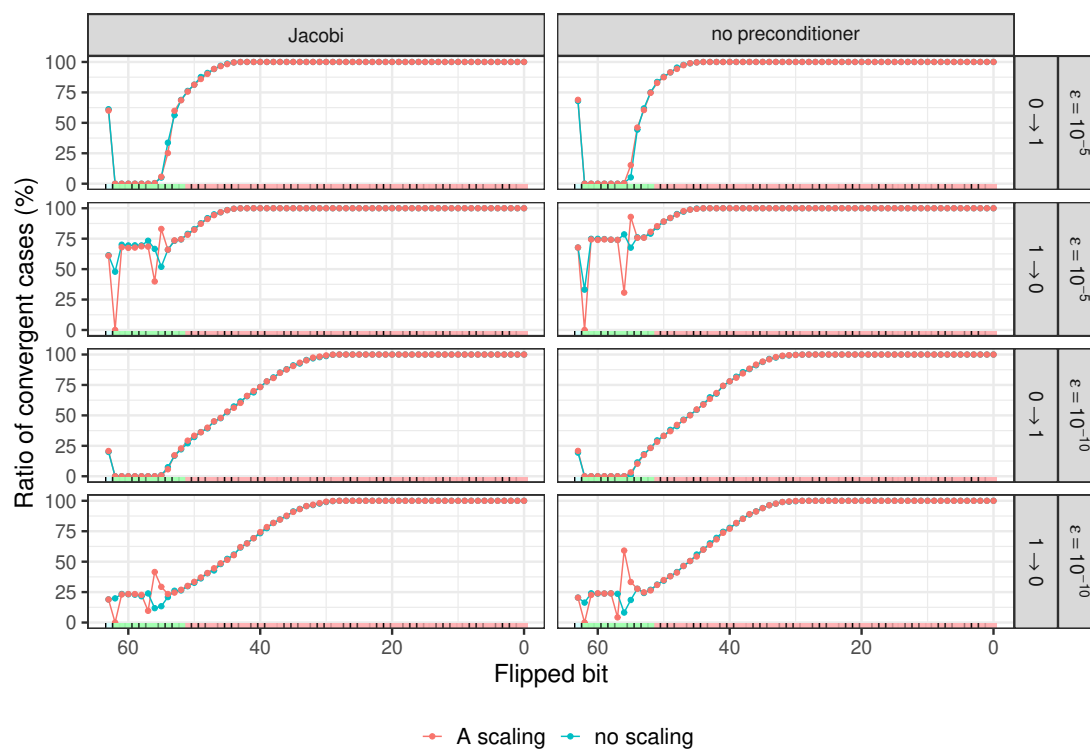


Figure 4: Comparison of the impact on convergence of the bit-flips at originally zero or one bits. The 64-bit indices of the IEEE 754 floating point numbers are displayed between each graph; from left to right, the sign (blue), exponent (green) and mantissa (red) bits are represented. Note that the missing data points at exponents in some figures are mainly due to the numerical range of the polluted vector entries.

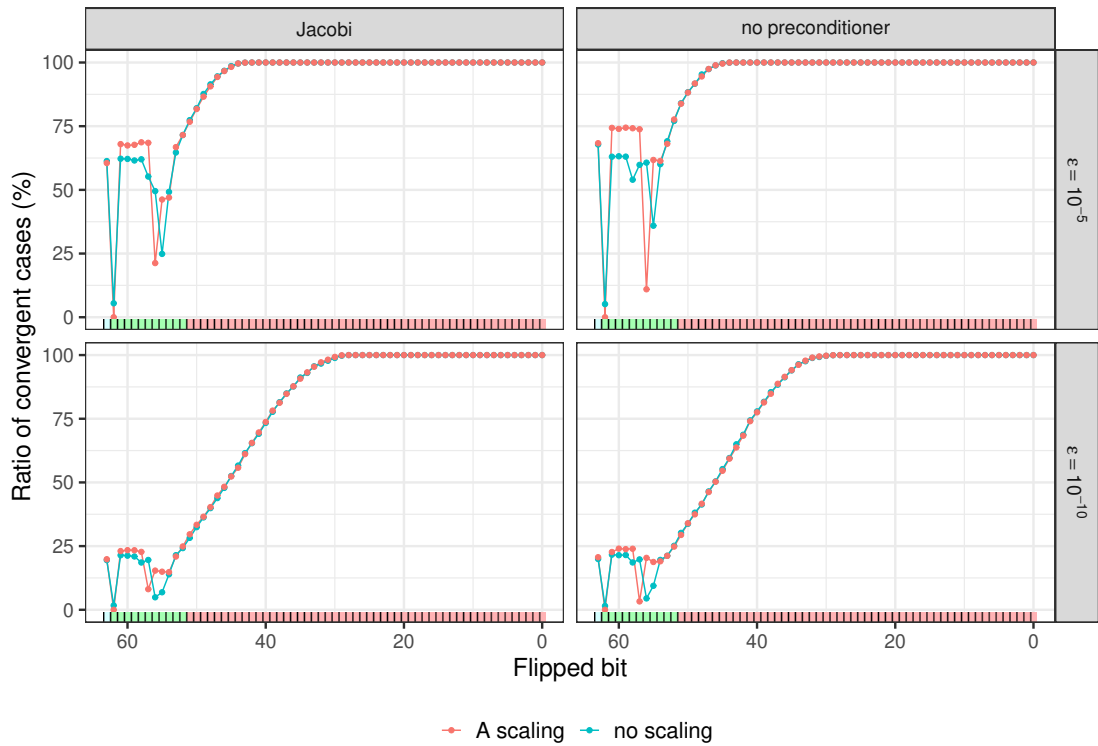


Figure 5: Impact of the index of the flipped bit in the matrix-vector product on PCG convergence success. The 64-bit indices of the IEEE 754 floating point numbers are displayed between each graph; from left to right, the sign (blue), exponent (green) and mantissa (red) bits are represented.

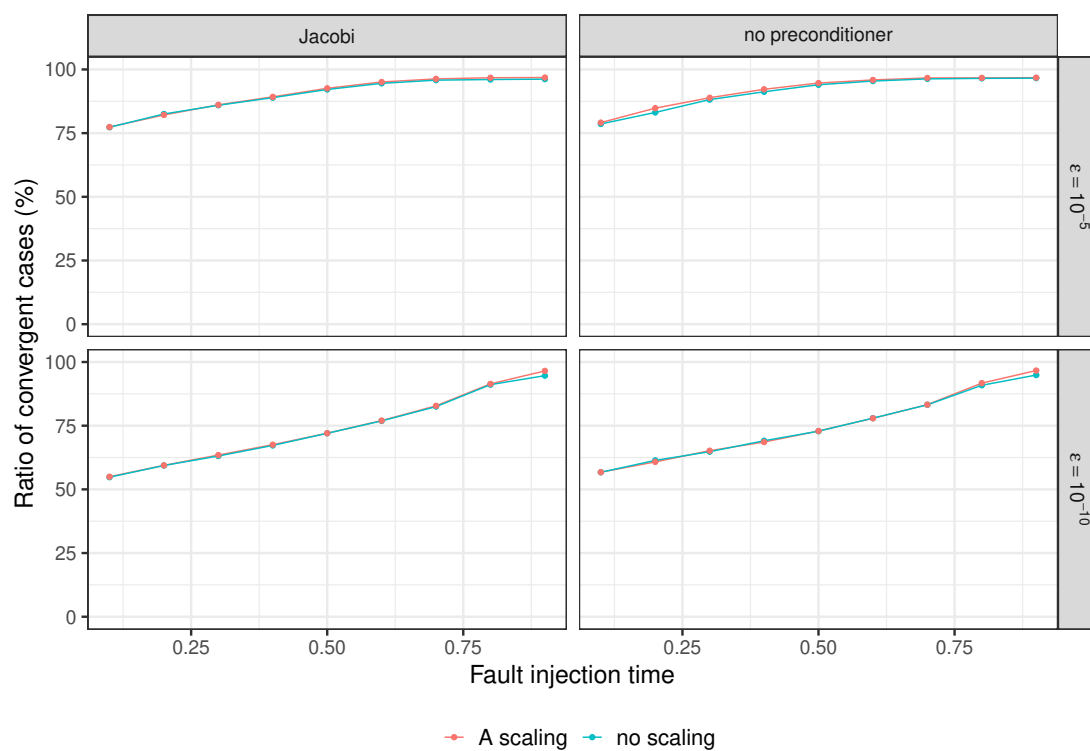


Figure 6: Impact of the bit-flip injection time (as a proportion of the number of iterations with respect to the non-faulty execution) in the matrix-vector product on PCG convergence success.

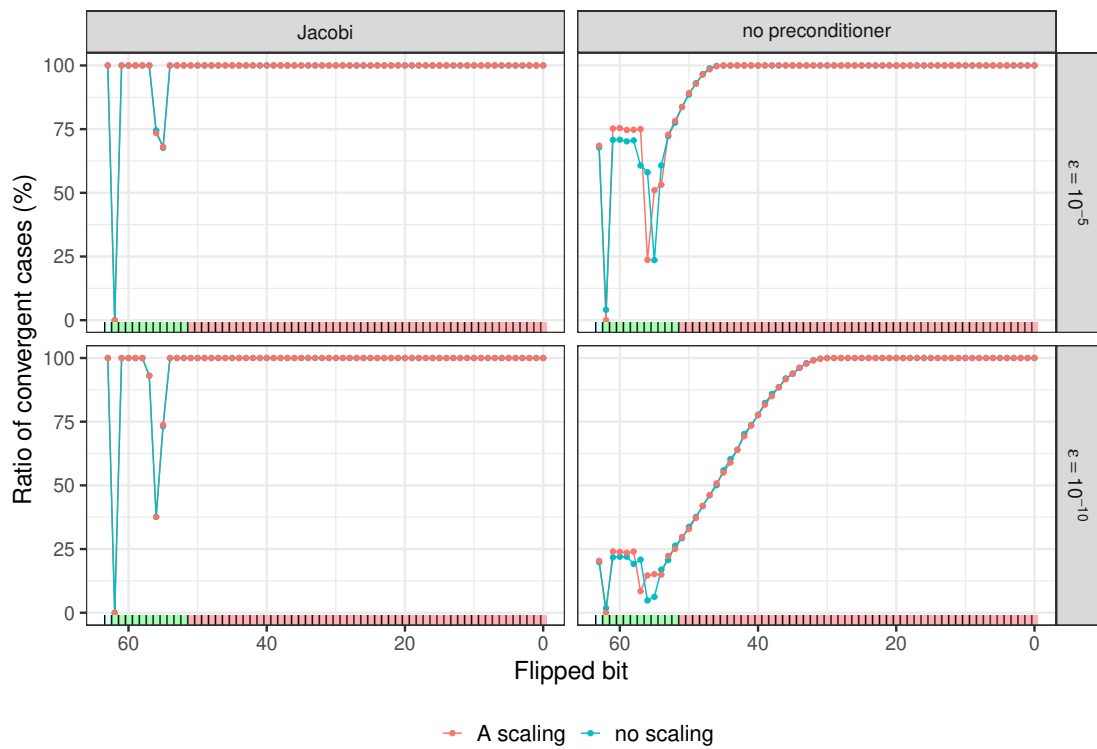


Figure 7: Impact of the index of the flipped bit in the preconditioner application on PCG convergence success.

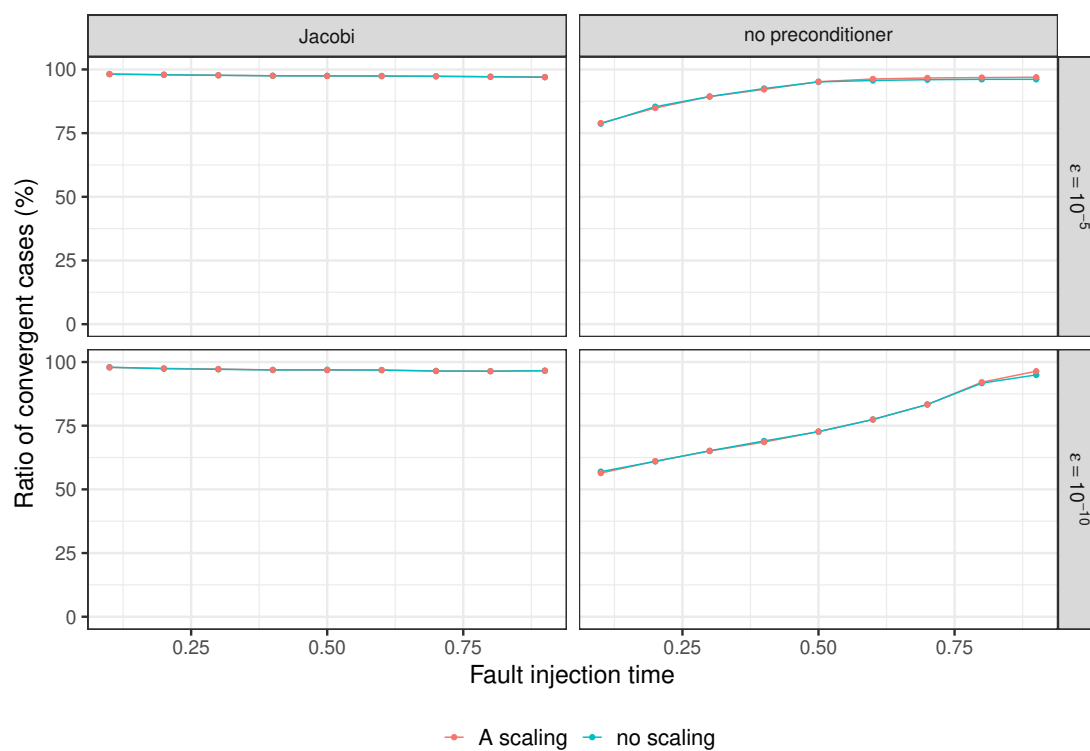


Figure 8: Impact of the bit-flip injection time in the preconditioner application on PCG convergence success.

a norm equal to one makes the numerical method generally slightly more robust to bit-flip in the exponent. A possible explanation is that in such cases, the values of the entries of the vectors are mostly lower than one, which corresponds to a large number of bits equal to one in their exponents [8]. This trend is more visible for bit-flips in the preconditioner application (see Figure 7) than in the matrix-vector product (see Figure 5).

### 3.3.4 Concluding remarks

A few supplementary comments on the experiments presented so far can be made. The first one is that PCG is rather robust and still converges in many cases even when bit-flips occur on exponent or large digits of the mantissa; obviously the less stringent the convergence threshold the more robust PCG is. This is in accordance with results from [23]. Much more surprising is that PCG is significantly more sensitive to transient soft errors occurring in the matrix-vector product, than to those appearing in the preconditioner application. Finally, in accordance with existing results on inexact Krylov, the earlier the soft error appears in the convergence process the larger the impact on the numerical behavior is and large errors close to the convergence might not prevent it to eventually converge.

## 4 Numerical criteria for detecting soft errors in PCG

### 4.1 Numerical criteria

The PCG method is a very sophisticated and elegant numerical scheme that has many properties induced by the symmetric positive definiteness of the matrix  $A$ , which, in particular, can be used to define a vectorial norm. Among those properties, we can recall the orthogonality between the residual  $r_i$  at each iteration or the  $A$ -orthogonality of the descent directions  $p_i$ . Unfortunately, those properties, as associated characteristic equalities, are no longer valid in finite precision calculation. On the other hand a lot of work has been devoted to study PCG in finite precision, see [22, 21] and references therein. We consider some of the finite precision results and use them to define a potential soft error detection mechanism based on the residual gap.

#### 4.1.1 Residual gap-based detection

In exact arithmetic, the iteratively computed residual  $r_i$  is equal to the true residual defined by  $b - Ax_i$  associated with the current iterate  $x_i$ ; that is

$$r_i - (b - Ax_i) = 0. \quad (4)$$

In finite precision calculation, the computed quantities (denoted with a bar) differ from their exact mathematical values. A first consequence is that  $f_i \equiv \bar{r}_i - (b - A\bar{x}_i)$  is no longer zero and defines the gap between the true and the iteratively computed residual referred to as the residual gap, which determines the maximal attainable accuracy. Using the rounding error analysis performed in [13, 14], given an initial guess  $\bar{x}_0$ , the computed vectors satisfy

$$\bar{p}_0 = \bar{r}_0 = b - A\bar{x}_0 + f_0$$

and

$$\bar{x}_i = \bar{x}_{i-1} + \bar{\alpha}_{i-1}\bar{p}_{i-1} + \delta x_i, \quad (5)$$

$$\bar{r}_i = \bar{r}_{i-1} - \bar{\alpha}_{i-1}A\bar{p}_{i-1} + \delta r_i, \quad (6)$$

$$\bar{p}_i = \bar{r}_i - \bar{\beta}_i\bar{p}_{i-1} + \delta p_i, \quad (7)$$

where the individual  $\delta$ -terms account for the local round-off errors associated with the different iterative updates.

Using (5) and (6), a recurrence on the residual gap can be derived that accounts for the accumulation of the local round-off errors

$$\begin{aligned} f_i &= \bar{r}_i - (b - A\bar{x}_i) \\ &= \bar{r}_{i-1} - \bar{\alpha}_{i-1}A\bar{p}_{i-1} + \delta r_i - (b - A(\bar{x}_{i-1} + \bar{\alpha}_{i-1}\bar{p}_{i-1} + \delta x_i)) \\ &= f_{i-1} + \delta r_i + A\delta x_i \end{aligned}$$

so that we have

$$f_i = f_0 + A \sum_{\ell=1}^i \delta r_\ell + A \sum_{\ell=1}^i \delta x_\ell.$$

The norm of the residual gap between the true and the computed residuals has been intensively studied [13, 21, 31]. Assuming the standard model of floating point arithmetic with machine precision  $\epsilon$ , see, e.g. [13, 29, 31], it is shown in [31] that the following upper bound holds for the norm of the residual gap

$$\|f_i\| \leq \epsilon \left( m \|A\| \sum_{\ell=0}^i \|\bar{x}_\ell\| + \sum_{\ell=0}^i \|r_\ell\| \right), \quad (8)$$

where  $m$  corresponds to the maximal number of non-zero entries in the rows of the matrix  $A$ . This bound on the residual gap can be used to detect soft errors that have larger effects than the one predicted by the worse case scenario of the rounding error analysis. It can be assessed on a periodic basis, for instance every other *CheckPeriod* iterations, as illustrated at lines 11 to 16 in Algorithm 3.

#### 4.1.2 $\alpha$ -based detection

Among the numerous relationships that exist between the quantities computed by PCG, there is one that is possibly less prone to defection due to finite precision calculation because it is a bound and not a strict equality as for the orthogonality or  $A$ -orthogonality properties. It was already presented in the original paper on CG [17, Thm 5.5],

$$\forall i \quad \frac{1}{\lambda_{\max}} < \alpha_i < \frac{1}{\lambda_{\min}} \quad (9)$$

where  $\lambda_{\max}$  ( $\lambda_{\min}$ ) denotes the largest (respectively the smallest) eigenvalue of  $A$ , or the preconditioned matrix. From a practical view point, the calculation or the tight approximation of  $\lambda_{\min}$  is generally expensive while  $\lambda_{\max}$  can often be cheaply approximated using for instance randomized techniques [15]. Consequently, we only consider the lower bound to define our  $\alpha$ -based detection mechanism, which is cheap to check at each iteration to possibly detect that an error occurred, as illustrated at lines 6 to 8 in Algorithm 3. The overall PCG algorithm equipped with both residual gap and  $\alpha$ -based detection is given in Algorithm 3.

## 4.2 Numerical experiments

In this section, we aim at evaluating the robustness and genericity of the numerical detection mechanisms described in the previous sections (we do not consider the full DMR technique). We use the same data as in Section 3.3, In order to evaluate the different detection criteria, we will,



**Algorithm 3** PCG enhanced with both residual gap-based and  $\alpha$ -based detection**Require:**  $\mathbf{A}$ ,  $b$ ,  $x_0$ ,  $\mathbf{M}$ ,  $\lambda_{max}$ ,  $CheckPeriod$ .

---

```

1:  $r_0 := b - Ax_0$ ;  $u_0 = M^{-1}r_0$ ;  $p_0 := r_0$ 
2:  $f_0 = \epsilon(\|r_0\| + m\|A\|\|x_0\|)$ 
3: for  $i = 0, \dots$  do
4:    $s_i := Ap_i$ 
5:    $\alpha_i := r_i^T u_i / s_i^T p_i$ 
6:   if  $\alpha_i < \frac{1}{\lambda_{max}}$  then
7:     CreateDetectionAlert()
8:   end if
9:    $x_{i+1} := x_i + \alpha_i p_i$ 
10:   $r_{i+1} := r_i - \alpha_i s_i$ 
11:   $f_{i+1} = f_i + \epsilon(\|r_{i+1}\| + m\|A\|\|x_{i+1}\|)$ 
12:  if  $mod(i, CheckPeriod) == 0$  then
13:    if  $\|r_{i+1} - (b - Ax_{i+1})\| > f_{i+1}$  then
14:      CreateDetectionAlert()
15:    end if
16:  end if
17:   $u_{i+1} = M^{-1}r_{i+1}$ 
18:   $\beta_{i+1} := r_{i+1}^T u_{i+1} / r_i^T u_i$ 
19:   $p_{i+1} := u_{i+1} + \beta_{i+1} p_i$ 
20: end for

```

---

however, take into account the experiments without a bit-flip and slightly broaden the classical terminology to characterize soft error detection mechanisms.

Table 3 discusses the color codes used in this section. The first four rows correspond to the classical taxonomy of the outcomes of any kind of decision methodology, that we extend with the last two rows for a finer analysis. These final rows correspond to situations where the detector raises an alert (or not) after a soft error occurred that did not prevent PCG from converging. If, in a more binary setting, one only wishes to detect bit-flips that prevent convergence, the special positive and negative cases could for example be interpreted as false positives and true negatives respectively. Depending on the goal of the detection, other interpretations are possible.

#### 4.2.1 Checksum-based detection

Although the well-known checksum technique can be applied for protecting both the matrix-vector product and the preconditioner application, we focus on its capabilities in the case of bit-flip in the matrix-vector calculation. As indicated in Section 2.3, a threshold  $\tau$  has to be chosen that should comply with two conflicting constraints: be large enough to reduce the false positives and be small enough to limit the number of false negatives. We do this independently for each matrix,  $\varepsilon_\ell$ , and preconditioner by minimizing the following cost function:

$$\text{cost}(\tau) = \omega \frac{n_1}{n_1 + n_2} \text{FP}(\tau) + (1 - \omega) \frac{n_2}{n_1 + n_2} \text{FN}(\tau).$$

Here,  $n_1$  and  $n_2$  are the number of PCG runs for the given matrix,  $\varepsilon_\ell$  and preconditioner without and with a bit-flip,  $\text{FP}(\tau)$  and  $\text{FN}(\tau)$  are the number of false positives and false negatives for the given value of  $\tau$ , and  $\omega \in [0, 1]$  is used to balance the two terms.

In Figure 9, we report on experiments where the checksum threshold parameter has been optimally tuned for each individual matrix, value of  $\varepsilon_\ell$ , and preconditioner in order to minimize

Color	Term	Explanation
Green	true positive	A bit-flip occurred, it prevented convergence, and the detector raised an alert.
Red	false negative	A bit-flip occurred, it prevented convergence, but the detector did not raise an alert.
Blue	true negative	No bit-flip occurred, and the detector did not raise an alert.
Orange	false positive	No bit-flip occurred and the detector raised an alert.
Grey	special negative	A bit-flip occurred, but it did not prevent convergence, and the detector did not raise an alert.
Grey	special positive	A bit-flip occurred, but it did not prevent convergence, and the detector raised an alert.
Grey	special critical	A bit-flip occurred, it prevented convergence, and it resulted in a NaN.

Table 3: Corresponding terms for color codes.

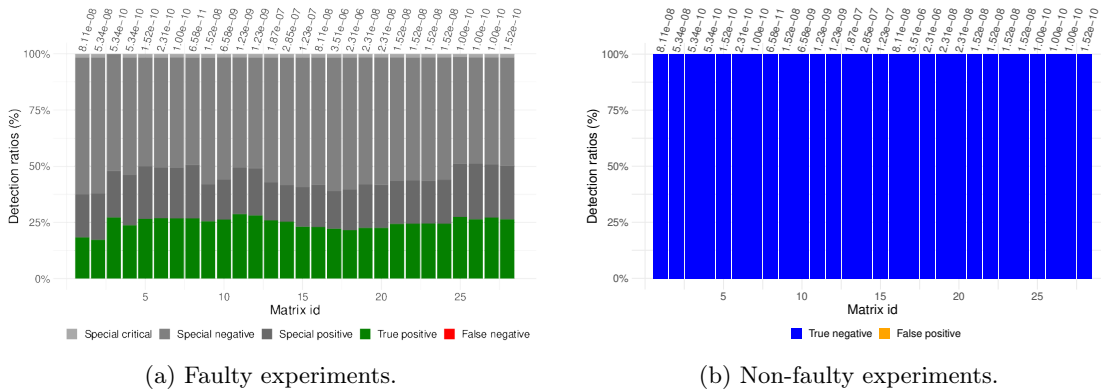


Figure 9: Ratio of missed errors (a) and false-positives (b) with the optimal thresholds  $\tau$  (top of the bars) for the experiments with  $\epsilon = 1e-10$  and a Jacobi preconditioner.

the cost function. The abscissa corresponds to the matrix index as defined in Table 2 and the values on top of the bars are the individual threshold values  $\tau$ . In Figure 10 we report the same results, but here we used a non-optimal value for  $\tau$ : the mean value of the optimal values of  $\tau$  for all experiments with the same  $\epsilon_\ell$ . The former criterion virtually measures the potential of checksum, the optimization procedure it requires may often be prohibitive in practice. On the other hand, the latter certainly represents a more realistic usage of the checksum in practice.

#### 4.2.2 Residual gap-based detection

In this section we investigate the robustness of the soft error detection mechanism based on the residual gap. As discussed in Section 1 and illustrated in Figure 2, one could expect that soft errors in the matrix-vector product will very likely create a larger residual gap than predicted by the theoretical bound that only accounts for the worse case induced by round-off. The errors in the preconditioner calculation generate corrupted quantities that similarly affect the computed residual and the current iterate, so that the corresponding error mostly vanishes in the residual

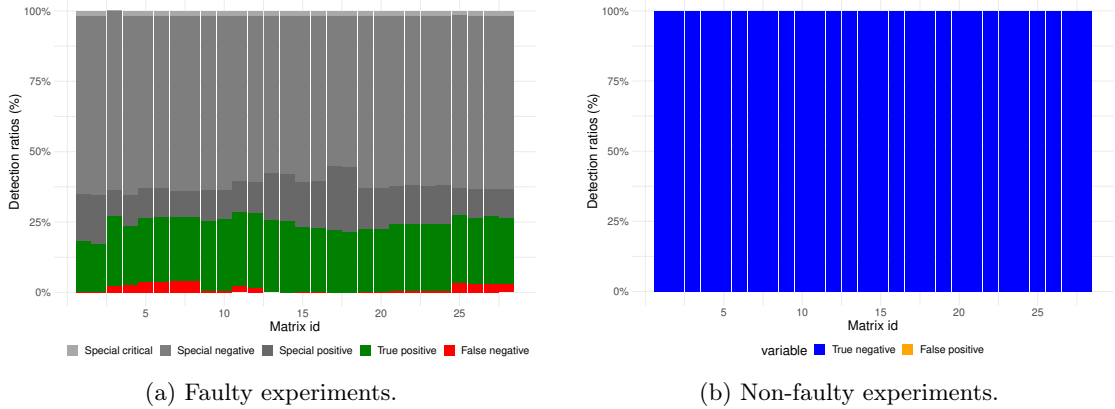


Figure 10: Ratio of missed errors (a) and false-positives (b) with the non-optimal thresholds  $\tau = 2.30e-7$  for the experiments with  $\varepsilon = 1e-10$  and a Jacobi preconditioner.

gap. Consequently, we first consider the experiments where the bit-flips are injected in the matrix-vector product. Furthermore, because we want to design criteria able to detect soft errors that prevent PCG to converge, we only consider non converging runs in our analysis below.

It would not make sense to check the residual gap at each iteration, as the required matrix-vector product would be as costly as DMR to protect the matrix-vector calculation. Consequently, we investigate the robustness of three policies: either we check this criterion only periodically (every other  $CheckPeriod = 10$  iterations in our experiments, as in Algorithm 3, corresponding to the blue plot in Figure 11) or only when exiting PCG (when it exceeded the maximal number of iterations, green plot in Figure 11), or both periodically and on exit of PCG (red plot in Figure 11). Figure 11 shows the ratio of undetected soft errors for these three detection policies as a function of the bit-flip index. We consider experiments with both non scaled and scaled  $A$  since the norm of the matrix appears in the upper bound of the residual gap (see Equation (8)). It can be observed that the strategy that combines a periodic checking with a final one is the most effective; it successfully detects most of the errors in the matrix-vector operation that prevent PCG to converge. The defect of the policy that performs the check only when exiting PCG is that the upper bound in Equation (8) continuously increases along the iteration so that the actual residual gap, which becomes larger than the bound after an error, ultimately ends up below the upper bound. Symmetrically, the policy that only checks periodically the bound misses the soft errors that occurs between the last check and the exit of PCG when it exceeds the maximum number of iterations.

We now assess the behaviour of the residual gap detection compared to the checksum criterion to detect soft errors in the matrix-vector product. Figure 12 presents the proportion of undetected critical soft errors. The checksum strategy with an optimal threshold (green) may be very efficient. However, as discussed above, the optimization procedure may be prohibitive in practice. Without such an optimization procedure (non-optimal checksum, in blue), the checksum detection (blue) is significantly less efficient than the residual gap criterion (red). These experiments confirm the robustness of the residual gap criterion combined with periodic and final checks as a practical detection: it achieves a very high rate of detection while not requiring any optimization procedure.

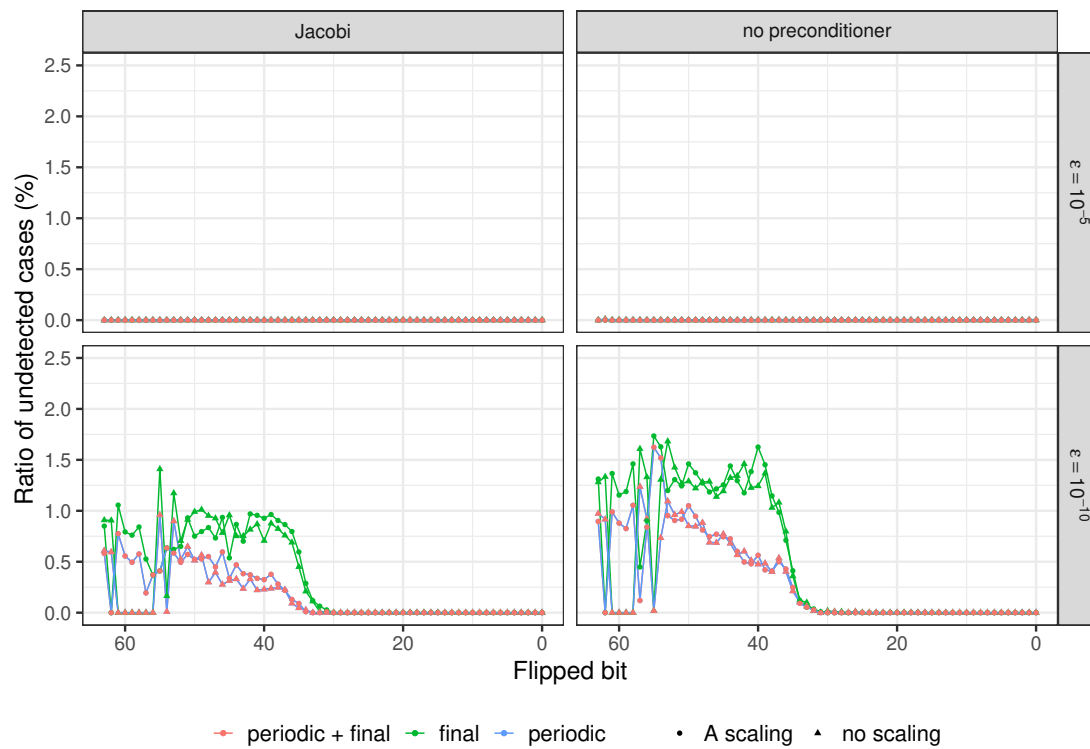


Figure 11: Detection performance of the three policies based on the residual gap criterion.

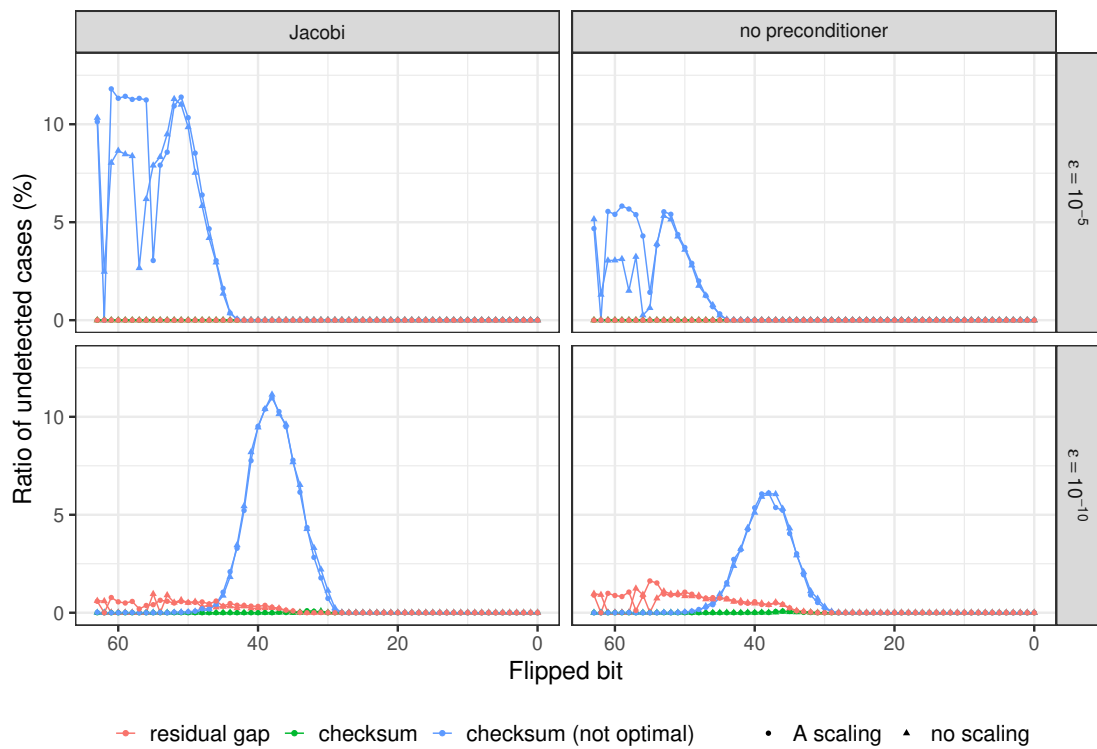


Figure 12: Detection performance of gap deviation and checksum-based methodologies for soft errors in the matrix-vector calculation.

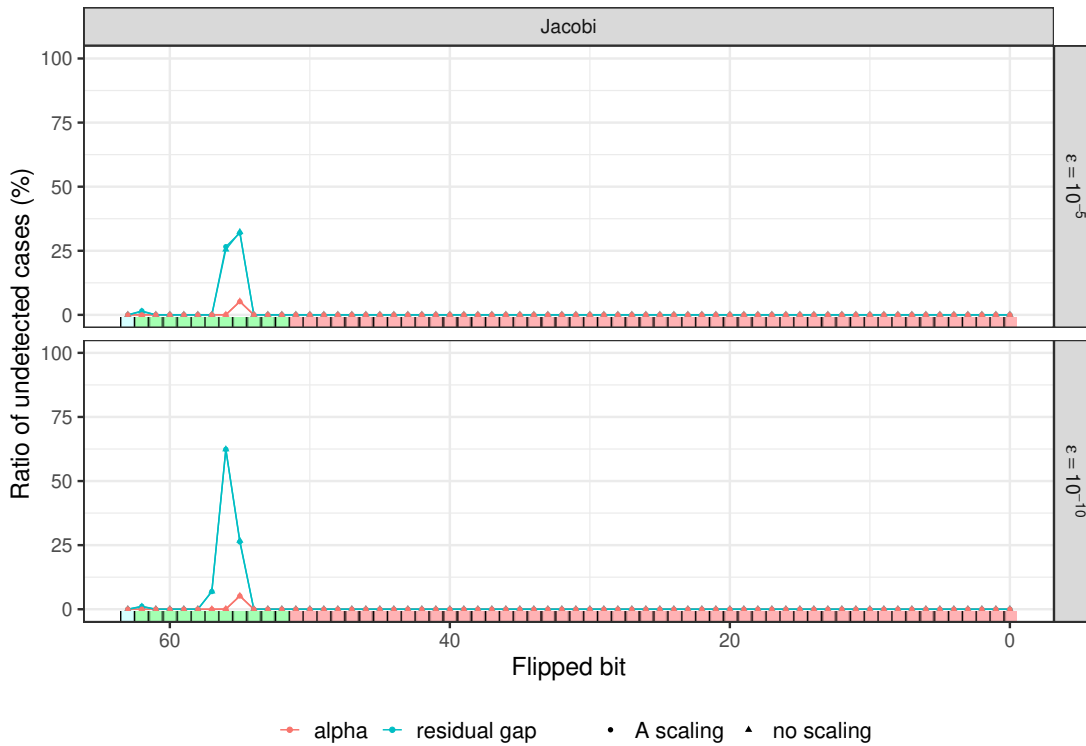


Figure 13: Detection performance of the residual gap and  $\alpha$ -based methodologies for soft errors in the preconditioner calculation.

### 4.2.3 $\alpha$ -based detection

In this section we study the robustness and reliability of the  $\alpha$ -based criterion (given by Equation (9)) to detect possible soft errors in the preconditioner application as it proved to be not effective to detect errors in the matrix-vector calculation. We display the ratio of undetected soft errors as a function of the bit-flip index as well as the ratio for the residual gap criterion in Figure 13. As it could have been expected due to the consistent propagation of the error in the iterate and residual updates, the residual gap criterion is very often ineffective. On the contrary, the  $\alpha$ -based criterion appears to be very robust and only missed a small number of errors for bit-flips occurring on the low order bit of the exponent.

### 4.2.4 Concluding remarks

In this section, we have assessed three numerical criteria to detect soft errors: the classical checksum mechanism, a bound on the norm of the residual gap and a bound on the  $\alpha$  value. The numerical experiments have revealed the difficulty to define the threshold associated with the checksum in finite precision calculation. In that context, the rounding error analysis of the residual gap measurement provides a robust criterion. This criterion is particularly effective to detect soft errors in the matrix-vector product. Because the residual gap deviation bound is based on solid theoretical results, no false-positives can exist in non-faulty executions. Finally, the criterion based on  $\alpha$  allows the detection of most of the errors in the preconditioner application.

The combination of these last two criteria enables us to equip the PCG algorithm with numerical techniques to detect errors that do not suffer from false-positives; consequently they are robust and reliable. A possible drawback of the  $\alpha$  criterion is that it requires knowledge of the largest eigenvalue; we note that some numerically scalable multi-level preconditioning techniques provide this information (see [2] and reference therein).

One could naturally wonder whether these two detection mechanisms, which are robust criteria for detecting soft errors in the matrix-vector product and preconditioner application, would also be a robust criterion to detect errors occurring in the other steps of the PCG algorithm. In that respect, we performed an additional extensive set of experiments by injecting bit-flips in all steps of Algorithm 1. We report in Figure 14 the outcome of these experiments with the detection success ratio for detecting soft errors injected in each of these individual steps: for the residual gap criterion, the  $\alpha$ -based criterion or the combination of both criteria as expressed in Algorithm 3. Several comments can be made. First, regarding the sensitivity of bit-flips occurring in step 10; altering an entry of the descent direction rarely prevents PCG from converging. Although possibly surprising, this is consistent with the observation made in Section 3.3.3, that is, the weak sensitivity of PCG to soft-errors in the calculation of the preconditioned residual. Second, the ability of the residual gap detection to catch a soft error occurring in the computation of  $\alpha_i$  (step 4) or the iterate update (step 5) is remarkable.

## 5 Conclusion and perspectives

In this paper we have experimentally investigated the robustness of PCG to transient soft-errors in its (usually) most time consuming kernels: the preconditioner and matrix-vector product. As it could have been expected we observed that soft errors affecting the exponent have a more detrimental impact on the convergence of PCG than low order bits in the mantissa. Surprisingly, we noticed that PCG was more robust to soft errors in the preconditioner than in the matrix-vector calculation. Based on these observations we proposed numerical criteria that aim at detecting soft errors that prevent PCG to converge. In particular, we illustrated that the classical checksum approach, based on equalities in exact arithmetic, may lack robustness in practice where a priori tuning procedure may be prohibitive. Alternatively, criteria based on the residual gap and on the range of validity of the values of  $\alpha$ , which do not require any optimization procedure, allow for the definition of robust mechanisms. Future works will consist in using those criteria to design a self-correcting (or *self-stabilizing* using the terminology of [26]) PCG algorithm and in investigating similar approaches for modern variants of PCG such as pipelined PCG [12] as well as extending our work to non-symmetric Krylov subspace solvers.

## Acknowledgments

This work has been funded by the EXA2CT European Project on Exascale Algorithms and Advanced Computational Techniques, which receives funding from the EU's Seventh Framework Programme (FP7/2007-2013) under grant agreement no. 610741. Experiments presented in this paper were carried out using the PlaFRIM experimental testbed, supported by Inria, CNRS (LABRI and IMB), Université de Bordeaux, Bordeaux INP and Conseil Régional d'Aquitaine (see <https://www.plafrim.fr/>). Siegfried Cools acknowledges funding by the Research Foundation Flanders (FWO) under grand number 12H4617N.

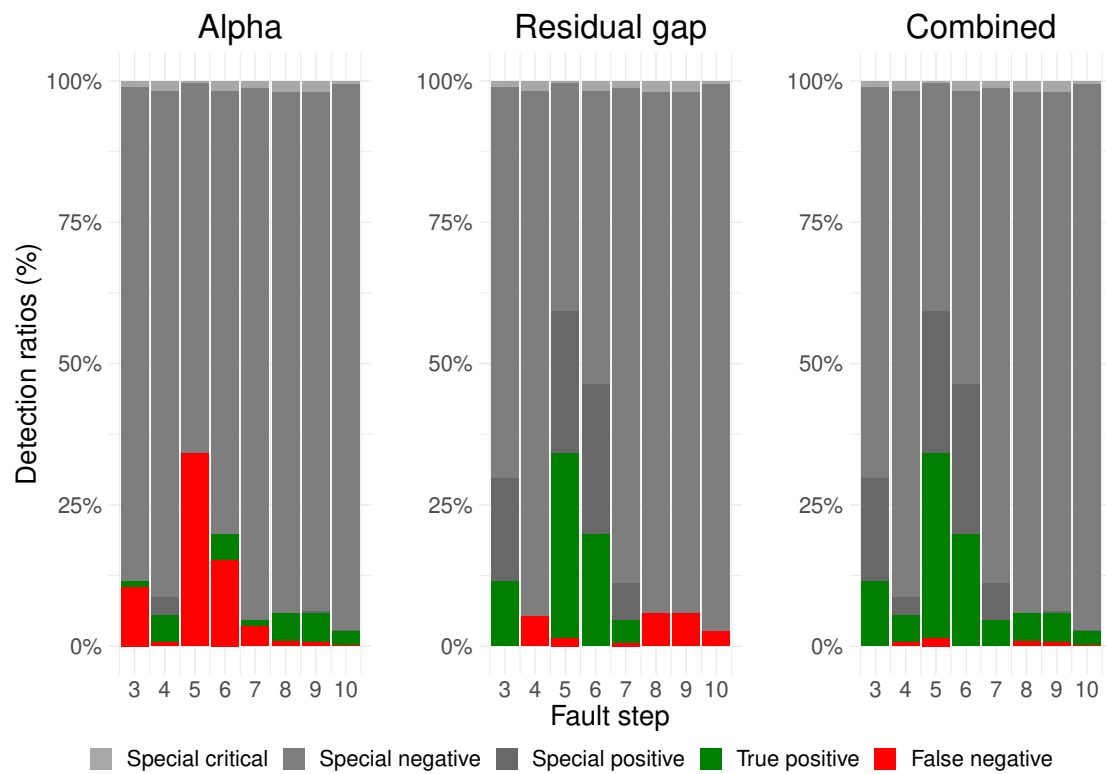


Figure 14: Comparison of the detection success of the alpha and residual gap based methodologies, and their combination for bit-flips in all possible steps of PCG. The set PCG runs used for this experiment is different from the other experiments, but was created using the same methodology described in Section 3.2: the only differences are the total number of runs and the possible locations for the bit-flip.



## References

- [1] Emmanuel Agullo, Siegfried Cools, Emrullah Fatih-Yetkin, Luc Giraud, and Wim Vanroose. On soft errors in the Conjugate Gradient method: sensitivity and robust numerical detection. Research Report RR-9226, Inria Bordeaux Sud-Ouest, November 2018.
- [2] Emmanuel Agullo, Luc Giraud, and Louis Poirel. Robust preconditioners via generalized eigenproblems for hybrid sparse linear solvers. *SIAM Journal on Matrix Analysis and Applications*, 40(2):417–439, 2019.
- [3] Wesley Bland, Aurelien Bouteiller, Thomas Hérault, George Bosilca, and Jack J. Dongarra. Post-failure recovery of MPI communication capability: Design and rationale. *IJHPCA*, 27(3):244–254, 2013.
- [4] A. Bouras and V. Frayssé. Inexact matrix-vector products in Krylov methods for solving linear systems: a relaxation strategy. *SIAM Journal on Matrix Analysis and Applications*, 26(23):660–678, 2005.
- [5] A. Bouras, V. Frayssé, and L. Giraud. A relaxation strategy for inner-outer linear solvers in domain decomposition methods. Technical Report TR/PA/00/17, CERFACS, Toulouse, France, 2000.
- [6] J. Elliott, F. Mueller, M. Stoyanov, and C. Webster. Quantifying the Impact of Single Bit Flips on Floating Point Arithmetic. *Technical Report 2013-2*, pages 1–13, 2013.
- [7] James Elliott, Mark Hoemmen, and Frank Mueller. Evaluating the impact of sdc on the gmres iterative solver. In *Parallel and Distributed Processing Symposium, 2014 IEEE 28th International*, pages 1193–1202. IEEE, 2014.
- [8] James Elliott, Mark Hoemmen, and Frank Mueller. Exploiting data representation for fault tolerance. *Journal of computational science*, 14:51–60, 2016.
- [9] The MPI Forum. Mpi: A message passing interface standard version 3.1, June, 2015.
- [10] Manuel Le Gallo, Abu Sebastian, Roland Mathis, Matteo Manica, Heiner Giefers, Tomas Tuma, Costas Bekas, Alessandro Curioni, and Evangelos Eleftheriou. Mixed-precision in-memory computing. *Nature Electronics*, 1:246–253, 2018.
- [11] Al Geist, Adam Beguelin, Jack Dongarra, Weicheng Jiang, Robert Manchek, and Vaidyalingam S Sunderam. *PVM: Parallel virtual machine: a users' guide and tutorial for networked parallel computing*. MIT press, 1994.
- [12] P. Ghysels and W. Vanroose. Hiding global synchronization latency in the preconditioned Conjugate Gradient algorithm. *Parallel Computing*, 40(7):224–238, 2014.
- [13] Anne Greenbaum. Estimating the attainable accuracy of recursively computed residual methods. *SIAM Journal on Matrix Analysis and Applications*, 18(3):535–551, 1997.
- [14] Martin H. Gutknecht and Zdenek Strakoš. Accuracy of two three-term and three two-term recurrences for Krylov space solvers. *SIAM Journal on Matrix Analysis and Applications*, 22(1):213–229, 2000.
- [15] N. Halko, P. G. Martinsson, and J. A. Tropp. Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions. *SIAM Review*, 53(2):217–288, 2011.

- 
- [16] Thomas Herault and Yves Robert, editors. *Fault-Tolerance Techniques for High-Performance Computing*. Springer International Publishing, 2015.
- [17] Magnus R. Hestenes and Eduard Stiefel. Methods of conjugate gradients for solving linear systems. *Journal of Research of the National Bureau of Standards*, 46(6):409–436, December 1952.
- [18] N. J. Higham. *Accuracy and Stability of Numerical Algorithms*. Society for Industrial and Applied Mathematics, Philadelphia, PA, USA, second edition, 2002.
- [19] Mark Hoemmen and Michael Allen Heroux. Fault-tolerant iterative methods via selective reliability. *Proceedings of the 2011 International ...*, 2011.
- [20] Kuang-hua Huang and Jacob a Abraham. Algorithm-Based Fault Tolerance for Matrx Operations. *IEEE Transactions on Computers*, c(6):518–528, 1984.
- [21] J. Liesen and Z. Strakoš. *Krylov Subspace Methods*. Numerical Mathematics and Scientific Computation. Oxford University Press, 2013.
- [22] Gérard Meurant and Zdenek Strakoš. *The Lanczos and conjugate gradient algorithms in finite precision arithmetic*, volume 15. Cambridge University Press, 2006.
- [23] Burcu Ozcelik Mutlu, Gokcen Kestor, Joseph Manzano, Osman Unsal, Samrat Chatterjee, and Sriram Krishnamoorthy. Characterization of the impact of soft errors on iterative methods. In *2018 IEEE 25th International Conference on High Performance Computing (HiPC)*, pages 203–214. IEEE, 2018.
- [24] Behrooz Parhami. Defect, fault, error,..., or failure? *IEEE Transactions on Reliability*, 46(4):450–451, 1997.
- [25] Y. Saad. *Iterative Methods for Sparse Linear Systems*. Society for Industrial and Applied Mathematics, Philadelphia, PA, USA, 2nd edition, 2003.
- [26] Piyush Sao and Richard Vuduc. Self-stabilizing iterative solvers. *Proceedings of the Workshop on Latest Advances in Scalable Algorithms for Large-Scale Systems - ScalA '13*, pages 1–8, 2013.
- [27] Manu Shantharam, Sowmyalatha Srinivasmurthy, and Padma Raghavan. Characterizing the impact of soft errors on iterative methods in scientific computing. *Proceedings of the international conference on Supercomputing - ICS '11*, page 152, 2011.
- [28] V. Simoncini and D. B. Szyld. Theory of inexact Krylov subspace methods and applications to scientific computing. *SIAM Journal Scientific Computing*, 25:454–477, 2003.
- [29] Z. Strakoš and P. Tichy. Error estimation in preconditioned conjugate gradients. *BIT Numerical Mathematics*, pages 789–817, 2005.
- [30] Henk A. Van der Vorst. *Iterative Krylov methods for large linear systems*. Cambridge monographs on applied and computational mathematics. Cambridge University Press, Cambridge, UK, New York, 2003.
- [31] Henk A. van der Vorst and Qiang Ye. Residual replacement strategies for Krylov subspace iterative methods for the convergence of true residuals. *SIAM Journal Scientific Computing*, 22(3):835–852, 2000.
- [32] Raoul Velazco, Pascal Fouillat, and Ricardo Reis. *Radiation effects on embedded systems*. Springer Science & Business Media, 2007.



**RESEARCH CENTRE  
BORDEAUX – SUD-OUEST**

200 avenue de la Vielle Tour  
33405 Talence Cedex

Publisher  
Inria  
Domaine de Voluceau - Rocquencourt  
BP 105 - 78153 Le Chesnay Cedex  
[inria.fr](http://inria.fr)

ISSN 0249-6399