



HAL
open science

Methods of Forecasting Environmental Stress and Strain on Working Humans in the Digital Factory

Gert Zülch

► **To cite this version:**

Gert Zülch. Methods of Forecasting Environmental Stress and Strain on Working Humans in the Digital Factory. IFIP International Conference on Advances in Production Management Systems (APMS), Sep 2021, Nantes, France. pp.523-532, 10.1007/978-3-030-85906-0_57 . hal-04022131

HAL Id: hal-04022131

<https://inria.hal.science/hal-04022131v1>

Submitted on 9 Mar 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License



This document is the original author manuscript of a paper submitted to an IFIP conference proceedings or other IFIP publication by Springer Nature. As such, there may be some differences in the official published version of the paper. Such differences, if any, are usually due to reformatting during preparation for publication or minor corrections made by the author(s) during final proofreading of the publication manuscript.

Methods of Forecasting Environmental Stress and Strain on Working Humans in the Digital Factory

Gert Zülch

Karlsruhe Institute of Technology, Karlsruhe, Germany
gert.zuelch@gefora-beratung.de

Abstract. According to the stress-strain concept of ergonomics, a distinction must be made between the stress on the working human and the resulting individual strain. Furthermore, it must be taken into account whether several influences act simultaneously or one of them acts successively. Therefore, point in time-related and period-related influences are to be considered, whereby in the latter case a connection to discrete event-driven simulation is necessary. It has been known for many years that simulation methods can be used to analyze stress on the human caused by the work task itself, at least in macro-ergonomic terms with regard to time utilization. In addition, anthropometric and work-physiological aspects of the work task can be analyzed using digital human models. The evaluation and assessment of influences from the indoor working environment are more difficult. In this case, both micro- and macro-ergonomic analyzes can be performed. In the following, it is explained in more detail to what extent such forecasts can already be carried out in Digital Factory tools. The result shows that there are still a lot of research and development tasks to be solved before a comprehensive forecast of ergonomic influences can be carried out.

Keywords: Stress-Strain Concept, Indoor Work Area, Time-Related Analyzes, Evaluation, Assessment.

1 Problem statement and relation to associated guidelines

The computer-aided planning of production systems involving working humans takes place over several levels of detail. It ranges from the human supported material and information flow concepts to the planning of personnel deployment in a certain operational area to methods' design at individual workplaces. The last two levels of detail mentioned have been already reported at this conference: The personnel deployment planning is performed using event-driven simulation procedures that have also been considering service companies for some time [1]. The planning of work methods is already realized nowadays by Digital Factory tools, which not only include time management, but also enable ergonomic issues to some extent [2].

The associated software procedures have been the subject of several guidelines of the Association of German Engineers (VDI) for many years: In VDI Guideline 3633 Part 6 [3], the state of the art for ergonomic analyses of working humans in simulation

procedures is regarded (see also [4]). For this purpose, it is shown how the temporal workload and other macro-ergonomic aspects can be dealt with in existing software-procedures. Furthermore, from a micro-ergonomic point of view, methods for anthropometric and work-physiological work design in Digital Factory tools are addressed. They are presented in VDI Guideline 4499 Part 4 ([5]; see also [6] for an overview).

Following the stress-strain concept according to Rohmert [7], the two VDI guideline parts mentioned only deal with one ergonomic aspect, namely the effects on the working human through the work task itself. So what is still missing is how stress from the work environment and the resulting strain on the individual human can be taken up in Digital Factory tools.

This question is investigated in this paper referring to the Guideline Project VDI 4499 Part 5 (see for this project [8]). Since this guideline part is currently in the final phase of its publication, only some methodological points can be discussed here. It is also shown which role the simulation plays in the prognosis of environmental influences in an indoor work area.

In the new guideline VDI 4499 Part 5, the environmental influences affecting humans working in an indoor work area are dealt with. According to the stress-strain concept, each of the treated influences is differentiated according to the effective stress and the resulting strain on the individual human. A further distinction is made according to their evaluation, i.e. the assignment of a numerical value, and the assessment using legally binding comparison values. Furthermore, a distinction can be made between person-related and location-related as well as between point in time-related and period-related forecasts in the Digital Factory.

2 State of the art of forecasting environmental influences

Thus, this guideline part supplements the previous ones, which deal with the inclusion of working humans in simulation procedures and Digital Factory tools. In addition, it can be stated that there is extensive knowledge about the effects of the work environment and about existing legal requirements. This comes in part from occupational health and safety regulations (see the required risk assessment in the German Act on the Implementation of Measures of Occupational Safety and Health [9], § 5 pp.).

In Germany, software procedures are also available for forecasting purposes, but apart from one exception detailed below, these are not included in the Digital Factory. The existing methods not only come from the ergonomic field, but also to a large extent from building physics and planning. In this respect, the prognosis of environmental influences on working humans represents a new field of the Digital Factory.

Almost no corresponding forecasting methods are known on the international level. In the International Ergonomics Association there is a Technical Committee "Digital Human Modeling and Simulation", but this specialists' group primarily deals with human modeling, primarily in an anthropometric and work-physiological sense (see e.g. [10]). Also in international ergonomics congresses (see e.g. [11]) and in more recent English-language publications (see e.g. [12]) there is hardly any reference to this. Also in the German-speaking countries there are only a few publications that

indicate the importance of the prognosis of environmental influences (for one exception see [13]).

3 Simulation application for period-related forecasts and its validity

3.1 The EPRI method

For the period-related prognosis of environmental influences, a connection with a discrete event-driven simulation procedure is necessary, but as far as the author is aware, only actually implemented in one specific example: Figure 1 shows the coupling of such a simulation procedure with the prognosis of a temporally constant gamma radiation in a work area [14]. In order to limit the radiation exposure of the maintenance staff, two workers are deployed and their exposures are monitored by virtual dosimeters. The attached Gantt chart shows when it will be necessary to replace the active by the stand-by worker.

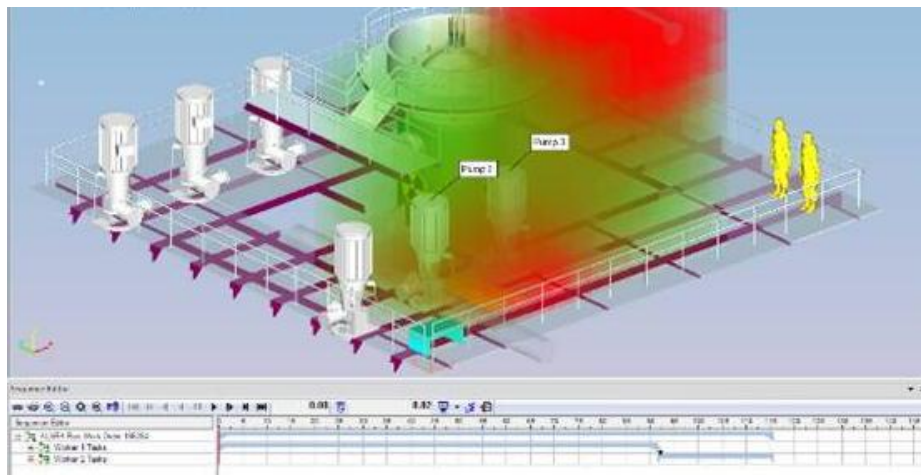


Fig. 1. Work area with calculated radioactive load and two workers deployed (Source: [15])

In this example there is no shield between the radiation source and the maintenance worker active in the area. The calculation method used by the American Electric Power Research Institute (EPRI; [16]) also provides for such shielding: In addition to the radiation strength of the source and the absorption value of the shielding material, at least one real measured value at a point in the work area must be known (Fig. 2). On this basis, the method then calculates the radiation loads at other calculation points therein.

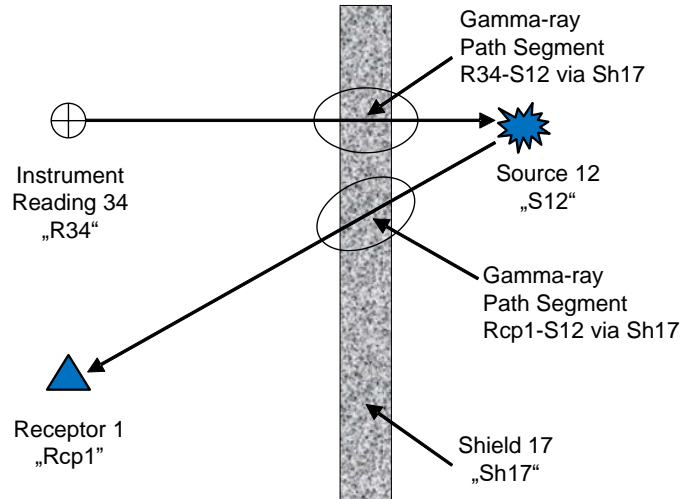


Fig. 2. Scheme of the forecast calculation using the EPRI method with shielded radiation
(Source: [16], p. 2-2)

3.2 Validation studies

The algorithm developed was validated in several studies by the EPRI, initially under ideal conditions in a laboratory test ([16], pp. 2-6). Two directly shielded radiation sources and two measuring points were used for this purpose. The real exposure rates were measured on these positions and compared with the calculated algorithmic values. The validation exhibits deviations of 2% and -15%, respectively.

Supplementary field studies were carried out in a nuclear power plant with the participation of software developers, in whose software procedures the spatial geometry, the radiation sources and the measured exposure rates were entered ([16], pp. 2-8; see also [17]). In one case, a room with three high-pressure charging pumps and the associated radioactive pipelines as well as 19 real measuring points was chosen. For the maintenance staff, a total of 24 calculation points were assumed, for which the values were determined using the algorithm. The validation showed deviations in the range of approximately $\pm 55\%$.

Compared to maintenance work actually carried out and monitored by dosimeters, this result was nevertheless described as relatively good ([16], pp. 4-11). The deviations were attributed to differences in the work durations and locations of the real maintenance activities. In particular, approximately the same values resulted between the forecasts of the algorithm and manually calculated estimates.

For further validation studies in this field of investigation, reference must be made to the publication mentioned. Overall, it can be seen that validation studies for forecasting methods can only very rarely be found in the literature. Another validation study of environmental prognoses for lighting and noise in a workshop for tool production has been reported elsewhere ([18], pp. 156) with promising results.

addition, methods for calculating stress situations can be integrated into this data model.

Each object class is described by attributes and applicable methods as well as the relationships between object classes by associations. The "workplace" object class can, for example, contain several elements of the "lighting" object class. The data relevant to occupational health and safety are integrated into the data model as attributes of the related objects. The "lamp" object contains, for example, the attributes "lamp type", "luminance", "light intensity" and "light color". The methods for calculating environmental stress are specializations of the object class "environmental stress" and are linked to all object data required for their calculation. This then ensures that a change in the property data leads to an update of the calculated stress situation.

Object-oriented three-dimensional building models are increasingly being used in building planning. Building Information Modeling (BIM; [21]) is used for data storage and, in particular, for data exchange between manufacturers. The so-called Industry Foundation Classes (IFC), which are standardized in ISO 16739-1:2018 [22], are used as an open data standard. This data modeling was originally developed for building construction, later also for civil engineering. It is to be expected that this approach will also be used in the future for modeling objects in work areas.

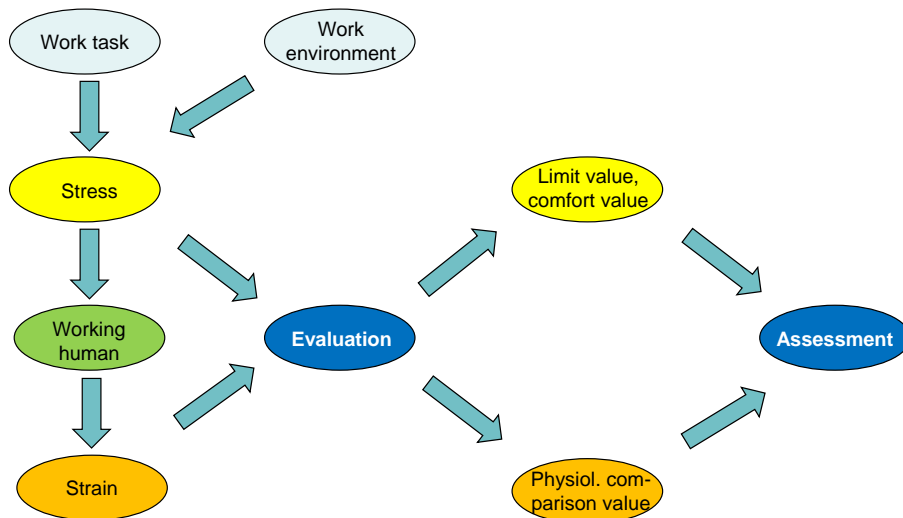


Fig. 4. Ergonomic evaluation and assessment

4.2 IT provision of comparison values for assessment purposes

A special problem is the assessment of a determined stress or strain value (Fig. 4). For this purpose, a comparison value is necessary, which may be available in the form of a limit and occasionally a comfort value. Such values may be found in an ordinance, standard or as a recommendation with regard to a certain type of exposure (see e.g.

comfort values at [23]). For types of strain, physiological comparison values are required in an analogous manner. However, such information is only available in text form, if at all.

In the case of a point in time-related prognosis in the Digital Factory, first the stress value (more rarely a strain value) is usually determined first at a calculation point. A corresponding comparison value is then manually taken from a regulation or another source, which is often achieved today through research on the Internet. An assessment of the determined value is then carried out, taking into account the task at hand. Ultimately, this requires a process performed by personnel.

Accordingly, there is no automated IT provision of the comparison values together with the associated context data. In order to achieve this, existing sources would first have to be processed into a structured knowledge base using IT (Fig. 5). This can be done through text and data mining.

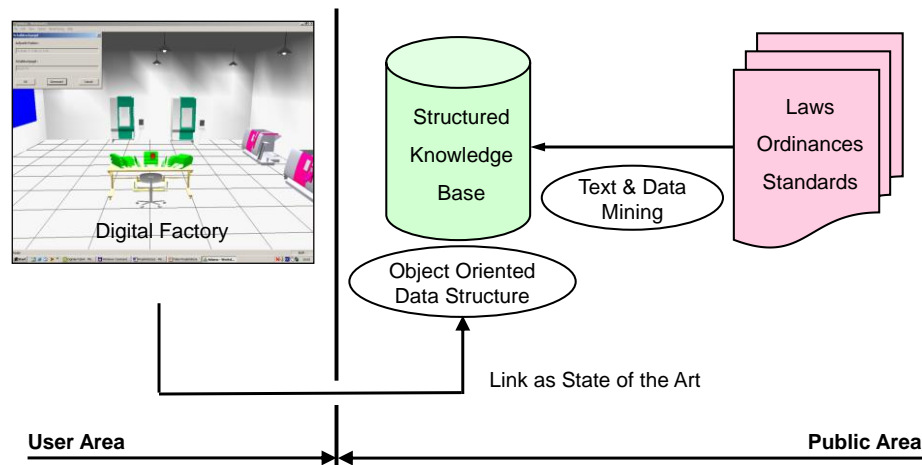


Fig. 5. Development of an occupational health and safety knowledge base

The problem with such a publicly available data is that many sources (e.g. guidelines and standards) are not provided free of charge. If possible at all, the user could take the evaluation data from the Digital Factory to access the public knowledge base in a structured manner and finally derive the assessment algorithmically from it. Such a concept would certainly simplify and improve the use of occupational health and safety regulations considerably. As far as the author is aware, this approach has not yet been pursued through research funding.

5 Further development of environmental forecasts in the Digital Factory

A major number of calculation methods are already available for the prognosis of environmental influences. However, these mainly relate to a certain type of stress; the

associated software procedures are (with a few exceptions) not integrated into the Digital Factory. With regard to the resulting strain on the working human, first methods and software procedures are available.

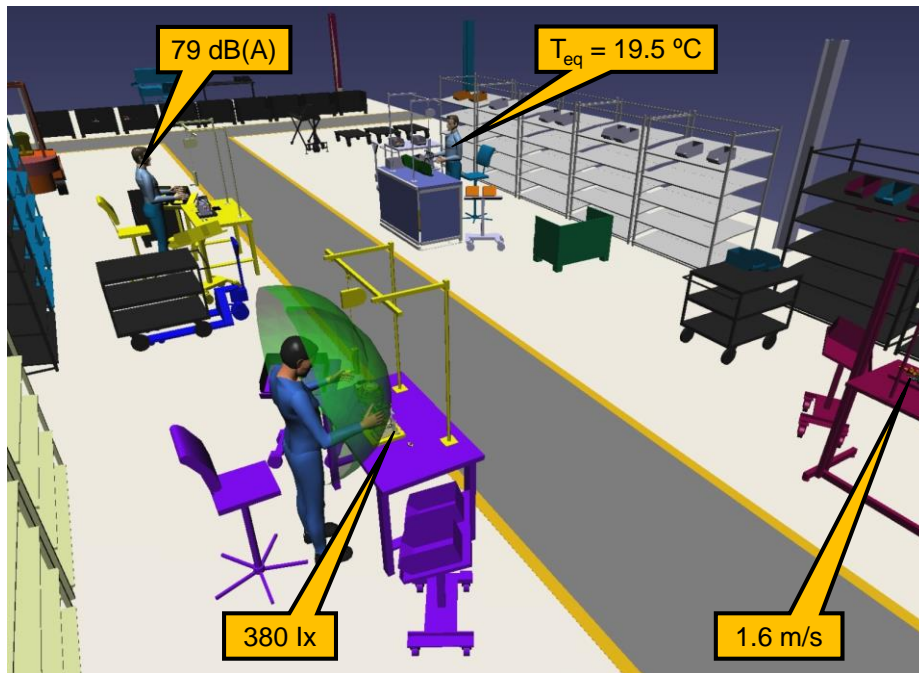


Fig. 6. Vision of forecasting environmental stress in the Digital Factory (Layout Graphics: [27])

In addition, the existing methods usually concern time-related evaluations, and they are often no suitable methods for period-related influences. Only a few examples of successive exposure to a single environmental influence are available. In this regard, reference can be made to the calculation method for evaluating a fluctuating sound pressure level (person-related daily noise exposure level according to the German Noise and Vibrations Occupational Safety and Health Ordinance ([24], § 2 (2))).

Even more there is a lack of evaluation methods and procedures for simultaneously acting environmental influences, and this also for combinations of different types of stress caused by the work task and the work environment. A counterexample is the evaluation of energetic heat work (see e.g. [25], pp. 14). In this respect a lack of integrating methods can be stated. The lexicographical approach developed for this purpose for simultaneously acting influences ([26], p. 42) can only represent a work-around.

All of this shows that there are an important number of open questions about the prognosis of environmental influences in the Digital Factory. Thus, multiple research efforts are required before a comprehensive prognosis can be made (Fig.6).

References

1. Zülch G, Stock P, Hrdina J (2006) Working Time Configuration in Hospitals Using Personnel-oriented Simulation. In: Koch T (ed) *Lean Business Systems and Beyond*. IFIP Advances in Information and Communication Technology, vol 257. Springer US, Heidelberg, pp. 493-501
2. Zülch G (2014) Evaluating Human Work in the Digital Factory – A New German Guideline. In: Grabot B, Vallespir B, Gomes S, Bouras A, Kiritsis D (eds) *Advances in Production Management Systems: Innovative and Knowledge-Based Production Management in a Global-Local World*. IFIP Advances in Information and Communication Technology 438, IFIP AICT 440. Springer, Heidelberg et al., pp. 35-42
3. VDI 3633-6:2001-10 (2001) Simulation of systems in materials handling, logistics and production – Representation of human resources in simulation models. Beuth, Berlin. <https://www.beuth.de/en/technical-rule/vdi-3633-blatt-6/44890290>, last accessed 20.01.2021.
4. Zülch G (2020) Development and Status of Personnel Deployment Simulation and its Inclusion into the Digital Factory. *SNE Simulation Notes Europe* 30:197-202
5. VDI 4499-4:2015-03 (2015) Digital factory - Ergonomic representation of humans in the digital factory. Beuth, Berlin. <https://www.beuth.de/en/technical-rule/vdi-4499-blatt-4/222813009>, last accessed 18.03.2021
6. Zülch G (2013) Ergonomische Abbildung des Menschen in der Digitalen Fabrik – Die neue VDI-Richtlinie 4499-4. In: Dangelmaier W, Laroque C, Klaas A (eds) *Simulation in Produktion und Logistik 2013: Entscheidungsunterstützung von der Planung bis zur Steuerung*. ASIM-Mitteilung Nr. 147. HNI-Verlagsschriftenreihe, Paderborn, pp. 53-60. http://www.asim-fachtagung-spl.de/asim2013/papers/Proof_165_Zuelch.pdf, last accessed 09.03.2021
7. Rohmert W (1986) Ergonomics: concept of work, stress and strain. *Applied Psychology* 35(2):159-181. <https://doi.org/10.1111/j.1464-0597.1986.tb00911.x>, last accessed 20.01.2021
8. VDI (2020) VDI 4499-5 - Projekt. Digitale Fabrik: Prognose von Umgebungseinflüssen auf den arbeitenden Menschen. Beuth, Berlin. <https://www.vdi.de/richtlinien/details/vdi-4499-blatt-5-digitale-fabrik-prognose-von-umgebungseinfluessen-auf-den-arbeitenden-menschen>, last accessed 26.01.2021
9. ArbSchG (2019) Act on the Implementation of Measures of Occupational Safety and Health to Encourage Improvements in the Safety and Health Protection of Workers at Work (Arbeitsschutzgesetz, ArbSchG). Occupational Safety and Health Act of 07.08.1996. Federal Law Gazette I p. 1246, as amended by the Second Data Protection Adjustment and Implementation ActEUof 20.11.2019. http://www.gesetze-im-internet.de/englisch_arbschg/englisch_arbschg.pdf, last accessed 16.03.2021
10. Briceno L, Paul G (2019) MakeHuman: A Review of the Modelling Framework. In: Bagnara S, Tartaglia R, Albolino S, Alexander T, Fujita Y (eds) *Proceedings of the 20th Congress of the International Ergonomics Association (IEA 2018): Advances in Intelligent Systems and Computing*, vol 822. Springer, Cham, pp. 224-232. https://rd.springer.com/chapter/10.1007%2F978-3-319-96077-7_23, last accessed 28.01.2021
11. Nunes, IL (ed) (2020) *Advances in Human Factors and Systems Interaction*. Proceedings of the AHFE 2020 Virtual Conference on Human Factors and Systems Interaction, July 16-20, USA. Springer, Heidelberg & Berlin. <https://rd.springer.com/book/10.1007%2F978-3-030-51369-6>, last accessed 29.01.2021

12. Neumann WP, Winkelhaus S, Grosse EH, Glock CH (2021) Industry 4.0 and the human factor – A systems framework and analysis methodology for successful development. *International Journal of Production Economics* 233. <https://doi.org/10.1016/j.ijpe.2020.107992>, last accessed 29.01.2021.
13. Illmann B, Fritzsche L, Ullmann S, Leidholdt W (2015) Ganzheitliche Gefährdungsbeurteilung mit digitalen Menschmodellen – Die Integration von Umgebungsbedingungen in die Digitale Fabrik. In: Gesellschaft für Arbeitswissenschaft (ed) *VerANTWORTung für die Arbeit der Zukunft*. GfA Press, Dortmund. <http://gfa2015.gesellschaft-fuer-arbeitswissenschaft.de/inhalt/A.2.7.pdf>, last accessed 18.03.2021
14. Ribon N (2013) 3D ALARA Planning Overview. Presentation, 13.01.2017. Siemens PLM Software, Fellbach
15. Brinkmeier B (2017) Personal communication, 13.01.2017. Siemens Industry Software, Fellbach
16. Electric Power Research Institute (2012) Demonstration of Advanced 3D ALARA Planning Prototypes for Dose Reduction. 1025310, Final Report. EPRI, Palo Alto CA. <https://www.epri.com/research/products/00000000001025310>, last accessed 02.06.2021
17. PennWell (n.d.) ALARA planning: Siemens PLM Software and Microsoft engineer a partnership to ensure employee health and safety. <http://download.microsoft.com/download/F/0/D/F0D0F18A-D6BE-4214-B14D-1B52F8075135/ALARA%20Planning%20with%20Siemens%20PLM%20and%20Microsoft.pdf>, last accessed 20.01.2021
18. Keller V (2002) Ansatz zur objektorientierten Modellierung betrieblicher Arbeitsschutzdaten. Shaker, Aachen
19. Zülch G, Grieger T, Keller V (2003) Object-oriented modelling and prognosis of occupational health and safety-related data. In: *Safety and Health, Proceedings Volume 5: Proceedings of the XVth Triennial Congress of the International Ergonomics*, pp. 399-402, August 24-30, 2003. Ergonomics Society of Korea, Seoul
20. Alhir SS (1998, 2005) *UML in a Nutshell*. O'Reilly & Associates, Cambridge MA, 1998. *UML 2.0 in a Nutshell*. O'Reilly & Associates, Sebastopol CA, 2005
21. Wikipedia (2021) *Building Information Modeling*. https://en.wikipedia.org/wiki/Building_information_modeling, last accessed 04.06.2021
22. ISO 16739-1:2018 (2018) *Industry Foundation Classes (IFC) for data sharing in the construction and facility management industries — Part 1: Data schema*. <https://www.iso.org/standard/70303.html>, last accessed 11.03.2021
23. Fraunhofer-Institut für Bauphysik (IBP) (2014) BNB-Tool Thermischer Komfort. Fraunhofer IBP, Holzkirchen. <https://www.ibp.fraunhofer.de/content/dam/ibp/ibp-neu/de/dokumente/produktblaetter/eer/produktblatt-bnb-tool.pdf>, last accessed 16.03.2021
24. *LärmVibrationsArbSchV* (2017) Verordnung zum Schutz der Beschäftigten vor Gefährdungen durch Lärm und Vibrationen. *Lärm- und Vibrations-Arbeitsschutzverordnung – LärmVibrationsArbSchV*. Date of issue: 06.03.2007. Federal Law Gazette I p. 261. Last amended by Article 3 of the Ordinance of 19.07.2010. Federal Law Gazette I p. 960
25. Berufsgenossenschaft Holz und Metall (BGHM) (2013) *Hitzearbeit erkennen – beurteilen – schützen*. BGI 579. BGHM, Mainz. <https://publikationen.dguv.de/widgets/pdf/download/article/340>, last accessed 16.03.2021
26. Zülch M, Zülch G (2017) Production logistics and ergonomic evaluation of U-shaped assembly systems. *International Journal of Production Economics* 190:37-44. <http://dx.doi.org/10.1016/j.ijpe.2017.01.004>, last accessed 16.03.2021
27. Schneck M (2009) Personal communication, 11.07.2009. Delmia Systemes, Fellbach