



**HAL**  
open science

# Research on Calculation Method of Period and Deadline of Frame in Automotive Electronic and Information Integrated Control System

Jian Hu, Gangyan Li, Ye-Qiong Song

► **To cite this version:**

Jian Hu, Gangyan Li, Ye-Qiong Song. Research on Calculation Method of Period and Deadline of Frame in Automotive Electronic and Information Integrated Control System. International Journal of Factory Automation, Robotics and Soft Computing, 2008. inria-00332760

**HAL Id: inria-00332760**

**<https://inria.hal.science/inria-00332760>**

Submitted on 21 Oct 2008

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Research on Calculation Method of Period and Deadline of Frame in Automotive Electronic and Information Integrated Control System

Jian HU<sup>1)</sup>, Gangyan LI<sup>1)</sup> and Yeqiong SONG<sup>2)</sup>

<sup>1)</sup>School of Mechanical and Electronic Engineering, Wuhan University of Technology  
122, Luoshi Road, 430070, Wuhan, Hubei Province  
P. R. China

hujian@whut.edu.cn, gangyanli@whut.edu.cn

<sup>2)</sup>LORIA - Equipe TRIO  
615, Rue Du Jardin Botanique, 54600 Villers Les Nancy  
France  
song@loria.fr

**Abstract:** With the increase of the complexity of automotive control, it is necessary to develop AEIICS (Automotive Electronic and Information Integrated Control System) for exchanging information between ECUs (Electronic Control Units) based on in-vehicle network technology. We named the parameter (or variable) contained in and transmitted by frame as signal. Period and deadline are basic temporal characteristics for signal and frame. Designers mainly focus on directly designing the period and deadline of frame but omit the temporal characteristic relationship between signal and frame. In this paper, we researched on the calculation method of period and deadline of frame according to the temporal characteristic of signal. Based on the period of signal, we proved the period of frame is the minimal period of signals composing this frame. Considering the possible time offset between the production time of data of signal and the first transmission time of frame containing this data, we deduced the calculation formula of deadline of frame by applying GCRT (Generalized Chinese Remainder Theorem).

**Key-Words:** Automotive electronic; In-vehicle network; Networked control; Temporal characteristic; Real-time; GCRT

## 1. INTRODUCTION

Nowadays, with the requirements of security, comfort and environment protection, automobiles are more and more equipped with ECUs (Electronic Control Units) to implement different control functions. These functions require the use of real-time and reliable exchange of information between different ECUs, sensors and actuators. But it is impossible to realize this exchange of information through the traditional point-to-point links which would induce a disproportionate length of cable, an increase of cost and production time, reliability problems and other

drawbacks. Thus, it is essential to develop AEIICS (Automotive Electronic and Information Integrated Control System) with in-vehicle network for sharing information and implementing real-time and correlative control between ECUs [1].

At the beginning of 1980s the engineers of the automotive manufacturers assessed the existing field bus systems for their using in vehicles [2]. With the development of in-vehicle network technology, the typical in-vehicle network protocols are LIN [3], CAN [4]-[6], TTCAN [7]-[9], TTP/C [10], FlexRay [11], and MOST [12] etc. which have different characteristics and are applied in different automotive domains.

All kinds of status information and control information are basic parameters for well-working of AEIICS. In this paper, we named the parameter (or variable) transmitted through in-vehicle network as signal. The instance of signal, termed as the data of this signal, identifies different parameter value in AEIICS. For example, engine speed is a signal. 1000rpm is one data of engine speed and a parameter value of engine control system. In a word, the basic function of AEIICS is to share datum of signals between different ECUs based on in-vehicle network technology.

Signal transmission in AEIICS is implemented by frame which is the information unit exchanged in data link layer of ISO/OSI (International Standardization Organization/Open System Interconnect) Reference Model. Before sending signals, data link layer packages signals into frame with specific in-vehicle network protocol format. Every frame includes not only the data of signal but also some additional control information such as synchronization information, address information and error control information etc.

Currently, research of AEIICS focuses on network message scheduling, system performance analysis and system development method etc [13]. Period and deadline are primary parameters to describe temporal characteristics for signal and frame in AEIICS. In system design process, period and deadline of signal depend on sampling period of sensor, control algorithm

and experience of system engineer etc., the period and deadline of frame depend on the temporal characteristic of signal. However, in current research and design of AEIICS, researchers and engineers mainly focus on directly designing the period and deadline of frame but omit the temporal characteristic relationship between signal and frame (such as SAE J1939 [14]). Because of directly specifying the period and deadline of frame in system design, it couldn't ensure the temporal characteristic of signal and there would be system security problem induced by this kind of design method.

In this paper, we mainly research on the calculation method of period and deadline of frame in AEIICS. This paper is organized as follows: In section 2, we described the characteristics of signal and frame of AEIICS with tuples respectively. In section 3, we defined the conditions with which the period of frame should be satisfied. We also presented and proved the calculation formula of period of frame according to the periods of signals. By illustrating the deadline of frame isn't always the minimal deadline of signals composing this frame, in section 4, we deduced the calculation formula of deadline of frame according to the temporal characteristics of signals. In section 5, we calculated the period and deadline of frame containing lighting control signals as a case study. Finally, in section 6 we concluded and presented future work.

## 2. FORMAL DESCRIPTION FOR CHARACTERISTICS OF SIGNAL AND FRAME IN AEIICS

Regarding temporal characteristic as the main description object, each signal  $s_i (i \in Z^+)$  in AEIICS is characterized by a tuple  $(\dot{N}_i, \dot{T}_i, \dot{D}_i, \dot{C}_i)$ :

$\dot{N}_i$  is the node (i.e. ECU) sending  $s_i$ .

$\dot{T}_i$  is the production period of  $s_i$ . In practice the clocks of the nodes are not synchronized but it is assumed that the first production time of all signals on the same node takes place at the same time.

$\dot{D}_i$  is the deadline of  $s_i$ . It is the maximal interval between the production of  $s_i$  on the sending node and its reception by all consumers. Usually, it is assumed that the deadline of  $s_i$  is equal to its period:  $\dot{D}_i = \dot{T}_i$ .

$\dot{C}_i$  is the size of  $s_i$  in bits with the assumption that  $\dot{C}_i$  is always smaller than or equal to the maximal data field size of frame (i.e. there is no segmentation of a signal). For CAN data frame, the maximal signal size is 64 bits because the maximal data field size of CAN data frame is 8 bytes.

Each frame  $f_j (j \in Z^+)$  in AEIICS is characterized by a tuple  $(N_j, T_j, D_j, C_j, P_j)$ :

$N_j$  is the node (i.e. ECU) sending  $f_j$ .

$T_j$  is the transmission period of  $f_j$ . The value of  $T_j$  depends on the temporal characteristics of signals composing  $f_j$ .

$D_j$  is the deadline of  $f_j$ . The value of  $D_j$  depends on the temporal characteristics of signals composing  $f_j$ .

$C_j$  is the size of  $f_j$  in bits. It consists of the size of the data field and the size of the frame overhead.

$P_j$  is the priority of  $f_j$  for the priority MAC protocol.

This paper focuses on how to obtain the period and deadline of frame according to the temporal characteristics of signals in AEIICS.

## 3. CALCULATION METHOD OF PERIOD OF FRAME BASED ON TEMPORAL CHARACTERISTICS OF SIGNALS

### 3.1 Problem description

It is assumed that frame  $f_k$  consists of signals  $\{s_1^k, s_2^k, \dots, s_n^k\} (k, n \in Z^+)$ . The periods of  $f_k$  and  $s_i^k (i \in Z^+)$  are  $T_k (T_k \in Z^+)$  and  $\dot{T}_i (\dot{T}_i \in Z^+)$  respectively. As shown in Fig.3.1, the calculation problem of the period of  $f_k$  can be described as follows:

One finds out the maximal value of  $T_k$  which ensures that the data of  $s_i^k$  produced at  $k_i * \dot{T}_i (k_i \in N)$  can be transmitted before  $(k_i + 1) * \dot{T}_i$  for  $\forall s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}$ .

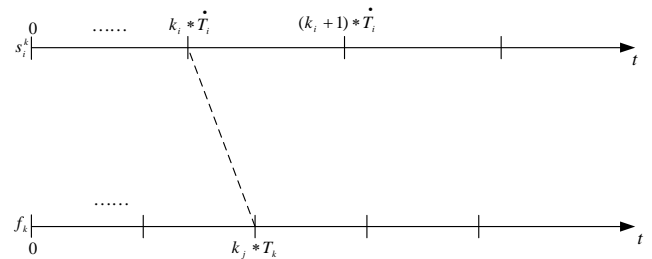


Fig.3.1 When  $f_k$  is transmitted with  $T_k$ , the data of  $s_i^k$  produced at  $k_i * \dot{T}_i (k_i \in N)$  can be transmitted before  $(k_i + 1) * \dot{T}_i$ .

### 3.2 Calculation method of period of frame

It is assumed that frame  $f_k$  consists of signals  $\{s_1^k, s_2^k, \dots, s_n^k\} (k, n \in \mathbb{Z}^+)$ . The periods of  $f_k$  and  $s_i^k$  ( $i \in \mathbb{Z}^+$ ) are  $T_k (T_k \in \mathbb{Z}^+)$  and  $\dot{T}_i (\dot{T}_i \in \mathbb{Z}^+)$  respectively. Every signal of  $\{s_1^k, s_2^k, \dots, s_n^k\}$  has the same first production time.  $s_{\min}^k$  is the signal with the minimal period of signal set  $\{s_1^k, s_2^k, \dots, s_n^k\}$ , i.e.  $\dot{T}_{\min} = \min \{\dot{T}_i | s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}\}$ . It is also assumed that the transmission time of  $f_k$  is synchronized with the production time of  $s_{\min}^k$ .

Before deducing the calculation method of period of frame, we firstly introduce one of the divisibility theorems.

**Theorem 1:** Assuming  $b \in \mathbb{Z}$  and  $b \neq 0$ , any integer  $a$  can be uniquely formulized as follows:

$$a = b * q + r$$

where  $q, r \in \mathbb{Z}$  and  $0 \leq r < |b|$ .

For  $\forall s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}$ , applying theorem 1, the duration of  $s_i^k$  between  $k_i * \dot{T}_i$  ( $k_i \in \mathbb{N}$ ) and  $(k_i + 1) * \dot{T}_i$  is formulized by:

$$\Delta_i^k = q * T_k + r \quad (3.1)$$

where  $q, r \in \mathbb{Z}$  and  $0 \leq r < |T_k|$ .

Setting  $T_k = \dot{T}_{\min}$ ,

because

$$\Delta_i^k = (k_i + 1) * \dot{T}_i - k_i * \dot{T}_i = \dot{T}_i \quad (3.2)$$

and  $\dot{T}_i \geq \dot{T}_{\min}$ ,

thus:

$$\Delta_i^k = q * \dot{T}_{\min} + r \quad (3.3)$$

where  $q, r \in \mathbb{Z}$  and  $q \geq 1, 0 \leq r < \dot{T}_{\min}$ .

Therefore,  $f_k$  is transmitted for  $q$  ( $q \in \mathbb{Z}$  and  $q \geq 1$ ) times during the duration  $[k_i * \dot{T}_i, (k_i + 1) * \dot{T}_i)$ , i.e.  $s_i^k$  contained by  $f_k$  is transmitted for  $q$  times. It ensures that the data of  $s_i^k$  produced at  $k_i * \dot{T}_i$  ( $k_i \in \mathbb{N}$ ) can be transmitted by  $f_k$  before  $(k_i + 1) * \dot{T}_i$ .

It has proved  $\dot{T}_{\min}$  can be the period of  $f_k$ . We will prove  $\dot{T}_{\min}$  is the maximal allowed period of  $f_k$  by using reduction to absurdity as follows.

It is assumed that  $\dot{T}_{\min}$  is not the maximal allowed period of  $f_k$ . Then there exists  $(\dot{T}_{\min} + \varepsilon) (\varepsilon \in \mathbb{Z}^+)$  is

the maximal allowed period of  $f_k$ , i.e.  $T_k = \dot{T}_{\min} + \varepsilon$ . According to formula (3.1), we obtain:

$$\Delta_i^k = q * (\dot{T}_{\min} + \varepsilon) + r$$

where  $q, r \in \mathbb{Z}$  and  $0 \leq r < (\dot{T}_{\min} + \varepsilon)$ .

Setting  $\dot{T}_i = \dot{T}_{\min}$ ,

according to formula (3.2):

$$\Delta_{\min}^k = \dot{T}_{\min} = q * (\dot{T}_{\min} + \varepsilon) + r \quad (3.4)$$

where  $q, r \in \mathbb{Z}$  and  $q \leq 0, 0 \leq r < (\dot{T}_{\min} + \varepsilon)$ .

Therefore, when  $f_k$  is transmitted with period  $(\dot{T}_{\min} + \varepsilon)$ , it can't ensure that the data of  $s_i^k$  produced at  $k_i * \dot{T}_i$  ( $k_i \in \mathbb{N}$ ) will be transmitted by  $f_k$  before  $(k_i + 1) * \dot{T}_i$  during the duration  $[k_i * \dot{T}_i, (k_i + 1) * \dot{T}_i)$ .

Thus, the assumption is wrong.

Finally, we obtain the maximal allowed period of  $f_k$ , i.e. the period of  $f_k$  defined by us is:

$$T_k = \dot{T}_{\min} \quad (3.5)$$

## 4. CALCULATION METHOD OF DEADLINE OF FRAME BASED ON TEMPORAL CHARACTERISTICS OF SIGNALS

### 4.1 Problem description

When it is assumed that the transmission time of frame  $f_k$  containing signals  $\{s_1^k, s_2^k, \dots, s_n^k\} (k, n \in \mathbb{Z}^+)$  is synchronized with the production time of  $s_{\min}^k$ , we have

known that the period of  $f_k$  is  $\dot{T}_{\min}$ , the minimal period of signal set  $\{s_1^k, s_2^k, \dots, s_n^k\}$ . So should we conclude that the deadline of  $f_k$  is the minimal deadline of the set  $\{s_1^k, s_2^k, \dots, s_n^k\}$ ?

Because there is possible offset [15] between the production time of the data of signal and the first transmission time of the frame containing this data, the deadline of  $f_k$  is not the minimal deadline of signal set  $\{s_1^k, s_2^k, \dots, s_n^k\}$ .

The calculation problem of the deadline of  $f_k$  can be described as follows: for  $\forall s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}$ , one finds out the value of  $D_k$  which ensures that the response time of  $s_i^k$  satisfies with the requirement of deadline of  $s_i^k$  if the response time of  $f_k$  satisfies with the requirement of deadline of  $f_k$ .

In order to calculate the deadline of  $f_k$ , we firstly present and prove the mathematic formula between the production times of two periodic signals.

## 4.2 Relationship between the production times of two periodic signals

### GCRT (Generalized Chinese Remainder Theorem):

For any  $1 \leq i < j \leq n$ , a common residue equation set

$$\begin{cases} x \equiv a_1 \pmod{m_1} \\ x \equiv a_2 \pmod{m_2} \\ \vdots \\ x \equiv a_n \pmod{m_n} \end{cases}$$

has a solution if and only if:

$$a_i \equiv a_j \pmod{\gcd(m_i, m_j)} \quad (4.1)$$

When  $n=2$ , the common residue equation set

$$\begin{cases} x \equiv a_1 \pmod{m_1} \\ x \equiv a_2 \pmod{m_2} \end{cases}$$

has a solution if and only if

$$a_1 \equiv a_2 \pmod{\gcd(m_1, m_2)} \quad (4.2)$$

Given two periodic signals  $s_1$  and  $s_2$  with periods  $\dot{T}_1$  and  $\dot{T}_2$  ( $\dot{T}_1, \dot{T}_2 \in \mathbb{Z}^+$ ), and the production time  $p_1$  and  $p_2$  ( $p_1, p_2 \in \mathbb{N}$ ) respectively, it is assumed that they have the same initial time. We will deduce the relationship between  $p_1$  and  $p_2$  using GCRT.

Because  $s_1$  and  $s_2$  are periodic signals,

thus  $\exists k_1, k_2 \in \mathbb{N}$ ,  $p_1$  and  $p_2$  can be formulized by:

$$\begin{aligned} p_1 &= k_1 * \dot{T}_1 \\ p_2 &= k_2 * \dot{T}_2 \end{aligned}$$

Thus:

$$\begin{aligned} p_1 \bmod \dot{T}_1 &= 0 \\ p_2 \bmod \dot{T}_2 &= 0 \end{aligned}$$

i.e.:

$$\begin{cases} 0 \equiv p_1 \pmod{\dot{T}_1} \\ 0 \equiv p_2 \pmod{\dot{T}_2} \end{cases}$$

Thus the common residue equation set

$$\begin{cases} x \equiv p_1 \pmod{\dot{T}_1} \\ x \equiv p_2 \pmod{\dot{T}_2} \end{cases}$$

has solution and the solution is  $x=0$ .

According to GCRT, we know:

$$p_1 \equiv p_2 \pmod{\gcd(\dot{T}_1, \dot{T}_2)}$$

i.e.  $\gcd(\dot{T}_1, \dot{T}_2) \mid p_1 - p_2$

thus  $\exists q \in \mathbb{Z}$ ,

$$p_1 - p_2 = q * \gcd(\dot{T}_1, \dot{T}_2) \quad (4.3)$$

This states that the interval between the production times of any two datum of two periodic signals always equals to the integer multiple of the great common division of their periods if these two periodic signals have the same initial time.

### 4.3 Calculation method of deadline of frame

It is assumed that frame  $f_k$  consists of signals  $\{s_1^k, s_2^k, \dots, s_n^k\}$  ( $k, n \in \mathbb{Z}^+$ ). The period and deadline of  $s_i^k$  ( $i \in \mathbb{Z}^+$ ) is  $\dot{T}_i$  ( $\dot{T}_i \in \mathbb{Z}^+$ ) and  $\dot{D}_i$  ( $\dot{D}_i \in \mathbb{Z}^+$ ) respectively. Every signal of  $\{s_1^k, s_2^k, \dots, s_n^k\}$  has the same first production time.  $s_{\min}^k$  is the signal with the minimal period of signal set  $\{s_1^k, s_2^k, \dots, s_n^k\}$ , i.e.  $\dot{T}_{\min} = \min\{\dot{T}_i \mid s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}\}$ . The period and deadline of  $f_k$  is  $T_k$  ( $T_k \in \mathbb{Z}^+$ ) and  $D_k$  ( $D_k \in \mathbb{Z}^+$ ) respectively. The transmission time of  $f_k$  is synchronized with the production time of  $s_{\min}^k$ . As

shown in Fig.4.1,  $Offset(T_k, \dot{T}_i)$  is defined as the time offset between the production time of the data of  $s_i^k$  and the first transmission time of  $f_k$  containing this data (because the data of  $s_i^k$  maybe be transmitted more than one time);  $Offset_{\max}(T_k, \dot{T}_i)$  is defined as the maximal value of  $Offset(T_k, \dot{T}_i)$ .

Because there is possible time offset between the production time of the data of  $s_i^k$  and the first transmission time of  $f_k$  containing this data.

Thus the deadline of  $f_k$  is defined as the minimal value of the difference between  $\dot{D}_i$  and  $Offset_{\max}(T_k, \dot{T}_i)$ , i.e.:

$$D_k = \min\{\dot{D}_i - Offset_{\max}(T_k, \dot{T}_i) \mid s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}\}$$

Because  $T_k = \dot{T}_{\min}$ ,

thus:

$$D_k = \min\{\dot{D}_i - Offset_{\max}(\dot{T}_{\min}, \dot{T}_i) \mid s_i^k \in \{s_1^k, s_2^k, \dots, s_n^k\}\}$$

Thus the key of calculating the deadline of  $f_k$  is to calculate  $Offset_{\max}(T_k, \dot{T}_i)$ .

In order to calculate  $Offset_{\max}(T_k, \dot{T}_i)$ , it is assumed that  $t_i$  is the production time of the data of  $s_i^k$ ,  $t_k$  is the first transmission time of  $f_k$  containing this data. Then  $Offset(T_k, \dot{T}_i)$  equals to  $t_k - t_i$ .

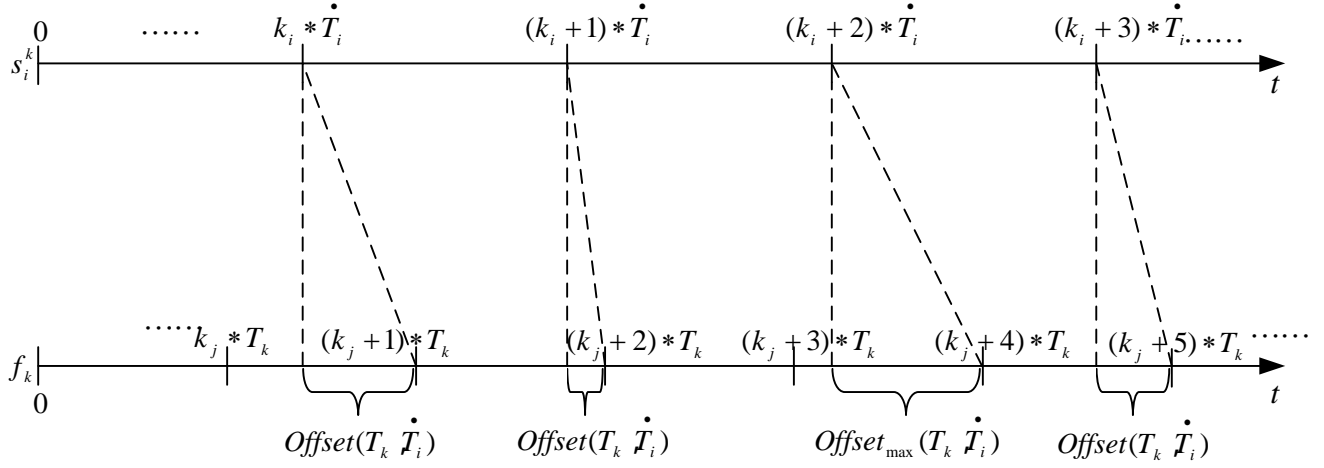


Fig.4.1  $Offset(T_k, \dot{T}_i)$ : time offset between the production time of the data of  $s_i^k$  and the first transmission time of  $f_k$  containing this data;  $Offset_{\max}(T_k, \dot{T}_i)$ : the maximal value of  $Offset(T_k, \dot{T}_i)$ .

Because  $T_k = \dot{T}_{\min}$ ,  
thus:

$$t_k = k_{\min} * \dot{T}_{\min} \quad (k_{\min} \in \mathbb{N})$$

$$t_i = k_i * \dot{T}_i \quad (k_i \in \mathbb{N})$$

Thus:

$$t_k - t_i = k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i,$$

and

$$k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i \geq 0$$

According to the definition of time offset:

$$t_k - t_i < \dot{T}_{\min} \quad (\text{shown in Fig.4.2})$$

i.e.  $0 \leq k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i < \dot{T}_{\min}$

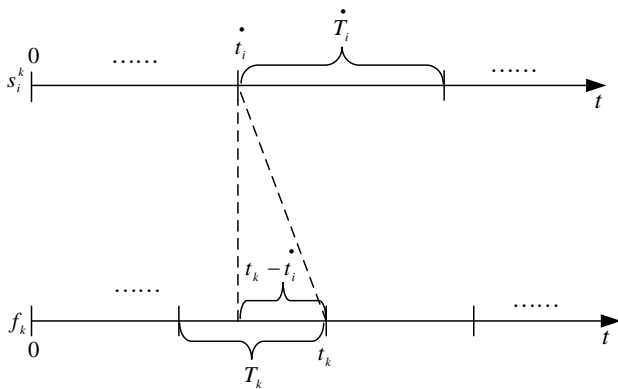


Fig.4.2 The relationship between  $Offset(T_k, \dot{T}_i)$  and  $T_k$

According to formula (4.3), the production times of any two datum of two periodic signals have the relationship as:

$$p_1 - p_2 = q * \gcd(\dot{T}_1, \dot{T}_2), \text{ i.e.:}$$

$$k_1 * \dot{T}_1 - k_2 * \dot{T}_2 = q * \gcd(\dot{T}_1, \dot{T}_2)$$

Setting  $\dot{T}_{\min} = \dot{T}_1, \dot{T}_i = \dot{T}_2$ ,

thus:

$$k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i = q * \gcd(\dot{T}_{\min}, \dot{T}_i) \quad (q \in \mathbb{N})$$

Thus the key of calculating the maximal value of  $k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i$  is to calculate the maximal value of  $q * \gcd(\dot{T}_{\min}, \dot{T}_i)$ .

And because  $\gcd(\dot{T}_{\min}, \dot{T}_i)$  is a constant, thus the key of calculating the maximal value of  $k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i$  is to calculate the maximal value of  $q$ .

We calculate the maximal value of  $q$  as follows:

Because  $0 \leq k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i < \dot{T}_{\min}$ , i.e.:

$$0 \leq q * \gcd(\dot{T}_{\min}, \dot{T}_i) < \dot{T}_{\min}$$

thus:

$$q < \frac{\dot{T}_{\min}}{\gcd(\dot{T}_{\min}, \dot{T}_i)}$$

And because  $\gcd(\dot{T}_{\min}, \dot{T}_i) | \dot{T}_{\min}$ ,

thus:

$$\max(q) = \frac{\dot{T}_{\min}}{\gcd(\dot{T}_{\min}, \dot{T}_i)} - 1$$

Thus:

$$Offset_{\max}(T_k, \dot{T}_i)$$

$$= \max(k_{\min} * \dot{T}_{\min} - k_i * \dot{T}_i)$$

$$= \max(q) * \gcd(\dot{T}_{\min}, \dot{T}_i)$$

$$\begin{aligned}
&= \max(q) * \gcd(\dot{T}_{\min}, \dot{T}_i) \\
&= \left( \frac{\dot{T}_{\min}}{\gcd(\dot{T}_{\min}, \dot{T}_i)} - 1 \right) * \gcd(\dot{T}_{\min}, \dot{T}_i) \\
&= \dot{T}_{\min} - \gcd(\dot{T}_{\min}, \dot{T}_i)
\end{aligned}$$

Thus:

$$\begin{aligned}
D_k &= \min \{ \dot{D}_i - \text{Offset}_{\max}(T_k, \dot{T}_i) \} \\
&= \min \{ \dot{D}_i - \dot{T}_{\min} + \gcd(\dot{T}_{\min}, \dot{T}_i) \}
\end{aligned}$$

Therefore, the deadline of  $f_k$ :

$$D_k = \min \{ \dot{D}_i - \dot{T}_{\min} + \gcd(\dot{T}_{\min}, \dot{T}_i) \} \quad (4.4)$$

If  $\dot{D}_i = \dot{T}_i$ ,

$$D_k = \min \{ \dot{T}_i - \dot{T}_{\min} + \gcd(\dot{T}_{\min}, \dot{T}_i) \} \quad (4.5)$$

## 5. CASE STUDY

There are many lighting control signals in AEIICS. We usually configure all these signals into one frame which is transmitted through in-vehicle network. Because of different importance, there are different sampling period and real-time request for each lighting control signal. As shown in Table 5.1, it is different for the periods and deadlines of these signals. Here we assume that the deadline of lighting control signal is equal to its period.

Table 5.1 Periods and deadlines of lighting control signals

Signal Name	Period (ms)	Deadline (ms)
Running Light Command	500	500
Alternate Beam Head Light Command	80	80
Low Beam Head Light Command	80	80
High Beam Head Light Command	80	80
Front Fog Lights Command	100	100
Right Turn Signal Lights Command	50	50
Left Turn Signal Lights Command	50	50
Back Up Light Command	50	50
Marker Light Command	500	500
Rear Fog Light Command	100	100
Lighting Data Request Command	500	500
Work Light Command	500	500

$$\dot{T}_{\min} = \min \{ \dot{T}_i \mid s_i^k \in \{ s_1^k, s_2^k, \dots, s_n^k \} \}$$

$$= \min \{ 500, 80, 80, 80, 100, 50, 50, 50, 500, 100, 500, 500 \}$$

$$= 50(\text{ms})$$

Applying formula (3.5),

$$\begin{aligned}
T_k &= \dot{T}_{\min} \\
&= 50(\text{ms})
\end{aligned}$$

$$\begin{aligned}
\dot{D}_{\min} &= \min \{ \dot{D}_i \mid s_i^k \in \{ s_1^k, s_2^k, \dots, s_n^k \} \} \\
&= \min \{ 500, 80, 80, 80, 100, 50, 50, 50, 500, 100, 500, 500 \} \\
&= 50(\text{ms})
\end{aligned}$$

Applying formula (4.4),

$$\begin{aligned}
D_k &= \min \{ \dot{D}_i - \dot{T}_{\min} + \gcd(\dot{T}_{\min}, \dot{T}_i) \} \\
&= \min \{ 500, 40, 40, 40, 100, 50, 50, 50, 500, 100, 500, 500 \} \\
&= 40(\text{ms})
\end{aligned}$$

According to the calculation results, we know the deadline of frame isn't always equal to the minimal deadline of signals. It is essential to obtain the deadline of frame with formula (4.4) because it will affect on the analysis of system schedulability and the selection of network transmission rate if we configure the deadline of frame as the the minimal deadline of signals composing this frame.

## 6. CONCLUSION

In this paper, we researched on the temporal characteristic relationship between signal and frame in automotive electronic and information integrated information control system. We proved the period of frame is the minimal period of signals composing this frame. By applying GCRT, we put forward the mathematic formula of the difference between the production times of two periodic signals. Based on this formula, we finally deduced the calculation formula of deadline of frame with the temporal characteristic of signals as input parameters. In SAE J1939 protocol, the periods and deadlines of some messages are specified, but others depends on the decision of system designer. The further research will focus on the conditions which make the period and deadline of frame equals to the minimal period and deadline of signals composing this frame and keep the period and deadline of frame when other signals are inserted into this frame.

## ACKNOWLEDGEMENT

We would like to give our acknowledgments to Hubei province, Wuhan city and Wuhan University of Technology, China because the research work reported

here has been sponsored by “Hubei province digital manufacturing key laboratory open foundation” (SZ0615), “Wuhan city tackle key science and technology problem project” (200710421118) and “Excellent PhD. Dissertation Sustentation Fund of Wuhan University of Technology”(200704). We also want to thank Mathieu Grenier and Nicolas Navet, LORIA, France, for their helpful advices on this study.

#### REFERENCES

- [1] Jian Hu, Gangyan Li, Xiangpeng Yu and Sheng Liu, “Design and Application of SAE J1939 Communication Database in City-Bus Information Integrated Control System Development”, in *Proceedings of the 2007 IEEE International Conference on Mechatronics and Automation (IEEE ICMA 2007)*, harbin, china, 2007, pp.3429-3434.
- [2] Miguel A. Domínguez, Perfecto Mariño, Francisco Poza and Santiago Otero, “Communication Networks for Vehicular Electronic Devices”, in *Proceedings of EUROCON 2007 The International Conference on “Computer as a Tool”*, Warsaw, 2007, pp.1061-1067.
- [3] LIN Consortium, “LIN specification package, revision 2.0”, Online available: <http://www.lin~subbus.org/>, Feb 2005.
- [4] ISO, “Road vehicles-low speed serial data communication-part 2: low speed controller area network”, in *ISO 11519-2*, 1994.
- [5] Bosch, “CAN Specification 2.0”, in *Robert Bosch GmbH*, 1991.
- [6] ISO, “Road vehicles-interchange of digital information-controller area network for high-speed communication”, in *ISO 11898*, 1994.
- [7] B. Müller, T. Führer, F. Hartwich, et al, “Fault tolerant TTCAN networks”, in *Proceedings 8th International CAN Conference, LasVegas, 2002*, pp. 3-9.
- [8] Thomas Führer, B Müller, W Dieterle, et al, “Time triggered communication on CAN”, in *Proceedings 7th International CAN Conference, 2000*, pp.1-7.
- [9] ISO, “Road vehicles-controller area network (CAN)-part 4: time-triggered communication”, in *ISO 11898-4*, 2000.
- [10] TTTech Computertechnik GmbH, “Time-triggered protocol TTP/C, high-level specification document, protocol version 1.1”, Online available: <http://www.tttech.com>, Aug 2007.
- [11] FlexRay Consortium, “FlexRay communication system, protocol specification, version 2.0”, Online available: <http://www.flexray.com>, Feb 2007.
- [12] MOST Cooperation, “MOST specification revision 2.3”, Online available: <http://www.mostnet.de>, Jan 2008.
- [13] Navet, N., Song, Y.Q., Simonot-Lion, F. and Wilwert, C(). “Trends in automotive communication systems”, in *Proceedings of the IEEE*, vol.6, 2005, pp. 1204-1223.
- [14] SAE, “Surface vehicle recommended practice, SAE J1939”, in *SAE J1939*, Jan 2005.
- [15] Rishi Saket and Nicolas Navet, “Frame packing algorithms for automotive applications”, in *Journal of Embedded Computing*, vol.2, 2006, pp. 93-102.