



HAL
open science

Compareads: comparing huge metagenomic experiments

Nicolas Maillet, Claire Lemaitre, Rayan Chikhi, Dominique Lavenier, Pierre Peterlongo

► To cite this version:

Nicolas Maillet, Claire Lemaitre, Rayan Chikhi, Dominique Lavenier, Pierre Peterlongo. Compareads: comparing huge metagenomic experiments. 13e édition des Journées Ouvertes en Biologie, Informatique et Mathématiques - JOBIM 2012, Jul 2012, Rennes, France. 2012. hal-00760332

HAL Id: hal-00760332

<https://inria.hal.science/hal-00760332>

Submitted on 3 Dec 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Compareads: comparing huge metagenomic experiments

Nicolas Maillet^{*1}, Claire Lemaitre¹, Rayan Chikhi², Dominique Lavenier¹, Pierre Peterlongo^{*1}

¹INRIA Rennes - Bretagne Atlantique / IRISA, EPI GenScale, Rennes, France


²ENS Cachan/IRISA, EPI GenScale, Rennes, France

*Corresponding authors

Metagenomics studies overall genomic information of multiple organisms coming from the same biotope. The information is generally provided by High Throughput Sequencers. Nowadays, metagenomic sample analyses are mainly achieved by comparing them with *a priori* knowledge stored in data banks.


This work introduces Compareads, a *de novo* comparative metagenomic approach that returns the similar reads between two datasets. Thanks to a new data structure, its time and memory features make Compareads able to retrieve biological information while scaling to huge datasets.

How to define "similarity"?

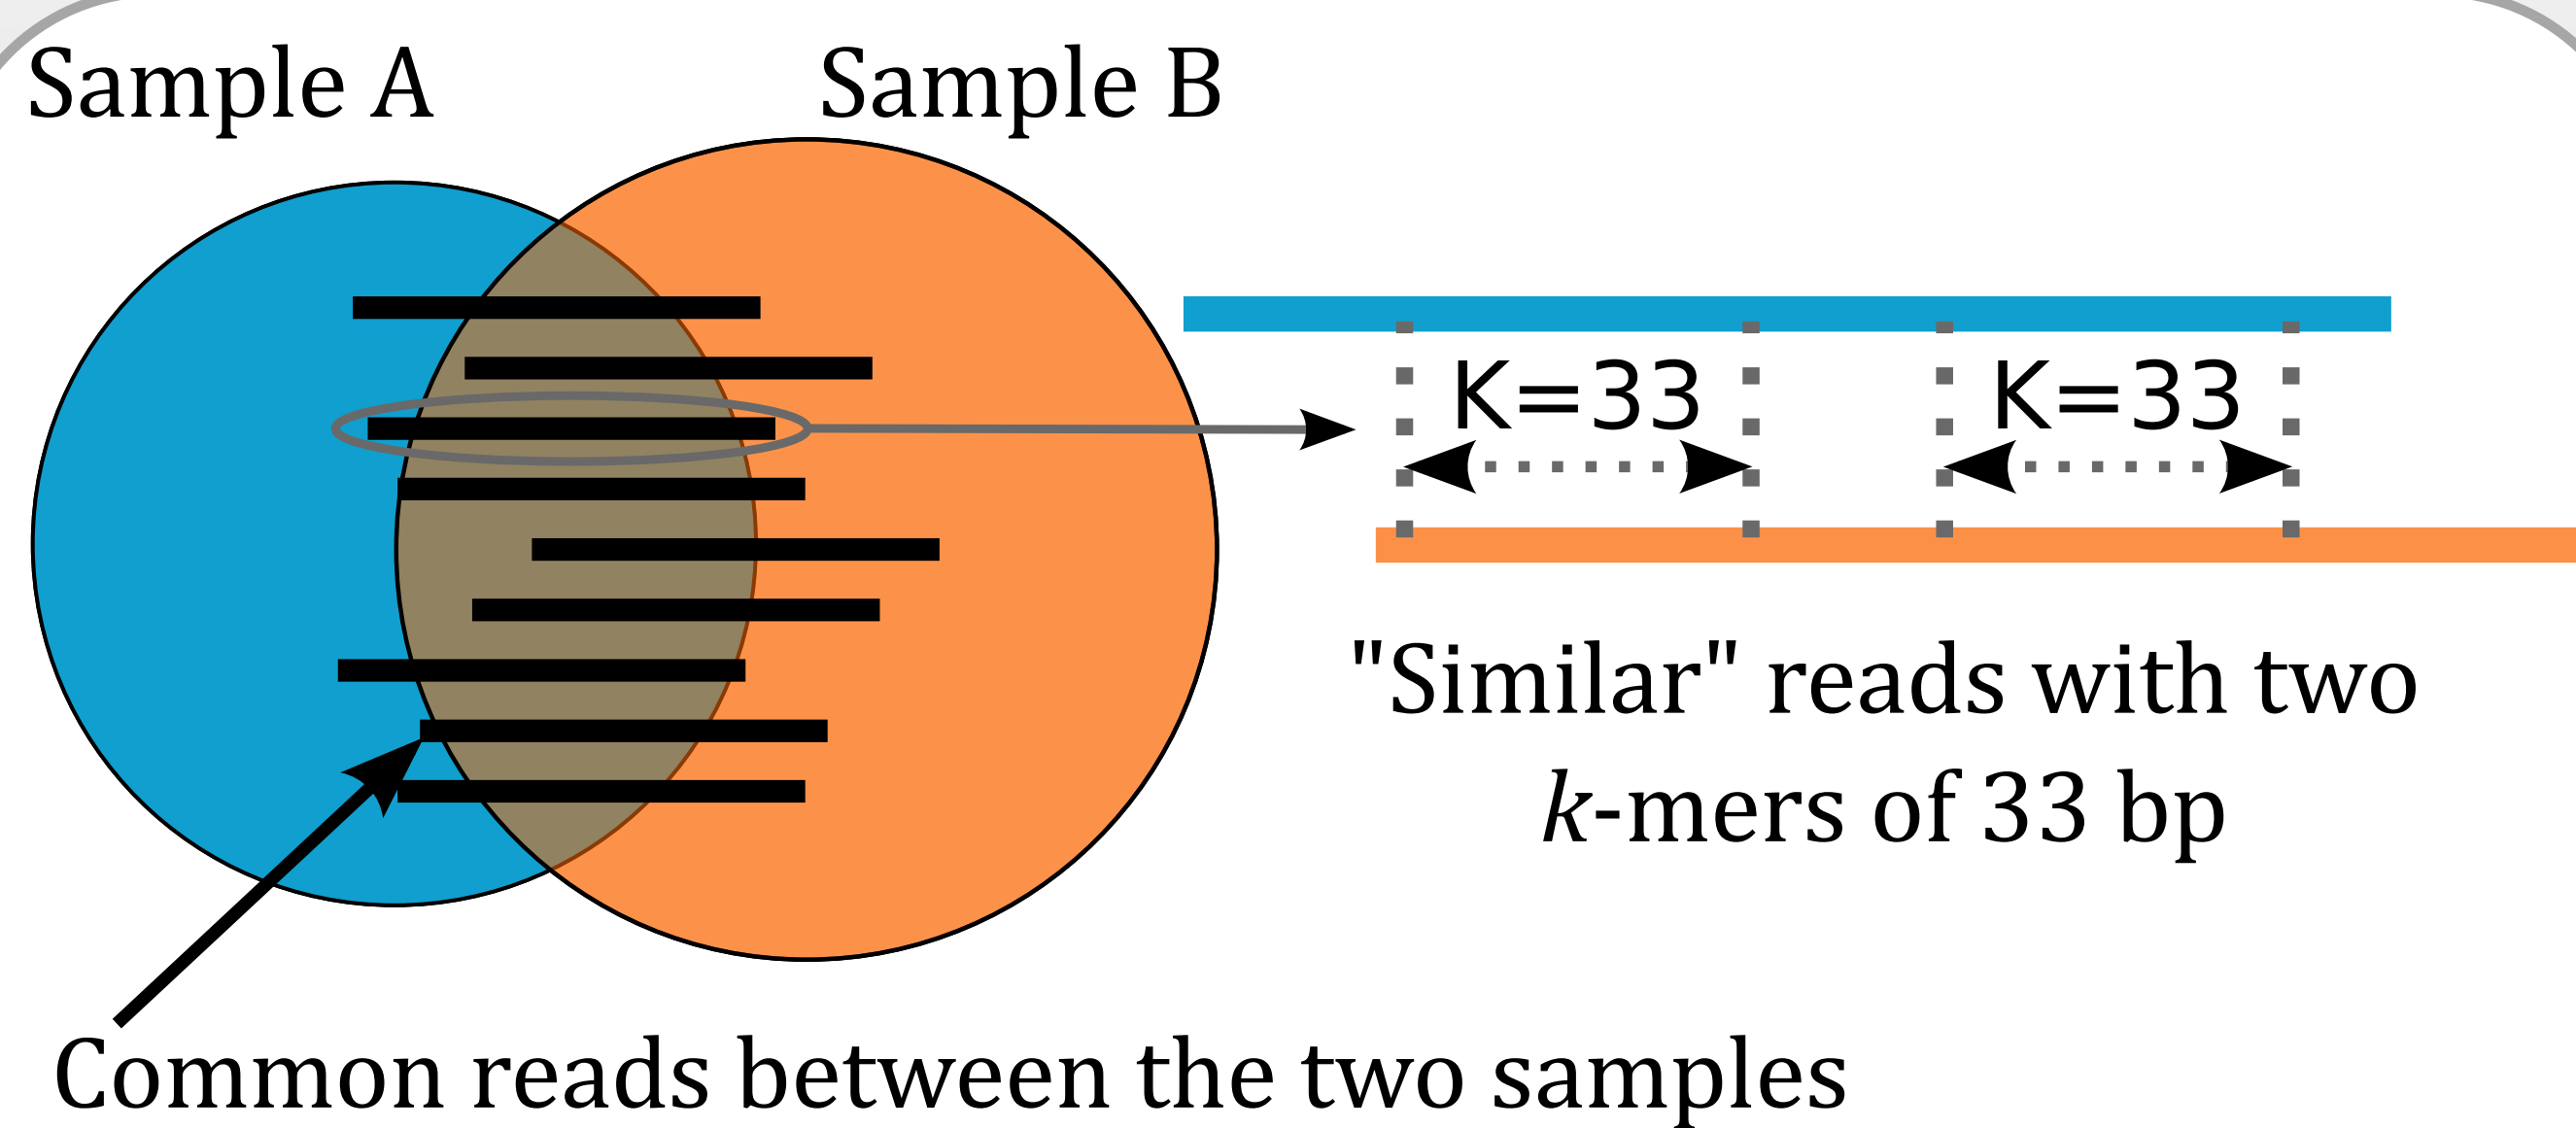

In order to perform efficiently the intersection, Compareads uses a rough but efficient notion of "similar sequences": two sequences are said similar if and only if they share at least t non overlapping words of length k (k -mers).


Results on Global Ocean Sampling¹

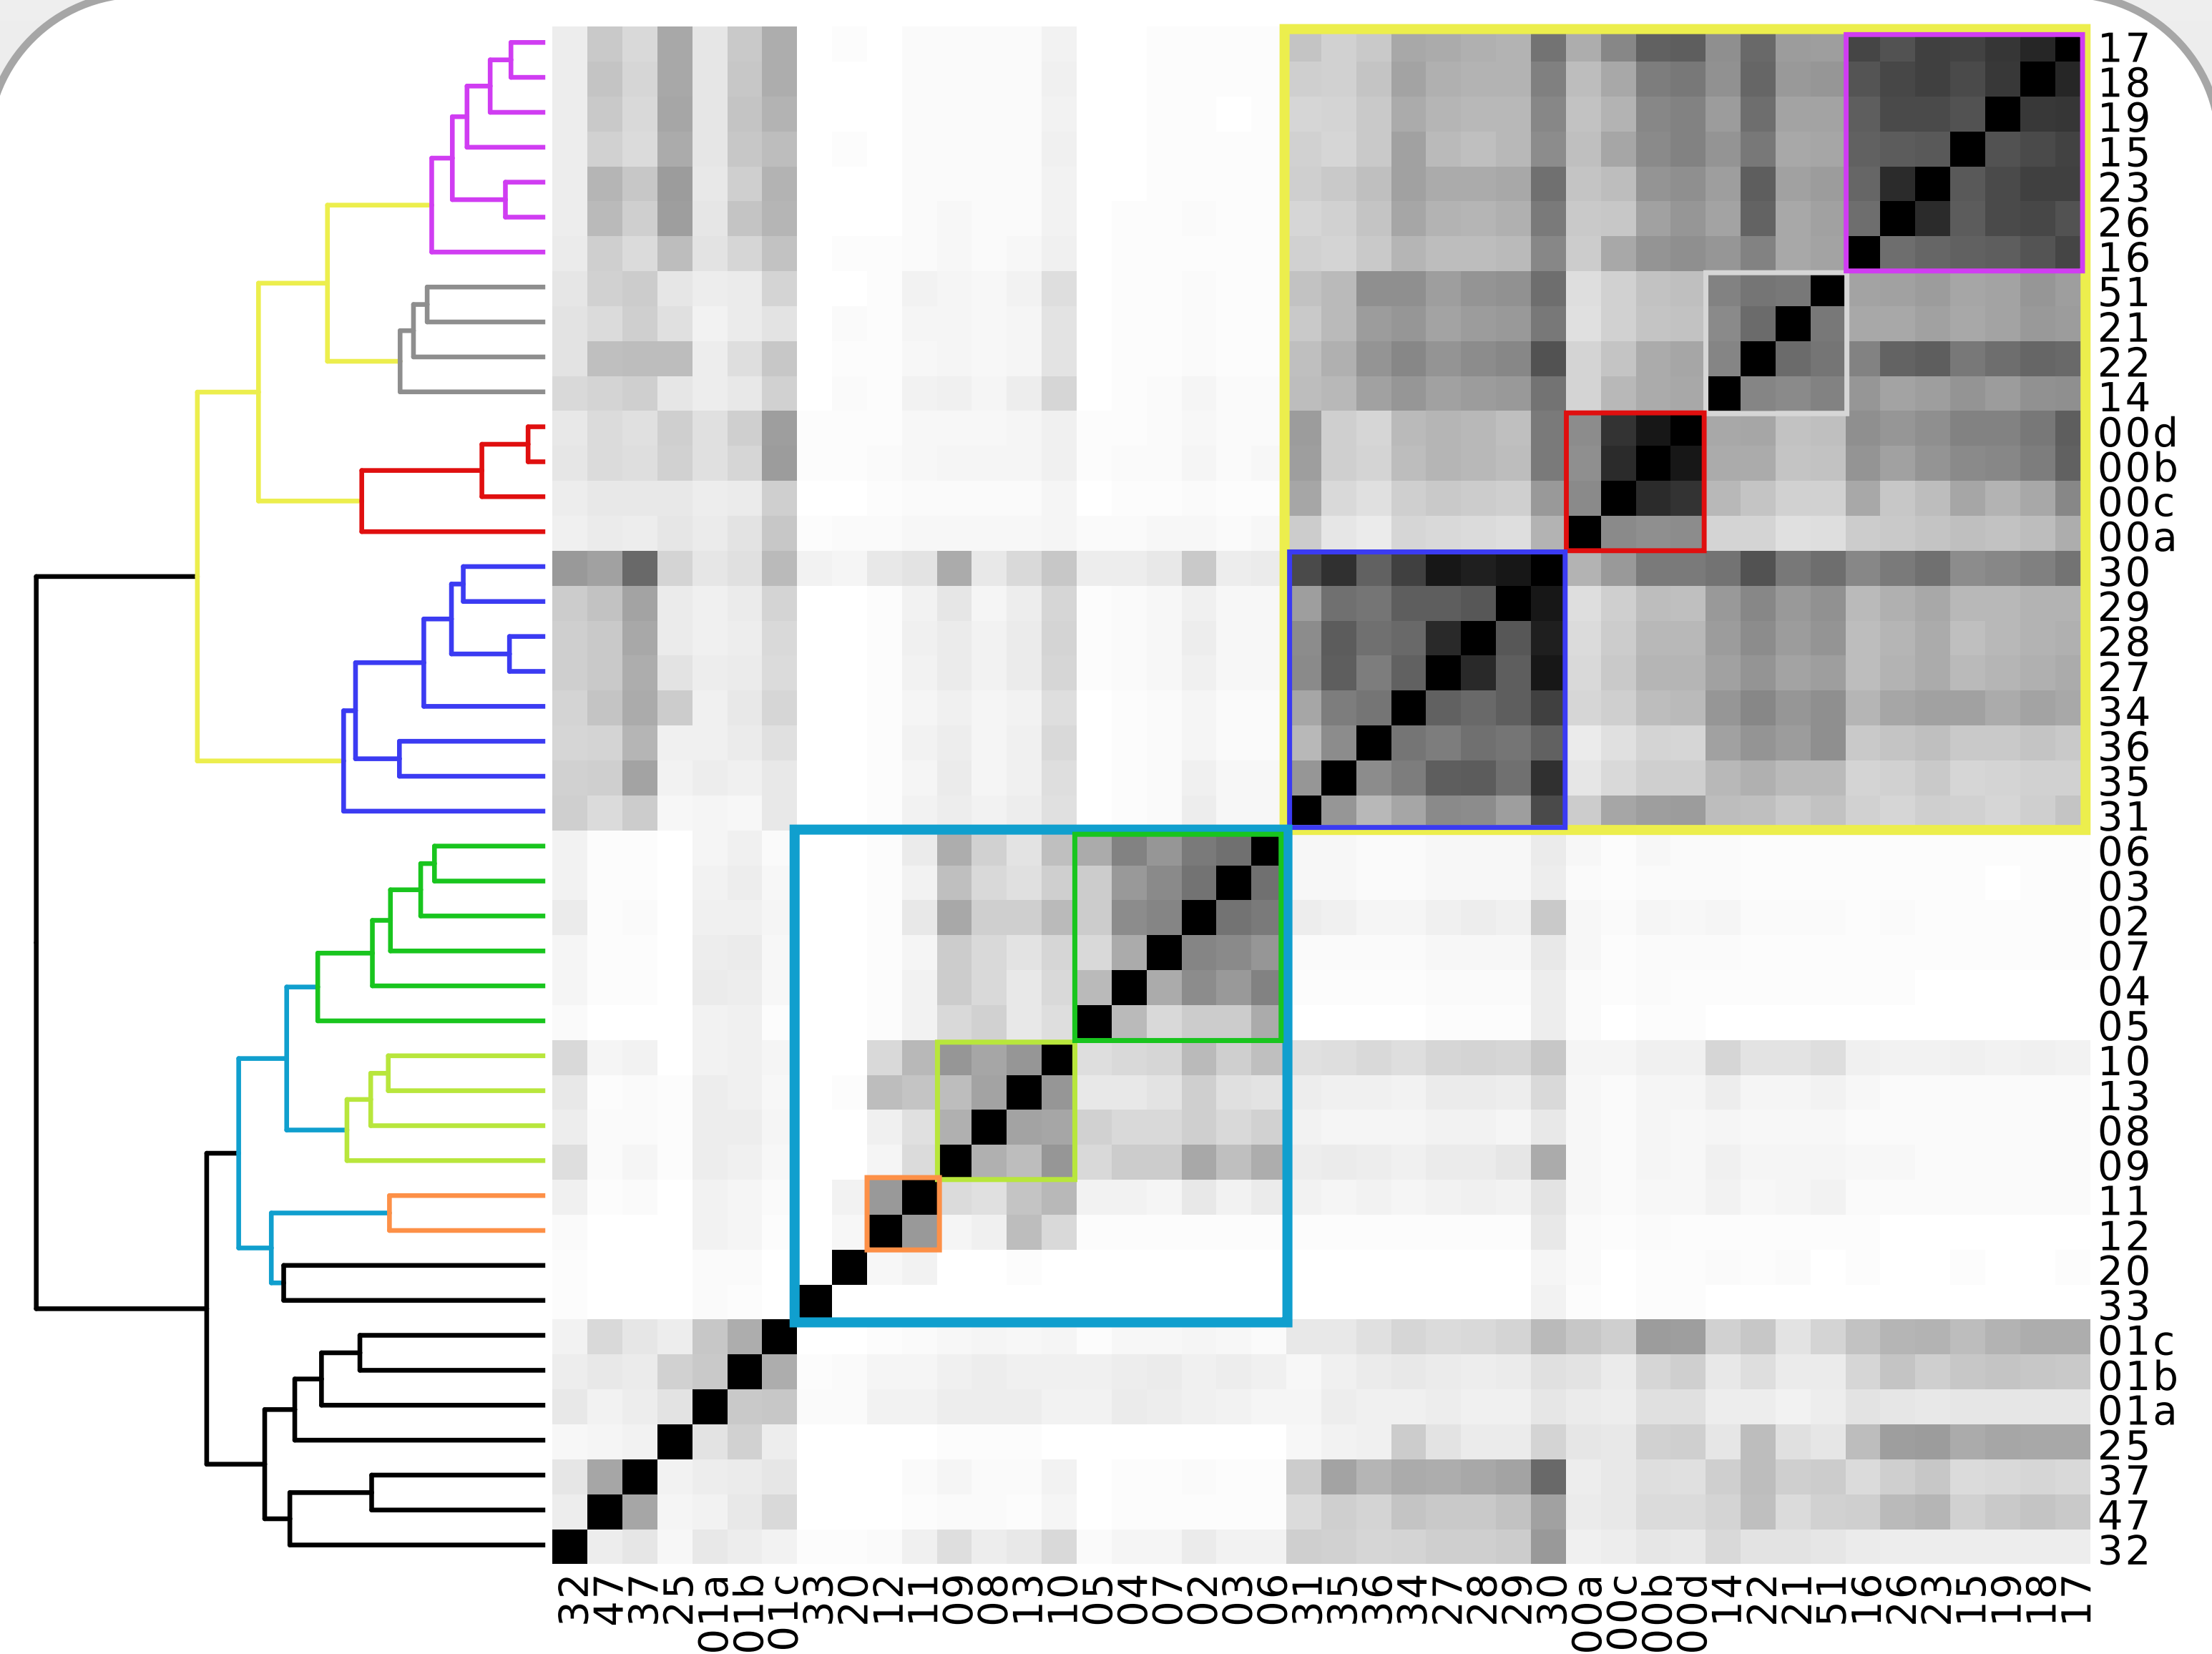

Hierarchical clustering based on pairwise intersections between all samples of the Global Ocean Sampling (The Sorcerer II expedition¹).


¹. Rusch et al. The Sorcerer II Global Ocean Sampling Expedition: Northwest Atlantic through Eastern Tropical Pacific. Plos Biol (2007) vol. 5 (3) pp. e77

Modified Bloom Filter

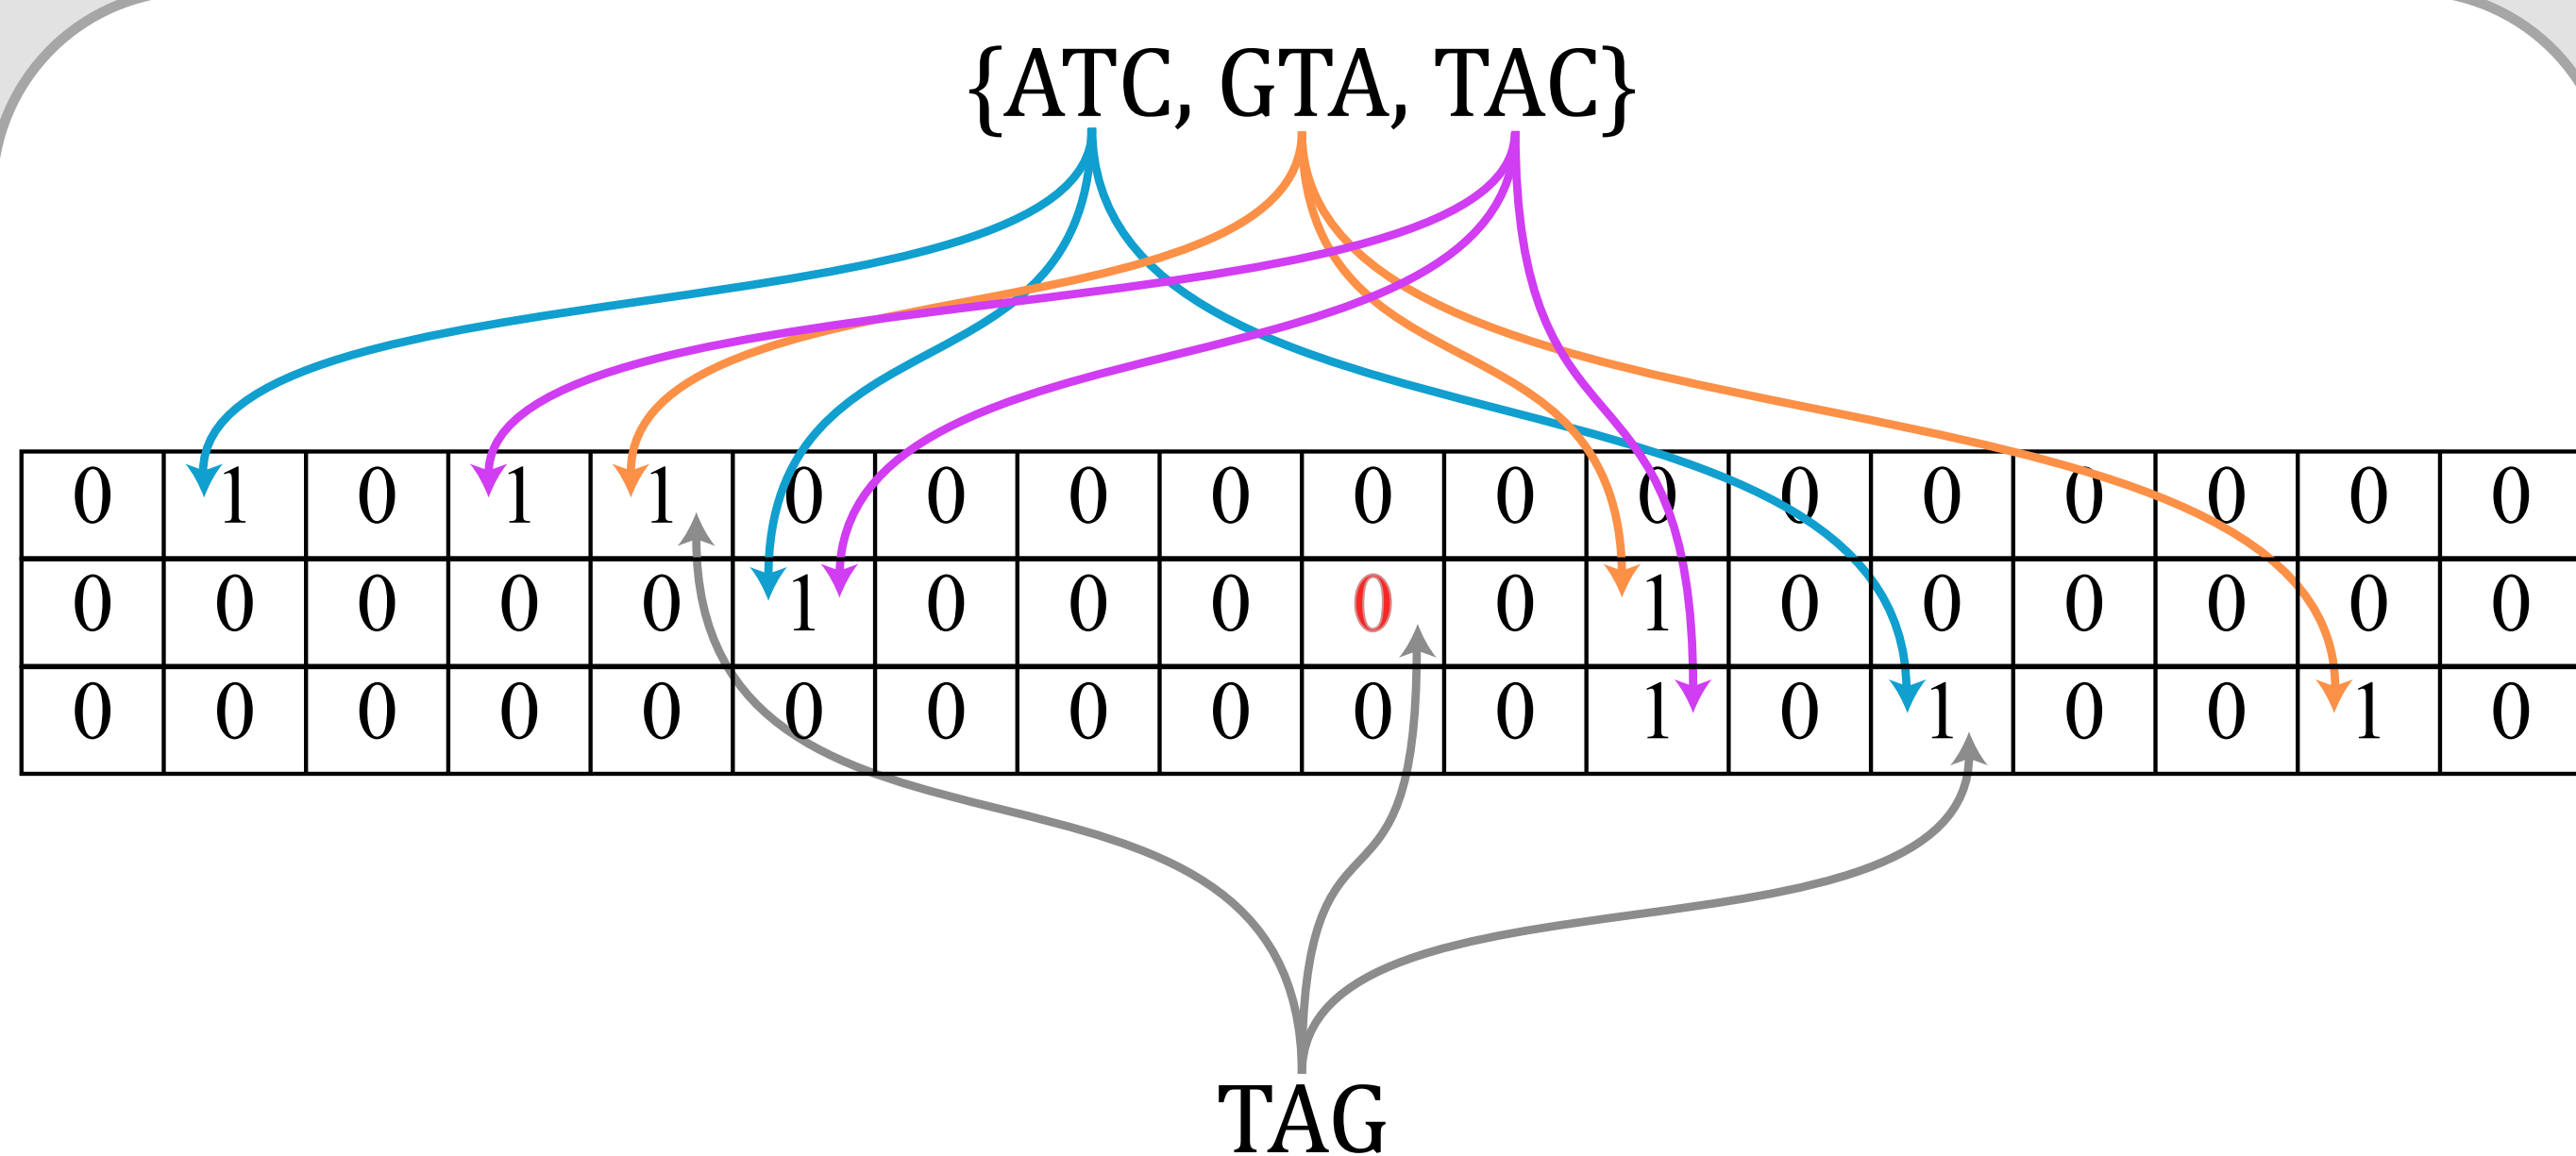

The set {ATC, GTA, TAC} is inserted in the data structure using 3 hash functions. A query is said to be present in the set if the 3 hashes in the bit-arrays are filled with 1. The element TAG is not in the set {ATC, GTA, TAC}, because it hashes to at least one bit-array position containing 0.

Performance comparisons with other methods

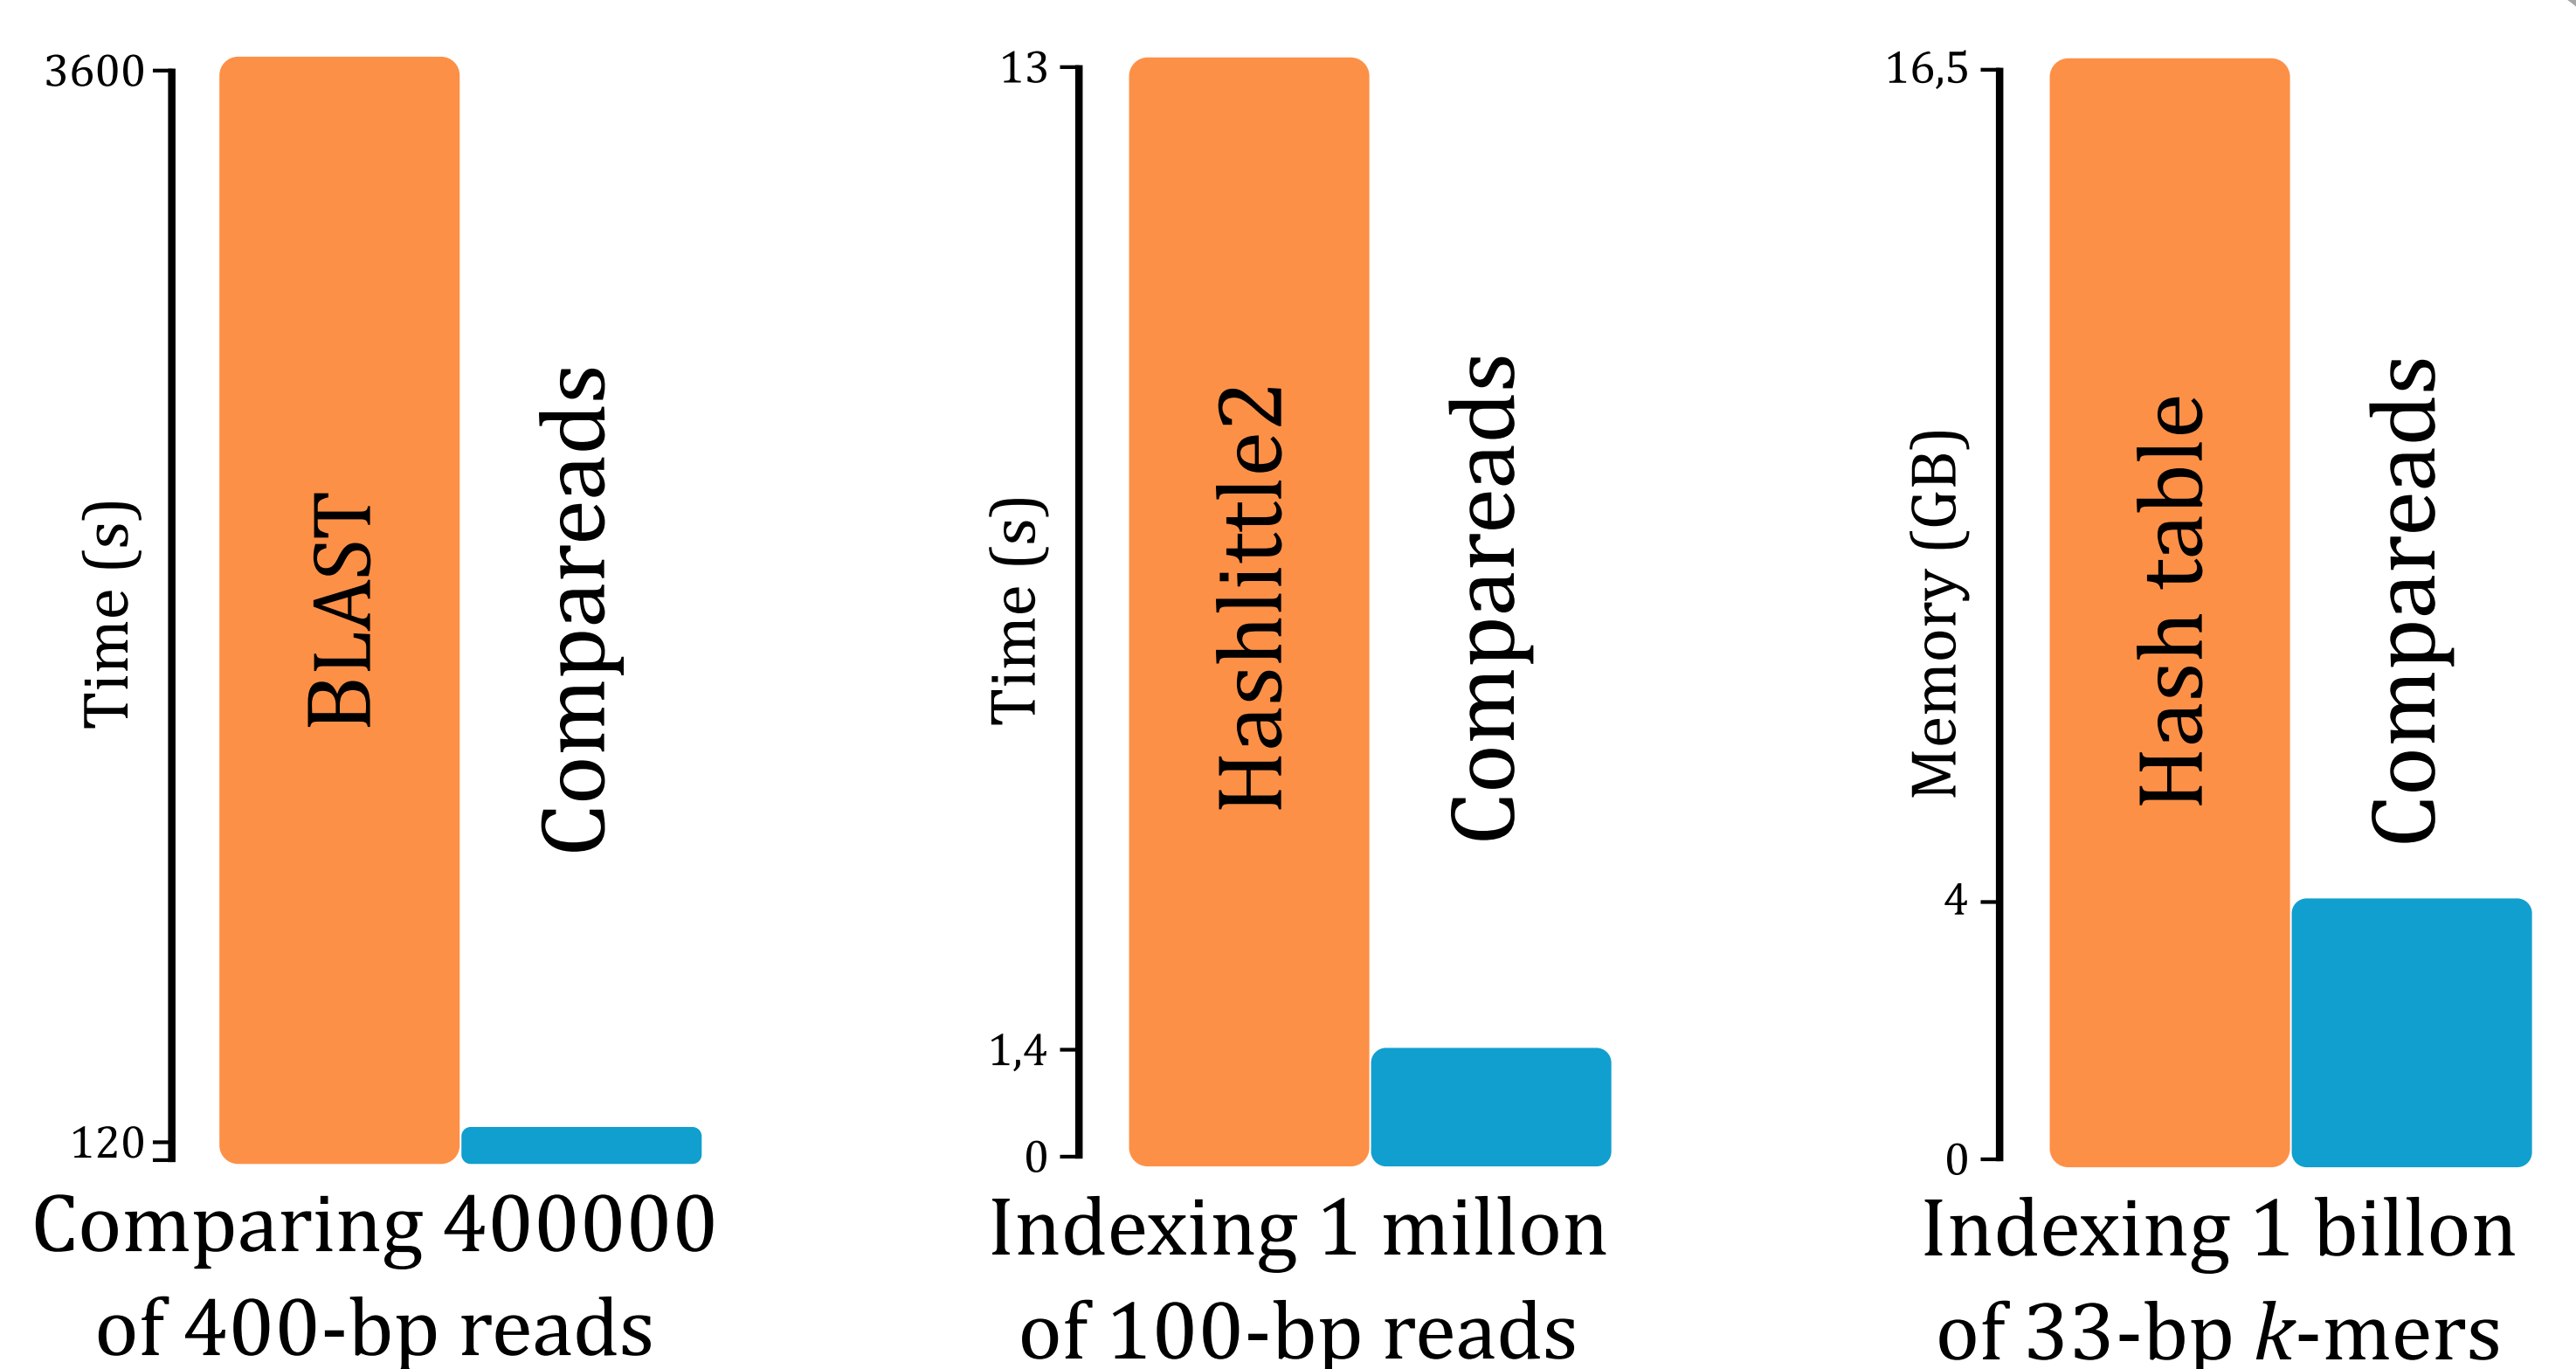

Using our new data structure, Compareads efficiently performs *de novo* intensive comparisons of huge metagenomic datasets generated by High Throughput Sequencers. This approach enables to retrieve and classify differences in genomic content between metagenomic samples. For this kind of comparison, our approach is much faster than alternative ones such as BLAST and thus enables to scale to huge datasets. Compareads is released under the CeCILL license and can be freely downloaded from:

<http://alcovna.genouest.org/compareads>