Vincent Acary, Maurice Brémond INRIA Rhône-Alpes, Grenoble.

Computational Contact Mechanics: Advances and Frontiers in Modeling Contact, Banff International Research station, Canada, February 15–21th, 2013,

Joint work with Florent Cadoux, Claude Lemaréchal, Jérôme Malick, Florence Bertails–Descoubes, Gilles Daviet



(ロ) (部) (主) (主) (三) (2)

One of the father of Nonsmooth Mechanics and Convex Analysis



Jean Jacques Moreau (1923 - 2014)

Introduction

The 3D frictional contact problem

Signorini condition and Coulomb's friction 3D frictional contact problems From the mathematical programming point of view

An existence result

Numerical solution procedure.

VI based methods Nonsmooth Equations based methods Matrix block–splitting and projection based algorithms Proximal point algorithms Optimization based approach Siconos/Numerics

Preliminary Comparisons

Performance profiles Chain Capsules Performance profiles. BoxesStack Performance profiles. Kaplas


Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

- The 3D frictional contact problem

L-Signorini condition and Coulomb's friction

Signorini's condition and Coulomb's friction



- gap function $g_N = (C_B C_A)N$.
- reaction forces

 $r = r_N N + r_T$, with $r_N \in \mathbf{R}$ and $r_T \in \mathbf{R}^2$.

Signorini condition at position level

$$0 \leqslant g_N \perp r_N \geqslant 0.$$

relative velocity

 $u = u_N N + u_T$, with $u_N \in \mathbf{R}$ and $u_T \in \mathbf{R}^2$.

Signorini condition at velocity level

$$\left\{ \begin{array}{ll} 0\leqslant u_{\mathsf{N}}\perp r_{\mathsf{N}}\geqslant 0 & \text{ if } g_{\mathsf{N}}\leqslant 0 \\ r_{\mathsf{N}}=0 & \text{ otherwise.} \end{array} \right.$$

- The 3D frictional contact problem

L-Signorini condition and Coulomb's friction

Signorini's condition and Coulomb's friction

Modeling assumption

Let μ be the coefficient of friction. Let us define the Coulomb friction cone K which is chosen as the isotropic second order cone

$$\mathcal{K} = \{ r \in \mathbf{R}^3 \mid ||r_{\mathsf{T}}|| \leq \mu r_n \}.$$
(1)

The Coulomb friction states

for the sticking case that

$$u_{\mathrm{T}} = 0, \quad r \in K$$
 (2)

and for the sliding case that

$$u_{\mathrm{T}} \neq 0, \quad r \in \partial K, \exists \alpha > 0, r_{\mathrm{T}} = -\alpha u_{\mathrm{T}}.$$
 (3)

Disjunctive formulation of the frictional contact behavior

- $\left\{\begin{array}{ll}
 r = 0 & \text{if } g_{N} > 0 \quad (\text{no contact}) \\
 r = 0, u_{N} \ge 0 & \text{if } g_{N} \leqslant 0 \quad (\text{take-off}) \\
 r \in K, u = 0 & \text{if } g_{N} \leqslant 0 \quad (\text{sticking}) \\
 r \in \partial K, u_{N} = 0, \exists \alpha > 0, u_{T} = -\alpha r_{T} \quad \text{if } g_{N} \leqslant 0 \quad (\text{sliding})
 \end{array}\right. (4)$
 - The 3D frictional contact problem 5/42

イロト 不得 とうせん ほう

- The 3D frictional contact problem

Signorini condition and Coulomb's friction

Signorini's condition and Coulomb's friction

Second Order Cone Complementarity (SOCCP) formulation [De Saxcé(1992)]

• Modified relative velocity $\hat{u} \in \mathbf{R}^3$ defined by

$$\hat{u} = u + \mu \| u_{\mathsf{T}} \| \mathsf{N}. \tag{5}$$

Second-Order Cone Complementarity Problem (SOCCP)

$$K^* \ni \hat{u} \perp r \in K \tag{6}$$

if $g_{\rm N}\leqslant 0$ and r=0 otherwise. The set ${\cal K}^{\star}$ is the dual convex cone to ${\cal K}$ defined by

$$K^{\star} = \{ u \in \mathbf{R}^3 \mid r^{\top} u \ge 0, \text{ for all } r \in K \}.$$
(7)

- The 3D frictional contact problem

Signorini condition and Coulomb's friction



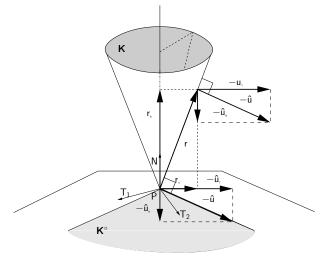


Figure : Coulomb's friction and the modified velocity \hat{u} . The sliding case.

The 3D frictional contact problem - 7/42

- The 3D frictional contact problem

└─ 3D frictional contact problems

3D frictional contact problem

Multiple contact notation

For each contact $\alpha \in \{1, \dots, n_c\}$, we have

▶ the local velocity : $u^{\alpha} \in \mathbb{R}^3$, and

$$u = [[u^{\alpha}]^{\top}, \alpha = 1 \dots n_c]^{\top}$$

• the local reaction vector $r^{lpha} \in I\!\!R^3$

$$r = [[r^{\alpha}]^{\top}, \alpha = 1 \dots n_c]^{\top}$$

the local Coulomb cone

$$\mathcal{K}^{\alpha} = \{ \mathbf{r}^{\alpha}, \|\mathbf{r}^{\alpha}_{\mathsf{T}}\| \leqslant \mu^{\alpha} |\mathbf{r}^{\alpha}_{\mathsf{N}}| \} \subset \mathbf{R}^{3}$$

and the set ${\it K}$ is the cartesian product of Coulomb's friction cone at each contact, that

$$K = \prod_{\alpha=1\dots n_c} K^{\alpha} \tag{8}$$

and K^* is dual.

The 3D frictional contact problem - 8/42

- The 3D frictional contact problem

└─ 3D frictional contact problems

3D frictional contact problems

Problem 1 (General discrete frictional contact problem)

Given

- a symmetric positive definite matrix $M \in \mathbb{R}^{n \times n}$,
- a vector $f \in \mathbb{R}^n$,
- a matrix $H \in \mathbb{R}^{n \times m}$,
- a vector $w \in \mathbb{R}^m$,
- a vector of coefficients of friction $\mu \in \mathbf{R}^{n_c}$,

find three vectors $v \in \mathbb{R}^n$, $u \in \mathbb{R}^m$ and $r \in \mathbb{R}^m$, denoted by $FC/I(M, H, f, w, \mu)$ such that

$$\begin{cases} Mv = Hr + f \\ u = H^{\top}v + w \\ \hat{u} = u + g(u) \\ K^{\star} \ni \hat{u} \perp r \in K \end{cases}$$
with $g(u) = [[\mu^{\alpha} ||u_{T}^{\alpha} || \mathbf{N}^{\alpha}]^{\top}, \alpha = 1 \dots n_{c}]^{\top}.$

$$(9)$$

The 3D frictional contact problem - 9/42

- The 3D frictional contact problem

└─ 3D frictional contact problems

3D frictional contact problems

Problem 2 (Reduced discrete frictional contact problem) *Given*

- ▶ a symmetric positive semi-definite matrix $W \in \mathbb{R}^{m \times m}$,
- ▶ a vector $q \in \mathbb{R}^m$,
- a vector $\mu \in \mathbf{R}^{n_c}$ of coefficients of friction,

find two vectors $u \in \mathbf{R}^m$ and $r \in \mathbf{R}^m$, denoted by $FC/II(W, q, \mu)$ such that

$$\begin{cases}
u = Wr + q \\
\hat{u} = u + g(u) \\
K^* \ni \hat{u} \perp r \in K
\end{cases}$$
(10)

with $g(u) = [[\mu^{\alpha} || u_T^{\alpha} || \mathbb{N}^{\alpha}]^{\top}, \alpha = 1 \dots n_c]^{\top}.$

Relation with the general problem $W = H^{\top}M^{-1}H$ and $q = H^{\top}M^{-1}f + w$.

- The 3D frictional contact problem

└─ 3D frictional contact problems

3D frictional contact problems

Wide range of applications

Origin of the linear relations .

$$Mv = Hr + f, \quad u = H^{\top}v + w$$

- > Time-discretization of the discrete dynamical mechanical system
 - Event-capturing time-stepping schemes
 - Event-detecting time-stepping schemes (event-driven)
- Time-discretization and space discretization of the elasto dynamic problem of solids
- Space discretization of the quasi-static problem of solids.

with a possible linearization (Newton procedure.)

→ These problems are really representative of a lot of applications.

- The 3D frictional contact problem

From the mathematical programming point of view

From the mathematical programming point of view Nonmonotone and nonsmooth problem

$$K^* \ni Wr + q + g(Wr + q) \perp r \in K$$
(11)

- if we neglect $g(\cdot)$, (11) is a gentle monotone SOCLCP that is the KKT conditions of a convex SOCQP.
- otherwise, the problem is nonmonotone and nonsmooth since g() is nonsmooth
- → The problem is very hard to solve efficiently.

Possible reformulation

Variational inequality or normal cone inclusion

$$-(Wr+q+g(Wr+q)) \stackrel{\Delta}{=} -F(r) \in N_K(r).$$
(12)

- Nonsmooth equations G(r) = 0
 - The natural map F^{nat} associated with the VI (12) $F^{\text{nat}}(z) = z P_X(z F(z))$.
 - Variants of this map (Alart-Curnier formulation, ...)
 - one of the SOCCP-functions. (Fisher-Bursmeister function)
- and many other ...

- The 3D frictional contact problem

From the mathematical programming point of view

Introduction

The 3D frictional contact problem

Signorini condition and Coulomb's friction 3D frictional contact problems From the mathematical programming point of view

An existence result

Numerical solution procedure.

VI based methods Nonsmooth Equations based methods Matrix block–splitting and projection based algorithms Proximal point algorithms Optimization based approach Siconos/Numerics

Preliminary Comparisons

Performance profiles Chain Capsules Performance profiles. BoxesStack Performance profiles. Kaplas

Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

イロト 不得下 不足下 不足下

An existence result. (F. Cadoux PhD)

Let us introduce a slack variable

$$\mathbf{s}^{\alpha} := \| \mathbf{u}_{\mathsf{T}}^{\alpha} \|$$

New formulation of the modified velocity with $A \in \mathbb{R}^{m \times n_c}$

$$\hat{u} := u + As$$
 $(g(u) = As)$

The problem $FC/I(M, H, f, w, \mu)$ can be reformulated as

$$\begin{cases} Mv = Hr + f\\ \widetilde{u} = H^{\top}v + w + As\\ K^* \ni \widehat{u} \perp r \in K \end{cases}$$

< □ → < □ → < 亘 → < 亘 → < 亘 → 三 の Q (~ An existence result - 14/42

The problem (14) appears to be the KKT condition of primal problem

$$\begin{cases} \min \quad J(v) := \frac{1}{2}v^{\top}Mv + f^{\top}v \\ H^{\top}v + w + As \in K^{\star} \end{cases}$$
 (D_s)

dual problem

$$\begin{cases} \min \quad J_s(r) := \frac{1}{2}r^\top Wr - q_s^\top r \\ r \in K \end{cases}$$
(P_s)

with $q_s = q + As$

Interest

Two convex program \rightarrow existence of solutions under feasibility conditions.

Fixed point problem

Introducing

$$u(s) := \operatorname{argmin}_{u}(P_s) = \operatorname{argmin}_{u}(D_s)$$

practically computable by optimization software, and

$$F^{\alpha}(s) := \|u^{\alpha}_{T}(s)\|,$$

the incremental problem becomes a fixed point problem

$$F(s) = s$$

Key assumption

$$\exists v \in \mathbb{R}^m : Hv + w \in K^* \tag{13}$$

Using Assumption (13),

- ▶ the application $F : \mathbb{R}^n_+ \to \mathbb{R}^n_+$ is well-defined, continuous and bounded
- apply Brouwer's theorem

Theorem 3

A fixed point exists

This result is a variant of a previous result obtained by [Klarbring and Pang(1998)].

< □ ▶ < □ ▶ < ■ ▶ < ■ ▶ < ■ ▶ ○ Q () An existence result - 17/42

Numerical validation of the assumption

The assumption by solving a linear program over a product of SOC. Find $x \geqslant 0$

$$iggl\{ egin{array}{c} \mathsf{max}\,x\ \mathsf{Hv}+\mathsf{w}-\mathsf{ax}\in\mathsf{K}^{\star} \end{array}$$

where $a = [N^{\alpha, \top}]^{\top} \in \mathbb{R}^{m}$.

Numerical interest

The fixed point equation F(s) = s can be tackled by

fixed-point iterations

 $s \leftarrow F(s)$

Newton iterations

$$s \leftarrow \operatorname{Jac}[F](s) \setminus F(s)$$

Variants possible (truncated resolution of inner problem...)

イロト イ団ト イヨト イヨト 二百

An open question : How to solve efficiently 3D frictional contact problem ? \Box An existence result

Introduction

The 3D frictional contact problem

Signorini condition and Coulomb's friction 3D frictional contact problems From the mathematical programming point of view

An existence result

Numerical solution procedure.

VI based methods Nonsmooth Equations based methods Matrix block–splitting and projection based algorithms Proximal point algorithms Optimization based approach Siconos/Numerics

Preliminary Comparisons

Performance profiles Chain Capsules Performance profiles. BoxesStack Performance profiles. Kaplas

Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

イロト 不得 とうき とうとう

An open question : How to solve efficiently 3D frictional contact problem ? \Box Numerical solution procedure.

└─ VI based methods

VI based methods

Standard methods

Basic fixed point iterations with projection

$$\mathsf{z}_{\mathsf{k}+1} \gets \mathsf{P}_{\mathsf{X}}(\mathsf{z}_{\mathsf{k}} - \rho_{\mathsf{k}} \, \mathsf{F}(\mathsf{z}_{\mathsf{k}}))$$

Extragradient method

$$\mathsf{z}_{\mathsf{k}+1} \gets \mathsf{P}_\mathsf{X}(\mathsf{z}_\mathsf{k} - \rho_\mathsf{k}\,\mathsf{F}(\mathsf{P}_\mathsf{X}(\mathsf{z}_\mathsf{k} - \rho_\mathsf{k}\,\mathsf{F}(\mathsf{z}_\mathsf{k}))))$$

Hyperplane projection method

Self-adaptive procedure for ρ_k For instance.

$$m_k \in \mathbf{N}$$
 such that $\begin{array}{l} \rho_k = \rho 2^{m_k}, \\ \rho_k \|F(z_k) - F(\bar{z}_k)\| \leqslant \|z_k - \bar{z}_k\| \end{array}$ (14)

イロト イポト イヨト イヨト 三日

-Numerical solution procedure.

- Nonsmooth Equations based methods

Nonsmooth Equations based methods

Nonsmooth Newton on G(z) = 0

$$z_{k+1} = z_k - \Phi^{-1}(z_k)(G(z_k)), \qquad \Phi(z_k) \in \partial G(z_k)$$

Alart–Curnier Formulation [Alart and Curnier(1991)]

$$\begin{cases} r_{N} - P_{\mathbf{R}_{+}^{n_{c}}}(r_{N} - \rho_{N} u_{N}) = 0, \\ r_{T} - P_{D(\mu, r_{N, +})}(r_{T} - \rho_{T} u_{T}) = 0, \end{cases}$$
(15)

Direct normal map reformulation

$$r-P_{K}\left(r-\rho(u+g(u))\right)=0$$

Extension of Fischer-Burmeister function to SOCCP

$$\phi_{\text{FB}}(x, y) = x + y - (x^2 + y^2)^{1/2}$$

with Jordan product and square root

◆□> ◆□> ◆三> ◆三> ・三 のへで

-Numerical solution procedure.

Matrix block-splitting and projection based algorithms

Matrix block-splitting and projection based algorithms [Moreau(1994), Jean and Touzot(1988)]

Block splitting algorithm with $W^{\alpha\alpha} \in \mathbb{R}^3$

$$\begin{cases} u_{i+1}^{\alpha} - W^{\alpha\alpha} P_{i+1}^{\alpha} = q^{\alpha} + \sum_{\beta < \alpha} W^{\alpha\beta} r_{i+1}^{\beta} + \sum_{\beta > \alpha} W^{\alpha\beta} r_{i}^{\beta} \\ \\ \widehat{u}_{i+1}^{\alpha} = \left[u_{\mathsf{N},i+1}^{\alpha} + \mu^{\alpha} || u_{\mathsf{T},i+1}^{\alpha} ||, u_{\mathsf{T},i+1}^{\alpha} \right]^{\mathsf{T}} \\ \\ \mathsf{K}^{\alpha,*} \ni \widehat{u}_{i+1}^{\alpha} \perp r_{i+1}^{\alpha} \in \mathsf{K}^{\alpha} \end{cases}$$
(16)

for all $\alpha \in \{1 \dots m\}$.

One contact point problem

- closed form solutions
- Any solver listed before.

- Numerical solution procedure.

Proximal point algorithms

Proximal point technique [Moreau(1962), Moreau(1965), Rockafellar(1976)] Principle

We want to solve

$$\min_{x} f(x) \tag{17}$$

We define the approximation problem for a given x_k

$$\min_{x} f(x) + \rho \|x - x_k\|^2$$
(18)

with the optimal point x^* .

$$x^{\star} \stackrel{\Delta}{=} \operatorname{prox}_{f,\rho}(x_k) \tag{19}$$

Numerical solution procedure. - 23/42

Proximal point algorithm

$$x_{k+1} = \operatorname{prox}_{f,\rho_k}(x_k)$$

Special case for solving G(x) = 0

$$f(x) = \frac{1}{2}G^{\top}(x)G(x)$$

- Numerical solution procedure.

Coptimization based approach

Optimization based methods

Successive approximation with Tresca friction (Haslinger et al.)

$$\begin{cases} \theta = h(r_{N}) \\ \min \frac{1}{2}r^{\top}Wr + r^{\top}q \\ \text{s.t.} \quad r \in C(\mu, \theta) \end{cases}$$
(20)

where $C(\mu, \theta)$ is the cylinder of radius $\mu\theta$.

 Fixed point on the norm of the tangential velocity [A., Cadoux, Lemaréchal, Malick(2011)].

$$\begin{cases} s = \|u_{\mathsf{T}}\|\\ \min \frac{1}{2}r^{\mathsf{T}}Wr + r^{\mathsf{T}}(q + \alpha s)\\ \text{s.t.} \quad r \in K \end{cases}$$
(21)

Fixed point or Newton Method on F(s) = s

Alternating optimization problems (Panagiotopoulos et al.)

◆□ → ◆問 → ◆臣 → ◆臣 → □臣

-Numerical solution procedure.

Siconos/Numerics

Siconos/Numerics

Siconos

Open source software for modelling and simulation of nonsmooth systems

SICONOS/NUMERICS

Collection of C routines to solve FC3D problem

- NonSmoothGaussSeidel : VI based projection/splitting algorithm
- TrescaFixedPoint : fixed point algorithm on Tresca fixed point
- LocalAlartCurnier : semi-smooth newton method of Alart-Curnier formulation
- ProximalFixedPoint : proximal point algorithm
- VIFixedPointProjection : VI based fixed-point projection
- VIExtragradient : VI based extra-gradient method
- ...

http://siconos.gforge.inria.fr

use and contribute ...

-Numerical solution procedure.

Siconos/Numerics

Introduction

The 3D frictional contact problem

Signorini condition and Coulomb's friction 3D frictional contact problems From the mathematical programming point of view

An existence result

Numerical solution procedure.

VI based methods Nonsmooth Equations based methods Matrix block–splitting and projection based algorithms Proximal point algorithms Optimization based approach Siconos/Numerics

Preliminary Comparisons

Performance profiles Chain Capsules Performance profiles. BoxesStack Performance profiles. Kaplas

Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

・ロト ・ 一日 ト ・ 日 ト ・

Preliminary Comparisons

Performance profiles

Performance profiles [Dolan and Moré(2002)]

- Given a set of problems \mathcal{P}
- \blacktriangleright Given a set of solvers ${\cal S}$
- A performance measure for each problem with a solver $t_{p,s}$ (cpu time, flops, ...)
- Compute the performance ratio

$$\tau_{p,s} = \frac{t_{p,s}}{\min_{s \in \mathcal{S}} t_{p,s}} \ge 1$$
(22)

イロト 不得入 不定入 不定入 一座

Preliminary Comparisons - 27/42

▶ Compute the performance profile $ho_s(au): [1, +\infty]
ightarrow [0, 1]$ for each solver $s \in S$

$$\rho_{s}(\tau) = \frac{1}{|\mathcal{P}|} \left| \left\{ p \in \mathcal{P} \mid \tau_{p,s} \leqslant \tau \right\} \right|$$
(23)

The value of $\rho_s(1)$ is the probability that the solver *s* will win over the rest of the solvers.

An open question : How to solve efficiently 3D frictional contact problem ? Preliminary Comparisons Chain

First comparisons. Chain

Hanging chain with initial velocity at the tip




coefficient of friction	0.3	
number of problems	1514	
number of degrees of freedom	[48 : 60]	
number of contacts	[8 :28]	
required accuracy	10 ⁻⁸	

A D > A D > A D
 A


∟_{Chain}

First comparisons. Chain

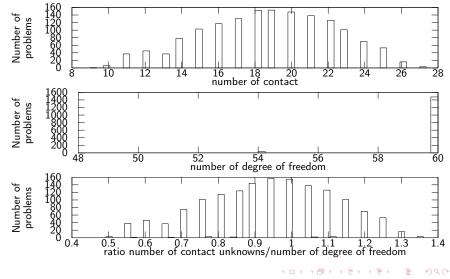

Preliminary Comparisons - 29/42

First comparisons. Chain

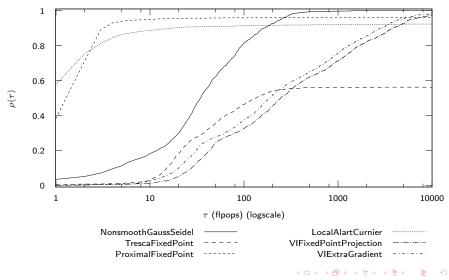


Preliminary Comparisons - 30/42

An open question : How to solve efficiently 3D frictional contact problem ? Preliminary Comparisons Capsules

First comparisons. Capsules

100 capsules dropped into a box.




coefficient of friction	0.7
number of problems	1705
number of degrees of freedom	[6 : 600]
number of contacts	[0:300]
required accuracy	10^{-8}


<□ ト < □ ト < □ ト < ■ ト < ■ ト < ■ ト ■ の Q (~ Preliminary Comparisons - 31/42 Preliminary Comparisons

L Capsules

First comparisons. Capsules

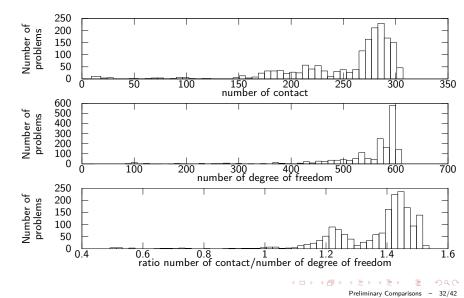

First comparisons. Capsules

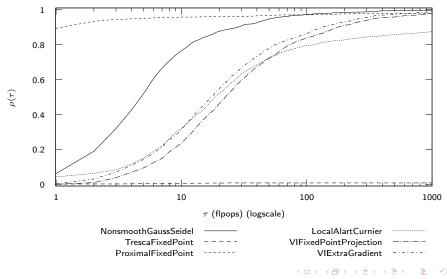


Preliminary Comparisons - 33/42

Preliminary Comparisons

Performance profiles. BoxesStack

First comparisons. BoxesStack

50 boxes stacked under gravity.




coefficient of friction	0.7	
number of problems	1159	
number of degrees of freedom number of contacts required accuracy	[6 : 300]	
number of contacts	[0: 200]	
required accuracy	10^{-8}	

Preliminary Comparisons

Performance profiles. BoxesStack

First comparisons. BoxesStack

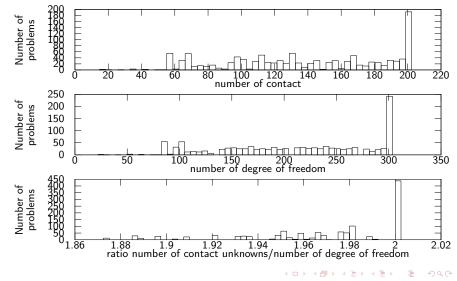


Preliminary Comparisons - 35/42

Preliminary Comparisons

Performance profiles. BoxesStack

First comparisons. BoxesStack

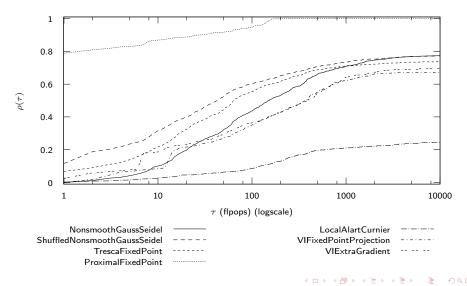


Preliminary Comparisons - 36/42

Preliminary Comparisons

Performance profiles. Kaplas

A tower of Kaplas

A Tower of Kaplas




coefficient of friction	0.3	
number of problems	201	
number of degrees of freedom	[72 : 864]	
number of contacts	[72 : 864] [0: 950]	
required accuracy	10 ⁻⁸	

Preliminary Comparisons

Performance profiles. Kaplas

A tower of Kaplas

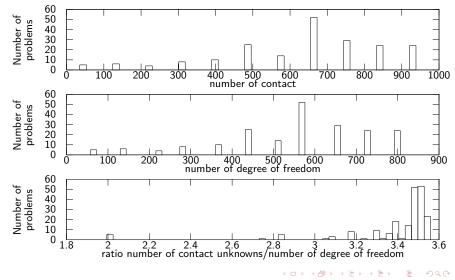


Preliminary Comparisons - 38/42

Preliminary Comparisons

Performance profiles. Kaplas

A tower of Kaplas

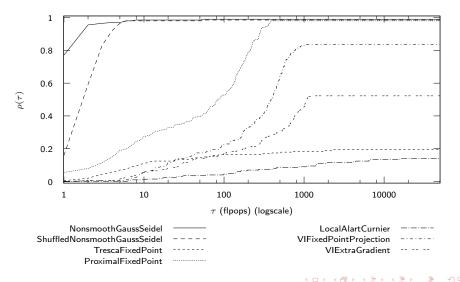

Preliminary Comparisons - 39/42

Conclusions & Perspectives

Conclusions

- 1. A bunch of articles in the literature
- 2. No "Swiss-knife" solution : choose efficiency OR robustness
- 3. Newton-based solver solves efficiently the problems but robustness issues
- 4. First order iterative methods solves all the problems but very slowly
- 5. The rank of the *H* matrix (ratio number of contacts unknows/number of d.o.f) plays an important role.

Perspectives

- 1. Develop new algorithm and compare other algorithm in the literature. (issues with standard optimization software.)
- 2. Study the influence of the friction coefficient, the size of problem, the conditionning of the problem , ...
- 3. Set up a collection of benchmarks → FCLIB

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

Our inspiration: MCPLIB or CUTEst

What is FCLIB ?

- A open source collection of Frictional Contact (FC) problems stored in a specific HDF5 format
- A open source light implementation of Input/Output functions in C Language to read and write problems (Python and Matlab coming soon)

Goals of the project

Provide a standard framework for testing available and new algorithms for solving discrete frictional contact problems share common formulations of problems in order to exchange data

Call for contribution http://fclib.gforge.inria.fr

Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

Thank you for your attention.



Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

V. Acary and B. Brogliato.

Numerical methods for nonsmooth dynamical systems. Applications in mechanics and electronics. Lecture Notes in Applied and Computational Mechanics 35. Berlin: Springer. xxi, 525 p., 2008.



V. Acary and F. Cadoux.

Recent Advances in Contact Mechanics, Stavroulakis, Georgios E. (Ed.), volume 56 of Lecture Notes in Applied and Computational Mechanics, chapter Applications of an existence result for the Coulomb friction problem. Springer Verlag, 2013.



V. Acary, F. Cadoux, C. Lemaréchal, and J. Malick.

A formulation of the linear discrete Coulomb friction problem via convex optimization. ZAMM - Journal of Applied Mathematics and Mechanics / Zeitschrift für Angewandte Mathematik und Mechanik, 91(2): 155-175, 2011. ISSN 1521-4001. doi: 10.1002/zamm.201000073. URL http://dx.doi.org/10.1002/zamm.201000073.



P. Alart and A. Curnier.

A mixed formulation for frictional contact problems prone to Newton like solution method. Computer Methods in Applied Mechanics and Engineering, 92(3):353–375, 1991.



G. De Saxcé.

Une généralisation de l'inégalité de Fenchel et ses applications aux lois constitutives. *C. R. Acad. Sci. Paris*, t 314,série II:125–129, 1992.



E.D. Dolan and J. J. Moré.

Benchmarking opimization sofware with performance profiles. Mathematical Programming A, 91:201–213, 2002.



M. Jean and G. Touzot.

Implementation of unilateral contact and dry friction in computer codes dealing with large deformations problems. J. Méc. Théor. Appl., 7(1):145–160, 1988.



Conclusions & Perspectives

FCLIB : a collection of discrete 3D Frictional Contact (FC) problems

Existence of solutions to discrete semicoercive frictional contact problems. *SIAM Journal on Optimization*, 8(2):414–442, 1998. ISSN 1052-6234.



J.J. Moreau.

Fonctions convexes duales et points proximaux dans un espace hilbertien. C. R. Acad. Sci. Paris, 255:2897–2899, 1962.



J.J. Moreau.

Proximité et dualité dans un espace hilbertien. Bulletin de la société mathématique de France, 93:273–299, 1965.

J.J. Moreau.

Some numerical methods in multibody dynamics: Application to granular materials. *European Journal of Mechanics/A-Solids*, supp.(4):93–114, 1994.



R.T. Rockafellar.

Augmented Lagrangians and applications of the proximal point algorithm in convex programming. Mathematics of Operations research, 1(2):97–116, 1976.

