



A dynamical computational model of theta generation in hippocampal circuits to study theta-gamma oscillations during neurostimulation

Nikolaos Vardalakis, Amélie Aussel, Nicolas P. Rougier, Fabien B Wagner

► To cite this version:

Nikolaos Vardalakis, Amélie Aussel, Nicolas P. Rougier, Fabien B Wagner. A dynamical computational model of theta generation in hippocampal circuits to study theta-gamma oscillations during neurostimulation. eLife, inPress. hal-04383365

HAL Id: hal-04383365

<https://inria.hal.science/hal-04383365>

Submitted on 9 Jan 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

A dynamical computational model of theta generation in hippocampal circuits to study theta-gamma oscillations during neurostimulation

Nikolaos Vardalakis^{1,2}, Amélie Aussel^{1,2,3}, Nicolas P. Rougier^{1,2,3}, Fabien B. Wagner^{1*}

*For correspondence:
fabien.wagner@u-bordeaux.fr
(Fabien B. Wagner)

¹Univ. Bordeaux, CNRS, IMN, UMR 5293, F-33000 Bordeaux, France; ²Univ. Bordeaux, INRIA, IMN, UMR 5293, F-33000 Bordeaux, France; ³Univ. Bordeaux, CNRS, Bordeaux INP, LaBRI, UMR 5800, F-33400 Talence, France

Abstract

Neurostimulation of the hippocampal formation has shown promising results for modulating memory but the underlying mechanisms remain unclear. In particular, the effects on hippocampal theta-nested gamma oscillations and theta phase reset, which are both crucial for memory processes, are unknown. Moreover, these effects cannot be investigated using current computational models, which consider theta oscillations with a fixed amplitude and phase velocity. Here, we developed a novel computational model that includes the medial septum, represented as a set of abstract Kuramoto oscillators producing a dynamical theta rhythm with phase reset, and the hippocampal formation, composed of biophysically-realistic neurons and able to generate theta-nested gamma oscillations under theta drive. We showed that, for theta inputs just below the threshold to induce self-sustained theta-nested gamma oscillations, a single stimulation pulse could switch the network behavior from non-oscillatory to a state producing sustained oscillations. Next, we demonstrated that, for a weaker theta input, pulse train stimulation at the theta frequency could transiently restore seemingly physiological oscillations. Importantly, the presence of phase reset influenced whether these two effects depended on the phase at which stimulation onset was delivered, which has practical implications for designing neurostimulation protocols that are triggered by the phase of ongoing theta oscillations. This novel model opens new avenues for studying the effects of neurostimulation on the hippocampal formation. Furthermore, our hybrid approach that combines different levels of abstraction could be extended in future work to other neural circuits that produce dynamical brain rhythms.

Introduction

Neurostimulation methods have emerged as promising therapeutic modalities to restore neurological functions in a broad range of motor and cognitive disorders (*Gupta et al., 2023*). In the context of learning and memory, deep brain stimulation (DBS) of the entorhinal area or hippocampus has been shown to either enhance (*Suthana et al., 2012; Suthana and Fried, 2014; Titiz et al., 2017; Jun et al., 2019*) or disrupt (*Jacobs et al., 2016; Goyal et al., 2018; Lozano et al., 2016*) memory encoding. These conflicting results may originate from differences in experimental protocols and from a poor understanding of their biophysical underpinnings. Among such mechanisms, the in-

40 involvement of hippocampal theta oscillations (4-12 Hz) and their interactions with higher-frequency
 41 gamma oscillations (30-120 Hz) in memory-related processes has been reported in multiple studies
 42 (*Lisman et al., 2005; de Almeida et al., 2007; Lega et al., 2012; Lin et al., 2017; Malkov et al., 2022;*
 43 *Abbaspoor et al., 2023*). Moreover, the modulation of gamma oscillations by the phase of theta os-
 44 cillations in hippocampal circuits, a phenomenon termed theta-gamma phase-amplitude coupling
 45 (PAC), correlates with the efficacy of memory encoding and retrieval (*Jensen and Colgin, 2007; Tort*
 46 *et al., 2009; Canolty and Knight, 2010; Axmacher et al., 2010; Fell and Axmacher, 2011; Lisman and*
 47 *Jensen, 2013; Lega et al., 2016*). Experimental and computational work on the coupling between
 48 oscillatory rhythms has indicated that it originates from different neural architectures and corre-
 49 lates with a range of behavioral and cognitive functions, enabling the long-range synchronization
 50 of cortical areas and facilitating multi-item encoding in the context of memory (*Hyafil et al., 2015*).

51 Neurostimulation protocols that affect these rhythms, such as theta burst stimulation (*Titiz*
 52 *et al., 2017*), have also been shown to optimally induce long-term potentiation (LTP) (*Larson and*
 53 *Munkácsy, 2015*). Another potential mechanism underlying the effect of hippocampal neurostim-
 54 ulation might be the reset of the phase of theta oscillations in response to exogenous inputs, such
 55 as a novel sensory input or a pulse of electrical stimulation applied to the fornix or perforant path
 56 (*Buño et al., 1978; Williams and Givens, 2003*). Theta phase reset is known to facilitate LTP (*McCart-*
 57 *ney et al., 2004*) and naturally occurs during both encoding and retrieval of associative memories
 58 (*Kota et al., 2020*). In this context, the design of a computational model that replicates memory-
 59 related theta-gamma oscillations and theta phase reset is of uttermost importance to investigate
 60 the effects of electrical stimulation on the hippocampal formation and possibly optimize neurostim-
 61 ulation protocols for memory improvement.

62 Models of memory-related theta-gamma oscillations in the hippocampal formation have been
 63 developed across different resolution levels, ranging from abstract mean-field approaches (*Traub*
 64 *et al., 1997; Onslow et al., 2014; Segneri et al., 2020*) to biophysically-realistic conductance-based
 65 models (*Lundqvist et al., 2006; Herman et al., 2013; Aussen et al., 2018*). Neural masses, which
 66 represent the mean activity of a neuronal population, can generate gamma oscillations through
 67 reciprocal interactions between an excitatory and inhibitory population (*Traub et al., 1997; Onslow*
 68 *et al., 2014*), or even using a self-projecting inhibitory population (*Segneri et al., 2020*). Under exci-
 69 tatory oscillatory input at theta frequencies, these models are capable of generating theta-nested
 70 gamma oscillations. Similarly, these oscillations can be observed in more complex models of the
 71 hippocampal formation composed of single-compartment excitatory and inhibitory neurons con-
 72 nected through conductance-based synapses following the Hodgkin-Huxley formalism (*Hodgkin*
 73 *and Huxley, 1952*), and driven by a fixed oscillatory theta input (*Aussen et al., 2018*). Theta-nested
 74 gamma oscillations also appear in multi-compartment models of prefrontal cortex activity during
 75 memory retrieval (*Lundqvist et al., 2006; Herman et al., 2013*). Finally, several models have inves-
 76 tigated the functional link between the hippocampal theta rhythm and memory processes, show-
 77 ing that encoding and retrieval occur at different phases within each theta cycle through phasic
 78 changes in neuronal activity and LTP (e.g., *Hasselmo et al. (2002); Cutsuridis et al. (2010)*).

79 In terms of neurostimulation, most computational work has focused on the mechanisms under-
 80 lying DBS of the basal ganglia for motor disorders such as Parkinson's disease (*Rubin and Terman,*
 81 *2004; Pirini et al., 2009; Mina et al., 2013; Ebert et al., 2014*), peripheral nerve stimulation (*Rattay*
 82 *et al., 2003; Kipping and Nogueira, 2022*), spinal cord stimulation (*Rattay et al., 2000; Capogrosso*
 83 *et al., 2013*), or has remained generic (*Basu et al., 2018*). However, models investigating neurostim-
 84 ulation of hippocampal circuits are scarce (*Hendrickson et al., 2016; Bingham et al., 2018*), and do
 85 not take into account the effects on theta-gamma oscillations. For example, a detailed multicom-
 86 partment model of the rat dentate gyrus was able to replicate experimentally recorded local field
 87 potentials induced by different electrode placements and pulse amplitudes during stimulation of
 88 the perforant path (*Bingham et al., 2018*). To model the impact of neurostimulation on neuronal
 89 oscillations, a more abstract formalism based on Kuramoto phase oscillators (*Kuramoto, 1984*) has
 90 been introduced in the context of Parkinson's disease and essential tremor, which enabled the de-

sign of novel neurostimulation paradigms that enhance or disrupt neuronal synchrony in basal ganglia circuits (Tass, 2003; Ebert et al., 2014; Asllani et al., 2018; Weerasinghe et al., 2019).

To our knowledge, there is currently no model of the hippocampal formation that is able to replicate both theta-gamma PAC and theta phase reset during neurostimulation. To investigate the effects of neurostimulation on hippocampal circuits while taking into account these two mechanisms, we modified an existing biophysical model of the hippocampal formation (Aussel et al., 2018). In this original model, however, the theta rhythm was considered as an oscillatory input of fixed amplitude and phase velocity, which is inconsistent with theta phase reset. To circumvent this limitation, we combined this biophysical model with abstract Kuramoto oscillators that acted as a dynamical source of theta rhythm, thereby modeling medial septum inputs to the hippocampal formation. This new hybrid dynamical model could generate both theta-nested gamma oscillations and theta phase reset, following a particular phase response curve (PRC) inspired by experimental literature (Lengyel et al., 2005; Akam et al., 2012; Torben-Nielsen et al., 2010).

We then leveraged this model to explore the effect of single-pulse and pulse-train stimulation on theta-gamma oscillations. In the absence of theta input from the medial septum, single-pulse stimulation produced a transient effect consisting of one or several bursts of activity, depending on stimulation amplitude. The presence of multiple bursts depended on the single-cell calcium dynamics and M-type potassium adaptation current. In the presence of weak theta input, designed to mimic a pathological state that impairs theta-gamma oscillations, single-pulse stimulation could produce long-lasting or even persistent activity by switching the network to a highly synchronized state characterized by theta-nested gamma oscillations. When phase reset was not included in the model, this effect was more pronounced when the stimulation pulse was delivered at the peak of the theta rhythm. However, when strong theta reset was considered, the phase at which stimulation was delivered did not influence the outcome. In the presence of an even weaker theta input, mimicking a pathological state that completely abolishes theta-gamma oscillations, only pulse train stimulation could restore physiological theta-gamma oscillations during the stimulation period. As for the previous results, this effect was phase-dependent only when theta reset was not included.

These results provide a new framework to interpret neurostimulation interventions that interfere with hippocampal oscillations and aim at improving memory function. It can be further extended to investigate the effects of more complex neurostimulation protocols, and the impact of stimulation location and amplitude on the observed network dynamics.

Results

A computational model of the hippocampal formation with dynamical theta input

We first developed a computational model of hippocampal circuits, able to generate both theta-nested gamma oscillations and theta phase reset. To achieve this, we combined an existing conductance-based model of the hippocampal formation (Aussel et al., 2018) with a set of Kuramoto phase oscillators (Kuramoto, 1984) that were used to model the dynamical theta input originating from pacemaker neurons in the medial septum (Wang, 2002) (Figure 1A). Such ensembles of oscillators are designed to exhibit a strong phase reset of their collective rhythm in response to a perturbation (Levnajić and Pikovsky, 2010). The hippocampal model contained excitatory and inhibitory neuronal populations in the entorhinal cortex (EC), dentate gyrus (DG), CA3 and CA1 fields within a coronal slice of the human hippocampus (Figure 1B-C). The output of the hippocampal formation (i.e., the activity of CA1 pyramidal neurons) was provided as an input to the Kuramoto oscillators, simulating the hippocampal-septal projections through the fornix (Williams and Givens, 2003; Nuñez and Buño, 2021; Takeuchi et al., 2021). The oscillations produced by the collective behavior of Kuramoto oscillators represented a population average of their activity: highly synchronized and desynchronized states generated respectively high and low amplitude theta oscillations (Figure 1D). The number of oscillators was chosen so that their synchronization level (i.e., their order parameter) and their frequency distribution were sufficiently close to their asymptotic behavior

for a large number of oscillators (*Figure S1*).

Biologically, GABAergic neurons from the medial septum project to the EC, CA3, and CA1 fields of the hippocampus (*Toth et al., 1993; Hajós et al., 2004; Manseau et al., 2008; Hangya et al., 2009; Unal et al., 2015; Müller and Remy, 2018*). Although the respective roles of these different projections are not fully understood, previous computational studies have suggested that the direct projection from the medial septum to CA1 is not essential for the production of theta in CA1 microcircuits (*Mysin et al., 2019*). Since our modeling of the medial septum is only used to generate a dynamic theta rhythm, we opted for a simplified representation where the medial septum projects only to the EC, which in turn drives the different subfields of the hippocampus. In our model, Kuramoto oscillators are therefore connected to the EC neurons and they receive projections from CA1 neurons (see methods for more details).

From a conceptual point of view, our model is thus composed of excitatory-inhibitory (E-I) circuits connected in series, with a feedback loop going through a population of coupled phase oscillators. In the next sections, we first describe the generation of gamma oscillations by individual E-I circuits (*Figure 2*), and illustrate their behavior when driven by an oscillatory input such as theta oscillations (*Figure 3*). We then present a thorough characterization of the effects of theta input and stimulation amplitude on theta-nested gamma oscillations (*Figure 4* and *Figure 5*). Finally, we present some results on the effects of neurostimulation protocols for restoring theta-nested gamma oscillations in pathological states (*Figure 6* and *Figure 7*).

Generation of gamma oscillations by E-I circuits

It is well-established that a network of interconnected pyramidal neurons and interneurons can give rise to oscillations in the gamma range, a mechanism termed pyramidal-interneuronal network gamma (PING) (*Traub et al., 2004; Onslow et al., 2014; Segneri et al., 2020*). This mechanism has been observed in several optogenetic studies with gradually increasing light intensity (i.e., under a ramp input) affecting multiple different circuits, such as layer 2-3 pyramidal neurons of the mouse somatosensory cortex (*Adesnik and Scanziani, 2010*), the CA3 field of the hippocampus in rat in vitro slices (*Akam et al., 2012*), and in the non-human primate motor cortex (*Lu et al., 2015*). In all cases, gamma oscillations emerged above a certain threshold in terms of photostimulation intensity, and the frequency of these oscillations was either stable or slightly increased when increasing the intensity further. We sought to replicate these findings with our elementary E-I circuits composed of single-compartment conductance-based neurons driven by a ramping input current (*Figure 2* and *Figure S2*). As an example, all the results in this section will be shown for an E-I circuit that has similar connectivity parameters as the CA1 field of the hippocampus in our complete model (see section "Hippocampal formation: inputs and connectivity" in the methods).

For low input currents provided to both neuronal populations, only the highly-excitable interneurons were activated (*Figure 2A*). For a sufficiently high input current (i.e., a strong input that could overcome the inhibition from the fast-spiking interneurons), the pyramidal neurons started spiking as well. As the amplitude of the input increased, the activity of the both neuronal populations became synchronized in the gamma range, asymptotically reaching a frequency of about 60 Hz (*Figure 2A* bottom panel). Decoupling the populations led to the abolition of gamma oscillations (*Figure 2B*), as neuronal activity was determined solely by the intrinsic properties of each cell. Interestingly, when the ramp input was provided solely to the excitatory population, we observed that the activity of the pyramidal neurons preceded the activity of the inhibitory neurons, while still preserving the emergence of gamma oscillations (*Figure S2A*). As expected, decoupling the populations also abolished gamma oscillations, with the excitatory neurons spiking a frequency determined by their intrinsic properties and the inhibitory population remaining silent (*Figure S2B*).

To further characterize the intrinsic properties of individual inhibitory and excitatory neurons, we derived their input-frequency (I-F) curves, which represent the firing rate of individual neurons in response to a tonic input (*Figure S3A*). We observed that for certain input amplitudes, the firing rates of both types of neurons was within the gamma range. Interestingly, in the absence of

190 noise, each population could generate by itself gamma oscillations that were purely driven by the
191 input and determined by the intrinsic properties of the neurons (**Figure S3B**). Adding stochastic
192 Gaussian noise in the membrane potential disrupted these artificial oscillations in decoupled pop-
193 ulations (**Figure S3C**). All subsequent simulations were run with similar noise levels to prevent the
194 emergence of artificial gamma oscillations.

195 Another potent way to induce gamma oscillations is to drive fast-spiking inhibitory neurons
196 using pulsed optogenetic stimulation at gamma frequencies, a strategy that has been used both in
197 the neocortex (**Cardin et al., 2009**) and hippocampal CA1 (**Iaccarino et al., 2016**). In particular,
198 Cardin and colleagues systematically investigated the effect of driving either excitatory or fast-
199 spiking inhibitory neocortical neurons at frequencies between 10 and 200 Hz (**Cardin et al., 2009**).
200 They showed that fast-spiking interneurons are preferentially entrained around 40-50 Hz, while ex-
201 citatory neurons respond better to lower frequencies. To verify the behavior of our model against
202 these experimental data, we simulated pulsed optogenetic stimulation as an intracellular current
203 provided to our reduced model of a single E-I circuit. Stimulation was applied at frequencies be-
204 tween 10 and 200 Hz to excitatory cells only, to inhibitory cells only, or to both at the same time
205 (**Figure S4**). The population firing rates were used as a proxy for the local field potentials (LFP), and
206 we computed the relative power in a 10-Hz band centered around the stimulation frequency, simi-
207 larly to the method proposed in (**Cardin et al., 2009**). When presented with continuous stimulation
208 across a range of frequencies in the gamma range, interneurons showed the greatest degree of
209 gamma power modulation (**Figure S4**). Furthermore, when the stimulation was delivered to the ex-
210 citatory population, the relative power around the stimulation frequency dropped significantly in
211 frequencies above 10 Hz, similar to the reported experimental data (**Cardin et al., 2009**). The main
212 difference between our simulation results and these experimental data is the specific frequencies
213 at which fast-spiking interneurons showed resonance, which was around 40 Hz in the mouse barrel
214 cortex and around 90 Hz in our model, a fast gamma rhythm. This could be attributed to several fac-
215 tors, such as differences in the cellular properties between cortical and hippocampal fast-spiking
216 interneurons, or the differences between the size of the populations and their relevant connectivity
217 in the cortex and the hippocampus.

218 **Theta-gamma oscillations and theta phase reset under dynamical theta input**

219 Once we validated that our elementary E-I circuits were able to generate gamma oscillations under
220 an input of sufficiently high amplitude, we studied the behavior of the whole model when the theta
221 input was dynamically provided by the Kuramoto oscillators as described above (**Figure 1**). As in the
222 original model (**Aussel et al., 2018**), the input theta rhythm drove the network to produce spiking
223 activity in the gamma range preferentially around the peak of theta in all excitatory and inhibitory
224 populations (**Figure 3A** and **Figure S5**). Spectrograms of the CA1 population firing rates revealed
225 that these bursts of activity around each theta peak were characterized by oscillations around 60
226 Hz (**Figure 3A**). This was confirmed by power spectral densities, which showed a clear peak at 4
227 Hz (corresponding to the theta drive) and increases in gamma band activity between 40 and 80
228 Hz (**Figure 3B**). To quantify PAC between theta and gamma oscillations, we used the modulation
229 index (MI) (**Tort et al., 2008, 2010**), which has been shown to outperform other similar measures
230 (**Hülsemann et al., 2019**). However, we discovered that this metric would give erroneous results
231 in our simulated datasets due to the absence of certain frequency components. To overcome
232 this limitation and avoid artifacts, uniform noise was added to the firing rates prior to computing
233 the MI (**Figure S6**). We first visualized the quantification of PAC using the comodulogram, which
234 indicates the MI as a function of two frequencies corresponding to the modulating phase signal
235 and the modulated amplitude signal. This analysis confirmed that gamma-band signals between
236 45 and 75 Hz were modulated by lower theta frequencies between 3 and 6 Hz, which we quantified
237 by computing a global MI in frequency ranges encompassing theta (3-9 Hz) and gamma (40-80
238 Hz) (**Figure S5B**). To refine this analysis, we also computed a similar MI between the amplitude of
239 various gamma frequencies and the phase of theta, which indicated that oscillations between 40

240 and 80 Hz occur preferentially around the peak of theta (*Figure 3C* and *Figure S5B*).

241 Next, we verified that our model was able to display theta phase reset during single-pulse stim-
242 ulation (depolarizing pulse, 1-ms duration). This mechanism is tightly linked with the concept of
243 PRC, which characterizes the phase delay or advancement that follows a single pulse delivered to
244 an oscillatory system, as a function of the phase at which this input is delivered. Although there
245 is no direct measurement of the PRC of septal neurons, such characterizations have been per-
246 formed for individual pyramidal cells in the CA3 and CA1 fields of the hippocampus (*Lengyel et al.,*
247 *2005; Kwag and Paulsen, 2009; Akam et al., 2012*). These PRCs appear biphasic and show a phase
248 advancement (respectively delay) for stimuli delivered in the ascending (respectively descending)
249 slope of theta. We modeled this behavior by a specific term (which we called the phase response
250 function) in the general equation of the Kuramoto oscillators (see methods, *Equation 1*). Import-
251 antly, introducing a phase offset in the phase response function disrupted theta-nested gamma
252 oscillations (*Figure S7*), which suggests that the septohippocampal circuitry must be critically tuned
253 to be able to generate such oscillations. The strength of phase reset could also be adjusted by a
254 gain that was manually tuned. In the presence of the physiological phase response function and
255 of a sufficiently high reset gain, a single stimulation pulse delivered to all excitatory and inhibitory
256 CA1 neurons could reset the phase of theta to a value close to its peaks (*Figure 3A*). We computed
257 the PRC of our simulated data for different stimulation amplitudes and validated that our neuronal
258 network behaved according to the phase response function set in our Kuramoto oscillators (*Fig-*
259 *ure 3D*). It should be noted that including this phase reset mechanism affected the generated theta
260 rhythm even in the absence of stimulation, extending the duration of the theta peak and thereby
261 slowing down the frequency of the generated theta rhythm.

262 Importantly, our approach is generalizable and can be applied to other models producing theta-
263 nested gamma oscillations. For instance, we adapted the neural mass model by Onslow and col-
264 leagues (*Onslow et al., 2014*), replaced the fixed theta input by a set of Kuramoto oscillators, and
265 demonstrated that it could also generate theta phase reset in response to single-pulse stimulation
266 (*Figure S8*). These results illustrate that the general behavior of our model is not specific to the
267 tuning of individual parameters in the conductance-based neurons, but follows general rules that
268 are captured by the level of abstraction of the Kuramoto formalism.

269 Overall, we successfully developed a new model of the hippocampal formation able to exhibit
270 both theta-nested gamma oscillations and theta phase reset in response to stimulation. We then
271 decided to explore further the effects of various stimulation protocols on its dynamics.

272 **Effects of theta input and stimulation amplitudes on theta-gamma oscillations**

273 We investigated the behavior of the model across multiple states of varying septal theta input am-
274 plitude in response to single-pulse stimulation delivered to CA1. In the absence of theta drive, a
275 single stimulation pulse elicited either zero or two bursts of spiking activity (depending on stimula-
276 tion amplitude) separated by about 200 ms (*Figure 4A, C*). We first sought to understand the origin
277 of this second burst, as it showed that even a single pulse could induce transient periodic activity
278 around 5 Hz in our model, a frequency within the theta range. A previous model has shown that the
279 presence of Calcium-Activated Non-specific cationic (CAN) currents can lead to self-sustained theta
280 oscillations in the hippocampus (*Giovannini et al., 2017*). Moreover, this study showed a direct link
281 between the increased excitation provided by the CAN current and the spike-frequency adaptation
282 properties of the M-current, directly affecting transitions from an asynchronous low-firing regime
283 to synchronous bursting. We tested the role of the CAN current in the response to single-pulse
284 stimulation by completely removing it from our simulations, which abolished the second burst of
285 activity (*Figure 4B*). Moreover, the time interval separating the two bursts likely resulted from the
286 interplay between the depolarizing CAN current and hyperpolarizing M current (*Figure 4A*).

287 In the presence of dynamic theta input, the effects of single-pulse stimulation depended both
288 on theta input amplitude and stimulation amplitude, highlighting different regimes of network ac-
289 tivity (*Figure 5* and *Figure S9, Figure S10, Figure S11*). For low theta input, theta-nested gamma oscil-

lations were initially absent and could not be induced by stimulation (**Figure 5A**). At most, the stimulation could only elicit a few bursts of spiking activity that faded away after approximately 250 ms, similar to the rebound of activity seen in the absence of theta drive. For increasing theta input, the network switched to an intermediate regime: upon initialization at a state with no spiking activity, it could be kicked to a state with self-sustained theta-nested gamma oscillations by a single stimulation pulse of sufficiently high amplitude (**Figure 5B**). This regime existed for a range of septal theta inputs located just below the threshold to induce self-sustained theta-gamma oscillations without additional stimulation, as characterized by the post-stimulation theta power, gamma power, and theta-gamma PAC (**Figure 5D**). Removing CAN currents from all areas of the model abolished this behavior **Figure S12**, which is interesting given the role of this current in the multistability of EC neurons (*Egorov et al., 2002; Fransén et al., 2006*) and in the intrinsic ability of the hippocampus to generate theta-nested gamma oscillations (*Giovannini et al., 2017*). For the highest theta input, the network became able to spontaneously generate theta-nested gamma oscillations, even when initialized at a state with no spiking activity and without additional neurostimulation **Figure 5C**.

Neurostimulation for restoring theta-gamma oscillations in pathological states

Based on the above analyses, we considered two pathological states: one with a moderate theta input (i.e., moderately weak projections from the medial septum to the EC) that allowed the initiation of self-sustained oscillations by single stimulation pulses (**Figure 5**, point B), and one with a weaker theta input characterized by the complete absence of self-sustained oscillations even following transient stimulation (**Figure 5**, point A). In each case, we sought to assess whether single-pulse or pulse train stimulation could induce or restore theta-nested gamma oscillations and whether this effect depended on the phase at which stimulation was delivered (i.e., at the peak or trough of the theta cycle). We hypothesized that any possible phase relationship would also depend on the phase reset mechanism. To test this hypothesis, we ran a series of simulations using two different models: one without phase reset and one with strong phase reset (i.e., the reset gain was set at the value used in **Figure 3**).

In the case of a moderate theta input and in the presence of phase reset, delivering a pulse at either the peak or trough of theta could induce theta-nested gamma oscillations (**Figure 6A and 6C**). By contrast, in the absence of phase reset, only stimulation delivered at the peak of theta was able to induce such oscillations, after some time delay (**Figure 6B, D**). Quantification of these results in terms of theta power, gamma power, and theta-gamma PAC showed strongly similar responses between stimulation delivered at the peak or trough of theta with phase reset enabled, similar but weaker responses with stimulation delivered at the peak of theta with phase reset disabled, and no response in the case of trough stimulation with phase reset disabled (**Figure 6E**).

In the case of a weak theta input that completely abolished neuronal oscillations, we delivered stimulation pulses continuously at a frequency matching that of the underlying theta rhythm for a duration of 2 s, in order to restore physiological oscillations (**Figure 7**). The stimulation onset was timed to either the peak or trough of the ongoing theta cycle. The continuous delivery of pulses produced similar results as single-pulse stimulation. With phase reset, pulse train stimulation restored theta-nested gamma oscillations within the whole network, irrespective of the phase of stimulation onset (**Figure 7A, C**). Notably, stimulation delivered at the trough forced a reset of the phase of theta rhythm and led to the subsequent delivery of pulses at the peak of theta. Interestingly, in the absence of phase reset, peak-targeted stimulation induced theta-gamma oscillations in all network areas easily, while trough-targeted stimulation created artificial bursts that propagated in other areas with difficulty, requiring multiple pulses to achieve a fraction of the results of peak-targeted stimulation (**Figure 6B, D**). Comparing these simulations based on theta power, gamma power, and theta-gamma PAC within CA1 (**Figure 7E**) showed similar albeit less striking differences as single-pulse stimulation, possibly because CA1 was driven directly by the stimulation. Notably, gamma power in the absence of theta phase reset, was higher when utilizing pulse trains. These differences were even more pronounced in areas other than CA1, as can be seen by the

340 gradual emergence of oscillations for trough stimulation without phase reset (**Figure 7D**).

341 Discussion

342 Highlights

343 In summary, we have developed a novel computational model to investigate the effects of elec-
344 trical stimulation on a slice of the hippocampal formation, incorporating two important features
345 related to memory: theta-nested gamma oscillations and theta phase reset. The key innovation
346 compared to previous models (e.g., **Aussel et al. (2018)**) is the introduction of a set of abstract Ku-
347 ramoto oscillators, which represent pacemaker neurons in the medial septum and are interfaced
348 with biophysically realistic neuronal models in the hippocampus. From a methodological point of
349 view, this hybrid interfacing between two levels of abstraction represents an innovation in itself
350 and could be applied to other systems or brain structures that are driven by dynamical rhythms.
351 The main outcomes reported here relate to the importance of the theta reset mechanism when
352 examining the effects of neurostimulation on hippocampal oscillations.

353 A very interesting finding concerns the behavior of the model in response to single-pulse stim-
354 ulation for certain values of the theta amplitude (**Figure 5**). For low theta amplitudes, a single stim-
355 ulation pulse was capable of switching the network behavior from a state with no spiking activity
356 to one with prominent theta-nested gamma oscillations. Whether such an effect can be induced
357 in vivo in the context of memory processes remains an open question. Nevertheless, delivering a
358 single stimulation pulse bilaterally to the human hippocampus during a memory task is sufficient
359 to impair memory encoding (**Lacruz et al., 2010**), suggesting that even single-pulse stimulation can
360 indeed have wide network effects that are behaviorally relevant.

361 The second main finding is that the timing of individual stimulation pulses with respect to the
362 phase of the ongoing theta rhythm matters differently depending on the presence or absence
363 of phase reset (**Figure 6** and **Figure 7**). Human intracranial stimulation data indicate that the re-
364 ceptivity of hippocampal circuits to single-pulse stimulation is modulated by the phase of theta
365 (**Lurie et al., 2022**). A number of studies have also reported conflicting results in terms of memory
366 outcomes, which could potentially be attributed to the induction of phase reset through stimula-
367 tion (**Suthana et al., 2012; Jacobs et al., 2016**). To our knowledge, however, the degree of phase
368 reset that follows each stimulation pulse remains unknown and should be investigated in future
369 experimental studies. From a technological point of view, the two regimes with and without phase
370 reset have opposite predictions concerning the need for closed-loop stimulation protocols that
371 would trigger stimulation in real-time based on the phase of ongoing theta oscillations. Such phase-
372 triggered stimulation would be most useful if the phase reset mechanism remains relatively limited.
373 When this mechanism becomes too strong, regular continuous stimulation appears sufficient to
374 restore physiological theta-gamma oscillations (**Figure 7**).

375 It should also be noted that the reset gain in our simulations (**Equation 1**, gain G_{reset}) was either
376 completely turned off or set at a high value, producing a strong effect that always reset the phase
377 of theta to its peak. In reality, the degree of theta phase reset is dynamic, depending on the en-
378 vironment and associated task requirements (**Rizzuto et al., 2003; Mormann et al., 2005; Jackson**
379 **et al., 2008**), and may be affected by neurodegenerative disorders that affect the connections be-
380 tween the hippocampal formation and the medial septum. Importantly, our proposed framework
381 can simulate intermediate values of the reset gain, which should ideally be fitted to experimental
382 data in future applications.

383 Finally, we modeled pathological states by reducing the maximum amplitude of the theta in-
384 put (**Equation 2**, gain G_θ) until theta-nested gamma oscillations were impaired or even abolished
385 (**Figure 5**). This choice was meant to simulate neurodegeneration in the medial septum, which is
386 known to be affected in Alzheimer's disease, leading to oscillatory disruptions (**Nelson et al., 2014;**
387 **Hampel et al., 2018; Takeuchi et al., 2021**). Another possibility would be that neurodegeneration
388 limits the ability of the septal pacemaker neurons to synchronize, thus producing a weaker col-

lective theta rhythm without affecting the maximum amplitude of individual oscillators. Although we simulated this change in our model by reducing the synchronization parameter, the effects on hippocampal oscillations were less pronounced (**Figure S12**). Linking these different modeling parameters to experimental biomarkers will be important in future work.

Limitations

Even though we took great care in developing a precise representation of the hippocampal formation, the resulting model remains a simplification that could be further enriched. In particular, we deliberately modeled only a single theta generator, while multiple intra- and extra-hippocampal generators are known to co-exist (**Kocsis et al., 1999; Hummos and Nair, 2017**). We decided to model septal pacemaker neurons projecting to the EC as the main source of hippocampal theta as reported in multiple experimental studies (**Buzsáki, 2002; Buzsáki et al., 2003; Hangya et al., 2009; Colgin, 2013**). However, experimental findings and previous models have also proposed that direct septal inputs are not essential for theta generation (**Wang, 2002; Colgin, 2013; Mysin et al., 2019**), but play an important role in phase synchronization of hippocampal neurons. Furthermore, the model does not account for the connections between the lateral and medial septum and the hippocampus (**Takeuchi et al., 2021**). These connections include the inhibitory projections from the lateral to the medial septum and the monosynaptic projections from the hippocampal CA3 field to the lateral septum. An experimental study has highlighted the importance of the lateral septum in regulating the hippocampal theta rhythm (**Bender et al. (2015)**), an area that has not been included in the model. Specifically, theta-rhythmic optogenetic stimulation of the axonal projections from the lateral septum to the hippocampus was shown to entrain theta oscillations and lead to behavioral changes during exploration in transgenic mice. To account for these discrepancies, our model could be extended by considering more realistic connectivity patterns between the medial / lateral septum and the hippocampal formation, including glutamatergic, cholinergic, and GABAergic reciprocal connections (**Müller and Remy, 2018**), or by considering multiple sets of oscillators each representing one theta generator.

In terms of neuronal cell types, we also made an important simplification by considering only basket cells as the main class of inhibitory interneuron in the whole hippocampal formation. However, it should be noted that many other types of interneurons exist in the hippocampus and have been modeled in various works with higher computational complexity (e.g., **Bezaire et al. (2016); Chatzikalymniou et al. (2021)**). Among these various interneurons, oriens-lacunosum moleculare (OLM) neurons in the CA1 field have been shown to play a crucial role in synchronizing the activity of pyramidal neurons at gamma frequencies (**Tort et al., 2007**), and in generating theta-gamma PAC (e.g., **Neymotin et al. (2011); Ponzi et al. (2023)**). Additionally, these cells may contribute to the formation of specific phase relationships within CA1 neuronal populations, through the integration between inputs from the medial septum, the EC, and CA3 (**Mysin et al., 2019**). Future work is needed to include more diverse cell types and detailed morphologies modeled through multiple compartments.

Another limitation of our model concerns synaptic transmission delays, which have been largely neglected and could affect the phase relationships between the medial septum and different hippocampal subfields. Experimental studies have indeed reported time delays in the population activities of connected anatomical structures (i.e., from EC to DG) (**Mizuseki et al., 2009**), with pyramidal cells in downstream areas like CA3 and CA1 preferentially firing at different phases of theta (**Dragoi and Buzsáki, 2006**). Propagation effects could also depend on the spatial scale of the model. We also decided to represent only a thin coronal slice of the hippocampal formation, and it remains unclear how an anatomically-accurate model of the whole structure would behave in terms of propagation of spontaneous and electrically-induced neuronal activity.

Importantly, we did not consider learning through synaptic plasticity, even though such mechanisms could drastically modify synaptic conduction for the whole network (**Borges et al., 2017**). Even more interestingly, the inclusion of spike-timing-dependent plasticity would enable the inves-

439 tigation of stimulation protocols aimed at promoting LTP, such as theta-burst stimulation (*Larson*
440 *and Munkácsy, 2015*). This aspect would be of uttermost importance to make a link with memory
441 encoding and retrieval processes (*Axmacher et al., 2006; Tsanov and Manahan-Vaughan, 2009; Ju-*
442 *tras et al., 2013*) and with neurostimulation studies for memory improvement (*Titiz et al., 2017;*
443 *Solomon et al., 2021*).

444 From the point of view of neurostimulation, future work is needed to extend the current model
445 to a multi-compartment representation of neurites, since axons are known to be preferentially ac-
446 tivated by extracellular electrical stimulation (*Rattay et al., 2003*). Specifically, multi-compartment
447 cable models have been developed to investigate spike initiation and propagation by modeling
448 the axon as a series of resistance-capacitance circuits following its trajectory (*Rattay et al., 2003;*
449 *Joucla and Yvert, 2012; Ashida and Nogueira, 2018*). These models are particularly suited to study
450 the effects of extracellular stimulation, which are non-intuitive and depend as a first approxima-
451 tion on the second spatial derivative of the electrical potential along the cell membrane (*Rattay,*
452 *1986; Rattay et al., 2003; McIntyre et al., 2004; Rattay et al., 2018*). Here, we have modeled electri-
453 cal stimulation as an intracellular current applied equally across all neurons in the targeted area,
454 which is extremely simplified but enables computational tractability. Future developments will fo-
455 cus on developing an equivalent multicompartment model with realistic axonal trajectories while
456 making sufficient simplifications to allow for realistic computation times.

457 Finally, we likened conditions of low theta input to pathological states characteristic of oscil-
458 lopathies such as Alzheimer's disease, as these conditions disrupted all aspects of theta-gamma
459 oscillations in our model: theta power, gamma power, and theta-gamma PAC *Figure 5*. However,
460 it should be noted that changes in theta or gamma power in these pathologies are often unclear,
461 and that the most consistent alteration that has been reported in Alzheimer's disease is a reduction
462 of theta-gamma PAC (for review, see *Kitchigina (2018)*). Future work should explore the effects of
463 cellular alterations intrinsic to the hippocampal formation and their impact on theta-gamma oscil-
464 lations.

465 Outlook

466 Overall, this new model of the hippocampal formation represents a methodologically innovative
467 basis to further explore multiple neurostimulation strategies that target hippocampal oscillations.
468 Moreover, the limitations discussed above represent important avenues for future refinements,
469 which will require significant work to overcome the costs in terms of computational tractability (e.g.,
470 modeling the whole hippocampus, or using multicompartment models of axonal trajectories and
471 dendritic trees). Ultimately, such model refinements should allow the investigation of the effects
472 of extracellular stimulation using charge-balanced biphasic pulses and multipolar electrode con-
473 figurations with realistic electrode geometries. Most importantly, we believe that our current work
474 may also serve as an inspiration for future computational models of oscillopathies (not necessarily
475 limited to the hippocampus), which could benefit from interfacing abstract sets of synchronizing
476 oscillators and investigating their interactions with biophysically-realistic neurons.

477 Materials and Methods

478 Computational Model

479 Overall Architecture

480 We aimed to develop a computational model of the hippocampal formation that is able to generate
481 theta-nested gamma oscillations and takes into account the dynamic nature of the theta input
482 from the medial septum, i.e., the reset of the theta phase following strong activity in the perforant
483 path or fornix (*Buño et al., 1978; Williams and Givens, 2003*). To this end, we adapted a previous
484 biophysical model of the human hippocampal formation under fixed sinusoidal input (*Aussel et al.,*
485 *2018*) and interconnected it with an abstract representation of the medial septum, modeled as an
486 assembly of Kuramoto oscillators (*Kuramoto, 1984*) (*Figure 1*).

More precisely, we modeled a 15-mm thick coronal slice of the hippocampal formation which comprises the DG, the CA3 and CA1 subfields of the hippocampus, and the EC, all populated with excitatory and inhibitory Hodgkin-Huxley neurons. For the medial septum, we opted for a simplified representation where the medial septum projects only to the EC, which in turn drives the different subfields of the hippocampus (see also L142-151). In our model, Kuramoto oscillators are therefore connected to the EC neurons and they receive projections from CA1 neurons (see sections below for more details).

Medial septum: Kuramoto Oscillators

The medial septum contains pacemaker neurons (Varga et al., 2008; Hangya et al., 2009) that synchronize with one another and generate a global theta rhythm. In turn, these pacemaker neurons drive downstream areas that receive projections from the medial septum. Here, we modeled the entire medial septum neuronal assembly as a set of coupled phase oscillators following the Kuramoto model (Kuramoto, 1984), which generated the driving theta rhythm that was provided to the hippocampal formation through the EC (Breakspear et al., 2010).

Kuramoto oscillators have also been used to investigate the effects of neurostimulation on synchronized brain rhythms in the context of Parkinson's disease or essential tremor (Tass, 2003; Weerasinghe et al., 2019). Here, each Kuramoto oscillator was described by its phase θ_i , which evolves over time according to the following equation:

$$\frac{d\theta_i}{dt} = \omega_i + \frac{k}{N} \sum_{j=1}^N \sin(\theta_j - \theta_i) + G_{reset} X(t) Z(\theta_i) \quad (1)$$

The term ω_i denotes the natural frequency of oscillator i , and is normally distributed around the center frequency f_0 and with standard deviation σ . The synchronization parameter k represents the coupling strength of the group of oscillators, and N is the number of oscillators. Higher values for the synchronization parameter indicate stronger coupling between pairs of oscillators, thus affecting how fast or slow their phases tend to synchronize. The final product $G_{reset} X(t) Z(\theta_i)$ is used to describe the effects of external inputs on the phase of the oscillators. Here, the only external input originates in the projections from CA1 to the medial septum. It is described by the instantaneous firing rate $X(t)$ of the CA1 excitatory population. G_{reset} is an arbitrary gain that determines the strength of the CA1 input to the oscillators. Finally, the function $Z(\theta_i)$ describes how the effects of CA1 inputs on the oscillators depend on the phase of the ongoing theta rhythm.

The coherence and phase of the driving theta rhythm I_θ were computed using the order parameter r to extract the mean amplitude A and the mean phase ϕ of the ensemble of Kuramoto oscillators as follows:

$$\begin{cases} r(t) &= \frac{1}{N} \sum_{i=1}^N e^{j\theta_i(t)} \\ A(t) &= \text{Re}(r) \\ \phi(t) &= \text{Im}(r) \\ I_\theta(t) &= G_\theta A(t) \frac{\cos(\phi(t))+1}{2} \end{cases} \quad (2)$$

where the mean amplitude $A(t)$ and the mean phase $\phi(t)$ are derived by taking the real and imaginary part of the order parameter respectively, and the output theta rhythm $I_\theta(t)$ is a rectified cosine, multiplied by a gain G_θ that controls the maximum output amplitude (in nA).

To simulate the effect of the projections from CA1 to the medial septum on the phase of the oscillators, an approximation of the instantaneous firing rate of the CA1 excitatory population was used as the term $X(t)$. To obtain the instantaneous firing rate, we convolved the CA1 population spike train with an exponential kernel using the following equations:

$$\begin{cases} \frac{dX}{dt} &= -\frac{X}{\tau_{FR}} \\ X_{t+1} &= X_t + \frac{1}{N \tau_{FR}}, \forall t \in t^S \end{cases} \quad (3)$$

Table 1. Full list of the default parameter values for the Kuramoto oscillators.

| Parameter | Value |
|---|--------|
| Number of oscillators (N) | 250 |
| Center frequency (f_0) | 6 Hz |
| Standard deviation (σ) | 0.5 Hz |
| Synchronization ratio ($\frac{k}{N}$) | 15 |
| Phase reset gain (G_{reset}) | 4 |
| Peak phase (θ_{peak}) | 0 rad |
| Firing rate time constant (τ_{FR}) | 10 ms |

where t^S denotes the ordered set of the spike timings, and τ_{FR} determines the exponential decay of the kernel, which was set to 10 ms to compute population activity (for single neurons, a typical value is 100 ms) (Gerstner et al., 2014).

Hereafter, we call the term $Z(\theta)$ the phase response function, to distinguish it from the PRC obtained from experimental data or simulations (see section below "Data Analysis", "Phase Response Curve"). Briefly, the PRC of an oscillatory system indicates the phase delay or advancement that follows a single pulse, as a function of the phase at which this input is delivered. The phase response function $Z(\theta)$ was chosen to mimic as well as possible experimental PRCs reported in the literature (Lengyel et al., 2005; Kwag and Paulsen, 2009; Akam et al., 2012). These PRCs appear biphasic and show a phase advancement (respectively delay) for stimuli delivered in the ascending (respectively descending) slope of theta. To accurately model this behavior, we used the following equation for the phase response function, where θ_{peak} represents the phase at which the theta rhythm reaches its maximum and the parameter ϕ_{offset} controls the desired phase offset from the peak:

$$Z(\theta_i) = -\sin(\theta_i - (\theta_{peak} + \phi_{offset})) \quad (4)$$

An overview of the default parameters for the Kuramoto oscillators and the bidirectional connections between medial septum-hippocampal formation can be found in Table 1.

Hippocampal formation: Hodgkin-Huxley Neurons

The following sections describe in detail how individual neurons and synapses were modeled, and are adapted from the original work by Aussen and colleagues (Aussen et al., 2018). Neurons were modeled as conductance-based single compartments, following the Hodgkin-Huxley formalism (Hodgkin and Huxley, 1952), in line with previous work (Aussen et al., 2022, 2018). The temporal evolution of the membrane potential of each neuron is described by a differential equation whose general form reads:

$$C_m \frac{dV_m}{dt} = -I_L - \sum_{channel} I_{channel} - \sum_{j \in [E, I]} I_{syn_j} + I_\theta + I_{stim} + \eta \quad (5)$$

I_L denotes the leakage current. $I_{channel}$ are currents associated with specific ion channels, namely potassium (I_K), fast sodium (I_{Na}), and low-threshold calcium (I_{Ca}) currents, the CAN current (I_{CAN}) (Giovannini et al., 2017), and the M-type potassium channel current (I_M) responsible for spike adaptation (Kosenko et al., 2012; Sun and Kapur, 2012; Kwag et al., 2014). I_{syn} represents the currents originating from synaptic inputs to the cell and can be either depolarizing (negative sign) or hyperpolarizing (positive sign). η is a Gaussian random noise term accounting for other external inputs and synaptic fluctuations. Theta input from the medial septum is modeled as a depolarizing current and is denoted by I_θ , while electrical stimulation is denoted by I_{stim} . Excitatory neurons represent pyramidal cells in EC, CA3, and CA1, and granule cells in DG. They were modeled with I_{Na} , I_K , and I_{Ca} , and I_M currents, with the addition of I_{CAN} for pyramidal cells. Fast-spiking interneurons in all areas were modeled with I_{Na} and I_K currents. The complete description for all of the above

558 ionic channels and their corresponding currents can be found in (Giovannini et al., 2017). Leakage
559 currents followed the following equation:

$$I_L = (g_L \times A) \times (V_m - E_L) \quad (6)$$

560 where g_L is the maximum leakage conductance, A is the area of the single compartment corre-
561 sponding to the membrane of a neuron, and E_L is the reversal potential of the leakage channel.
562 Channel currents I_K , I_M , I_{CAN} obey the following set of equations:

$$\begin{aligned} I_K &= g_K \times A \times n^4 \times (V_m - E_K) \\ I_M &= g_M \times A \times p \times (V_m - E_M) \\ I_{CAN} &= g_{CAN} \times A \times m_{CAN}^2 \times (V_m - E_{CAN}) \end{aligned} \quad (7)$$

563 where g_K , g_M , g_{CAN} are the maximum conductances for the respective channel, and n , p , m_{CAN} are
564 the respective gating variables defined by the following differential equations:

$$\begin{aligned} \frac{dn}{dt} &= \frac{n_\infty - n}{\tau_n} \\ \frac{dp}{dt} &= \frac{p_\infty - p}{\tau_p} \\ \frac{dm_{CAN}}{dt} &= \frac{m_{CAN,\infty} - m_{CAN}}{\tau_{m_{CAN}}} \end{aligned} \quad (8)$$

565 For the potassium and CAN currents, the steady-state values for their corresponding gating vari-
566 ables n_∞ and $m_{CAN,\infty}$ and their corresponding time constants τ_K and τ_{CAN} depend on the following
567 functions of the transition rate constants:

$$\begin{aligned} n_\infty &= \frac{\alpha_n}{\alpha_n + \beta_n} & m_{CAN,\infty} &= \frac{\alpha_{m_{CAN}}}{\alpha_{m_{CAN}} + \beta_{m_{CAN}}} \\ \tau_n &= \frac{0.2}{\alpha_n + \beta_n} & \tau_{m_{CAN}} &= \frac{0.2}{\alpha_{m_{CAN}} + \beta_{m_{CAN}}} \end{aligned} \quad (9)$$

568 The sodium current (I_{Na}) and calcium current (I_{Ca}) follow a similar set of equations:

$$\begin{aligned} I_{Na} &= g_{Na} \times A \times m^3 \times h \times (V_m - E_{Na}) \\ I_{Ca} &= g_{Ca} \times A \times m^2 \times h \times (V_m - E_{Ca}) \end{aligned} \quad (10)$$

569 with two gating variables m and h defined by the following differential equations:

$$\begin{aligned} \frac{dm}{dt} &= \frac{m_\infty - m}{\tau_m} & \frac{dn}{dt} &= \frac{n_\infty - n}{\tau_n} \\ m_\infty &= \frac{\alpha_m}{\alpha_m + \beta_m} & h_\infty &= \frac{\alpha_h}{\alpha_h + \beta_h} \\ \tau_m &= \frac{0.2}{\alpha_m + \beta_m} & \tau_h &= \frac{0.2}{\alpha_h + \beta_h} \end{aligned} \quad (11)$$

570 The gating variable of I_{CAN} depends on the calcium concentration within the neuron ($[Ca]_i^{2+}$), given
571 by:

$$\begin{aligned} \frac{d[Ca]_i^{2+}}{dt} &= \gamma(I_{Ca}) + \frac{([Ca]_\infty^{2+} - [Ca]_i^{2+})}{\tau_{[Ca]^{2+}}} \\ \gamma(I_{Ca}) &= \frac{-k_u \times I_{Ca}}{2 \times F \times d \times A} \end{aligned} \quad (12)$$

572 where $\tau_{[Ca]^{2+}} = 1s$ represents the rate of calcium removal from the cell, $[Ca]_\infty^{2+} = 0.24 \text{ mol/L}$ is the
573 calcium concentration if the calcium channel remains open for a duration of $\Delta T \rightarrow \infty$, $k_u = 10^4$ is a
574 unit conversion constant, F is the Faraday constant, and $d = 1 \mu m$ is the depth at which the calcium
575 is stored inside the cell.

Table 2. Full list of parameter values and expressions for pyramidal neurons

| Parameter | Expression |
|------------------|---|
| A | $29.10^3 cm^2$ |
| C_m | $1. \mu F/cm^2$ |
| g_L | $0.01 mS/cm^2$ |
| E_L | $-70 mV$ |
| g_K | $5 mS/cm^2$ |
| E_K | $-100 mV$ |
| $\alpha_{n,K}$ | $-0.032 \frac{V_m + 40 mV}{-1 + e^{-0.02(V_m + 40 mV)}}$ |
| $\beta_{n,K}$ | $0.5 e^{\frac{-(V_m + 45 mV)}{40 mV}}$ |
| g_{Na} | $50 mS/cm^2$ |
| E_{Na} | $50 mV$ |
| $\alpha_{m,Na}$ | $-0.32 \frac{V_m + 42 mV}{e^{\frac{V_m + 42 mV}{4 mV}} - 1}$ |
| $\beta_{m,Na}$ | $0.28 \frac{V_m + 15 mV}{e^{\frac{V_m + 15 mV}{3 mV}} - 1}$ |
| $\alpha_{h,Na}$ | $0.128 e^{\frac{4}{- \frac{V_m + 15 mV}{5 mV}}}$ |
| $\beta_{h,Na}$ | $\frac{4}{1 + e^{\frac{V_m + 15 mV}{5 mV}}}$ |
| g_M | $90 \mu S/cm^2$ |
| E_M | $-100 mV$ |
| p_∞ | $\frac{1}{1 + e^{-0.01(V_m + 35 mV)}}$ |
| τ_p | $\frac{1}{3.3 e^{\frac{(V_m + 35 mV)}{20 mV}} + e^{\frac{(V_m + 35 mV)}{20 mV}}}$ |
| g_{Ca} | $0.1 mS/cm^2$ |
| E_{Ca} | $120 mV$ |
| $\alpha_{m,Ca}$ | $-0.055 \frac{V_m + 27 mV}{e^{\frac{V_m + 27 mV}{17 mV}} - 1}$ |
| $\beta_{m,Ca}$ | $-0.94 e^{\frac{V_m + 75 mV}{17 mV}}$ |
| $\alpha_{h,Ca}$ | $-0.000457 e^{\frac{V_m + 13 mV}{50 mV}}$ |
| $\beta_{h,Ca}$ | $\frac{0.0065}{e^{\frac{V_m + 15 mV}{28 mV}} - 1}$ |
| g_{CAN} | $25 \mu S/cm^2$ |
| E_{CAN} | $-20 mV$ |
| $\alpha_{m,CAN}$ | $0.0002 e^{1.4 \frac{[Ca]_i^{2+}}{0.5 mol/L}}$ |
| $\beta_{m,CAN}$ | $0.0002 e^{1.4}$ |

Noise (η), accounting for random inputs to the network, was simulated as intracellular current acting on the membrane voltage and following the properties of a Gaussian random variable with a mean of $0 \mu V$ and a standard deviation of $1000 \mu V$ ($\eta_E \sim N(0, 1000) \mu V$) for excitatory neurons and a mean of $0 \mu V$ and standard deviation of $100 \mu V$ ($\eta_I \sim N(0, 100) \mu V$) for inhibitory neurons. The ratio of 1:10 between the noise terms was adapted from the original work and it accounts for the higher excitability of the inhibitory neurons as well as the E-I population size ratios.

The original model introduced some parameters representing the vigilance state (i.e., active wakefulness vs slow-wave sleep). However, the present model only focused on the state of active wakefulness, since this is when memory-related theta-nested gamma oscillations occur. For all simulations, the parameters were set so that the network operated in the wakefulness regime in a healthy hippocampus (Aussel et al., 2018). The full expressions for all the parameters defined above can be found in **Table 2** for pyramidal cells and in **Table 3** for interneurons.

Table 3. Full list of parameter values and expressions for interneurons

| Parameter | Expression |
|-----------------|--|
| A | $14.10^3 cm^2$ |
| C_m | $1. \mu F / cm^2$ |
| g_L | $0.1 mS / cm^2$ |
| E_L | $-65 mV$ |
| g_K | $9 mS / cm^2$ |
| E_K | $-90 mV$ |
| $\alpha_{n,K}$ | $0.01 \frac{V_m + 34 mV}{1 - e^{-0.1(V_m + 34 mV)}}$ |
| $\beta_{n,K}$ | $0.125 e^{-\frac{V_m + 44 mV}{80 mV}}$ |
| g_{Na} | $35 mS cm^2$ |
| E_{Na} | $55 mV$ |
| $\alpha_{m,Na}$ | $0.1 \frac{V_m + 35 mV}{1 - e^{-0.1(V_m + 35 mV)}}$ |
| $\beta_{m,Na}$ | $4 e^{-\frac{V_m + 60 mV}{18 mV}}$ |
| $\alpha_{h,Na}$ | $0.07 e^{-\frac{V_m + 58 mV}{20 mV}}$ |
| $\beta_{h,Na}$ | $\frac{1}{1 + e^{-0.1(V_m + 28 mV)}}$ |

Synaptic Models

Inter-neuronal interactions were modeled as instantaneous AMPA and GABA-A synapses using the synaptic currents I_{synE} and I_{synI} respectively. Synaptic currents were described by the following bi-exponential differential equations:

$$\begin{aligned}
 I_{synI,E} &= g_{I,E}(V_m - E_{I,E}) \\
 \frac{dg_{I,E}}{dt} &= \frac{1}{\tau_{g_{I,E}}}(-g_{I,E} + h_{I,E}) \\
 \frac{dh_{I,E}}{dt} &= -h_{I,E} \frac{1}{\tau_{h_{I,E}}}
 \end{aligned} \tag{13}$$

where $E_{I,E}$ are the synaptic resting potentials, and $\tau_{g_{I,E}}$ and $\tau_{h_{I,E}}$ are the synaptic time constants of rise and decay for inhibitory and excitatory neurons respectively. The occurrence of a pre-synaptic spike leads to an increase of the values h_I or h_E in the post-synaptic neuron by a fixed amount, which depends on the type of synapse and the region (due to the presence of cholinergic effects described in the initial model). Specific values for the intra-area and inter-area synaptic connections are given in **Table 4** and **Table 5** respectively.

Table 4. A pre-synaptic spike causes an increase in the conductances h_e and h_i in the post-synaptic neuron. The values for the intra-area connections are given here. Empty cells indicate no connection between the populations.

| | E → E | E → I | I → E | I → I |
|-----|-------|--------|---------|---------|
| EC | | 20 pS | 600 pS | |
| DG | | 180 pS | 1800 pS | |
| CA3 | 20 pS | 20 pS | 600 pS | |
| CA1 | | 60 pS | 1800 pS | 1800 pS |

Hippocampal formation: neuron types and numbers

Each area of the network is comprised of two populations, one excitatory and one inhibitory. Excitatory cells in the DG represent granule cells and pyramidal neurons in all other areas. Interneurons represent basket cells across all areas. The ratio between pyramidal neurons and interneurons

Table 5. A pre-synaptic spike causes an increase in the conductances h_e and h_i in the post-synaptic neuron. The values for the inter-area connections are given here. Empty cells indicate no connection between the areas. Recurrent projections are not allowed and are marked with dashes.

| Source \ Target | EC | DG | CA3 | CA1 |
|-----------------|-------|-------|--------|-------|
| EC | - | 20 pS | 20 pS | 20 pS |
| DG | | - | 180 pS | |
| CA3 | | | - | 20 pS |
| CA1 | 60 pS | | | - |

was directly adapted from *Aussel et al. (2018)*. The ratio between pyramidal neurons and interneurons was kept as a ratio of 10:1 for all areas except the dentate gyrus, where the ratio was 100:1. The number of neurons per subfield of the hippocampal formation is summarized in *Table 6*.

Table 6. Number of neurons per subfield of the hippocampal formation, divided by neuron type.

| Area | N_{Exc} | N_{Inh} |
|------|-----------|-----------|
| EC | 10,000 | 1,000 |
| DG | 10,000 | 100 |
| CA3 | 10,000 | 100 |
| CA1 | 10,000 | 1,000 |

A two-dimensional simplified image depicting a coronal slice of the hippocampal formation (*Aussel et al., 2018*) was used as a basis for a two-dimensional manifold that was uniformly populated by neurons following a density-driven approach (*Rougier, 2018*). Pyramidal neurons were uniformly distributed within the stratum pyramidale (or within the stratum granulosum for the dentate gyrus) and interneurons were uniformly distributed within the stratum oriens. Initial neuron positions were drawn from a blue noise distribution and a Voronoi diagram was computed. To adjust the positions of the neurons over a centroidal Voronoi diagram, the Lloyd relaxation algorithm was applied for 1000 iterations. Transitioning from a two-dimensional manifold to a 3D reconstruction of the hippocampal formation was achieved through the addition of the third coordinate with values uniformly distributed between 0 and 15 mm.

Hippocampal formation: inputs and connectivity

The hippocampal formation receives most of its external inputs from the EC. Activity from the EC is projected to all hippocampal subfields, starting with the DG. DG granule cells project onto the CA3 pyramidal cells via mossy cell fibers. CA3 projects in turn to CA1 via Schaffer collaterals. These connections form the tri-synaptic pathway. Direct connections from the EC towards the CA3 and CA1 subfields through the monosynaptic pathway are also considered. Pyramidal neurons from CA1 project to pyramidal neurons and interneurons in the EC, closing the hippocampal-entorhinal loop. CA1 pyramidal neurons also project to the medial septum through the fornix. An overview of the connections between areas is presented in panel B of *Figure 1*.

In the current model, EC pyramidal neurons and interneurons receive oscillatory theta input from the medial septum in the form of an excitatory intracellular current as described in *Equation 2* and *Equation 5*. Projections from CA1 towards the medial septum were modeled as a signal representing the collective firing rate of the CA1 pyramidal neurons. All connections towards and from the medial septum are summarized in panels A and B of *Figure 1*.

Synaptic connectivity between neurons within a region is characterized using a probability p and is distance-based, following a Gaussian-like distribution (*Equation 14*) with a width σ of $2500\mu m$ (excitatory synapses) and $350\mu m$ (inhibitory synapses). The value of A_{intra} defines the maximum

632 probability of connection between two neurons separated by an infinitesimal distance (i.e., for
633 $D \rightarrow 0$). The maximum values for A_{intra} are given in **Table 7**.

$$p = A_{intra} \exp\left(-\frac{D^2}{2\sigma^2}\right) \quad (14)$$

634 Inter-area connectivity followed a similar Gaussian-like distribution (**Equation 15**), however,
635 only excitatory projections were considered and the distance D_z was computed only across the
636 z-coordinate. Pyramidal neurons from the source area projected to pyramidal neurons and in-
637 terneurons in the target area, with connectivity probabilities drawn from the said distribution with
638 a width σ of 1000 μm .

$$p = \min(1, A_{inter} \exp\left(-\frac{D_z^2}{2\sigma^2}\right)) \quad (15)$$

Table 7. Maximum probability of connection (A_{intra} , **Equation 14**) between neurons within each region.

| | Py-Py | Py-Inh | Inh-Py | Inh-Inh |
|-----|-------|--------|--------|---------|
| EC | 0 | 0.37 | 0.54 | 0 |
| DG | 0 | 0.06 | 0.14 | 0 |
| CA3 | 0.56 | 0.75 | 0.75 | 0 |
| CA1 | 0 | 0.28 | 0.3 | 0.7 |

639 Tuning input gain and connection strengths: targeted firing rates

640 We adjusted the input gain (G_θ) and inter-area connection strengths (A_{inter}) to target an overall os-
641 cillatory rhythm $f_{osc,targ}$ at the driving frequency of the input, i.e., 6 Hz, and a mean firing rate of
642 each excitatory population $f_{exc,targ}$ also at 6 Hz (meaning that each excitatory cell should spike on
643 average once per theta cycle). Because of the ratio between excitatory and inhibitory neurons in
644 the model, this resulted in firing rates of about 60 Hz in inhibitory neurons. These targeted val-
645 ues were inspired by literature in behaving rodents showing that hippocampal pyramidal neurons
646 typically fire at rates below 10 Hz, usually between 1 and 2 Hz, and that interneurons fire at rates
647 between 20 and 80 Hz (**Hirase et al., 2001**). In practice, the obtained firing rates were constrained
648 by the simplifications made in the model.

649 The mean population firing rate f_{exc} was computed by counting the number of spikes in the
650 last second of a 3-s simulation run, to avoid edge effects due to the non-physiological initial con-
651 ditions, and by averaging this number over time and across neurons. The oscillatory frequency
652 f_{osc} was computed as the mean of the inverse of the timing between all pairs of consecutive peaks
653 in the theta rhythm. Finally, the metric used to adjust parameters (input strength and connection
654 strengths) was calculated as the Euclidean distance between the targeted and obtained firing rate
655 and oscillatory rate:

$$J = \sqrt{(f_{exc} - f_{exc,targ})^2 + (f_{osc} - f_{osc,targ})^2} \quad (16)$$

656 Tuning input and connection strengths: detailed procedure

657 The input gain (G_θ , **Equation 2**) and inter-area connection strengths (A_{inter} , **Equation 15**) were se-
658 quentially adjusted using the following heuristics. All simulations were performed for a duration
659 of 3 s, and the first 2 s were excluded from the analysis to avoid edge effects. The network was
660 initialized with membrane voltages uniformly distributed in the range $[-70, -60]$ mV. Our initial
661 point was a fully uncoupled model in which all the connection strengths were set to 0. The tuning
662 procedure was performed in the absence of noise.

Table 8. Inter-area connection strengths (A_{inter}). The source is always the excitatory population of the subfield. The same values are used when targeting excitatory and inhibitory populations. Empty cells indicate no connections. EC: Entorhinal Cortex, DG: Dentate Gyrus.

| Source \ Target | EC | DG | CA3 | CA1 |
|-----------------|-----|------|------|-----|
| EC | - | 13.0 | 0.14 | 1.1 |
| DG | | - | 0.14 | |
| CA3 | | | - | 1.1 |
| CA1 | 0.2 | | | - |

1. First, we adjusted the amplitude of the theta input to a value that would produce a mean firing rate of 6 Hz in the excitatory population of the EC. To this end, the input strength was progressively increased from 0 to 0.5 nA in steps of 0.01 nA, and the value that maximized our metric was selected.
2. We then adjusted similarly the connection strength from the EC to the DG, increasing it from 0 to 20 in steps of 0.1.
3. We repeated the procedure to jointly tune the connection strengths from EC and DG to CA3, assuming an equal contribution from these two areas. These two connection strengths were set to the same value and were increased from 0 to 5 in steps of 0.1.
4. We followed the same procedure to jointly tune the connection strengths from CA3 and EC to CA1, assuming again an equal contribution from these two areas.
5. The last connection from CA1 to EC was more difficult to tune because it closes the feedback loop and induces complex dynamics when too strong. To tune it, we temporarily uncoupled CA1 from all other structures and temporarily added a fixed sinusoidal input at the target frequency of 6 Hz to both excitatory and inhibitory CA1 neurons. We first adjusted this input amplitude to generate a mean firing rate of about 6 Hz in CA1 excitatory neurons. Next, the connection strength from CA1 to EC was adjusted to also achieve a mean firing rate of 6 Hz in EC excitatory neurons.
6. Because EC receives both an external input and feedback from CA1, we assumed that both these contributions should be decreased for the system to behave in a physiological range in the presence of the feedback loop. We, therefore, decided to divide by two the connection strength from CA1 to EC obtained in step 5. All other connection strengths were then set again to the values tuned in the previous steps, and the temporary external input to CA1 was removed. The external theta input to the EC was reinstated and tuned again as in step 1.

Following the above procedure, the inter-area synaptic connectivity parameters were set for all subsequent simulations. The values are summarized in **Table 8**. Empty cells denote no effective connectivity.

Numerical Implementation

The model was implemented with the Brian2 libraries for Python (*Stimberg et al., 2019*) (see Data availability section for access to the code). Simulations were performed using a timestep of 0.1 ms and a total simulation duration ranging between 3-10 seconds (depending on the experiment, see results section). The average time for simulating 1 second for the complete model locally was 10 minutes.

Neural mass model interfaced with Kuramoto oscillators

The neural masses represented in **Figure S8** were modeled using the Wilson-Cowan formalism, with parameters adapted from *Onslow et al. (2014)*. Specifically, the firing rates of the excitatory and inhibitory populations were determined by the following equations:

$$\begin{cases} \tau_E \frac{dE}{dt} = -E + f(g_E \theta_E + W_{EE} E - W_{IE} I + stim_E(t)) \\ \tau_I \frac{dI}{dt} = -I + f(g_I \theta_I + W_{EI} E) \end{cases} \quad (17)$$

with the following parameters: $\tau_E = \tau_I = 3.2ms$, $g_E = 0.7$, $g_I = 0$, $W_{EE} = 4.8$, $W_{EI} = W_{IE} = 4$, and $W_{II} = 0$. The sigmoid response function was not modified from the original work, and was defined as:

$$f(x) = \frac{1}{1 + e^{-\beta(x-x_m)}} \quad (18)$$

with parameters β and x_m set to 4 and 1 respectively, according to the original model. The Kuramoto oscillators were modeled according to **Equation 1**. For these simulations we used a set of $N = 100$ oscillators with a center frequency f_0 of 4 Hz, a synchronization ratio $\frac{k}{N}$ of 25, and a strong phase reset gain G_{reset} of 90. Other parameters were kept as previously shown in **Table 1**. The neural masses were coupled to the Kuramoto oscillators by linking the variable $X(t)$ in **Equation 1** with the variable $E(t)$ in **Equation 17**.

We increased the phase reset gain significantly compared to the Hodgkin-Huxley model, as the Onslow model utilized a sigmoid function with values between 0 and 1, whereas the instantaneous firing rate of the populations of single-compartment neurons was much higher and therefore had a stronger phase resetting effect.

Data Analysis

During each simulation, we monitored and exported the following data for subsequent analysis: (i) spike timings per neuron, (ii) time series of ionic currents, (iii) septal input theta rhythm and phase, and (iv) time series of electrical stimulation. Theta phase was wrapped between $[-\pi, \pi]$ with a phase of 0 radians corresponding to the peak of theta rhythm. All PAC analyses were performed using the *TensorPAC* toolbox for Python (*Combrisson et al., 2020*).

Firing rates

To obtain instantaneous firing rates, the corresponding spike trains were binned in 5-ms rectangular windows with a 90% overlap (i.e., consecutive windows were spaced by 0.5 ms). The number of spikes within each bin was normalized by the bin size and the number of neurons in the group, yielding instantaneous population firing rates. Where reported (i.e., values μ_I and μ_E in **Figure 3A**), the mean population firing rates within a given time window (typically lasting several seconds) were computed by binning all spikes in that time window and normalizing by the window width and the number of neurons in the population.

Spectral analyses

Power spectral density (PSD) estimates were calculated based on Welch's method. The periodogram was computed using 1-s windows with a 90% overlap, yielding a frequency resolution of 1 Hz. The average spectral power within a specific frequency band was calculated using Simpson's rule within the desired frequency band $[f_l, f_h]$. Spectrograms were computed using the short-time Fourier transform with a sliding Hann window of 100-ms width and 99% overlap, yielding a frequency resolution of 10 Hz.

Modulation Index

The MI (*Tort et al., 2008*) was used to estimate the degree of PAC between theta and gamma oscillations in the model. To compute the MI, the normalized firing rate traces were band-pass filtered in the frequency ranges of interest: 3-9 Hz for theta (referred to as the "phase signal") and 40-80 Hz for gamma (referred to as the "amplitude signal"). Then, the phase and amplitude time series were extracted from the filtered signals using the Hilbert transform. A histogram of the mean amplitude of gamma over the phase of theta was then extracted, using phase bins of 5 degrees. The MI

741 was finally calculated as the Kullback-Leibler divergence between the mean amplitude distribution
742 and the uniform distribution. A higher MI indicates stronger PAC. For a schematic representation
743 regarding the computation of the MI, refer to Figure 1 in *Tort et al. (2010)*. These computations
744 were performed using the provided *PreferredPhase* and *Pac* methods from the *TensorPAC* library
745 for Python (*Combrisson et al., 2020*).

746 Comodulograms

747 Comodulograms represent the amount of PAC between two ranges of frequencies, used to ex-
748 tract respectively a phase and an amplitude signal. Specifically, we computed the MI between 80%
749 overlapping 1-Hz frequency bands used to compute the phase of the signal (in the theta range),
750 and 90% overlapping 10-Hz frequency bands used to compute the amplitude of the signal (in the
751 gamma range). The resulting distribution of MI values was subsequently plotted as heat maps. An
752 inherent problem with the computation of the MI using simulated data was the lack of frequency
753 components in some frequency bands. Filtering the data within 1-Hz frequency bands thus created
754 a flat signal, resulting in high values of the MI despite the absence of modulation. To overcome
755 this limitation, we added uniform noise to the firing rate signals prior to computing the MI, with an
756 amplitude of approximately 20% of the maximum instantaneous firing rates. The results with and
757 without added noise are presented in *Figure S6*.

758 Phase dependency of PAC

759 For a given theta frequency, PAC depends on the phase of the underlying theta oscillation. To
760 identify this relationship and the theta phase that maximizes coupling, we used the *PreferredPhase*
761 function of the *TensorPAC* toolbox. More precisely, we applied a Hilbert transform to extract the
762 phase of the theta signal (firing rate band-pass filtered between 3 and 9 Hz) and the amplitude of
763 the gamma signal band-pass filtered within narrow (10-Hz wide) frequency ranges between 20 and
764 100 Hz with a 90% overlap. For each narrow gamma range, we binned the amplitude with respect
765 to the phase in a similar way as in the calculation of the MI. We obtained a vector of the binned
766 high-frequency amplitudes with respect to the phase of the low-frequency phase, represented as
767 a polar plot as in *Figure 3C*.

768 Phase Response Curves

769 The PRC of an oscillatory system indicates the phase delay or advancement that follows a single
770 pulse, as a function of the phase at which this input is delivered. To characterize the PRC of our
771 computational model, we applied a single stimulation pulse to CA1 across different phases of the
772 theta rhythm and calculated the resulting change in the theta phase. We split a single theta cycle
773 into intervals of width $\pi/8$ radians and applied a single stimulation pulse of a given amplitude.
774 For each case, we ran two simulations: one with a stimulation pulse and one without. Finally, we
775 compared the theta phase 2.5 ms post-stimulation and at the same time but in the absence of
776 stimulation. The resulting values for the phase difference $\Delta\phi$ were plotted against the stimulation
777 phase and are presented in *Figure 3D* for varying stimulation amplitudes.

778 Acknowledgments

779 Simulations presented in this paper were carried out using the PlaFRIM experimental testbed, sup-
780 ported by Inria, CNRS (LABRI and IMB), Université de Bordeaux, Bordeaux INP and Conseil Régional
781 d'Aquitaine (see <https://www.plafrim.fr>).

782 Additional information

783 Funding

784 This work was supported by the Bordeaux Neurocampus junior chair program co-funded by the
785 Région Nouvelle-Aquitaine and the University of Bordeaux Initiative of Excellence (IdEx) (F.B.W.,
786 Neurocampus junior chair), and the European Union's Horizon Europe research and innovation

787 program under European Research Council (ERC) Starting Grant agreement N° 101040391 (F.B.W.,
788 MEMOPROSTHETICS).

789 Author ORCIDs

790 Nikolaos Vardalakis: <https://orcid.org/0000-0002-5436-4091>

791 Amélie Aussel: <https://orcid.org/0000-0003-0498-2905>

792 Nicolas P. Rougier: <https://orcid.org/0000-0002-6972-589X>

793 Fabien B. Wagner: <https://orcid.org/0000-0002-9582-6109>

794 Conflicts of interest

795 The authors declare no conflicts of interest.

796 Data availability

797 All model files and analysis scripts are available at the following repositories under the GNU Gen-
798 eral Public License v3.0 license:

799 ZENODO: <https://www.doi.org/10.5281/zenodo.8354987>

800 GITHUB: <https://github.com/NikVard/memstim-hh>

801 References

802 **Abbaspoor S**, Hussin AT, Hoffman KL. Theta- and gamma-band oscillatory uncoupling in the macaque hip-
803 pocampus. *eLife*. 2023 May; 12:e86548. <https://doi.org/10.7554/eLife.86548>, doi: 10.7554/eLife.86548, pub-
804 lisher: eLife Sciences Publications, Ltd.

805 **Adesnik H**, Scanziani M. Lateral competition for cortical space by layer-specific horizontal circuits. *Nature*.
806 2010 Apr; 464(7292):1155–1160. <https://www.nature.com/articles/nature08935>, doi: 10.1038/nature08935.

807 **Akam T**, Oren I, Mantoan L, Ferenczi E, Kullmann DM. Oscillatory dynamics in the hippocampus support dentate
808 gyrus–CA3 coupling. *Nature Neuroscience*. 2012 May; 15(5):763–768. [http://www.nature.com/articles/nn.](http://www.nature.com/articles/nn.3081)
809 [3081](http://www.nature.com/articles/nn.3081), doi: 10.1038/nn.3081.

810 **de Almeida L**, Idiart M, Lisman JE. Memory retrieval time and memory capacity of the CA3 network: role of
811 gamma frequency oscillations. *Learning & Memory (Cold Spring Harbor, NY)*. 2007 Nov; 14(11):795–806. doi:
812 [10.1101/lm.730207](https://doi.org/10.1101/lm.730207).

813 **Ashida G**, Nogueira W. Spike-Conducting Integrate-and-Fire Model. *eneuro*. 2018 Jul; 5(4):ENEURO.0112–
814 18.2018. <https://www.eneuro.org/lookup/doi/10.1523/ENEURO.0112-18.2018>, doi: 10.1523/ENEURO.0112-
815 18.2018.

816 **Asllani M**, Expert P, Carletti T. A minimally invasive neurostimulation method for controlling abnormal
817 synchronisation in the neuronal activity. *PLOS Computational Biology*. 2018 Jul; 14(7):e1006296. [https:](https://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1006296)
818 [://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1006296](https://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1006296), doi: 10.1371/journal.pcbi.1006296,
819 publisher: Public Library of Science.

820 **Aussel A**, Buhry L, Tyvaert L, Ranta R. A detailed anatomical and mathematical model of the hippocampal
821 formation for the generation of sharp-wave ripples and theta-nested gamma oscillations. *Journal of Com-*
822 *putational Neuroscience*. 2018 Dec; 45(3):207–221. <http://link.springer.com/10.1007/s10827-018-0704-x>, doi:
823 [10.1007/s10827-018-0704-x](https://doi.org/10.1007/s10827-018-0704-x).

824 **Aussel A**, Ranta R, Aron O, Colnat-Coulbois S, Maillard L, Buhry L. Cell to network computational model of the
825 epileptic human hippocampus suggests specific roles of network and channel dysfunctions in the ictal and in-
826 terictal oscillations. *Journal of Computational Neuroscience*. 2022 Nov; 50(4):519–535. doi: 10.1007/s10827-
827 022-00829-5.

828 **Axmacher N**, Henseler MM, Jensen O, Weinreich I, Elger CE, Fell J. Cross-frequency coupling supports multi-item
829 working memory in the human hippocampus. *Proceedings of the National Academy of Sciences*. 2010 Feb;
830 107(7):3228–3233. <https://www.pnas.org/content/107/7/3228>, doi: 10.1073/pnas.0911531107, publisher:
831 National Academy of Sciences Section: Biological Sciences.

832 **Axmacher N**, Mormann F, Fernández G, Elger CE, Fell J. Memory formation by neuronal synchronization. *Brain*
833 *Research Reviews*. 2006 Aug; 52(1):170–182. <https://linkinghub.elsevier.com/retrieve/pii/S0165017306000099>,
834 doi: 10.1016/j.brainresrev.2006.01.007.

- 835 **Basu I**, Crocker B, Farnes K, Robertson MM, Paulk AC, Vallejo DI, Dougherty DD, Cash SS, Eskandar EN, Kramer
836 MM, Widge AS. A neural mass model to predict electrical stimulation evoked responses in human and non-
837 human primate brain. *Journal of Neural Engineering*. 2018 Dec; 15(6):066012. [https://iopscience.iop.org/](https://iopscience.iop.org/article/10.1088/1741-2552/aae136)
838 [article/10.1088/1741-2552/aae136](https://iopscience.iop.org/article/10.1088/1741-2552/aae136), doi: 10.1088/1741-2552/aae136.
- 839 **Bender F**, Gorbati M, Cadavieco MC, Denisova N, Gao X, Holman C, Korotkova T, Ponomarenko A. Theta os-
840 cillations regulate the speed of locomotion via a hippocampus to lateral septum pathway. *Nature Commu-*
841 *nications*. 2015 Oct; 6(1):8521. <https://www.nature.com/articles/ncomms9521>, doi: 10.1038/ncomms9521,
842 number: 1 Publisher: Nature Publishing Group.
- 843 **Bezaire MJ**, Raikov I, Burk K, Vyas D, Soltesz I. Interneuronal mechanisms of hippocampal theta oscillations in
844 a full-scale model of the rodent CA1 circuit. *eLife*. 2016 Dec; 5:e18566. <https://elifesciences.org/articles/18566>,
845 doi: 10.7554/eLife.18566.
- 846 **Bingham CS**, Loizos K, Yu GJ, Gilbert A, Bouteiller JMC, Song D, Lazzi G, Berger TW. Model-Based Anal-
847 ysis of Electrode Placement and Pulse Amplitude for Hippocampal Stimulation. *IEEE Transactions on*
848 *Biomedical Engineering*. 2018 Oct; 65(10):2278–2289. <https://ieeexplore.ieee.org/document/8269392/>, doi:
849 10.1109/TBME.2018.2791860.
- 850 **Borges RR**, Borges FS, Lameu EL, Batista AM, Iarosz KC, Caldas IL, Antonopoulos CG, Baptista MS. Spike timing-
851 dependent plasticity induces non-trivial topology in the brain. *Neural Networks*. 2017 Apr; 88:58–64. [https://](https://linkinghub.elsevier.com/retrieve/pii/S0893608017300102)
852 linkinghub.elsevier.com/retrieve/pii/S0893608017300102, doi: 10.1016/j.neunet.2017.01.010.
- 853 **Breakspear M**, Heitmann S, Daffertshofer A. Generative Models of Cortical Oscillations: Neurobiological Im-
854 plications of the Kuramoto Model. *Frontiers in Human Neuroscience*. 2010; 4. [https://www.frontiersin.org/](https://www.frontiersin.org/articles/10.3389/fnhum.2010.00190/full)
855 [articles/10.3389/fnhum.2010.00190/full](https://www.frontiersin.org/articles/10.3389/fnhum.2010.00190/full), doi: 10.3389/fnhum.2010.00190, publisher: Frontiers.
- 856 **Buño W**, Garcia-Sanchez JL, Garcia-Austt E. Reset of hippocampal rhythmical activities by afferent stimulation.
857 *Brain Research Bulletin*. 1978; 3(1):21–28. doi: 10.1016/0361-9230(78)90057-6.
- 858 **Buzsáki G**, Buhl DL, Harris KD, Csicsvari J, Czéh B, Morozov A. Hippocampal network patterns of activity
859 in the mouse. *Neuroscience*. 2003 Jan; 116(1):201–211. [http://www.sciencedirect.com/science/article/pii/](http://www.sciencedirect.com/science/article/pii/S0306452202006693)
860 [S0306452202006693](http://www.sciencedirect.com/science/article/pii/S0306452202006693), doi: 10.1016/S0306-4522(02)00669-3.
- 861 **Buzsáki G**. Theta Oscillations in the Hippocampus. *Neuron*. 2002 Jan; 33(3):325–340. [https://www.sciencedirect.](https://www.sciencedirect.com/science/article/pii/S089662730200586X)
862 [com/science/article/pii/S089662730200586X](https://www.sciencedirect.com/science/article/pii/S089662730200586X), doi: 10.1016/S0896-6273(02)00586-X.
- 863 **Canolty RT**, Knight RT. The functional role of cross-frequency coupling. *Trends in Cognitive Sci-*
864 *ences*. 2010 Nov; 14(11):506–515. <https://linkinghub.elsevier.com/retrieve/pii/S1364661310002068>, doi:
865 10.1016/j.tics.2010.09.001.
- 866 **Capogrosso M**, Wenger N, Raspopovic S, Musienko P, Beauparlant J, Bassi Luciani L, Courtine G, Micera S. A
867 Computational Model for Epidural Electrical Stimulation of Spinal Sensorimotor Circuits. *The Journal of Neu-*
868 *roscience*. 2013 Dec; 33(49):19326–19340. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6618777/>, doi:
869 10.1523/JNEUROSCI.1688-13.2013.
- 870 **Cardin JA**, Carlén M, Meletis K, Knoblich U, Zhang F, Deisseroth K, Tsai LH, Moore CI. Driving fast-spiking
871 cells induces gamma rhythm and controls sensory responses. *Nature*. 2009 Jun; 459(7247):663–667. [https://](https://www.nature.com/articles/nature08002)
872 www.nature.com/articles/nature08002, doi: 10.1038/nature08002.
- 873 **Chatzikalymniou AP**, Gumus M, Skinner FK. Linking minimal and detailed models of CA1 microcircuits reveals
874 how theta rhythms emerge and their frequencies controlled. *Hippocampus*. 2021 Sep; 31(9):982–1002. doi:
875 10.1002/hipo.23364.
- 876 **Colgin LL**. Mechanisms and Functions of Theta Rhythms. *Annual Review of Neuroscience*. 2013; 36(1):295–312.
877 <https://doi.org/10.1146/annurev-neuro-062012-170330>, doi: 10.1146/annurev-neuro-062012-170330.
- 878 **Combrisson E**, Nest T, Brovelli A, Ince RAA, Soto JLP, Guillot A, Jerbi K. Tensorpac: An open-source Python tool-
879 box for tensor-based phase-amplitude coupling measurement in electrophysiological brain signals. *PLOS*
880 *Computational Biology*. 2020 Oct; 16(10):e1008302. [https://journals.plos.org/ploscompbiol/article?id=10.1371/](https://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1008302)
881 [journal.pcbi.1008302](https://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1008302), doi: 10.1371/journal.pcbi.1008302, publisher: Public Library of Science.
- 882 **Cutsuridis V**, Cobb S, Graham BP. Encoding and retrieval in a model of the hippocampal CA1 microcir-
883 cuit. *Hippocampus*. 2010; 20(3):423–446. <http://onlinelibrary.wiley.com/doi/abs/10.1002/hipo.20661>, doi:
884 10.1002/hipo.20661, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/hipo.20661>.

- 885 **Dragoi G**, Buzsáki G. Temporal encoding of place sequences by hippocampal cell assemblies. *Neuron*. 2006
886 Apr; 50(1):145–157. doi: 10.1016/j.neuron.2006.02.023.
- 887 **Ebert M**, Hauptmann C, Tass PA. Coordinated reset stimulation in a large-scale model of the STN-GPe circuit.
888 *Frontiers in Computational Neuroscience*. 2014; 8:154. [https://www.frontiersin.org/article/10.3389/fncom.](https://www.frontiersin.org/article/10.3389/fncom.2014.00154)
889 [2014.00154](https://www.frontiersin.org/article/10.3389/fncom.2014.00154), doi: 10.3389/fncom.2014.00154.
- 890 **Egorov AV**, Hamam BN, Fransén E, Hasselmo ME, Alonso AA. Graded persistent activity in entorhinal cortex neu-
891 rons. *Nature*. 2002 Nov; 420(6912):173–178. <https://www.nature.com/articles/nature01171>, doi: 10.1038/na-
892 ture01171, number: 6912 Publisher: Nature Publishing Group.
- 893 **Fell J**, Axmacher N. The role of phase synchronization in memory processes. *Nature Reviews Neuroscience*.
894 2011 Feb; 12(2):105–118. <http://www.nature.com/articles/nrn2979>, doi: 10.1038/nrn2979.
- 895 **Fransén E**, Tahvildari B, Egorov AV, Hasselmo ME, Alonso AA. Mechanism of Graded Persistent Cellular Activity
896 of Entorhinal Cortex Layer V Neurons. *Neuron*. 2006 Mar; 49(5):735–746. [https://www.cell.com/neuron/](https://www.cell.com/neuron/abstract/S0896-6273(06)00092-4)
897 [abstract/S0896-6273\(06\)00092-4](https://www.cell.com/neuron/abstract/S0896-6273(06)00092-4), doi: 10.1016/j.neuron.2006.01.036, publisher: Elsevier.
- 898 **Gerstner W**, Kistler WM, Naud R, Paninski L. *Neuronal Dynamics: From Single Neurons to Networks and Models*
899 *of Cognition*. USA: Cambridge University Press; 2014.
- 900 **Giovannini F**, Knauer B, Yoshida M, Buhry L. The CAN-In network: A biologically inspired model for self-
901 sustained theta oscillations and memory maintenance in the hippocampus. *Hippocampus*. 2017 Apr;
902 27(4):450–463. doi: 10.1002/hipo.22704.
- 903 **Goyal A**, Miller J, Watrous AJ, Lee SA, Coffey T, Sperling MR, Sharan A, Worrell G, Berry B, Lega B, Jobst BC, Davis
904 KA, Inman C, Sheth SA, Wanda PA, Ezzyat Y, Das SR, Stein J, Gorniak R, Jacobs J. Electrical Stimulation in Hip-
905 pocampus and Entorhinal Cortex Impairs Spatial and Temporal Memory. *The Journal of Neuroscience: The*
906 *Official Journal of the Society for Neuroscience*. 2018 May; 38(19):4471–4481. doi: 10.1523/JNEUROSCI.3049-
907 17.2018.
- 908 **Gupta A**, Vardalakis N, Wagner FB. Neuroprosthetics: from sensorimotor to cognitive disorders. *Communica-*
909 *tions Biology*. 2023 Jan; 6(1):1–17. <https://www.nature.com/articles/s42003-022-04390-w>, doi: 10.1038/s42003-
910 022-04390-w, number: 1 Publisher: Nature Publishing Group.
- 911 **Hajós M**, Hoffmann WE, Orbán G, Kiss T, Érdi P. Modulation of septo-hippocampal θ activity by GABAA receptors:
912 an experimental and computational approach. *Neuroscience*. 2004 Jan; 126(3):599–610. [https://linkinghub.](https://linkinghub.elsevier.com/retrieve/pii/S0306452204002301)
913 [elsevier.com/retrieve/pii/S0306452204002301](https://linkinghub.elsevier.com/retrieve/pii/S0306452204002301), doi: 10.1016/j.neuroscience.2004.03.043.
- 914 **Hampel H**, Mesulam MM, Cuello AC, Farlow MR, Giacobini E, Grossberg GT, Khachaturian AS, Vergallo A, Cavedo
915 E, Snyder PJ, Khachaturian ZS. The cholinergic system in the pathophysiology and treatment of Alzheimer's
916 disease. *Brain*. 2018 Jul; 141(7):1917–1933. <https://doi.org/10.1093/brain/awy132>, doi: 10.1093/brain/awy132.
- 917 **Hangya B**, Borhegyi Z, Szilágyi N, Freund TF, Varga V. GABAergic neurons of the medial septum lead the hip-
918 pocampal network during theta activity. *The Journal of Neuroscience: The Official Journal of the Society for*
919 *Neuroscience*. 2009 Jun; 29(25):8094–8102. doi: 10.1523/JNEUROSCI.5665-08.2009.
- 920 **Hasselmo ME**, Bodelón C, Wyble BP. A Proposed Function for Hippocampal Theta Rhythm: Separate Phases of
921 Encoding and Retrieval Enhance Reversal of Prior Learning. *Neural Computation*. 2002 Apr; 14(4):793–817.
922 <https://www.mitpressjournals.org/doi/abs/10.1162/089976602317318965>, doi: 10.1162/089976602317318965.
- 923 **Hendrickson PJ**, Yu GJ, Song D, Berger TW. A Million-Plus Neuron Model of the Hippocampal Dentate Gyrus:
924 Critical Role for Topography in Determining Spatiotemporal Network Dynamics. *IEEE Transactions on*
925 *Biomedical Engineering*. 2016 Jan; 63(1):199–209. doi: 10.1109/TBME.2015.2445771, conference Name: IEEE
926 *Transactions on Biomedical Engineering*.
- 927 **Herman PA**, Lundqvist M, Lansner A. Nested theta to gamma oscillations and precise spatiotemporal firing
928 during memory retrieval in a simulated attractor network. *Brain Research*. 2013 Nov; 1536:68–87. doi:
929 10.1016/j.brainres.2013.08.002.
- 930 **Hirase H**, Leinekugel X, Czúrkó A, Csicsvari J, Buzsáki G. Firing rates of hippocampal neurons are preserved
931 during subsequent sleep episodes and modified by novel awake experience. *Proceedings of the National*
932 *Academy of Sciences*. 2001 Jul; 98(16):9386–9390. <https://www.pnas.org/doi/10.1073/pnas.161274398>, doi:
933 10.1073/pnas.161274398, publisher: Proceedings of the National Academy of Sciences.

- 934 **Hodgkin AL**, Huxley AF. A quantitative description of membrane current and its application to conduction and
935 excitation in nerve. *The Journal of Physiology*. 1952 Aug; 117(4):500–544. [https://www.ncbi.nlm.nih.gov/pmc/](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC1392413/)
936 [articles/PMC1392413/](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC1392413/).
- 937 **Hülsemann MJ**, Naumann E, Rasch B. Quantification of Phase-Amplitude Coupling in Neuronal Oscilla-
938 tions: Comparison of Phase-Locking Value, Mean Vector Length, Modulation Index, and Generalized-Linear-
939 Modeling-Cross-Frequency-Coupling. *Frontiers in Neuroscience*. 2019; 13. [https://www.frontiersin.org/article/](https://www.frontiersin.org/article/10.3389/fnins.2019.00573)
940 [10.3389/fnins.2019.00573](https://www.frontiersin.org/article/10.3389/fnins.2019.00573).
- 941 **Hummos A**, Nair SS. An integrative model of the intrinsic hippocampal theta rhythm. *PLoS ONE*.
942 2017 Aug; 12(8):e0182648. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5546630/>, doi: 10.1371/jour-
943 [nal.pone.0182648](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5546630/).
- 944 **Hyafil A**, Giraud AL, Fontolan L, Gutkin B. Neural Cross-Frequency Coupling: Connecting Architectures, Mech-
945 anisms, and Functions. *Trends in Neurosciences*. 2015 Nov; 38(11):725–740. [https://www.sciencedirect.com/](https://www.sciencedirect.com/science/article/pii/S0166223615002088)
946 [science/article/pii/S0166223615002088](https://www.sciencedirect.com/science/article/pii/S0166223615002088), doi: 10.1016/j.tins.2015.09.001.
- 947 **Iaccarino HF**, Singer AC, Martorell AJ, Rudenko A, Gao F, Gillingham TZ, Mathys H, Seo J, Kritskiy O, Abdurrob F,
948 Adaikkan C, Canter RG, Rueda R, Brown EN, Boyden ES, Tsai LH. Gamma frequency entrainment attenuates
949 amyloid load and modifies microglia. *Nature*. 2016 Dec; 540(7632):230–235. [https://www.nature.com/articles/](https://www.nature.com/articles/nature20587)
950 [nature20587](https://www.nature.com/articles/nature20587), doi: 10.1038/nature20587.
- 951 **Jackson J**, Dickson CT, Bland BH. Median Raphe Stimulation Disrupts Hippocampal Theta Via Rapid Inhibition
952 and State-Dependent Phase Reset of Theta-Related Neural Circuitry. *Journal of Neurophysiology*. 2008 Jun;
953 99(6):3009–3026. <https://www.physiology.org/doi/10.1152/jn.00065.2008>, doi: 10.1152/jn.00065.2008.
- 954 **Jacobs J**, Miller J, Lee SA, Coffey T, Watrous AJ, Sperling MR, Sharan A, Worrell G, Berry B, Lega B, Jobst BC, Davis
955 K, Gross RE, Sheth SA, Ezzyat Y, Das SR, Stein J, Gorniak R, Kahana MJ, Rizzuto DS. Direct Electrical Stimulation
956 of the Human Entorhinal Region and Hippocampus Impairs Memory. *Neuron*. 2016 Dec; 92(5):983–990.
957 <https://www.sciencedirect.com/science/article/pii/S0896627316308364>, doi: 10.1016/j.neuron.2016.10.062.
- 958 **Jensen O**, Colgin LL. Cross-frequency coupling between neuronal oscillations. *Trends in Cognitive Sci-*
959 *ences*. 2007 Jul; 11(7):267–269. <https://www.sciencedirect.com/science/article/pii/S1364661307001271>, doi:
960 [10.1016/j.tics.2007.05.003](https://www.sciencedirect.com/science/article/pii/S1364661307001271).
- 961 **Joucla S**, Yvert B. Modeling extracellular electrical neural stimulation: From basic understanding to MEA-
962 based applications. *Journal of Physiology-Paris*. 2012 May; 106(3-4):146–158. [https://linkinghub.elsevier.com/](https://linkinghub.elsevier.com/retrieve/pii/S0928425711000416)
963 [retrieve/pii/S0928425711000416](https://linkinghub.elsevier.com/retrieve/pii/S0928425711000416), doi: 10.1016/j.jphysparis.2011.10.003.
- 964 **Jun S**, Kim JS, Chung CK. Direct Stimulation of Human Hippocampus During Verbal Associative Encoding
965 Enhances Subsequent Memory Recollection. *Frontiers in Human Neuroscience*. 2019 Feb; 13:23. <https://www.frontiersin.org/article/10.3389/fnhum.2019.00023/full>, doi: 10.3389/fnhum.2019.00023.
966
- 967 **Jutras MJ**, Fries P, Buffalo EA. Oscillatory activity in the monkey hippocampus during visual exploration and
968 memory formation. *Proceedings of the National Academy of Sciences of the United States of America*. 2013;
969 110(32):13144–13149. doi: 10.1073/pnas.1302351110.
- 970 **Kipping D**, Nogueira W. A Computational Model of a Single Auditory Nerve Fiber for Electric-Acoustic Stim-
971 ulation. *Journal of the Association for Research in Otolaryngology: JARO*. 2022 Dec; 23(6):835–858. doi:
972 10.1007/s10162-022-00870-2.
- 973 **Kitchigina VF**. Alterations of Coherent Theta and Gamma Network Oscillations as an Early Biomarker of
974 Temporal Lobe Epilepsy and Alzheimer's Disease. *Frontiers in Integrative Neuroscience*. 2018; 12. <https://www.frontiersin.org/article/10.3389/fnint.2018.00036>.
975
- 976 **Kocsis B**, Bragin A, Buzsáki G. Interdependence of Multiple Theta Generators in the Hippocampus: a Partial
977 Coherence Analysis. *Journal of Neuroscience*. 1999 Jul; 19(14):6200–6212. [https://www.jneurosci.org/content/](https://www.jneurosci.org/content/19/14/6200)
978 [19/14/6200](https://www.jneurosci.org/content/19/14/6200), doi: 10.1523/JNEUROSCI.19-14-06200.1999, publisher: Society for Neuroscience Section: ARTI-
979 CLE.
- 980 **Kosenko A**, Kang S, Smith IM, Greene DL, Langeberg LK, Scott JD, Hoshi N. Coordinated signal integration at the
981 M-type potassium channel upon muscarinic stimulation. *The EMBO journal*. 2012 May; 31(14):3147–3156.
982 doi: 10.1038/emboj.2012.156.
- 983 **Kota S**, Rugg MD, Lega BC. Hippocampal Theta Oscillations Support Successful Associative Memory Formation.
984 *The Journal of Neuroscience*. 2020 Dec; 40(49):9507–9518. [http://www.jneurosci.org/lookup/doi/10.1523/](http://www.jneurosci.org/lookup/doi/10.1523/JNEUROSCI.0767-20.2020)
985 [JNEUROSCI.0767-20.2020](http://www.jneurosci.org/lookup/doi/10.1523/JNEUROSCI.0767-20.2020), doi: 10.1523/JNEUROSCI.0767-20.2020.

- 986 **Kuramoto Y.** Chemical Oscillations, Waves, and Turbulence, vol. 19 of Springer Series in Synergetics.
 987 Haken H, editor, Berlin, Heidelberg: Springer Berlin Heidelberg; 1984. [http://link.springer.com/10.1007/](http://link.springer.com/10.1007/978-3-642-69689-3)
 988 [978-3-642-69689-3](http://link.springer.com/10.1007/978-3-642-69689-3), doi: 10.1007/978-3-642-69689-3.
- 989 **Kwag J**, Jang HJ, Kim M, Lee S. M-type potassium conductance controls the emergence of neural phase codes:
 990 a combined experimental and neuron modelling study. *Journal of the Royal Society, Interface*. 2014 Oct;
 991 11(99):20140604. doi: 10.1098/rsif.2014.0604.
- 992 **Kwag J**, Paulsen O. The timing of external input controls the sign of plasticity at local synapses. *Nature Neuro-*
 993 *science*. 2009 Oct; 12(10):1219–1221. <http://www.nature.com/articles/nn.2388>, doi: 10.1038/nn.2388.
- 994 **Lacruz ME**, Valentín A, Seoane JJG, Morris RG, Selway RP, Alarcón G. Single pulse electrical stimulation of the
 995 hippocampus is sufficient to impair human episodic memory. *Neuroscience*. 2010 Oct; 170(2):623–632. doi:
 996 10.1016/j.neuroscience.2010.06.042.
- 997 **Larson J**, Munkácsy E. Theta-burst LTP. *Brain Research*. 2015 Sep; 1621:38–50. doi:
 998 10.1016/j.brainres.2014.10.034.
- 999 **Lega B**, Burke J, Jacobs J, Kahana MJ. Slow-Theta-to-Gamma Phase-Amplitude Coupling in Human Hippocam-
 1000 pus Supports the Formation of New Episodic Memories. *Cerebral Cortex (New York, NY: 1991)*. 2016 Jan;
 1001 26(1):268–278. doi: 10.1093/cercor/bhu232.
- 1002 **Lega BC**, Jacobs J, Kahana M. Human hippocampal theta oscillations and the formation of episodic memo-
 1003 ries. *Hippocampus*. 2012 Apr; 22(4):748–761. <https://onlinelibrary.wiley.com/doi/10.1002/hipo.20937>, doi:
 1004 10.1002/hipo.20937.
- 1005 **Lengyel M**, Kwag J, Paulsen O, Dayan P. Matching storage and recall: hippocampal spike timing-dependent
 1006 plasticity and phase response curves. *Nature Neuroscience*. 2005 Dec; 8(12):1677–1683. <http://www.nature.com/articles/nn1561>, doi: 10.1038/nn1561.
- 1008 **Levnajić Z**, Pikovsky A. Phase resetting of collective rhythm in ensembles of oscillators. *Physical Review E*.
 1009 2010 Nov; 82(5):056202. <http://arxiv.org/abs/1007.4097>, doi: 10.1103/PhysRevE.82.056202, arXiv:1007.4097
 1010 [cond-mat, physics:nlin].
- 1011 **Lin JJ**, Rugg M, Das S, Stein J, Rizzuto D, Kahana M, Lega B. Theta band power increases in the posterior hip-
 1012 pocampus predict successful episodic memory encoding in humans. *Hippocampus*. 2017 Oct; 27(10):1040–
 1013 1053. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6517838/>, doi: 10.1002/hipo.22751.
- 1014 **Lisman JE**, Jensen O. The Theta-Gamma Neural Code. *Neuron*. 2013 Mar; 77(6):1002–1016. <https://linkinghub.elsevier.com/retrieve/pii/S0896627313002316>, doi: 10.1016/j.neuron.2013.03.007.
- 1016 **Lisman JE**, Talamini LM, Raffone A. Recall of memory sequences by interaction of the dentate and CA3: A
 1017 revised model of the phase precession. *Neural Networks*. 2005 Nov; 18(9):1191–1201. <https://linkinghub.elsevier.com/retrieve/pii/S0893608005002017>, doi: 10.1016/j.neunet.2005.08.008.
- 1019 **Lozano AM**, Fosdick L, Chakravarty MM, Leoutsakos JM, Munro C, Oh E, Drake KE, Lyman CH, Rosenberg PB,
 1020 Anderson WS, Tang-Wai DF, Pendergrass JC, Salloway S, Asaad WF, Ponce FA, Burke A, Sabbagh M, Wolk
 1021 DA, Baltuch G, Okun MS, et al. A Phase II Study of Fornix Deep Brain Stimulation in Mild Alzheimer's
 1022 Disease. *Journal of Alzheimer's Disease*. 2016 Jan; 54(2):777–787. [https://content.iospress.com/articles/](https://content.iospress.com/articles/journal-of-alzheimers-disease/jad160017)
 1023 [journal-of-alzheimers-disease/jad160017](https://content.iospress.com/articles/journal-of-alzheimers-disease/jad160017), doi: 10.3233/JAD-160017, publisher: IOS Press.
- 1024 **Lu Y**, Truccolo W, Wagner FB, Vargas-Irwin CE, Ozden I, Zimmermann JB, May T, Agha NS, Wang J, Nurmikko AV.
 1025 Optogenetically induced spatiotemporal gamma oscillations and neuronal spiking activity in primate motor
 1026 cortex. *Journal of Neurophysiology*. 2015 Jun; 113(10):3574–3587. [https://www.physiology.org/doi/10.1152/](https://www.physiology.org/doi/10.1152/jn.00792.2014)
 1027 [jn.00792.2014](https://www.physiology.org/doi/10.1152/jn.00792.2014), doi: 10.1152/jn.00792.2014.
- 1028 **Lundqvist M**, Rehn M, Djurfeldt M, Lansner A. Attractor dynamics in a modular network model of neocortex.
 1029 *Network: Computation in Neural Systems*. 2006 Jan; 17(3):253–276. <https://www.tandfonline.com/doi/full/10.1080/09548980600774619>, doi: 10.1080/09548980600774619.
- 1031 **Lurie SM**, Kragel JE, Schuele SU, Voss JL. Human hippocampal responses to network intracranial stimu-
 1032 lation vary with theta phase. *eLife*. 2022 Dec; 11:e78395. <https://elifesciences.org/articles/78395>, doi:
 1033 10.7554/eLife.78395.

- 1034 **Malkov A**, Shevkova L, Latyshkova A, Kitchigina V. Theta and gamma hippocampal-neocortical oscillations during the episodic-like memory test: Impairment in epileptogenic rats. *Experimental Neurology*. 2022 Aug; 354:114110. <https://www.sciencedirect.com/science/article/pii/S0014488622001352>, doi: 10.1016/j.expneurol.2022.114110.
- 1038 **Manseau F**, Goutagny R, Danik M, Williams S. The Hippocamposeptal Pathway Generates Rhythmic Firing of GABAergic Neurons in the Medial Septum and Diagonal Bands: An Investigation Using a Complete Septohippocampal Preparation In Vitro. *Journal of Neuroscience*. 2008 Apr; 28(15):4096–4107. <https://www.jneurosci.org/content/28/15/4096>, doi: 10.1523/JNEUROSCI.0247-08.2008, publisher: Society for Neuroscience Section: Articles.
- 1043 **McCartney H**, Johnson AD, Weil ZM, Givens B. Theta reset produces optimal conditions for long-term potentiation. *Hippocampus*. 2004; 14(6):684–687. <http://onlinelibrary.wiley.com/doi/abs/10.1002/hipo.20019>, doi: 10.1002/hipo.20019, eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/hipo.20019>.
- 1046 **McIntyre CC**, Grill WM, Sherman DL, Thakor NV. Cellular effects of deep brain stimulation: model-based analysis of activation and inhibition. *Journal of Neurophysiology*. 2004 Apr; 91(4):1457–1469. doi: 10.1152/jn.00989.2003.
- 1049 **Mina F**, Benquet P, Pasnicu A, Biraben A, Wendling F. Modulation of epileptic activity by deep brain stimulation: a model-based study of frequency-dependent effects. *Frontiers in Computational Neuroscience*. 2013; 7. <https://www.frontiersin.org/articles/10.3389/fncom.2013.00094/full>, doi: 10.3389/fncom.2013.00094, publisher: Frontiers.
- 1053 **Mizuseki K**, Sirota A, Pastalkova E, Buzsáki G. Theta Oscillations Provide Temporal Windows for Local Circuit Computation in the Entorhinal-Hippocampal Loop. *Neuron*. 2009 Oct; 64(2):267–280. <https://www.sciencedirect.com/science/article/pii/S0896627309006734>, doi: 10.1016/j.neuron.2009.08.037.
- 1056 **Mormann F**, Fell J, Axmacher N, Weber B, Lehnertz K, Elger CE, Fernández G. Phase/amplitude reset and theta-gamma interaction in the human medial temporal lobe during a continuous word recognition memory task. *Hippocampus*. 2005; 15(7):890–900. <https://onlinelibrary.wiley.com/doi/10.1002/hipo.20117>, doi: 10.1002/hipo.20117.
- 1060 **Müller C**, Remy S. Septo-hippocampal interaction. *Cell and Tissue Research*. 2018 Sep; 373(3):565–575. <https://doi.org/10.1007/s00441-017-2745-2>, doi: 10.1007/s00441-017-2745-2.
- 1062 **Mysin IE**, Kitchigina VF, Kazanovich YB. Phase relations of theta oscillations in a computer model of the hippocampal CA1 field: Key role of Schaffer collaterals. *Neural Networks*. 2019 Aug; 116:119–138. <https://linkinghub.elsevier.com/retrieve/pii/S0893608019301029>, doi: 10.1016/j.neunet.2019.04.004.
- 1065 **Nelson AR**, Kolasa K, McMahon LL. Noradrenergic Sympathetic Sprouting and Cholinergic Reinnervation Maintains Non-Amyloidogenic Processing of A β PP. *Journal of Alzheimer's Disease*. 2014 Jan; 38(4):867–879. <https://content.iospress.com/articles/journal-of-alzheimers-disease/jad130608>, doi: 10.3233/JAD-130608, publisher: IOS Press.
- 1069 **Neymotin SA**, Lazarewicz MT, Sherif M, Contreras D, Finkel LH, Lytton WW. Ketamine Disrupts Theta Modulation of Gamma in a Computer Model of Hippocampus. *The Journal of Neuroscience*. 2011 Aug; 31(32):11733–11743. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC3177405/>, doi: 10.1523/JNEUROSCI.0501-11.2011.
- 1072 **Nuñez A**, Buño W. The Theta Rhythm of the Hippocampus: From Neuronal and Circuit Mechanisms to Behavior. *Frontiers in Cellular Neuroscience*. 2021; 15. <https://www.frontiersin.org/articles/10.3389/fncel.2021.649262/full>, doi: 10.3389/fncel.2021.649262, publisher: Frontiers.
- 1075 **Onslow ACE**, Jones MW, Bogacz R. A Canonical Circuit for Generating Phase-Amplitude Coupling. *PLoS ONE*. 2014 Aug; 9(8):e102591. <https://dx.plos.org/10.1371/journal.pone.0102591>, doi: 10.1371/journal.pone.0102591.
- 1078 **Pirini M**, Rocchi L, Sensi M, Chiari L. A computational modelling approach to investigate different targets in deep brain stimulation for Parkinson's disease. *Journal of Computational Neuroscience*. 2009 Feb; 26(1):91–107. <https://doi.org/10.1007/s10827-008-0100-z>, doi: 10.1007/s10827-008-0100-z.
- 1081 **Ponzi A**, Dura-Bernal S, Migliore M. Theta-gamma phase amplitude coupling in a hippocampal CA1 microcircuit. *PLOS Computational Biology*. 2023 Mar; 19(3):e1010942. <https://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1010942>, doi: 10.1371/journal.pcbi.1010942, publisher: Public Library of Science.

- 1084 **Rattay F**, Minassian K, Dimitrijevic MR. Epidural electrical stimulation of posterior structures of the human
1085 lumbosacral cord: 2. quantitative analysis by computer modeling. *Spinal Cord*. 2000 Aug; 38(8):473–489. doi:
1086 [10.1038/sj.sc.3101039](https://doi.org/10.1038/sj.sc.3101039).
- 1087 **Rattay F**, Resatz S, Lutter P, Minassian K, Jilge B, Dimitrijevic MR. Mechanisms of Electrical Stimulation with
1088 Neural Prostheses: Mechanisms in Electrical Stimulation. *Neuromodulation: Technology at the Neural In-*
1089 *terface*. 2003 Jan; 6(1):42–56. <http://doi.wiley.com/10.1046/j.1525-1403.2003.03006.x>, doi: [10.1046/j.1525-](https://doi.org/10.1046/j.1525-1403.2003.03006.x)
1090 [1403.2003.03006.x](https://doi.org/10.1046/j.1525-1403.2003.03006.x).
- 1091 **Rattay F**. Analysis of Models for External Stimulation of Axons. *IEEE Transactions on Biomed-*
1092 *ical Engineering*. 1986 Oct; BME-33(10):974–977. <http://ieeexplore.ieee.org/document/4122186/>, doi:
1093 [10.1109/TBME.1986.325670](https://doi.org/10.1109/TBME.1986.325670).
- 1094 **Rattay F**, Bassereh H, Stiennon I. Compartment models for the electrical stimulation of retinal bipolar cells.
1095 *PLOS ONE*. 2018 Dec; 13(12):e0209123. [https://journals.plos.org/plosone/article?id=10.1371/journal.pone.](https://journals.plos.org/plosone/article?id=10.1371/journal.pone.0209123)
1096 [0209123](https://doi.org/10.1371/journal.pone.0209123), doi: [10.1371/journal.pone.0209123](https://doi.org/10.1371/journal.pone.0209123), publisher: Public Library of Science.
- 1097 **Rizzuto DS**, Madsen JR, Bromfield EB, Schulze-Bonhage A, Seelig D, Aschenbrenner-Scheibe R, Kahana MJ.
1098 Reset of human neocortical oscillations during a working memory task. *Proceedings of the National*
1099 *Academy of Sciences*. 2003 Jun; 100(13):7931–7936. <http://www.pnas.org/cgi/doi/10.1073/pnas.0732061100>,
1100 doi: [10.1073/pnas.0732061100](https://doi.org/10.1073/pnas.0732061100).
- 1101 **Rougier NP**. A Density-Driven Method for the Placement of Biological Cells Over Two-Dimensional Manifolds.
1102 *Frontiers in Neuroinformatics*. 2018 Mar; 12:12. [http://journal.frontiersin.org/article/10.3389/fninf.2018.00012/](http://journal.frontiersin.org/article/10.3389/fninf.2018.00012/full)
1103 [full](https://doi.org/10.3389/fninf.2018.00012), doi: [10.3389/fninf.2018.00012](https://doi.org/10.3389/fninf.2018.00012).
- 1104 **Rubin JE**, Terman D. High frequency stimulation of the subthalamic nucleus eliminates pathological thalamic
1105 rhythmicity in a computational model. *Journal of Computational Neuroscience*. 2004 Jun; 16(3):211–235. doi:
1106 [10.1023/B:JCN.0000025686.47117.67](https://doi.org/10.1023/B:JCN.0000025686.47117.67).
- 1107 **Segneri M**, Bi H, Olmi S, Torcini A. Theta-Nested Gamma Oscillations in Next Generation Neural Mass Models.
1108 *Frontiers in Computational Neuroscience*. 2020; 14. [https://www.frontiersin.org/articles/10.3389/fncom.2020.](https://www.frontiersin.org/articles/10.3389/fncom.2020.00047/full)
1109 [00047/full](https://doi.org/10.3389/fncom.2020.00047), doi: [10.3389/fncom.2020.00047](https://doi.org/10.3389/fncom.2020.00047), publisher: Frontiers.
- 1110 **Solomon EA**, Sperling MR, Sharan AD, Wanda PA, Levy DF, Lyalenko A, Pedisich I, Rizzuto DS, Kahana MJ. Theta-
1111 burst stimulation entrains frequency-specific oscillatory responses. *Brain Stimulation*. 2021 Sep; 14(5):1271–
1112 1284. <https://linkinghub.elsevier.com/retrieve/pii/S1935861X21002163>, doi: [10.1016/j.brs.2021.08.014](https://doi.org/10.1016/j.brs.2021.08.014).
- 1113 **Stimberg M**, Brette R, Goodman DF. Brian 2, an intuitive and efficient neural simulator. *eLife*. 2019 Aug;
1114 8:e47314. <https://doi.org/10.7554/eLife.47314>, doi: [10.7554/eLife.47314](https://doi.org/10.7554/eLife.47314), publisher: eLife Sciences Publica-
1115 tions, Ltd.
- 1116 **Sun J**, Kapur J. M-type potassium channels modulate Schaffer collateral-CA1 glutamatergic synaptic transmis-
1117 sion. *The Journal of Physiology*. 2012 Aug; 590(16):3953–3964. doi: [10.1111/jphysiol.2012.235820](https://doi.org/10.1111/jphysiol.2012.235820).
- 1118 **Suthana N**, Fried I. Deep brain stimulation for enhancement of learning and memory. *NeuroImage*. 2014 Jan;
1119 85 Pt 3:996–1002. doi: [10.1016/j.neuroimage.2013.07.066](https://doi.org/10.1016/j.neuroimage.2013.07.066).
- 1120 **Suthana N**, Haneef Z, Stern J, Mukamel R, Behnke E, Knowlton B, Fried I. Memory Enhancement and Deep-
1121 Brain Stimulation of the Entorhinal Area. *New England Journal of Medicine*. 2012 Feb; 366(6):502–510. <https://doi.org/10.1056/NEJMoa1107212>, doi: [10.1056/NEJMoa1107212](https://doi.org/10.1056/NEJMoa1107212), publisher: Massachusetts Medical Society
1122 _eprint: <https://doi.org/10.1056/NEJMoa1107212>.
- 1124 **Takeuchi Y**, Nagy AJ, Barcsai L, Li Q, Ohsawa M, Mizuseki K, Berényi A. The Medial Septum as a Potential
1125 Target for Treating Brain Disorders Associated With Oscillopathies. *Frontiers in Neural Circuits*. 2021; 15:66.
1126 <https://www.frontiersin.org/article/10.3389/fncir.2021.701080>, doi: [10.3389/fncir.2021.701080](https://doi.org/10.3389/fncir.2021.701080).
- 1127 **Tass PA**. A model of desynchronizing deep brain stimulation with a demand-controlled coordinated reset
1128 of neural subpopulations. *Biological Cybernetics*. 2003 Aug; 89(2):81–88. [http://link.springer.com/10.1007/](http://link.springer.com/10.1007/s00422-003-0425-7)
1129 [s00422-003-0425-7](https://doi.org/10.1007/s00422-003-0425-7), doi: [10.1007/s00422-003-0425-7](https://doi.org/10.1007/s00422-003-0425-7).
- 1130 **Titiz AS**, Hill MRH, Mankin EA, M Aghajan Z, Eliashiv D, Tchemodanov N, Maoz U, Stern J, Tran ME, Schuette
1131 P, Behnke E, Suthana NA, Fried I. Theta-burst microstimulation in the human entorhinal area improves
1132 memory specificity. *eLife*. 2017 Oct; 6:e29515. <https://doi.org/10.7554/eLife.29515>, doi: [10.7554/eLife.29515](https://doi.org/10.7554/eLife.29515),
1133 publisher: eLife Sciences Publications, Ltd.

- 1134 **Torben-Nielsen B**, Uusisaari M, Stiefel K. A comparison of methods to determine neuronal phase-response
1135 curves. *Frontiers in Neuroinformatics*. 2010; 4:6. <https://www.frontiersin.org/article/10.3389/fninf.2010.00006>,
1136 doi: 10.3389/fninf.2010.00006.
- 1137 **Tort ABL**, Rotstein HG, Dugladze T, Gloveli T, Kopell NJ. On the formation of gamma-coherent cell assemblies
1138 by oriens lacunosum-moleculare interneurons in the hippocampus. *Proceedings of the National Academy*
1139 *of Sciences*. 2007 Aug; 104(33):13490–13495. <http://www.pnas.org/cgi/doi/10.1073/pnas.0705708104>, doi:
1140 10.1073/pnas.0705708104.
- 1141 **Tort ABL**, Komorowski R, Eichenbaum H, Kopell N. Measuring Phase-Amplitude Coupling Between Neuronal
1142 Oscillations of Different Frequencies. *Journal of Neurophysiology*. 2010 Aug; 104(2):1195–1210. [https://www.](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC2941206/)
1143 [ncbi.nlm.nih.gov/pmc/articles/PMC2941206/](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC2941206/), doi: 10.1152/jn.00106.2010.
- 1144 **Tort ABL**, Komorowski RW, Manns JR, Kopell NJ, Eichenbaum H. Theta-gamma coupling increases during
1145 the learning of item–context associations. *Proceedings of the National Academy of Sciences*. 2009 Dec;
1146 106(49):20942–20947. <https://www.pnas.org/content/106/49/20942>, doi: 10.1073/pnas.0911331106, pub-
1147 lisher: National Academy of Sciences Section: Biological Sciences.
- 1148 **Tort ABL**, Kramer MA, Thorn C, Gibson DJ, Kubota Y, Graybiel AM, Kopell NJ. Dynamic cross-frequency couplings
1149 of local field potential oscillations in rat striatum and hippocampus during performance of a T-maze task.
1150 *Proceedings of the National Academy of Sciences*. 2008 Dec; 105(51):20517–20522. [https://www.pnas.org/](https://www.pnas.org/content/105/51/20517)
1151 [content/105/51/20517](https://www.pnas.org/content/105/51/20517), doi: 10.1073/pnas.0810524105, publisher: National Academy of Sciences Section:
1152 Biological Sciences.
- 1153 **Toth K**, Borhegyi Z, Freund T. Postsynaptic targets of GABAergic hippocampal neurons in the medial septum-
1154 diagonal band of broca complex. *The Journal of Neuroscience*. 1993 Sep; 13(9):3712–3724. [https://www.ncbi.](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6576440/)
1155 [nlm.nih.gov/pmc/articles/PMC6576440/](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6576440/), doi: 10.1523/JNEUROSCI.13-09-03712.1993.
- 1156 **Traub RD**, Bibbig A, LeBeau FEN, Buhl EH, Whittington MA. Cellular mechanisms of neuronal population os-
1157 cillations in the hippocampus in vitro. *Annual Review of Neuroscience*. 2004; 27:247–278. doi: 10.1146/an-
1158 nurev.neuro.27.070203.144303.
- 1159 **Traub RD**, Jefferys JGR, Whittington MA. Simulation of Gamma Rhythms in Networks of Interneurons and
1160 Pyramidal Cells. *Journal of Computational Neuroscience*. 1997; p. 10.
- 1161 **Tsanov M**, Manahan-Vaughan D. Long-Term Plasticity Is Proportional to Theta-Activity. *PLoS ONE*. 2009 Jun;
1162 4(6):e5850. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC2688745/>, doi: 10.1371/journal.pone.0005850.
- 1163 **Unal G**, Joshi A, Viney TJ, Kis V, Somogyi P. Synaptic Targets of Medial Septal Projections in the Hippocam-
1164 pus and Extrahippocampal Cortices of the Mouse. *Journal of Neuroscience*. 2015 Dec; 35(48):15812–15826.
1165 <https://www.jneurosci.org/content/35/48/15812>, doi: 10.1523/JNEUROSCI.2639-15.2015, publisher: Society
1166 for Neuroscience Section: Articles.
- 1167 **Varga V**, Hangya B, Kránitz K, Ludányi A, Zemankovics R, Katona I, Shigemoto R, Freund TF, Borhegyi Z. The
1168 presence of pacemaker HCN channels identifies theta rhythmic GABAergic neurons in the medial septum.
1169 *The Journal of Physiology*. 2008 Aug; 586(16):3893–3915. doi: 10.1113/jphysiol.2008.155242.
- 1170 **Wang XJ**. Pacemaker Neurons for the Theta Rhythm and Their Synchronization in the Septohippocampal Re-
1171 ciprocal Loop. *Journal of Neurophysiology*. 2002 Feb; 87(2):889–900. [https://journals.physiology.org/doi/full/](https://journals.physiology.org/doi/full/10.1152/jn.00135.2001)
1172 [10.1152/jn.00135.2001](https://journals.physiology.org/doi/full/10.1152/jn.00135.2001), doi: 10.1152/jn.00135.2001, publisher: American Physiological Society.
- 1173 **Weerasinghe G**, Duchet B, Cagnan H, Brown P, Bick C, Bogacz R. Predicting the effects of deep brain stimulation
1174 using a reduced coupled oscillator model. *PLoS Computational Biology*. 2019 Aug; 15(8):e1006575. [https:](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6701819/)
1175 [//www.ncbi.nlm.nih.gov/pmc/articles/PMC6701819/](https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6701819/), doi: 10.1371/journal.pcbi.1006575.
- 1176 **Williams JM**, Givens B. Stimulation-induced reset of hippocampal theta in the freely performing rat. *Hippocam-*
1177 *pus*. 2003 Jan; 13(1):109–116. <https://onlinelibrary.wiley.com/doi/10.1002/hipo.10082>, doi: 10.1002/hipo.10082,
1178 publisher: John Wiley & Sons, Ltd.

Figures

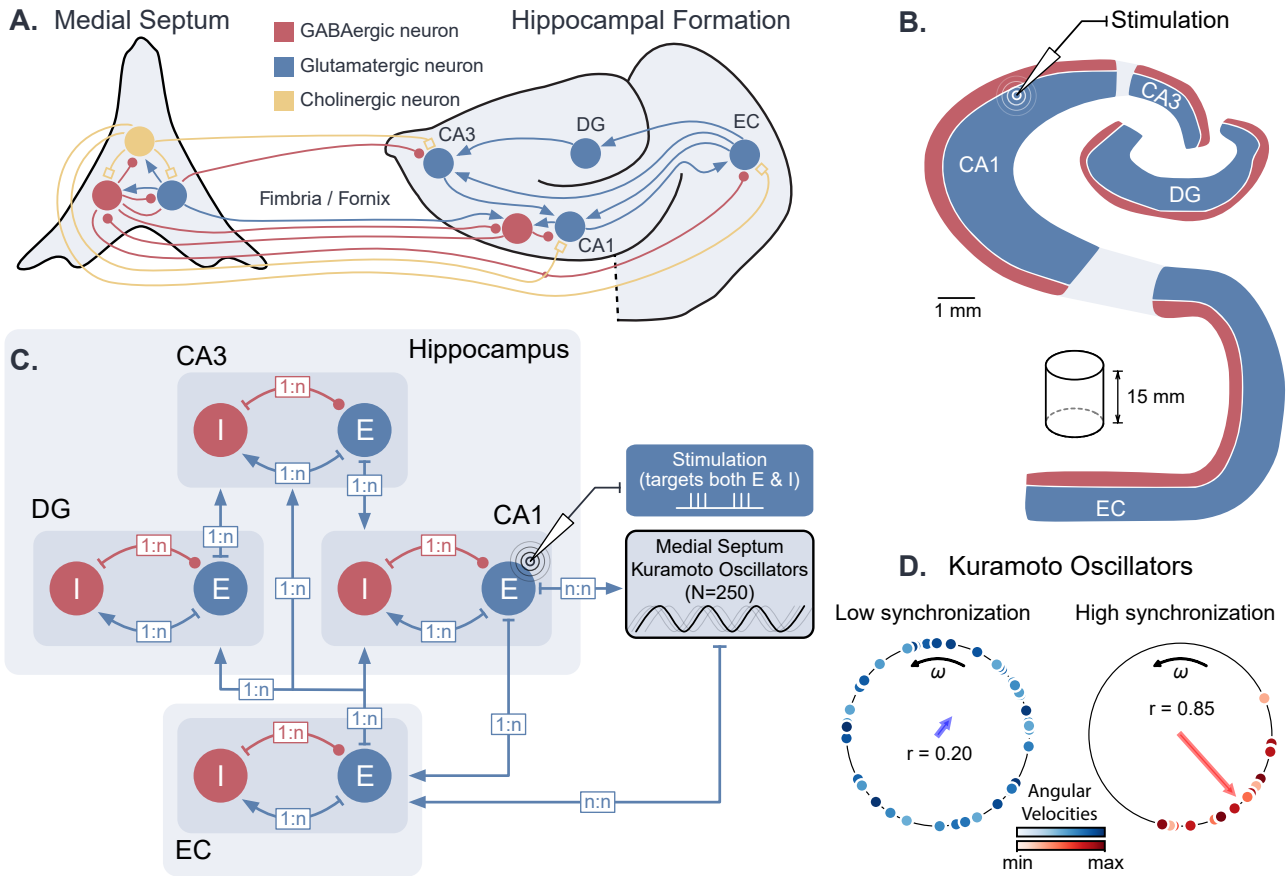


Figure 1. Dynamical computational model of the hippocampal formation and medial septum oscillatory drive. **A.** Anatomical representation of the neuronal types and interconnections within and between the medial septum and the hippocampal formation (EC: entorhinal cortex, DG: dentate gyrus, CA3 and CA1 fields of the hippocampus) **B.** Simplified anatomy of the hippocampal formation, modeled as a 15-mm thick cylindrical slice, with spatially segregated excitatory and inhibitory neurons (blue: excitatory neurons, consisting of granule cells in DG and pyramidal cells in other areas; red: inhibitory basket cells). **C.** Model architecture and connectivity. Each area is comprised of one excitatory and one inhibitory neuronal population. Theta drive is provided through input from the medial septum, which is modeled as a set of 250 Kuramoto oscillators and receives feedback connections from CA1. Electrical stimulation is modeled as an intracellular current affecting both excitatory and inhibitory populations in the targeted area (shown here for CA1). **D.** Illustration of Kuramoto oscillators with two different levels of synchronization. Each dot represents one oscillator, its position on the circle indicates its phase and its color its angular velocity. Higher synchronization corresponds to a clustering of the dots around a similar phase. “ r ” indicates the order parameter, which is a measure of synchronization.

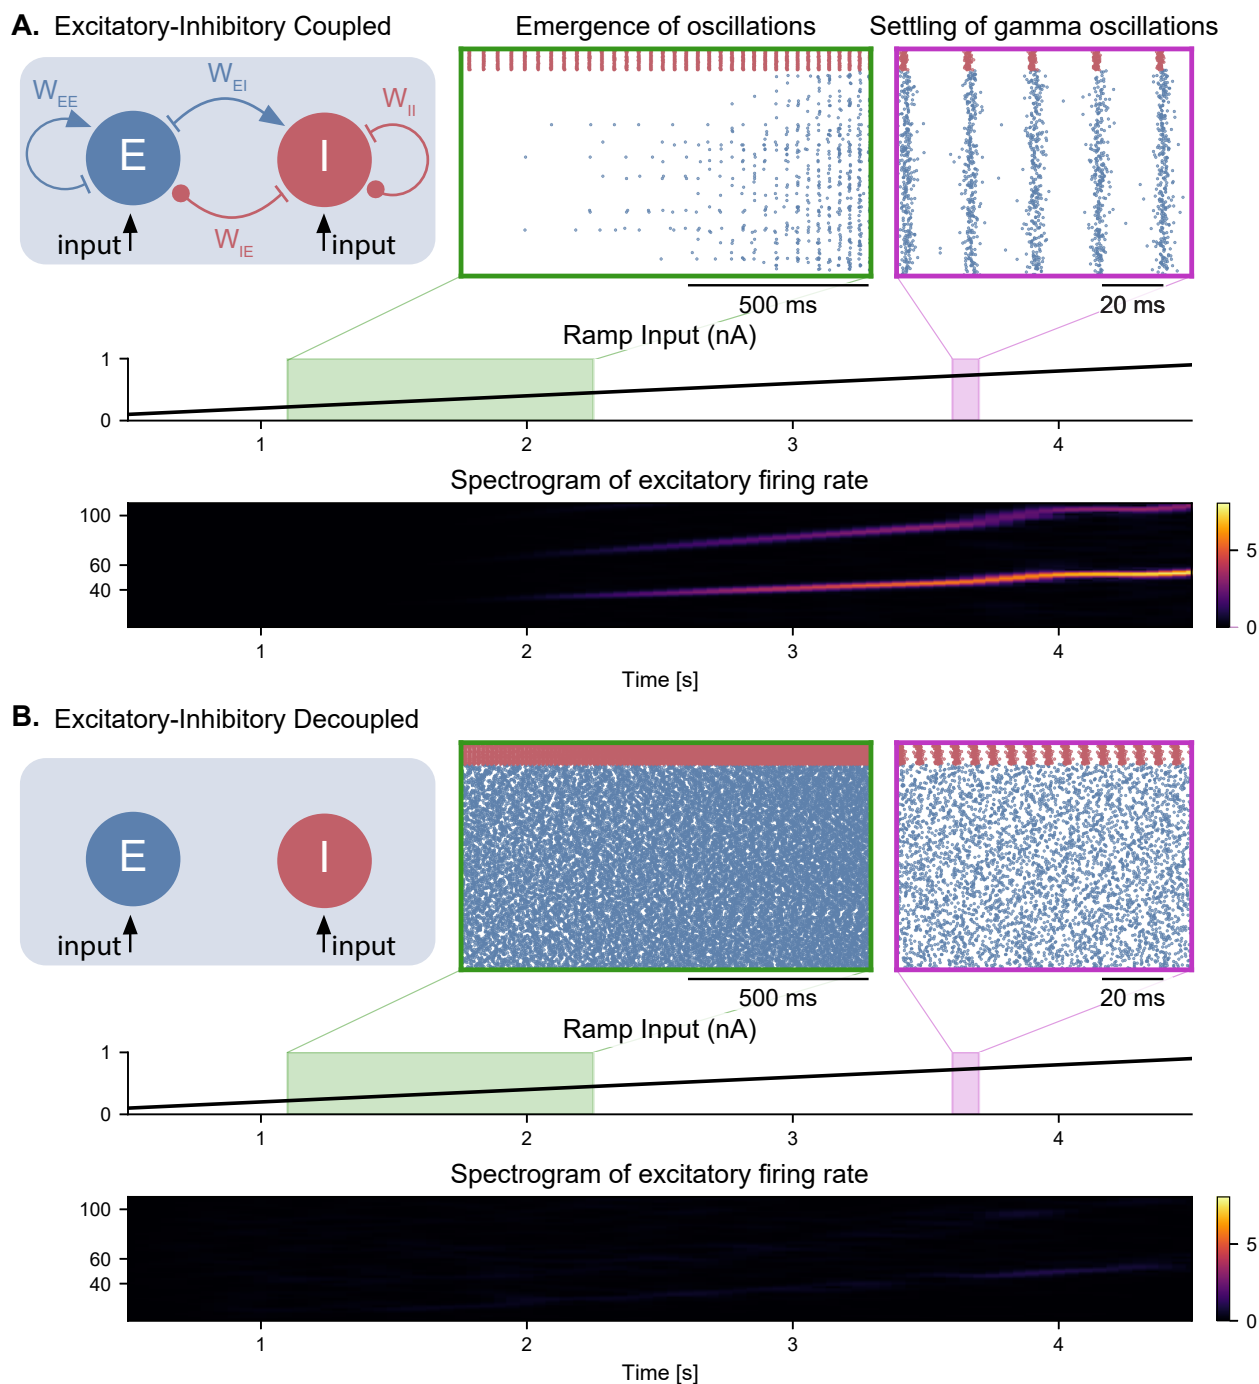


Figure 2. Emergence of gamma oscillations in coupled excitatory-inhibitory populations under ramping input to both populations. A. Two coupled populations of excitatory pyramidal neurons ($N_E = 1000$) and inhibitory interneurons ($N_I = 100$) are driven by a ramping current input (0 nA to 1 nA) for 5 s. As the input becomes stronger, oscillations start to emerge (shaded green area), driven by the interactions between excitatory and inhibitory populations. The green inset shows the raster plot (neuronal spikes across time) of the two populations during the green shaded period (red for inhibitory; blue for excitatory). When the input becomes sufficiently strong (shaded magenta area), the populations become highly synchronized and produce oscillations in the gamma range (at approximately 50 Hz). The spectrogram (bottom panel) shows the power of the instantaneous firing rate of the pyramidal population as a function of time and frequency. It reveals the presence of gamma oscillations that emerge around 2s and increase in frequency until 4 s, when they settle at approximately 60 Hz. **B.** Similar depiction as in panel A, with the pyramidal-interneuronal populations decoupled. The absence of coupling leads to the abolition of gamma oscillations, each cell spiking activity being driven by its own inputs and intrinsic properties.

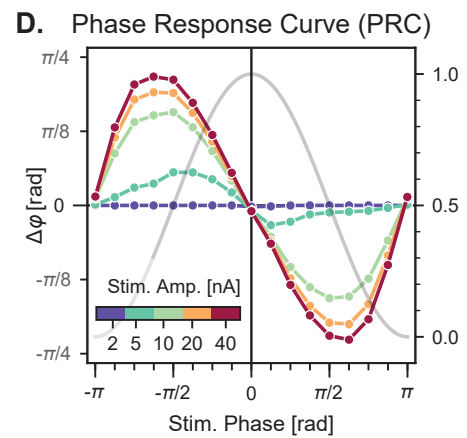
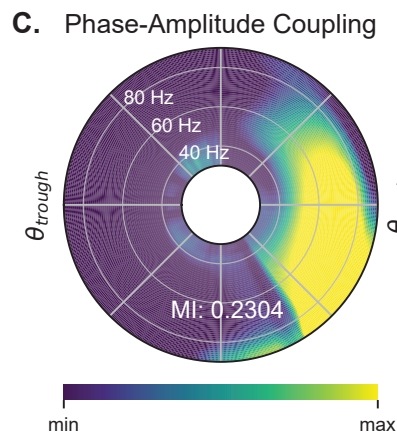
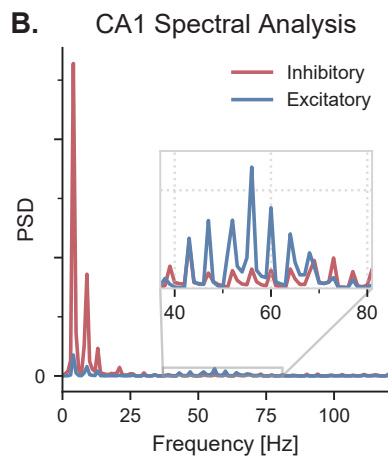
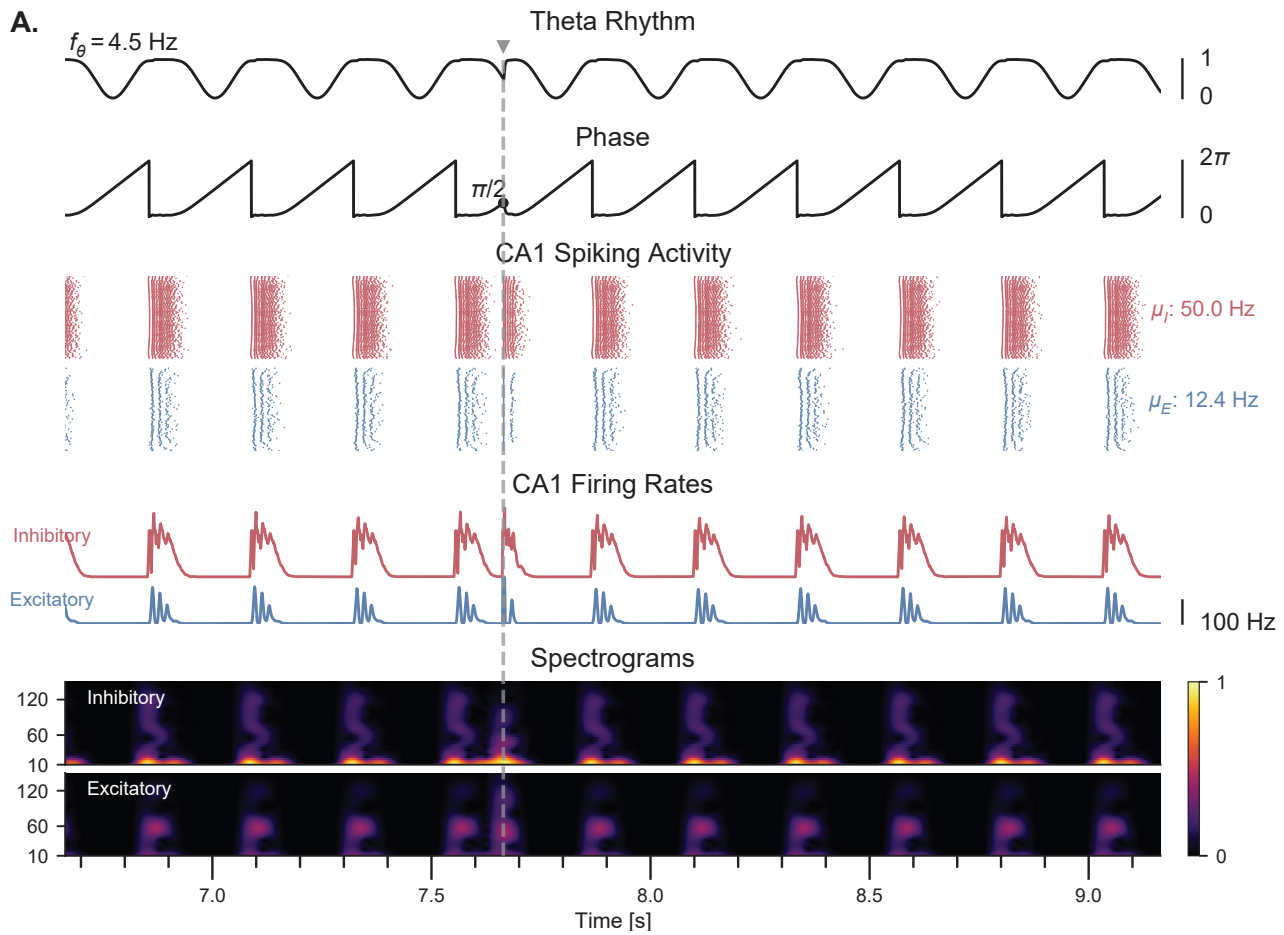


Figure 3. Theta-nested gamma oscillations and theta phase reset in response to a single stimulation pulse. **A.** Representative example of the network behavior, spontaneously producing theta-nested gamma oscillations and characterized by a reset of the theta phase following a single stimulation pulse (vertical grey line, applied here in CA1 at a theta phase of $\pi/2$, i.e., in the middle of the descending slope). Top to bottom: theta rhythm originating from the medial septum and provided as an input to the EC (f_θ : mean oscillation frequency), instantaneous phase of the theta rhythm, raster plots indicating the spiking activity of CA1 excitatory (blue) and inhibitory (red) neurons (μ_E and μ_I : mean firing rates within the shaded area), average population firing rates in CA1 (computed as a windowed moving average with a sliding window of 100 ms with 99% overlap), spectrograms for each CA1 population (windowed short-time fast Fourier transform using a Hann sliding window: 100 ms with 99% overlap). Spectrograms show gamma oscillations (around 60 Hz) modulated by the underlying theta rhythm (~ 4 Hz), indicating theta-gamma PAC. Theta phase reset after stimulation is associated with a rebound of spiking activity and theta-nested gamma oscillations. **B.** Power spectral densities of the CA1 firing rates. Theta peaks are found at 4 Hz for excitatory and inhibitory cells. Gamma activity is located between 40 and 80 Hz. **C.** PAC as a function of theta phase and gamma frequency. The polar plot represents the amplitude of gamma oscillations (averaged across all theta cycles, see methods) at each phase of theta (theta range: 3-9 Hz, phase indicated as angular coordinate) and for different gamma frequencies (radial coordinate, binned in 10-Hz ranges), indicating that gamma oscillations between 40 and 80 Hz occur preferentially around the peak of theta. The MI gives an overall quantification of how the phase of low-frequency oscillations (3-9 Hz) modulates the amplitude of higher-frequency oscillations (40-80 Hz) (see *Methods* and *Figure supplement 2*). **D.** PRC in response to a single stimulation pulse applied in CA1 at various phases of the ongoing theta rhythm and for various stimulation amplitudes (color-coded). The phase difference (left y-axis) shows the theta phase induced by the stimulation pulse (computed 2.5 ms after the pulse), compared to the phase computed at the same time in a scenario without stimulation. Positive and negative phase differences respectively indicate phase advances and delays. The grey trace shows the normalized amplitude of theta (right y axis) for different phases, used to indicate the peak and trough of the rhythm. Stimulation applied in the ascending slope of theta ($[-\pi, 0]$) produced a phase advance and accelerated the rhythm towards its peak (0 radians). Conversely, stimulation during the descending slope ($[0, \pi]$) produced a phase delay that slowed down the rhythm. Higher stimulation amplitudes yielded a stronger effect.

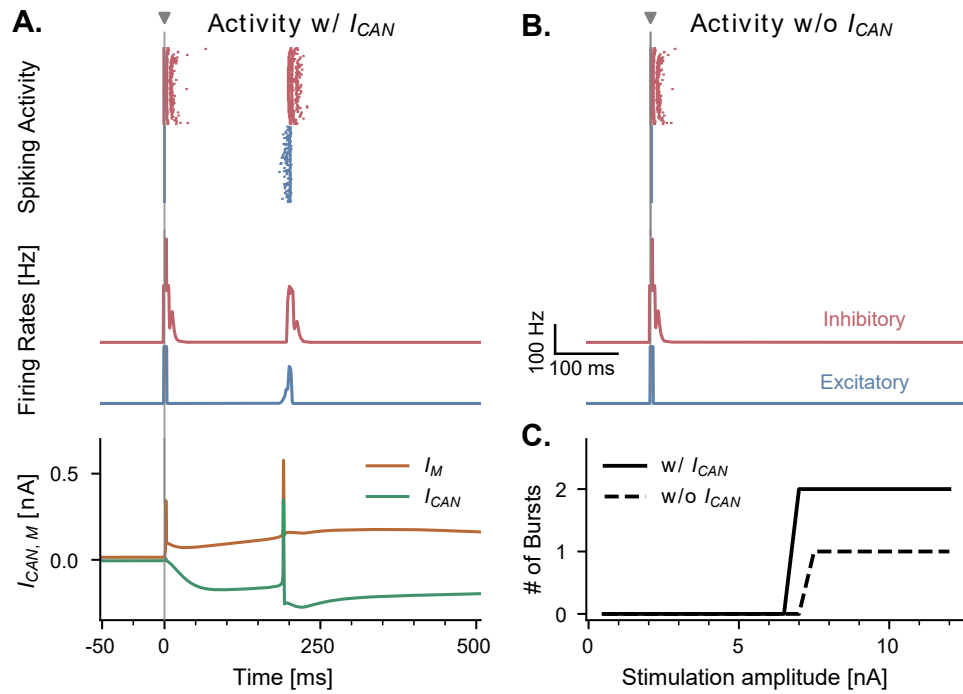


Figure 4. CAN and adaptation (M) currents modulate neuronal responses to single-pulse stimulation in the absence of theta input. A. Network response to single-pulse stimulation in the absence of medial septum input. Stimulation (grey vertical line, 10 nA, applied in CA1) induced an instantaneous burst of activity lasting about 20 ms in both excitatory and inhibitory CA1 neurons, followed by a secondary burst approximately 200 ms later (raster plot and firing rate traces), associated with specific CAN- and M- currents dynamics (bottom traces, illustrated for a representative CA1 excitatory neuron). Positive (I_M) and negative (I_{CAN}) currents indicate respectively a hyperpolarizing and depolarizing effect on the cell membrane potential. **B.** Similar representation as in A., but in the absence of CAN channel. Stimulation induced only a single burst of activity, indicating that CAN channels are necessary to observe a rebound of activity. **C.** Number of bursts in CA1 spiking activity following a single stimulation pulse at various amplitudes (x-axis), shown both in the presence and absence of CAN channels in excitatory neurons. The absence of the CAN current leads to the abolition of the second burst, irrespective of stimulation amplitude.

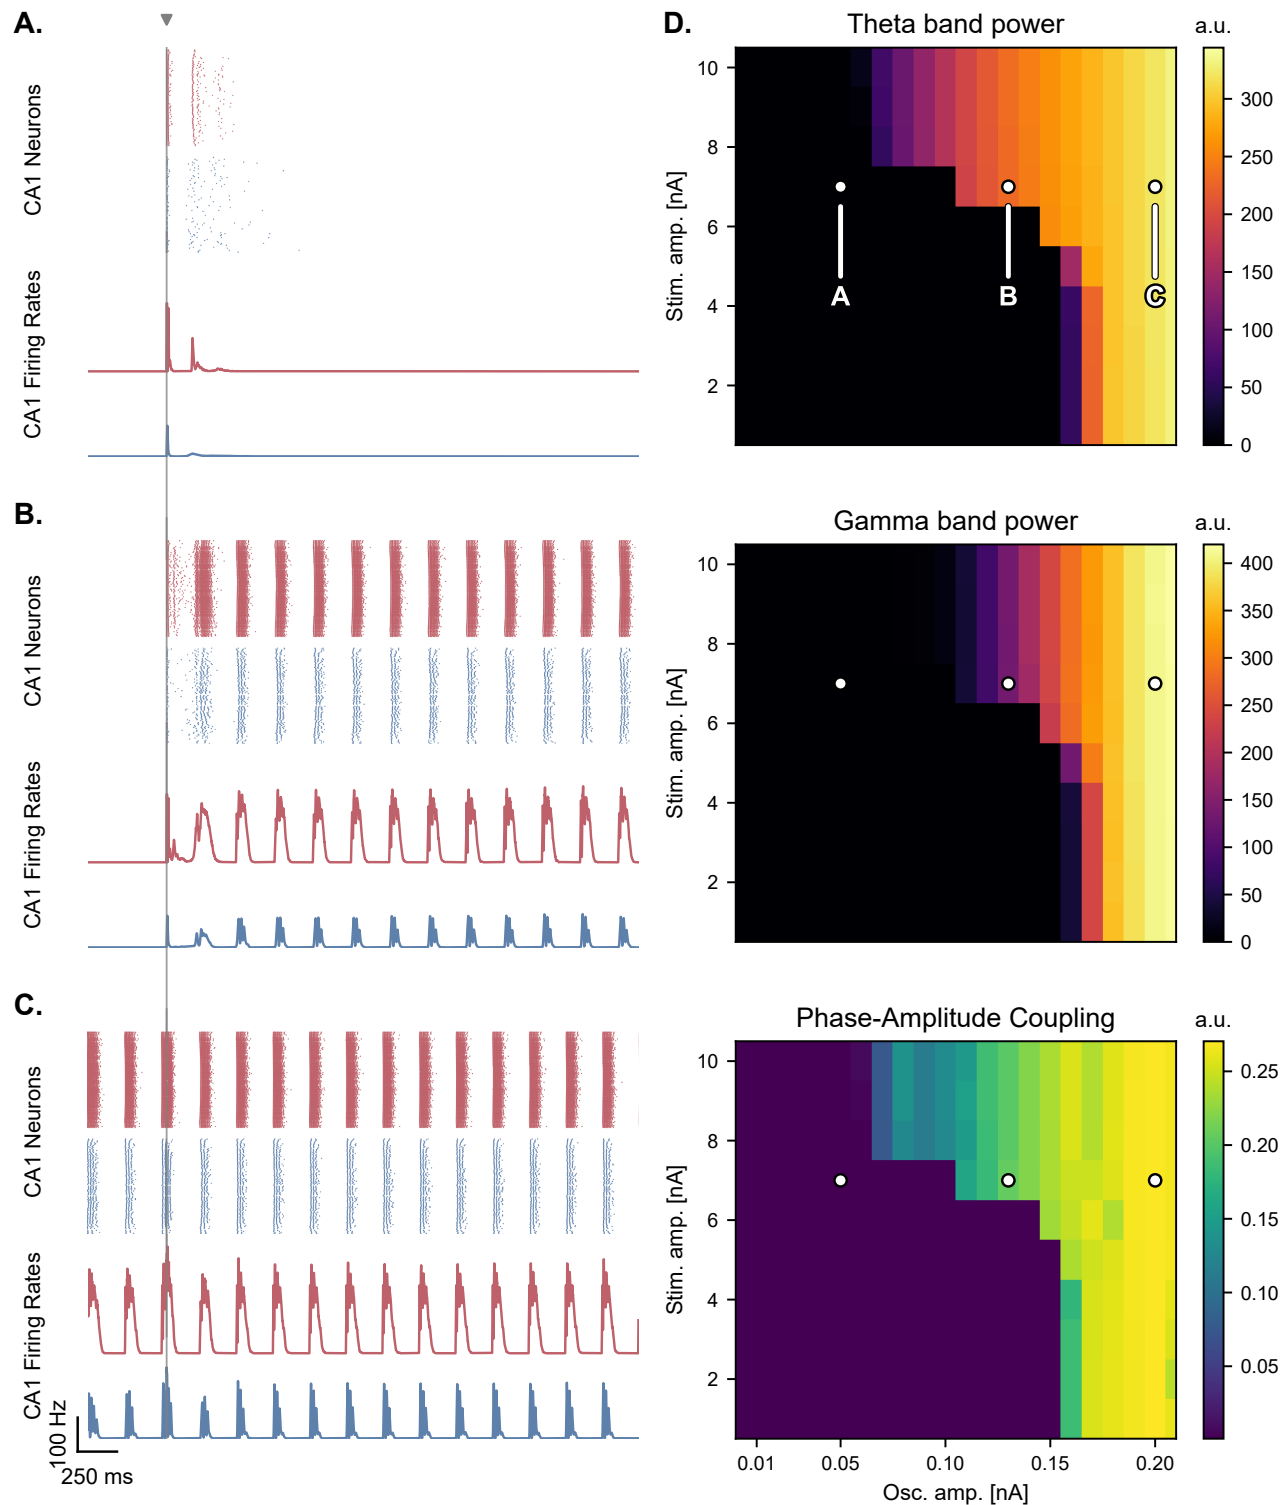


Figure 5. Medial septum oscillatory drive and stimulation amplitude govern the steady-state response to single-pulse stimulation. A-C. Network responses to single-pulse stimulation (vertical line) under medial septum input (with phase reset), shown for different amplitudes of the medial septum oscillatory drive (A-C: increasing oscillator amplitudes). **A.** Low oscillatory input: stimulation induces only two bursts of spiking activity as in Figure 4. **B.** Medium oscillatory input: a single stimulation pulse switches network behavior from no activity to sustained oscillations driven by the medial septum. **C.** Higher oscillatory input: theta drive is capable of inducing self-sustained theta-nested gamma oscillations. In this case, stimulation is delivered at the peak of theta oscillations and does not show a pronounced effect on theta-gamma oscillations. **D.** Steady-state response to single-pulse stimulation as a function of medial septum oscillatory input (x-axis) and stimulation amplitude (y-axis), characterized by three metrics: theta power (3-9 Hz), gamma power (40-80 Hz), and PAC (quantified using the MI). White dots: parameter combinations corresponding to panels A-C.

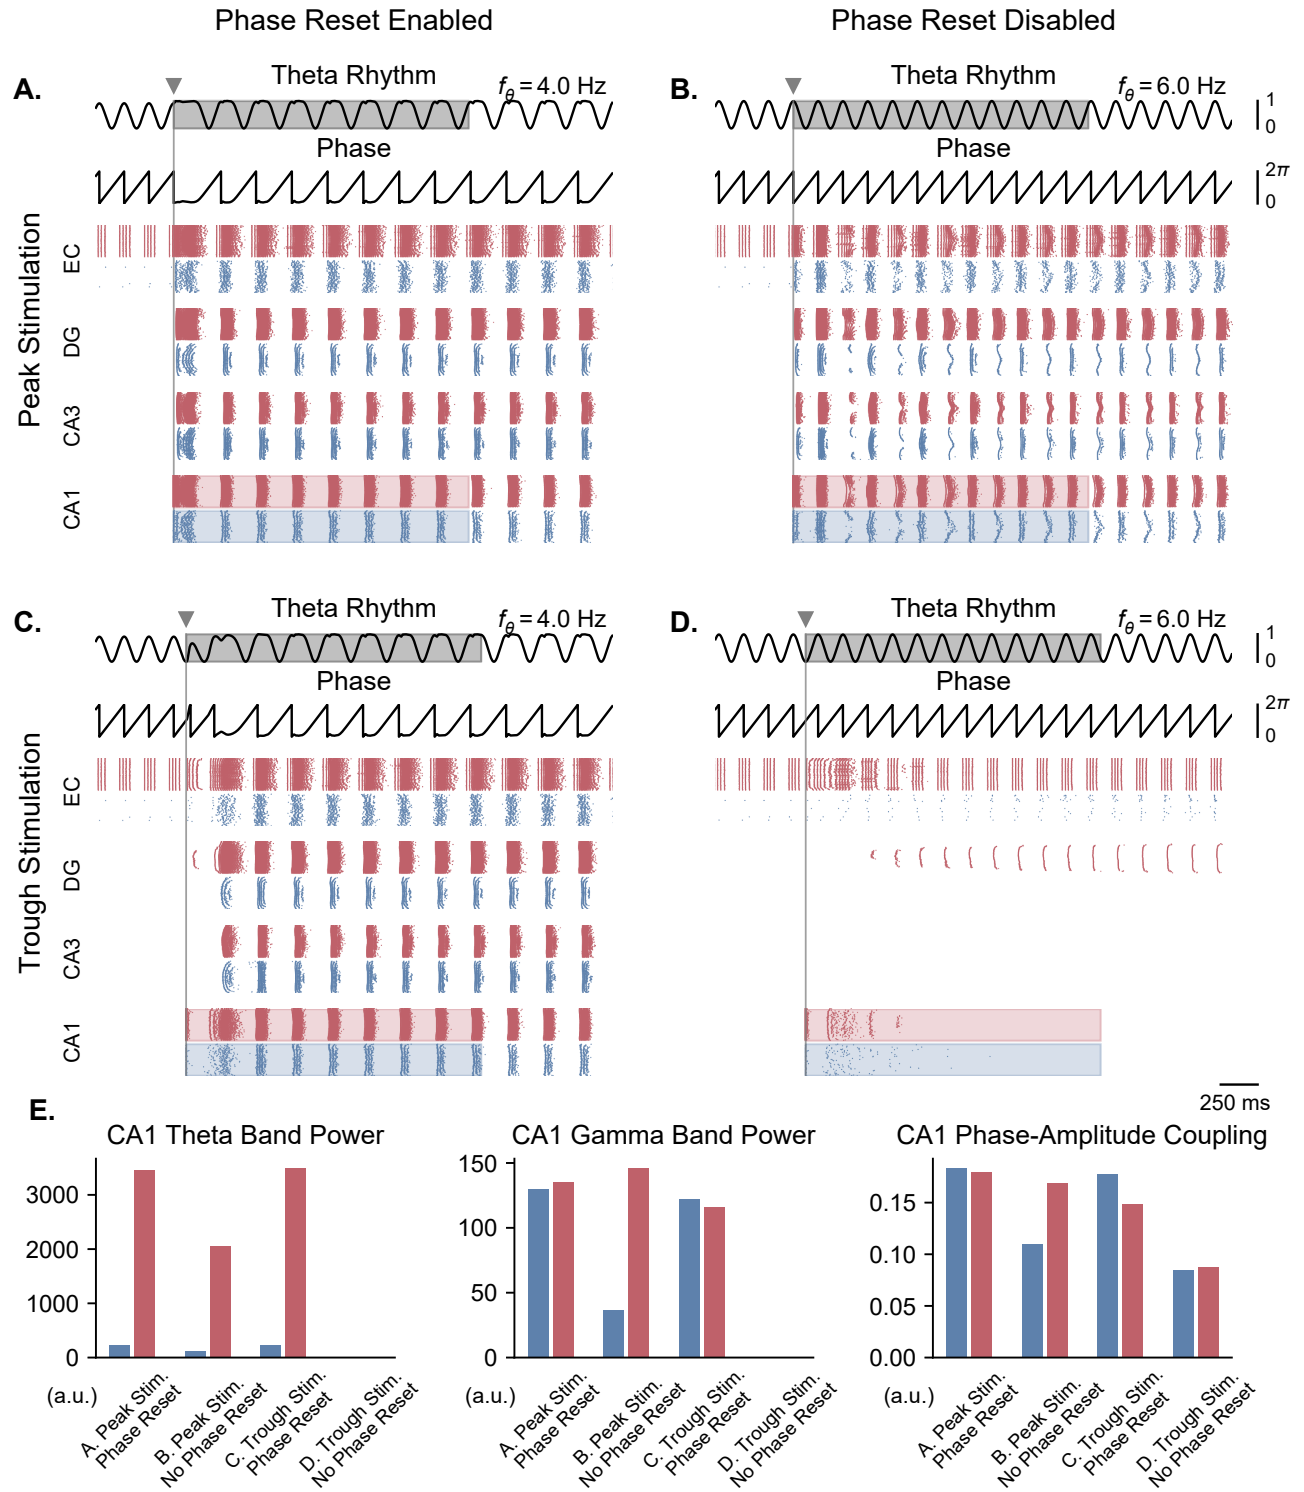


Figure 6. Single-pulse stimulation phase differentially affects network responses depending on the presence of theta phase reset. All results shown here were obtained for parameters from **Figure 5B** (theta oscillation amplitude: 0.13 nA, stimulation amplitude: 7.0 nA). A single stimulation pulse was delivered at the peak (**A, B**) or trough (**C, D**) of the underlying theta rhythm, either in the presence (**A, C**) or absence (**B, D**) of theta phase reset. With phase reset, both peak and trough stimulation switch network behavior from no activity to sustained oscillations. Without phase reset, only peak stimulation can induce sustained oscillations. **E.** Quantification of theta power, gamma power, and PAC (measured using the MI) in CA1 excitatory (blue) and inhibitory (red) populations in all 4 cases (metrics are computed in the shaded areas of panels A-D).

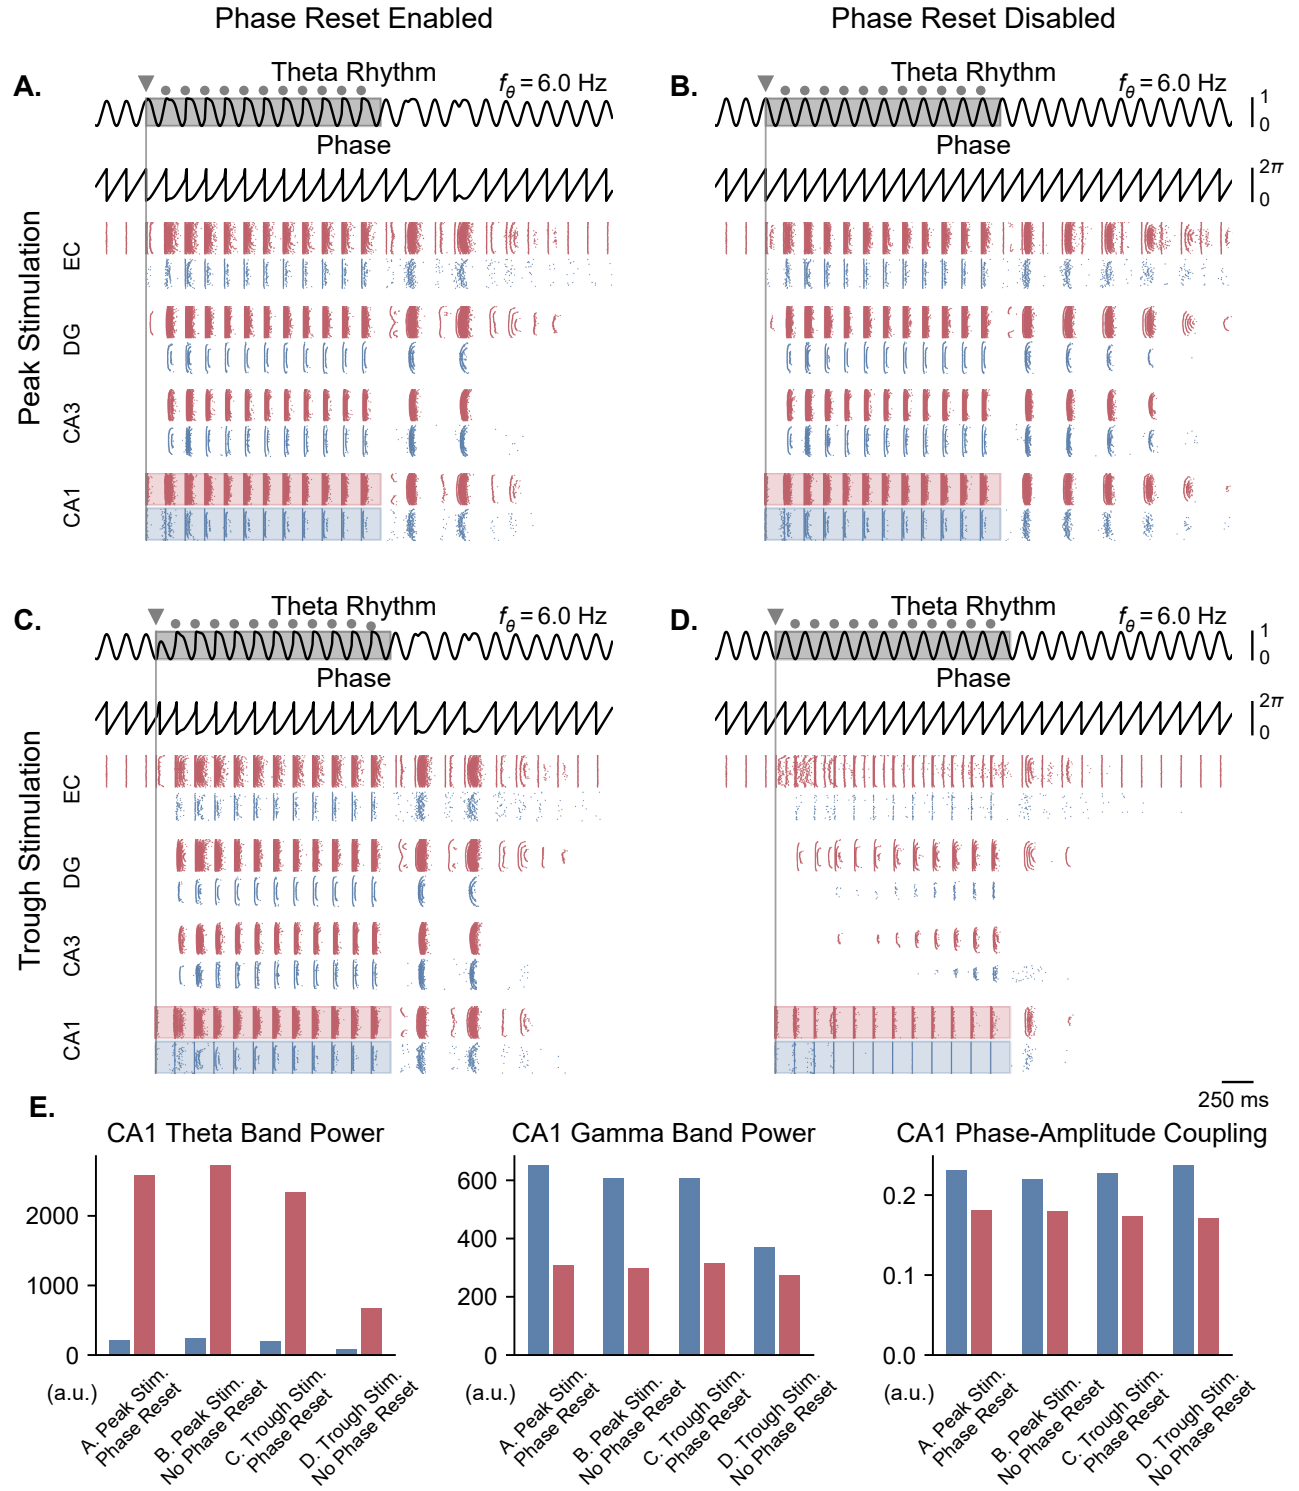


Figure 7. Pulse train stimulation restores theta-nested gamma oscillations depending on stimulation timing and theta phase reset. All results shown here were obtained for parameters from **Figure 5A** (theta oscillation amplitude: 0.05 nA; stimulation amplitude: 7.0 nA). Representations are similar to **Figure 6**, with the difference that stimulation consisted of a pulse train delivered at 6 Hz for a duration of 2 s (individual pulses indicated by grey dots, first pulse by a triangle). The pulse train was delivered at the peak (A, B) or trough (C, D) of the underlying theta rhythm, either in the presence (A, C) or absence (B, D) of theta phase reset. With phase reset, both peak and trough stimulation switch network behavior from no activity to sustained oscillations. Without phase reset, only peak stimulation can induce sustained oscillations. **E.** Quantification of theta power, gamma power, and PAC (measured using the MI) in CA1 excitatory (blue) and inhibitory (red) populations in all 4 cases (metrics are computed during the pulse train, within the shaded areas of panels A-D).

Appendix

Supplementary Figures


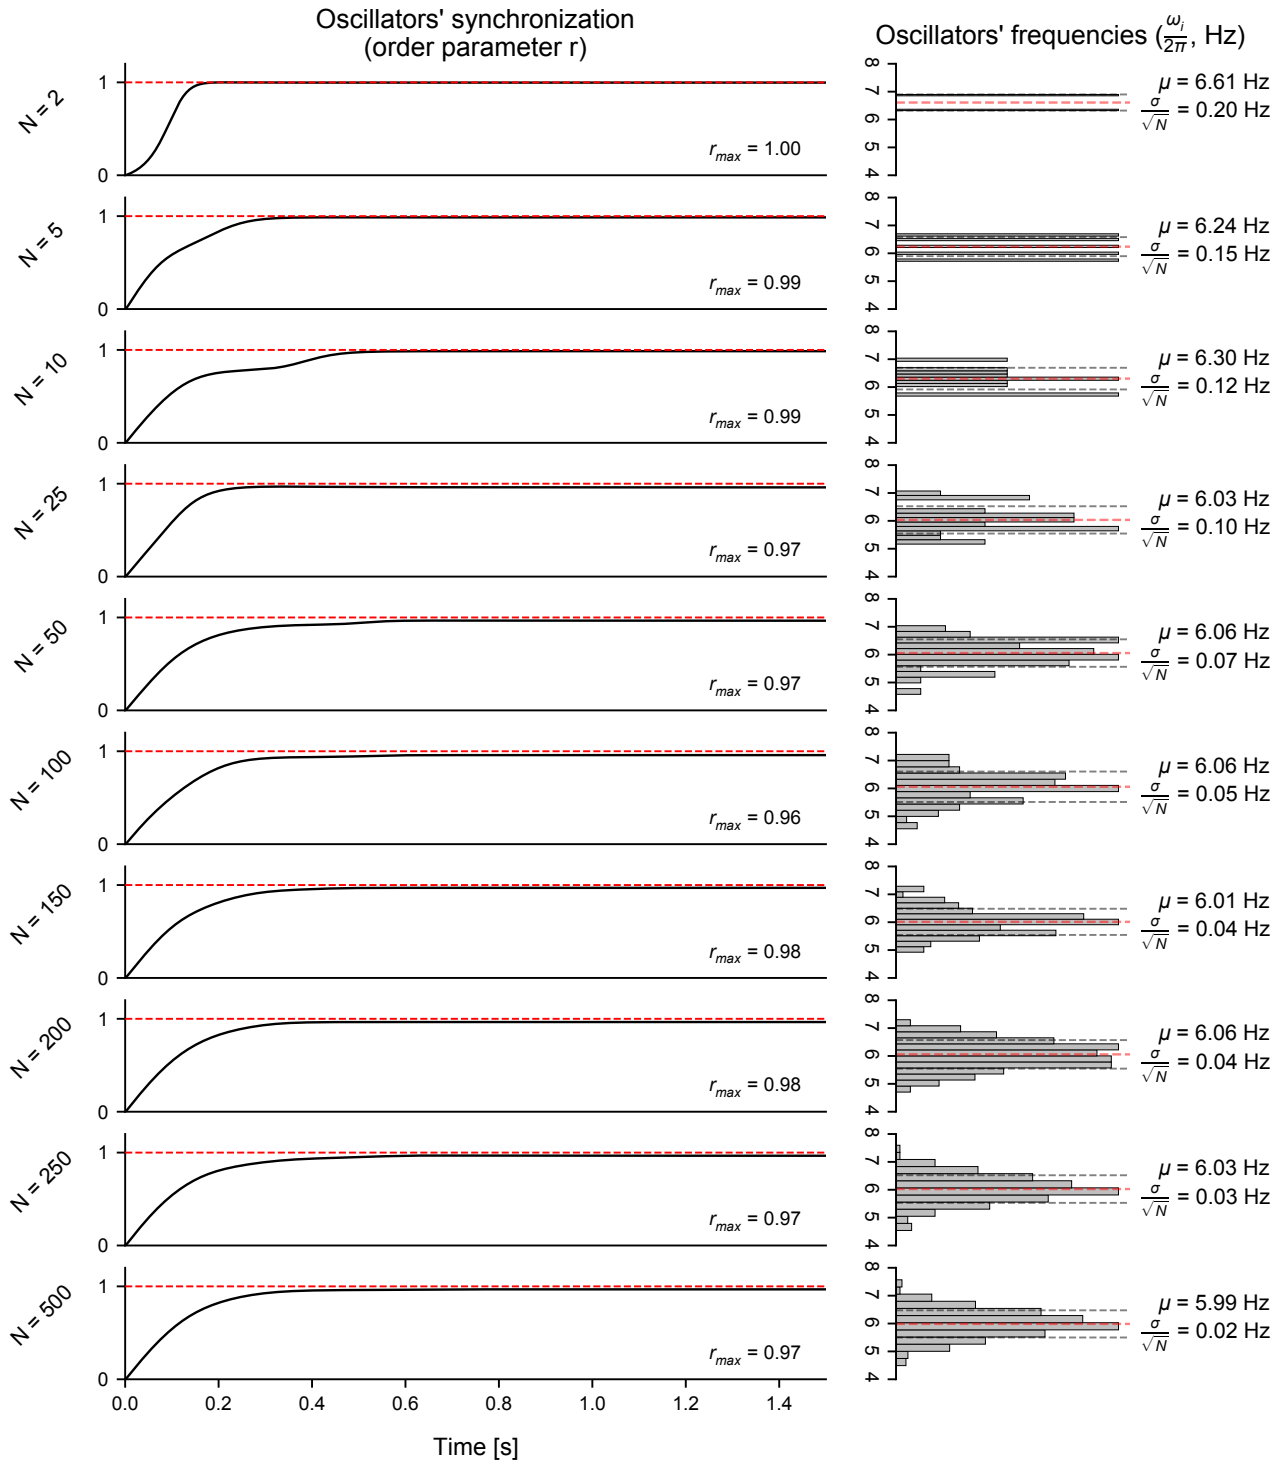


Figure S1. (Figure 1 – Figure Supplement 1) Influence of the number of Kuramoto oscillators on their collective dynamics. **Left:** influence of the number of Kuramoto oscillators (N) on the convergence over time of the order parameter (r), which is a measure of synchronization of the set of oscillators. The above results were obtained using a synchronization ratio k/N of 25. Upon initialization, the oscillators' natural frequencies (ω_i) were normally distributed with a center frequency ($f_0 = 6$ Hz). Initial phases were uniformly distributed around the unit circle ($U \sim [0, 2\pi]$). **Right:** histograms of the natural frequencies (ω_i), together with the distribution mean (μ) and standard error of the mean (σ/\sqrt{N}). As the number of oscillators increases, the mean frequency appears closer to the desired center frequency of 6 Hz, and the standard error of the mean is reduced. Overall, increasing the number of oscillators past 250 did not yield any substantial change in the convergence of the order parameter or the distribution of natural frequencies. This number of oscillators was therefore chosen for all subsequent analyses.

A. Excitatory-Inhibitory Coupled

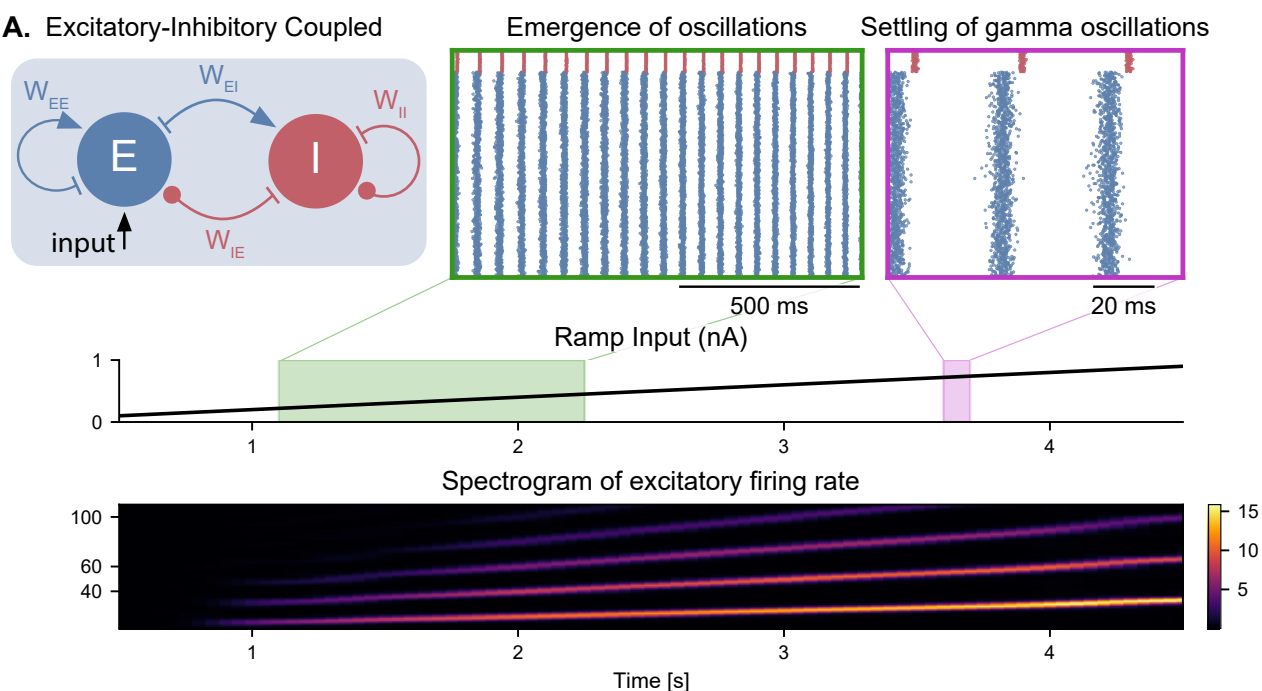

B. Excitatory-Inhibitory Decoupled

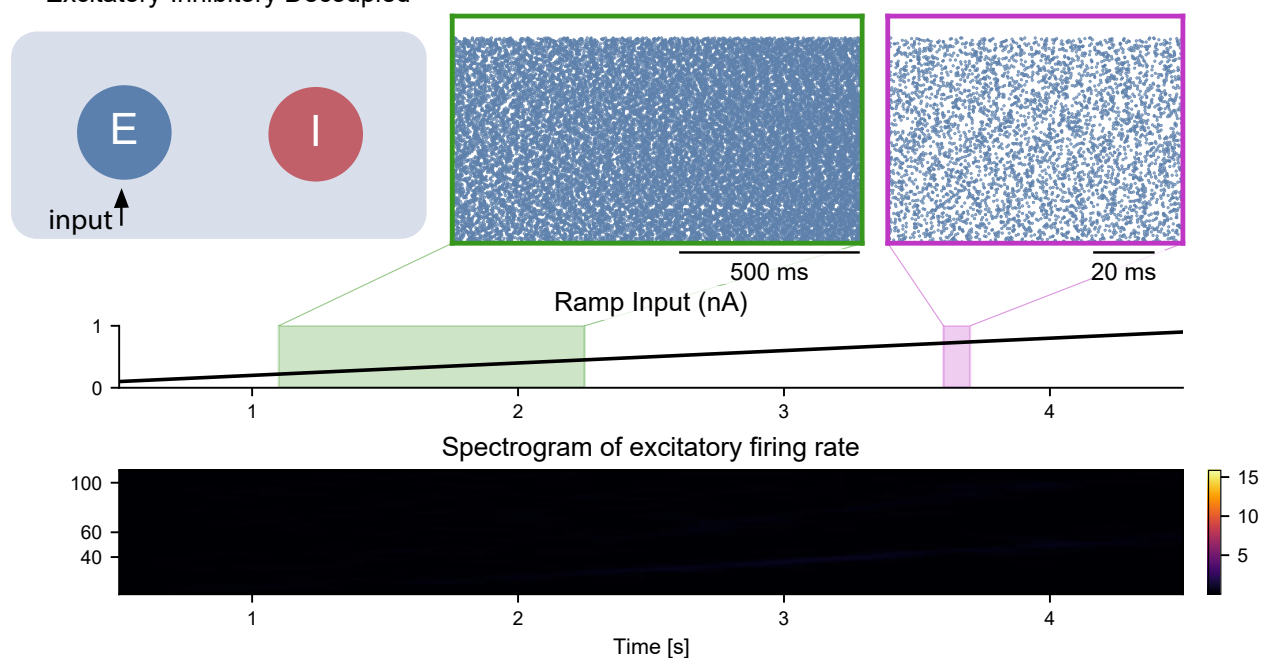


Figure S2. (Figure 2 – Figure Supplement 1) Emergence of gamma oscillations in coupled excitatory-inhibitory populations under ramping input to the excitatory population. Similar representation as in Figure 2, but with the input provided only to the excitatory population. All conclusions remain the same. In addition, the inhibitory population does not show any spiking activity in the decoupled case.

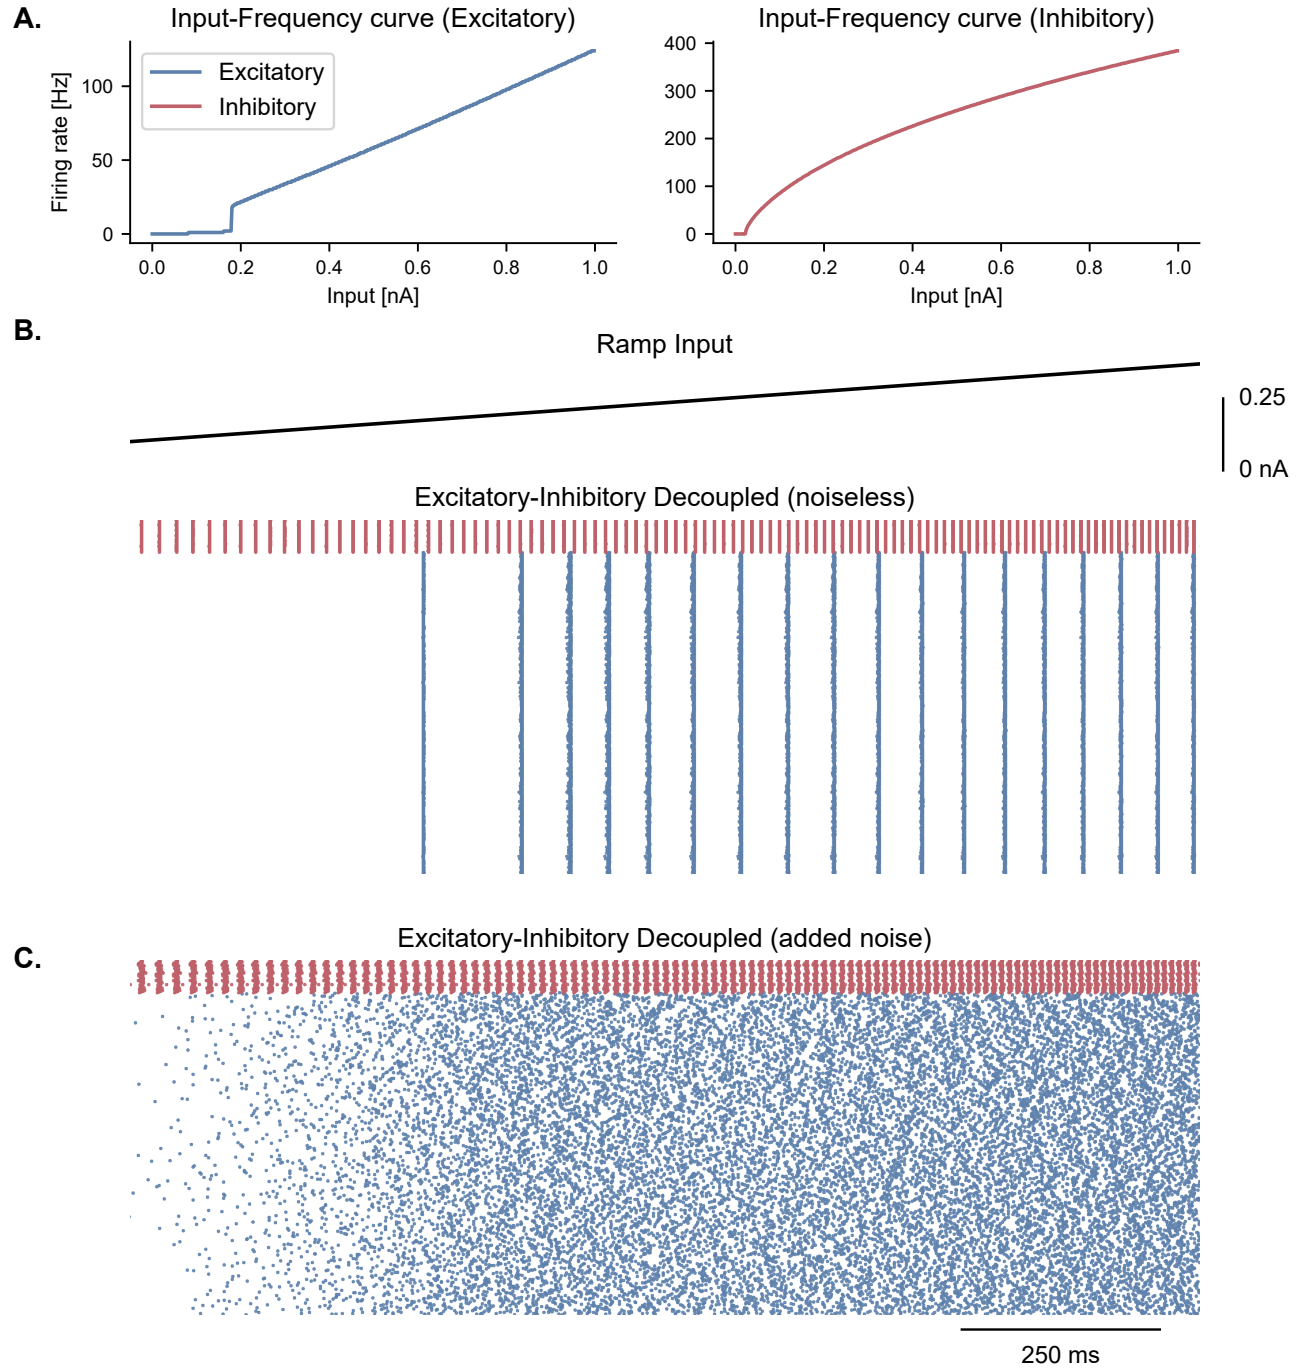


Figure S3. (Figure 2 – Figure Supplement 2) Cell-intrinsic spiking activity in decoupled excitatory and inhibitory populations under ramping input. **A.** Input-Frequency (I-F) curves for excitatory cells (left panel; pyramidal neurons with I_{CAN}) and inhibitory cells (right panel; interneurons, fast-spiking) used in the model. Above a certain tonic input (around 0.35 nA for excitatory and 0.1 nA for inhibitory neurons), neurons can spike in the gamma range. **B.** Raster plot showing the spiking activity of excitatory (blue, $N_E = 1000$) and inhibitory (red, $N_I = 100$) neurons in decoupled populations under ramping input (top trace) and in the absence of noise in the membrane potential. Despite random initial conditions across neurons, oscillations emerge in both populations due to the intrinsic properties of the cells, with a frequency that is predicted by the respective I-F curves (panel **A.**). **C.** Similar representation as panel **B.** but with the addition of stochastic noise in the membrane potential of each neuron. The presence of noise disrupts the emergence of oscillations in these decoupled populations.

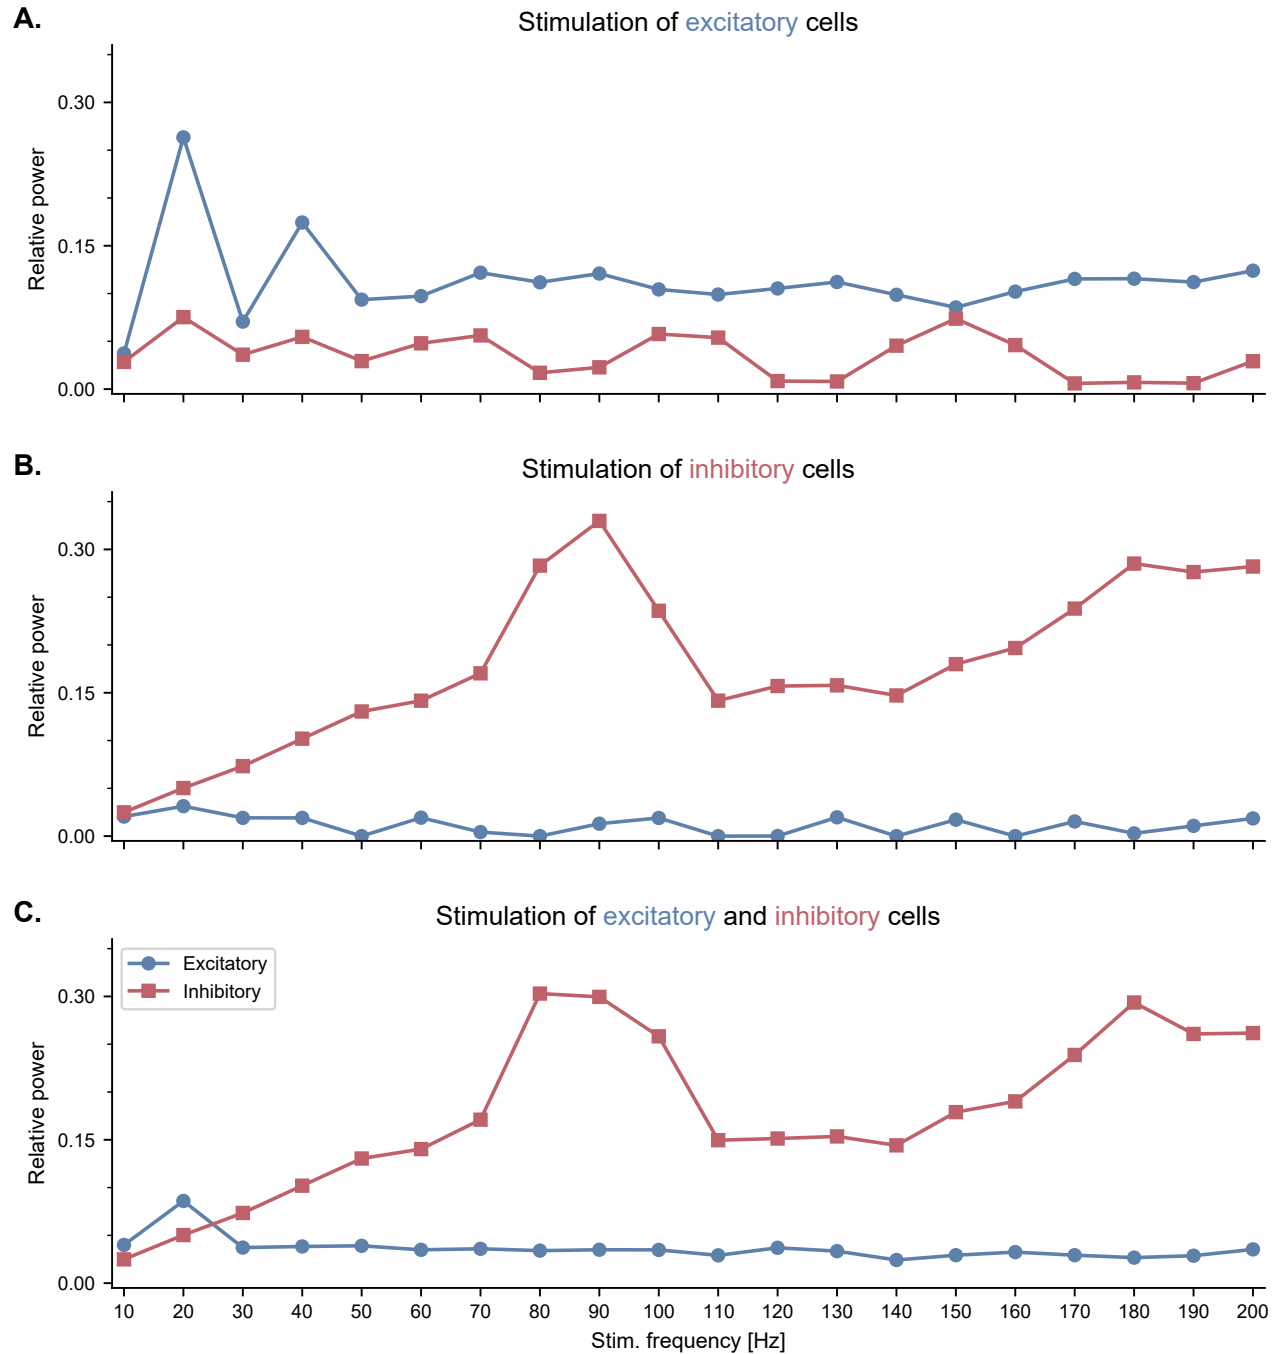


Figure S4. (Figure 2 – Figure Supplement 3) Neuronal entrainment of fast-spiking interneurons by pulsed optogenetic stimulation in the high gamma range. All panels show the effects of pulsed optogenetic stimulation of specific cell types (**A.** excitatory only, **B.** inhibitory only, **C.** both excitatory and inhibitory cells) at different frequencies, similar to the experiments reported by Cardin and colleagues (Cardin *et al.*, 2009). Pulsed stimulation was delivered continuously with a frequency ranging from 10 to 200 Hz. The relative power was calculated similarly to Cardin *et al.* (2009). Specifically, for each stimulation frequency, we computed first the power spectral density of the population firing rates using Welch's method, and then the ratio between the power within a 10-Hz band centered around the stimulation frequency and the total power across all frequencies. **A.** Pulsed stimulation of excitatory cells shows a higher relative power in the stimulated neurons at low frequencies (20 and 40 Hz). **B.** Pulsed stimulation of inhibitory cells reveals neuronal entrainment, i.e., a peak in their relative power, in the high gamma range (80-100 Hz). **C.** Simultaneous pulsed stimulation of both populations reveals a strong entrainment of inhibitory cells in the high gamma range, and a more modest entrainment of excitatory cells at low frequencies.

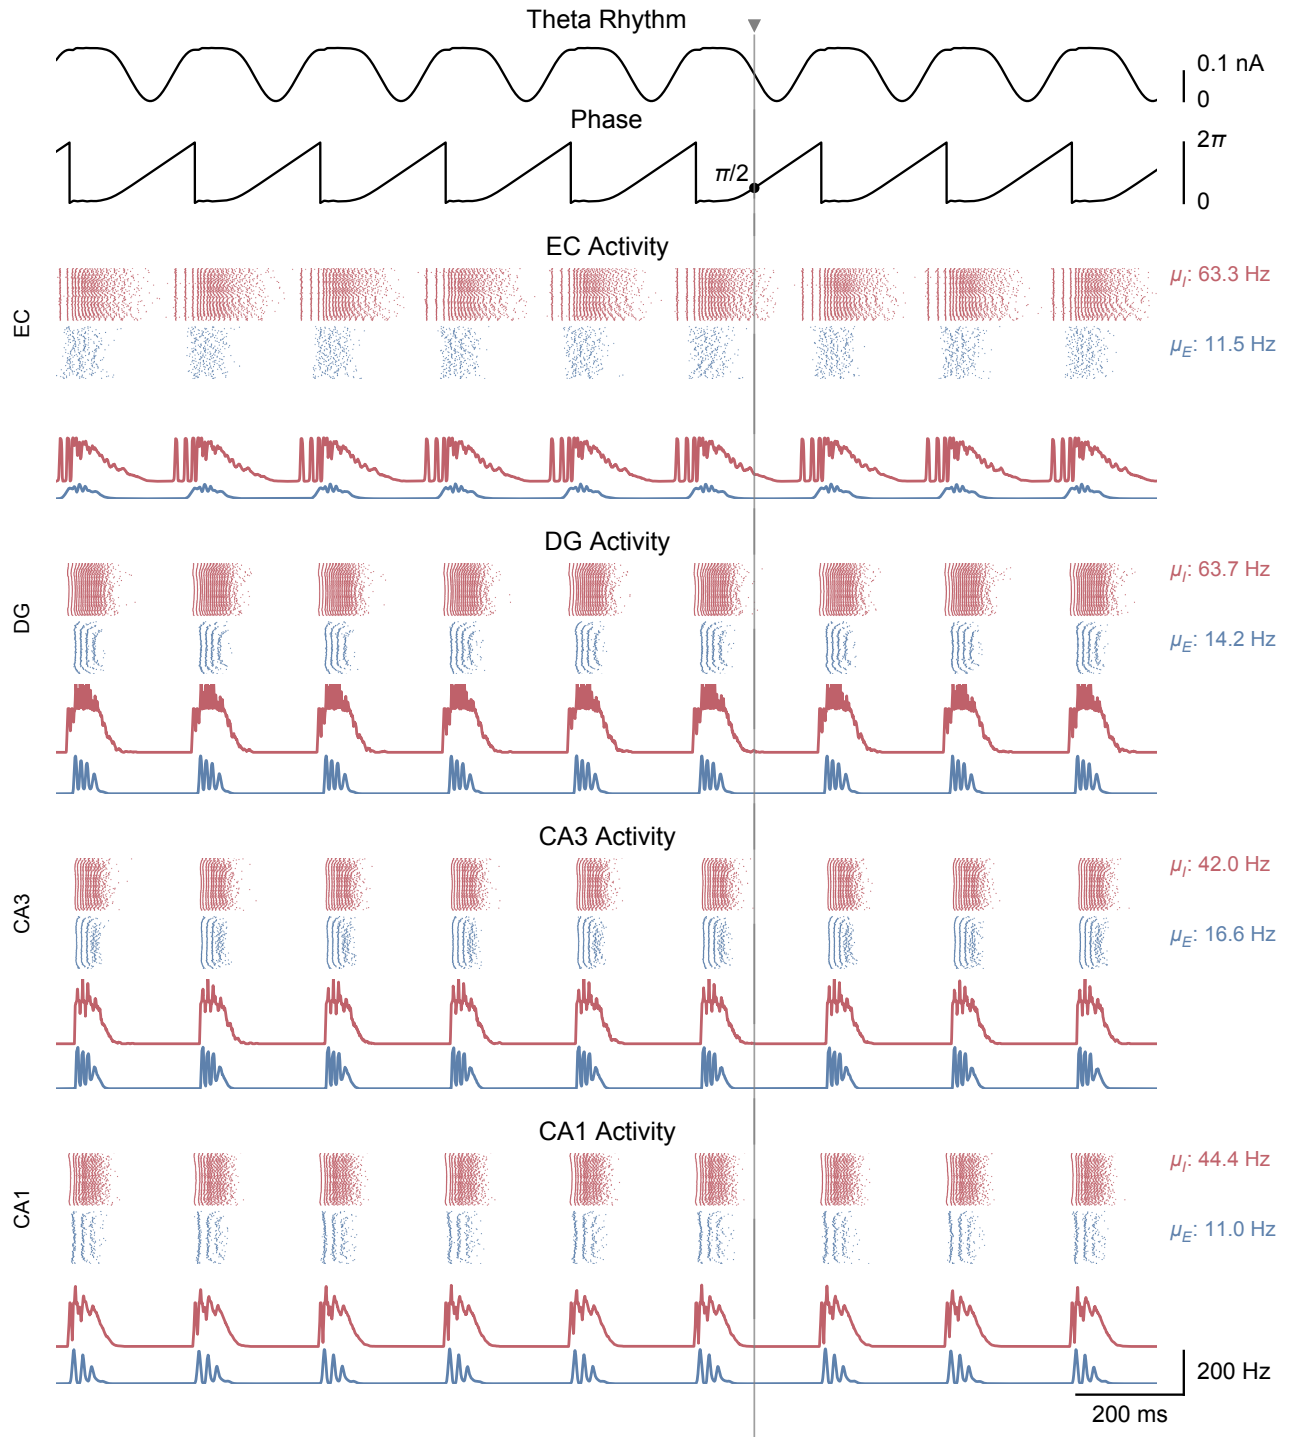


Figure S5. (Figure 3 – Figure Supplement 1) Whole-network behavior producing theta-nested gamma oscillations and theta phase reset in response to a single stimulation pulse. This figure shows the behavior of all areas of the hippocampal formation during the simulation illustrated in **Figure 3A**. All areas display bursts of gamma activity that occur almost synchronously at the peak of each theta cycle in both excitatory and inhibitory neuronal populations (μ_E and μ_I : mean firing rates within the shaded area). The CA1 excitatory population firing rate is supplied back to the medial septum. A single stimulation pulse (vertical line and grey triangle) delivered to both CA1 populations at a phase of $\pi/2$ (i.e., halfway through the descending slope) resets the phase of the theta rhythm according to the PRC shown in **Figure 3D**.

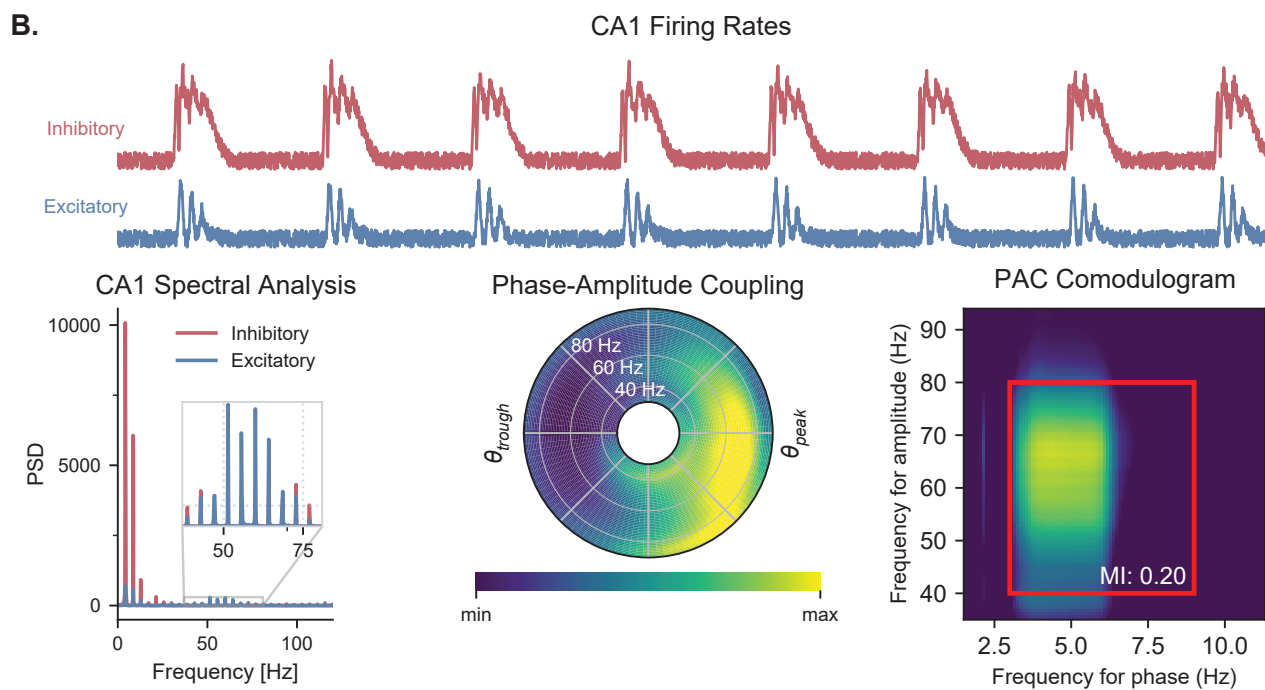
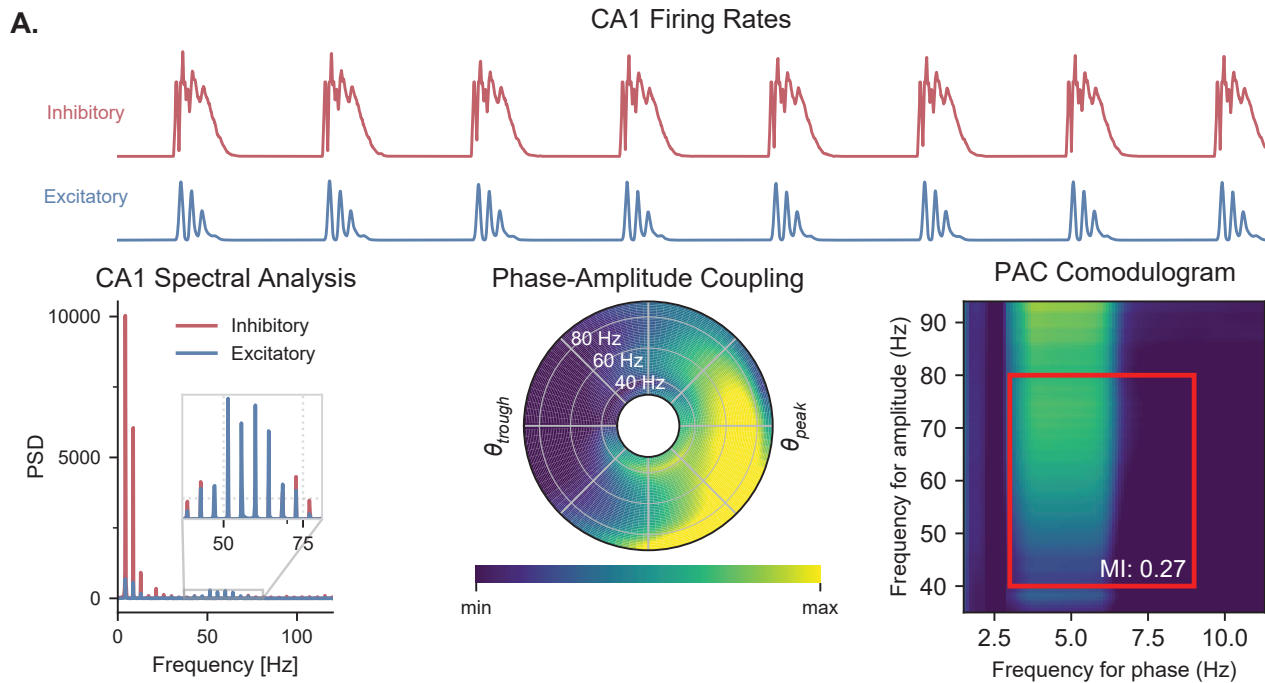


Figure S6. (Figure 3 – Figure Supplement 2) Quantification of PAC with and without noise. A. Quantifying PAC in the absence of noise produced inaccurate identification of the coupled frequency bands, due to the complete absence of oscillations at some frequencies. All analyses are based on the CA1 firing rates (top traces) during a representative simulation. Power spectral densities of these firing rates (**left**) indicate that some frequencies have a power of 0. PAC of the excitatory population was assessed using two graphical representations, the polar plot (**middle**) and comodulogram (**right**), and quantified using the MI. The comodulogram was calculated by computing the MI across 80% overlapping 1-Hz frequency bands in the theta range and across 90% overlapping 10-Hz frequency bands in the gamma range and subsequently plotted as a heat map. In the absence of noise, a slow theta frequency centered around 5 Hz is found to modulate a broad range of gamma frequencies between 40 and 100 Hz. The value indicated on the comodulogram indicates the average MI in the 3-9 Hz theta range and 40-80 Hz gamma range. As in **Figure 3**, the polar plot represents the amplitude of gamma oscillations (averaged across all theta cycles) at each phase of theta (theta range: 3-9 Hz, phase indicated as angular coordinate) and for different gamma frequencies (radial coordinate, binned in 1-Hz ranges). **B.** Adding uniform noise to the firing rate (with an amplitude ranging between 15 and 25% of the maximum firing rate) improved the identification of the coupled frequency bands. In this case, the slower theta frequency centered around 5 Hz modulates a gamma band located between 45 and 75 Hz.


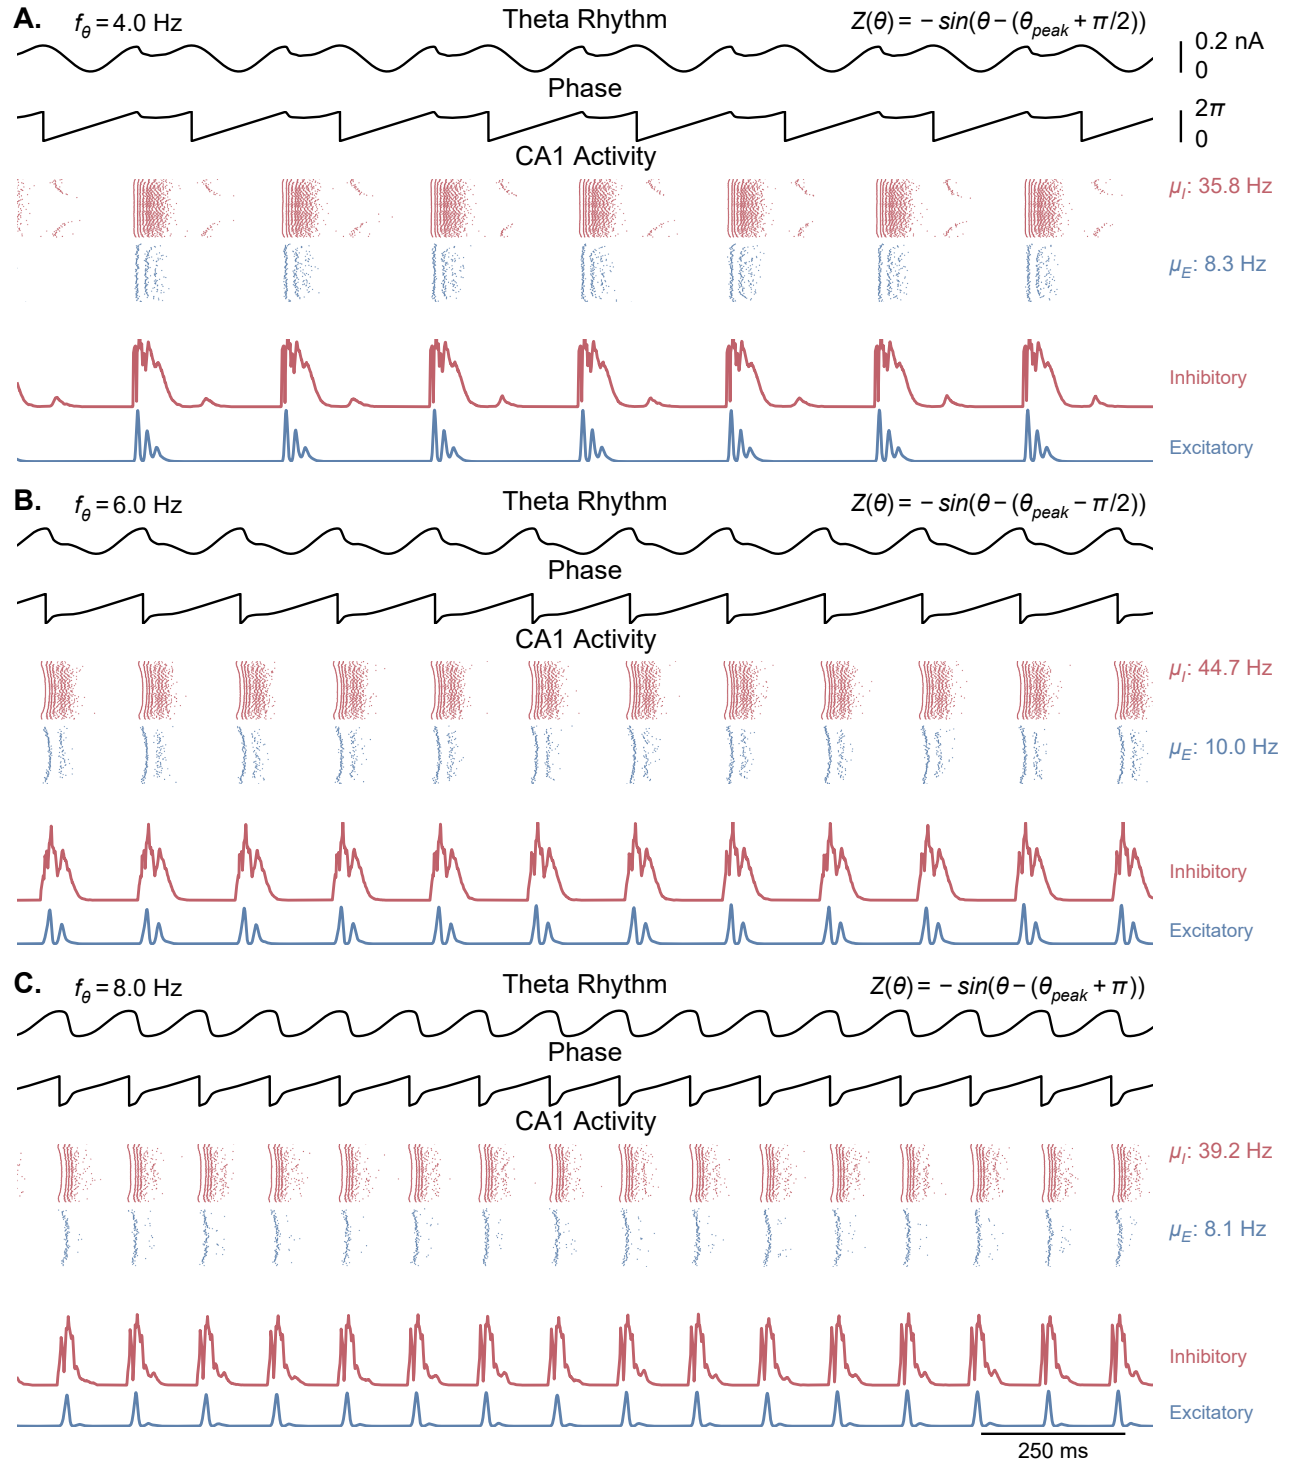


Figure S7. (Figure 3 – Figure Supplement 3) Network behavior generated by Kuramoto oscillators with non-physiological phase response functions. Each panel is similar to **Figure 3A**, but with a different offset added to the phase response function of the Kuramoto oscillators (see methods, **Equation 4**). The center frequency was set to 6 Hz in all of these simulations. Overall, theta oscillations in these cases are less sinusoidal and show more abrupt phase changes than in the physiological case. **A.** A phase offset of $-\pi/2$ leads to an overall theta oscillation of 4 Hz, with a second peak following the main theta peak. **B.** A phase offset of $+\pi/2$ reduces the peak of theta, resetting the rhythm to the middle of the ascending phase. **C.** A phase offset of π or $-\pi$ leads to the CA1 output resetting the theta rhythm to the trough of theta.

A. Neural Mass Model

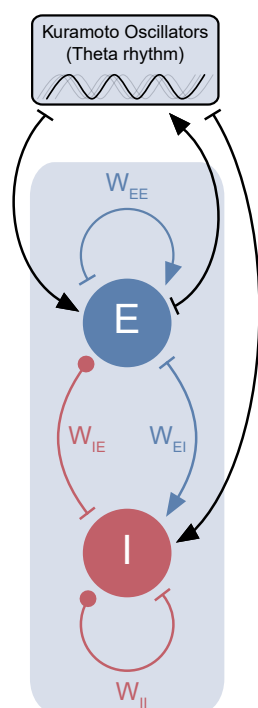

B.

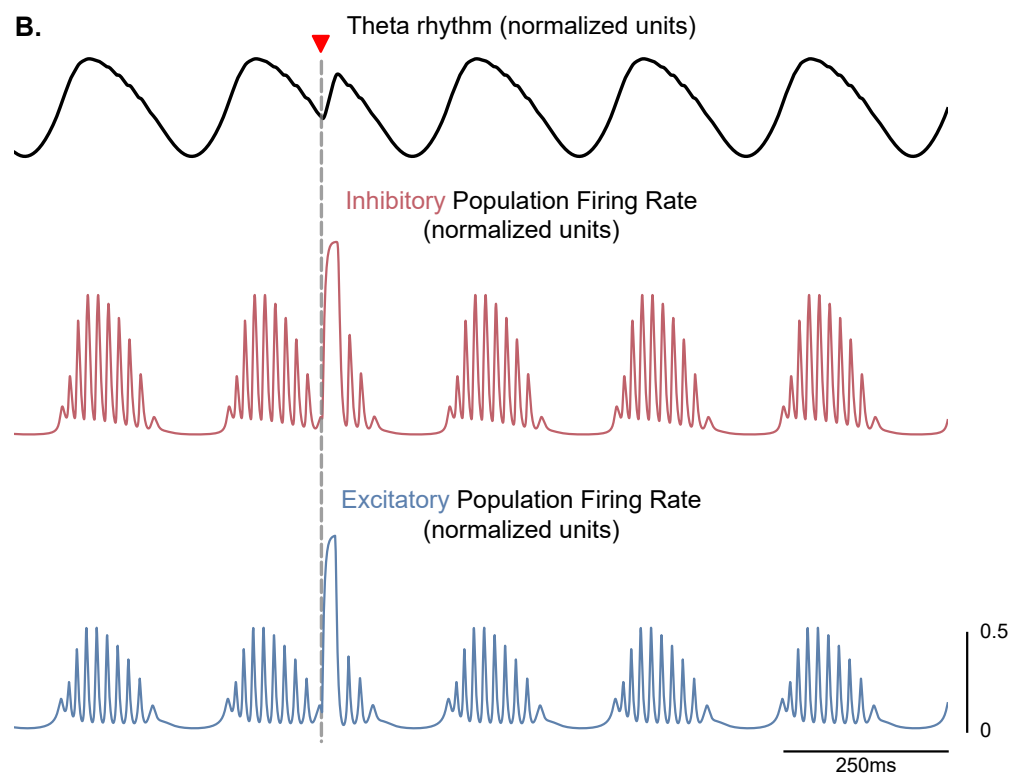


Figure S8. (Figure 3 – Figure Supplement 4) A neural mass model of coupled excitatory and inhibitory neurons driven by Kuramoto oscillators generates theta-nested gamma oscillations and theta phase reset. **A.** Two coupled neural masses (one excitatory and one inhibitory) driven by Kuramoto oscillators, which represent a dynamical oscillatory drive in the theta range, were used to implement a neural mass equivalent to our conductance-based model represented in **Figure 1**. Neural masses were modeled using the Wilson-Cowan formalism, with parameters adapted from *Onslow et al. (2014)* ($W_{EE} = 4.8$, $W_{EI} = W_{IE} = 4$, $W_{II} = 0$). **B.** The normalized population firing rates exhibit theta-nested gamma oscillations (middle and bottom panels) in response to the dynamic theta rhythm (top panel). A stimulation pulse delivered at the descending phase of the rhythm to both populations (marked by the inverted red triangle) produces a robust theta phase reset, similarly to **Figure 3A**.

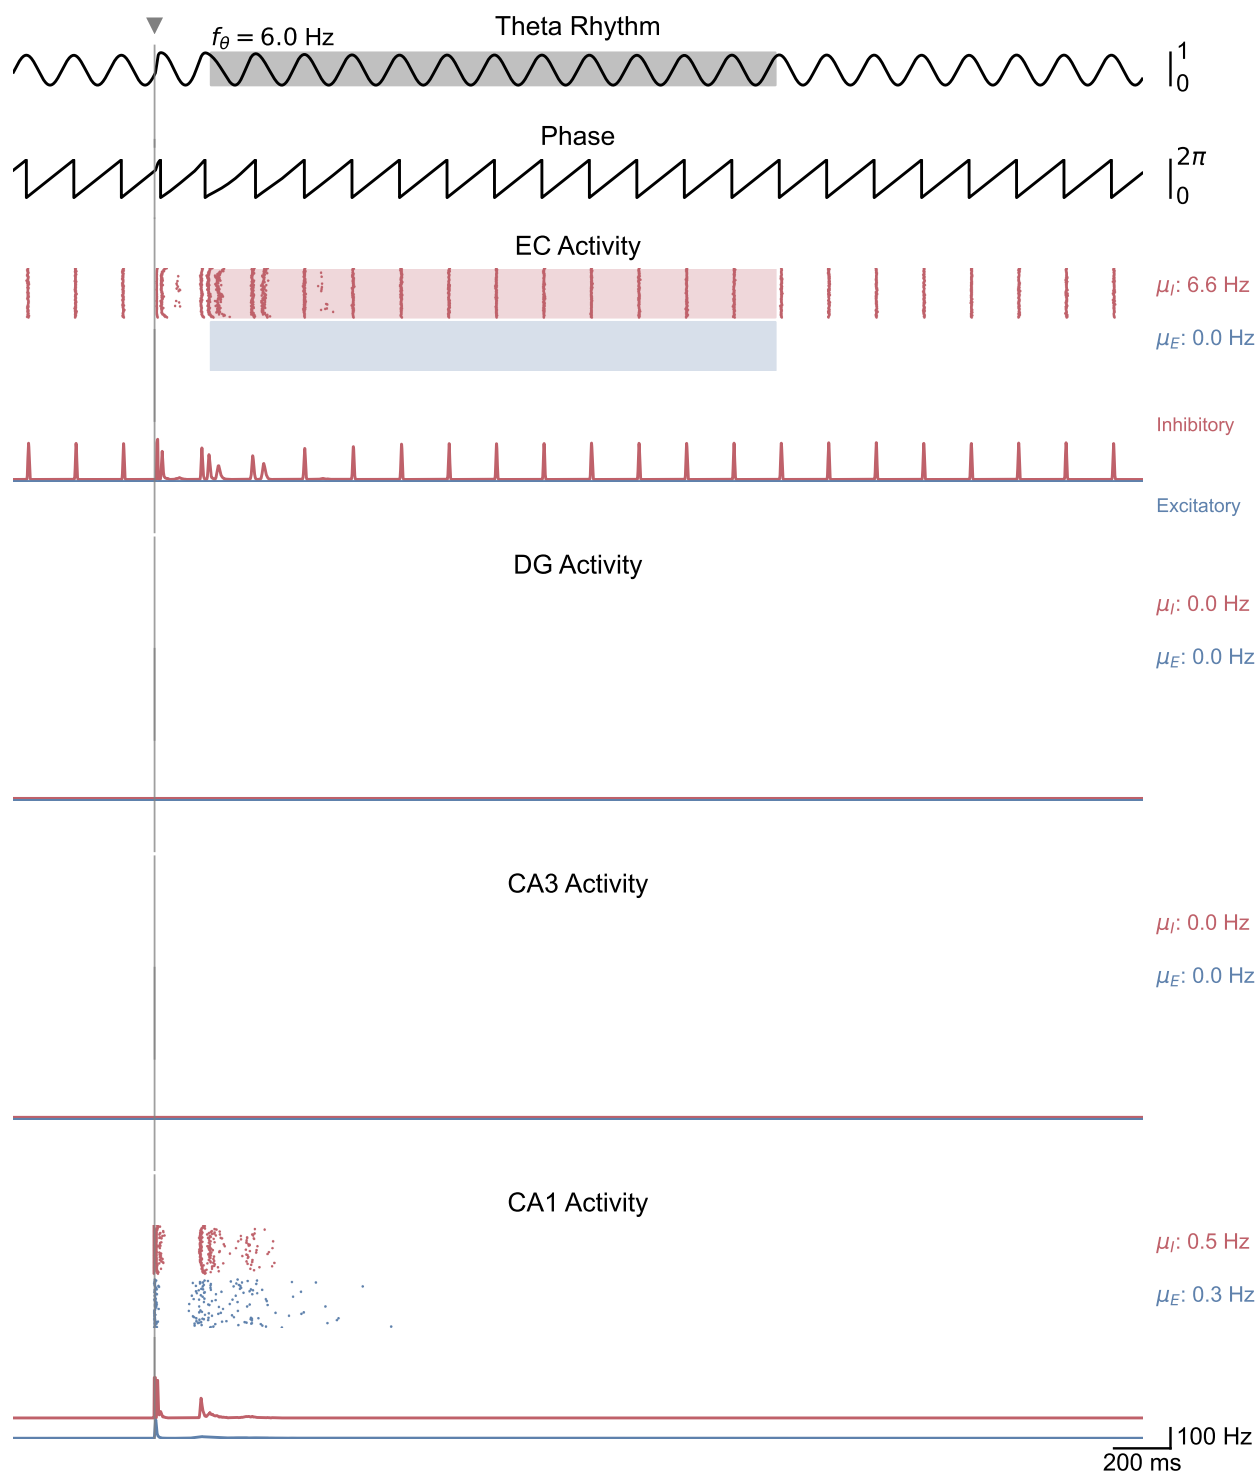


Figure S9. (Figure 5 – Figure Supplement 1) Whole-network behavior in response to single-pulse stimulation under low theta oscillatory drive. This figure shows the behavior of all areas of the hippocampal formation during the simulation illustrated in Figure 5A. A single stimulation pulse delivered to both CA1 populations induces two bursts of spiking activity that propagate only from CA1 to EC.

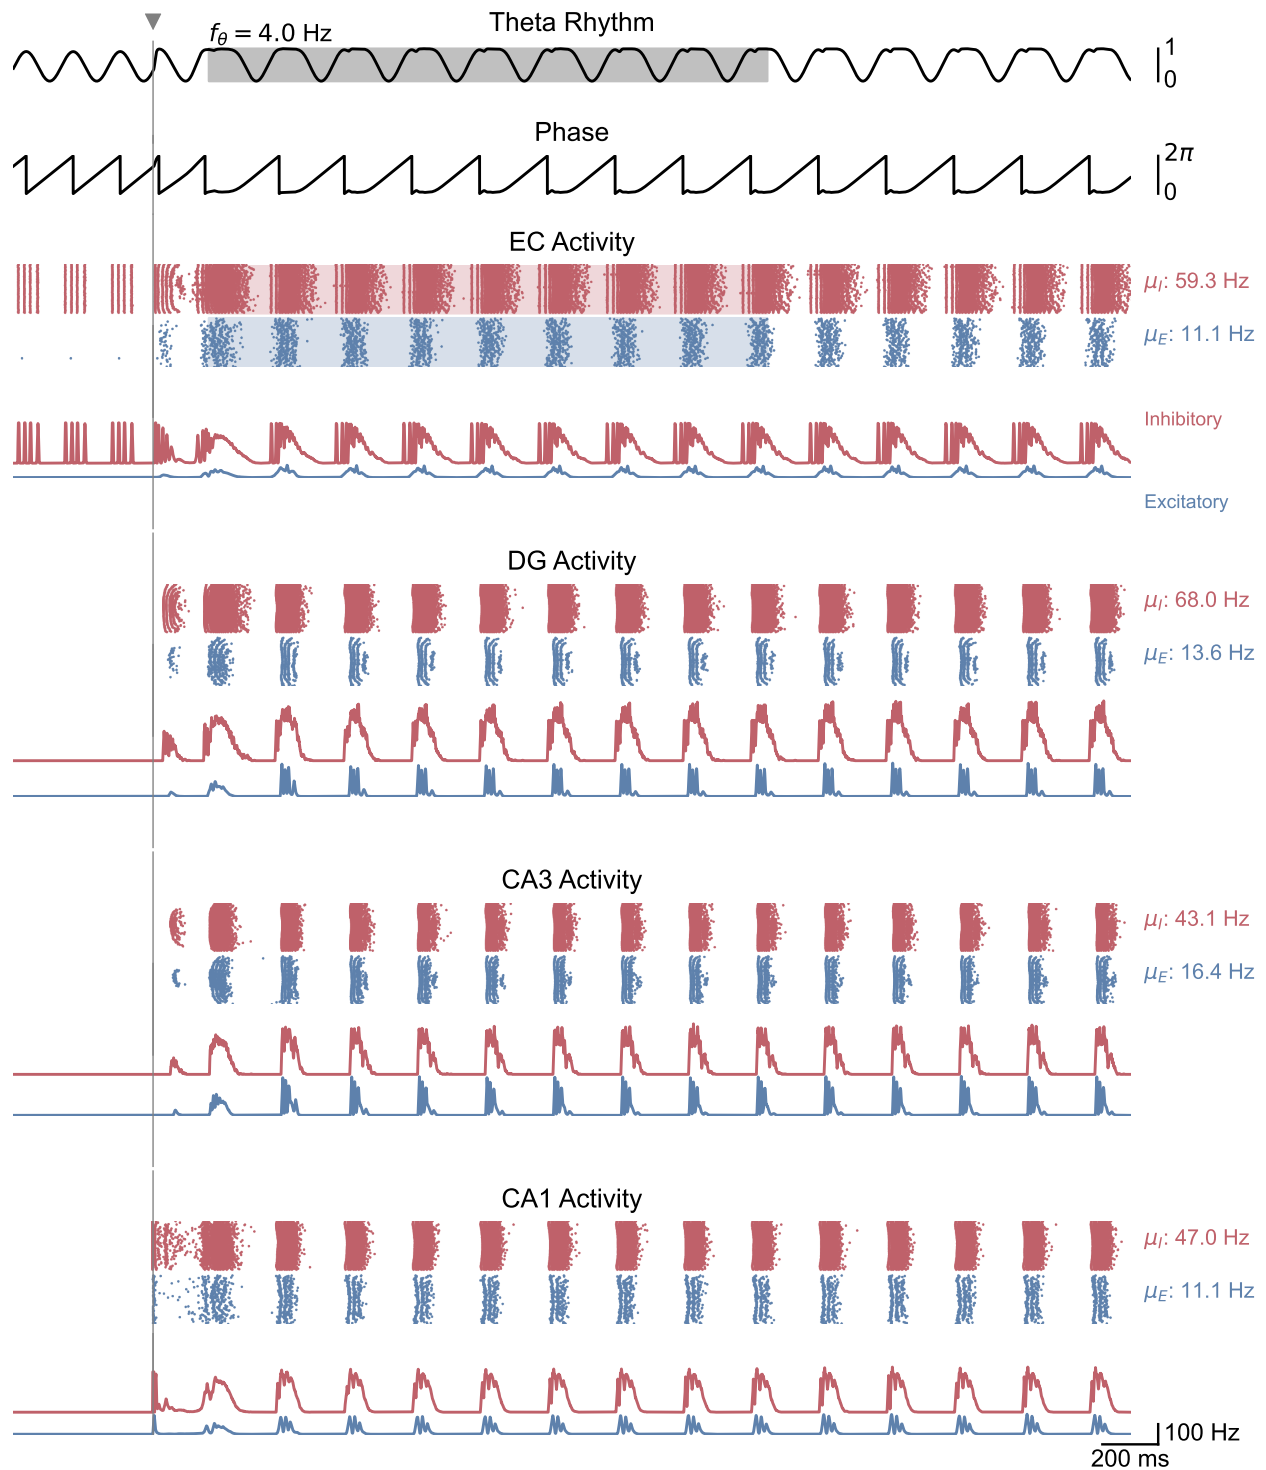


Figure S10. (Figure 5 – Figure Supplement 2) Whole-network behavior in response to single-pulse stimulation under medium theta oscillatory drive. This figure shows the behavior of all areas of the hippocampal formation during the simulation illustrated in Figure 5B. A single stimulation pulse switches network behavior from no activity to sustained oscillations driven by the medial septum.

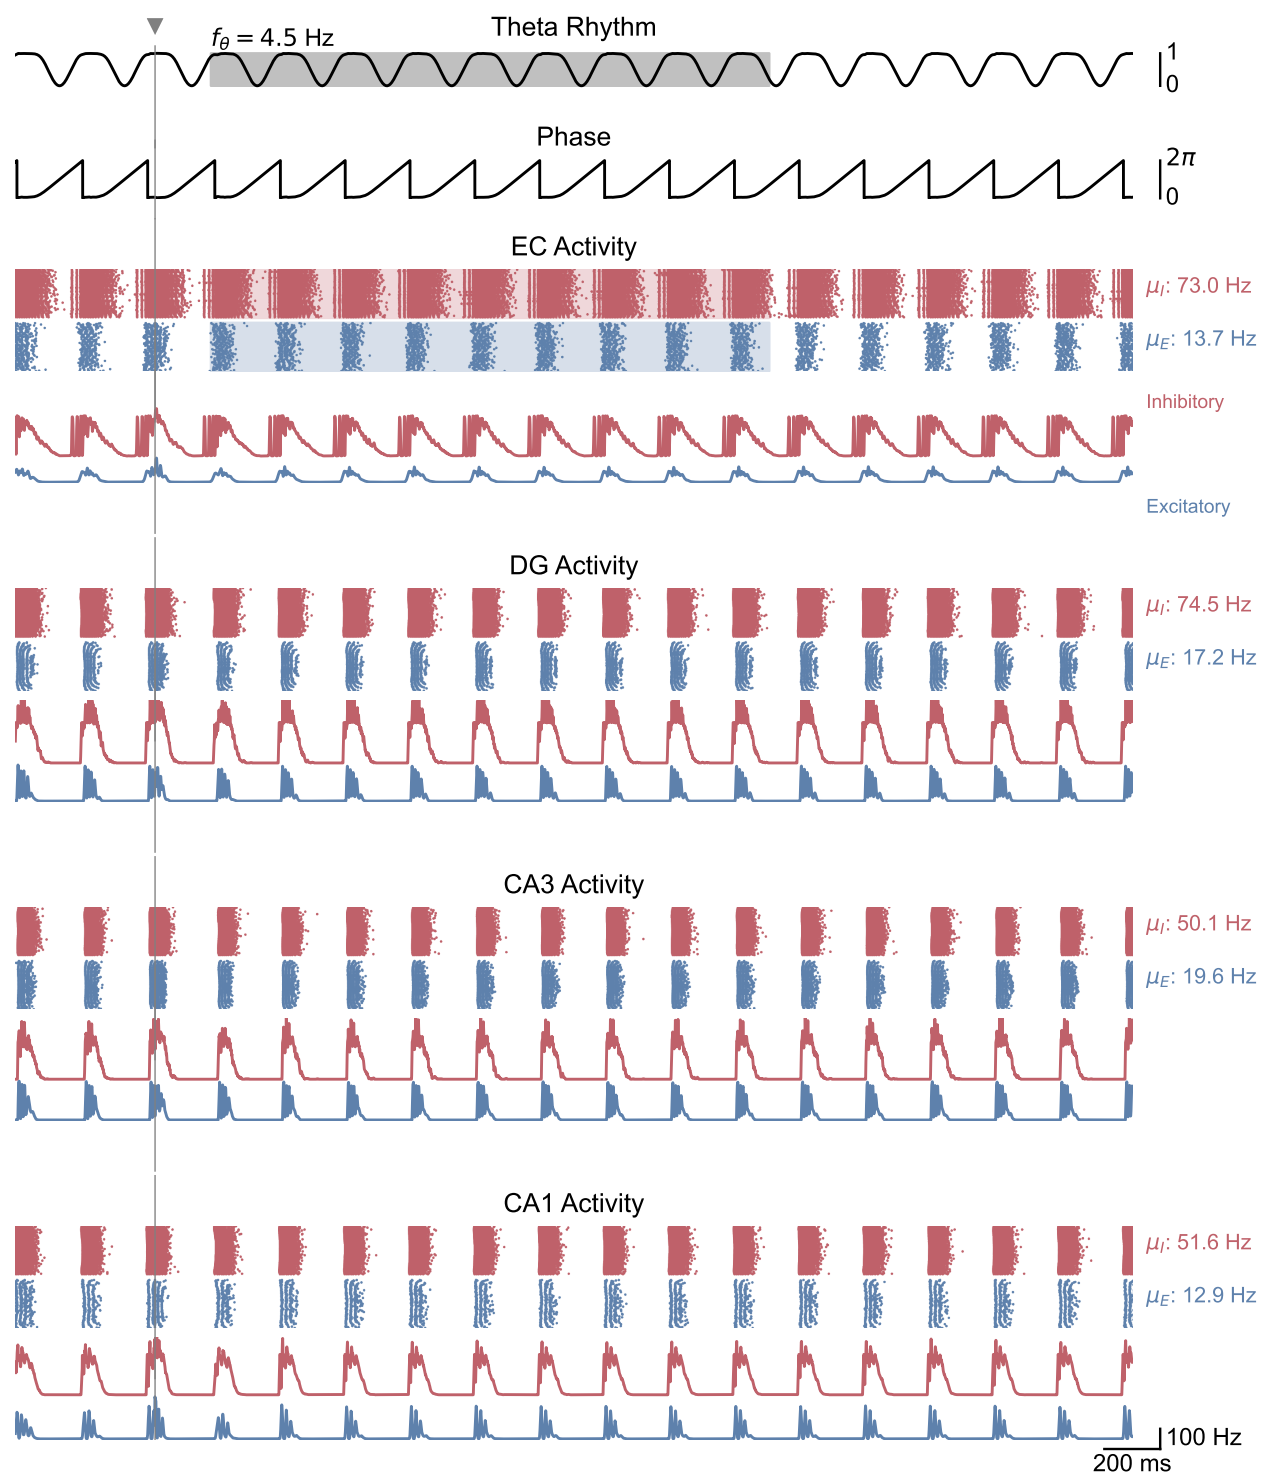


Figure S11. (Figure 5 – Figure Supplement 3) Whole-network behavior in response to single-pulse stimulation under higher theta oscillatory drive. This figure shows the behavior of all areas of the hippocampal formation during the simulation illustrated in Figure 5C. Theta oscillatory drive is enough to induce self-sustained theta-nested gamma oscillations. In this case, stimulation is delivered at the peak of theta and does not induce a pronounced effect on theta-gamma oscillations.

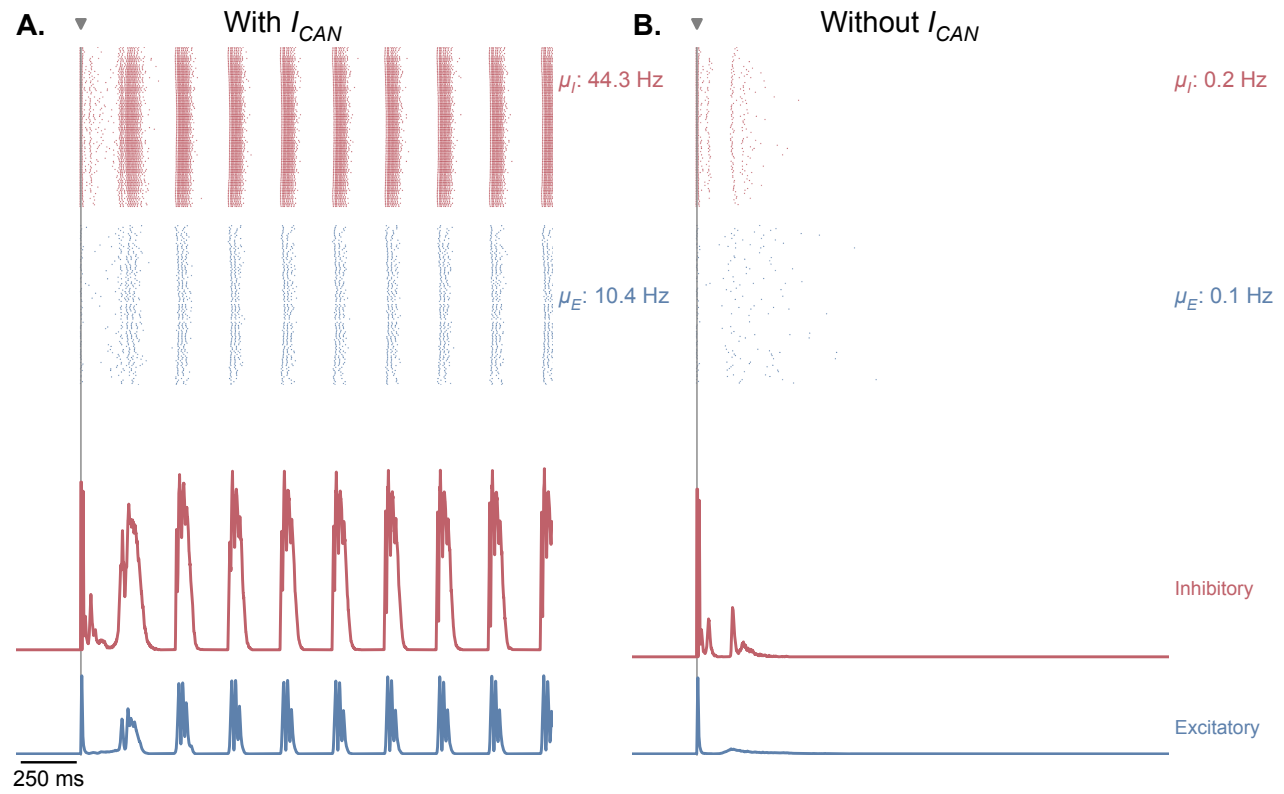


Figure S12. (Figure 5 – Figure Supplement 4) CAN currents are necessary for the production of self-sustained theta-gamma oscillations in response to single-pulse stimulation. A. Same as Figure 5B. **B.** Similar simulation as panel A., but without the presence of CAN currents in the EC, CA3 and CA1 fields of the hippocampus. Removing CAN currents from the model abolishes self-sustained theta-nested gamma oscillations in response to a single stimulation pulse (for the parameters represented in Figure 5, point B).

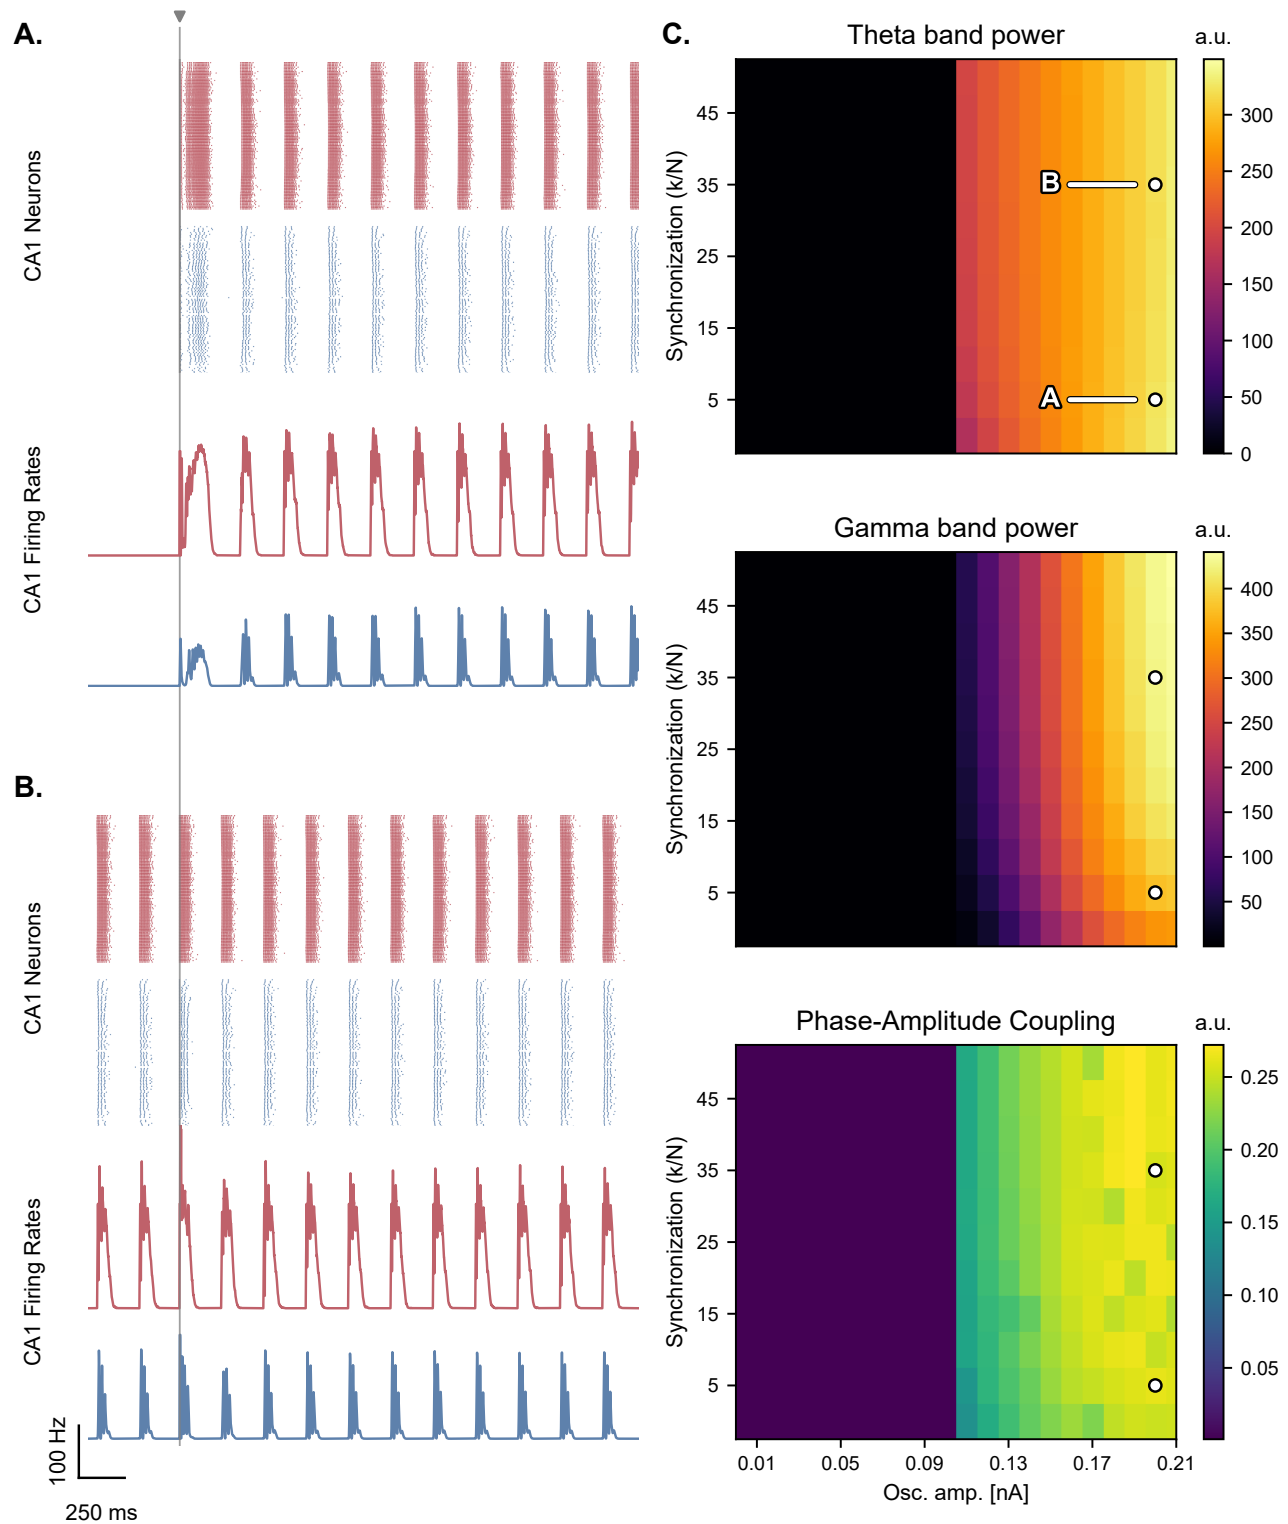


Figure S13. (Figure 5 – Figure Supplement 5) Synchronization level of the oscillators minimally affects the production of theta-nested gamma oscillations. A., B. Network responses to single-pulse stimulation (vertical line) under medial septum input (with phase reset), shown for different synchronization parameter ratios of the Kuramoto oscillators (A,B: $\frac{k}{N}$ of 5 and 35 respectively; stimulation amplitude: 7.0 nA). **Panel B.** indicates that the model can produce oscillations without external stimulation when the synchronization level is higher. **C.** Steady-state response to single-pulse stimulation as a function of medial septum oscillatory input (x-axis) and synchronization parameter ratio ($\frac{k}{N}$, y-axis), characterized by three metrics: theta power (3-9 Hz), gamma power (40-80 Hz), and PAC (quantified using the MI). White dots: parameter combinations corresponding to panels A and B.