

Multi-Item Single Machine Scheduling Optimization. The Case with Piecewise Deterministic Demands

Elina Mancinelli, Roberto L.V. González

▶ To cite this version:

Elina Mancinelli, Roberto L.V. González. Multi-Item Single Machine Scheduling Optimization. The Case with Piecewise Deterministic Demands. [Research Report] RR-3144, INRIA. 1997. inria-00073545

HAL Id: inria-00073545 https://inria.hal.science/inria-00073545

Submitted on 24 May 2006

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



INSTITUT NATIONAL DE RECHERCHE EN INFORMATIQUE ET EN AUTOMATIQUE

Multi-Item Single Machine Scheduling Optimization. The Case with Piecewise Deterministic Demands

Elina M. Mancinelli , Roberto L.V. González

N 3144

Mars 1997

_____ THÈME 4 _____





Multi-Item Single Machine Scheduling Optimization. The Case with Piecewise Deterministic Demands

Elina M. Mancinelli , Roberto L.V. González

Thème 4 — Simulation et optimisation de systèmes complexes Projet Promath

Rapport de recherche n°3144 — Mars 1997 — 47 pages

Abstract: In this work we study the optimization of a production system comprising a multi-item single machine with piecewise deterministic demands. Demands can only take a finite number of values and the demand changes are described by Poisson processes. We present the theoretical characterization of the solution and a numerical procedure to solve it. We establish the rate of convergence of the discrete solution toward the original continuous solution.

Key-words: scheduling problems, piecewise deterministic demands, quasi-variational inequalities, Hamilton-Jacobi-Bellman equation, numerical solution

(Résumé : tsvp)

* CONICET – Inst. Beppo Levi, Dpto. Matemática, Fac. Cs. Ex., Ing. y Agr., Universidad Nacional de Rosario, Rosario, Argentine. This paper is included in the activities developed in the frame of the Cooperation Projet INRIA–Instituto de Matemática Bepp 3 o Levi, Coordinators of the projet: E. Rofman–R. González

Optimisation d'un système des machines multiproduits. Le cas de demandes aléatoires déterministes par morceaux

Résumé: Dans ce papier on étudie l'optimisation d'un programme de production d'une machine multiproduit, où les demandes accumulées de chaque produit sont des processus aléatoires déterministes par morceaux. Les demandes instantanées prennent un nombre fini de valeurs et les instants de changement de demandes sont décrits par un processus de Poisson. On présente la caractérisation théorique de la solution du problème et un procédé d'approximation numérique. On établie aussi la vitesse de convergence des solutions discrètes vers la solution du problème originel.

Mots-clé : problèmes d'ordonnancement, demandes aléatoires déterministes par morceaux, inégalités quasi-variationelles, équation de Hamilton-Jacobi-Bellman, solution numérique

Contents

1	Intr	oduction	1
2	Des	cription of the problem	2
	2.1	Production system	2
	2.2	Admissible states	3
	2.3	System evolution	4
	2.4	Admissible controls	4
	2.5	Optimal cost function	5
	2.6	Properties of the optimal cost function	5
	2.7	Solution by perturbations	10
3	The	optimal cost function V	10
	3.1	The function and its properties	10
	3.2	Dynamic programming principle	11
		3.2.1 The integral form of the Hamilton-Jacobi-Bellman equation .	11
		3.2.2 Boundary conditions for the HJB equation	13
	3.3	A fixed point problem associated to the DPP	13
		3.3.1 An auxiliary operator and its properties	13
		3.3.2 A fixed point problem. Existence and uniqueness of solution.	18
		3.3.3 Equivalence between the DPP and the fixed point problem .	23
		3.3.4 Hölder continuity of the optimal cost function	25
4	Disc	crete problem	27
	4.1	Elements of the discrete problem	27
		4.1.1 Domain Approximation	27
		4.1.2 Approximation of the boundary	28
		4.1.3 Approximation space \overline{F}_k	28
	4.2	The discrete HJB equation	28
		4.2.1 A discrete fixed point problem	28
		4.2.2 Existence and uniqueness of the discrete solution	29
	4.3	Convergence results	33
5	App	olications	38

1 Introduction

We consider the optimization of a production system comprising a multi-item single machine with piecewise deterministic demands. The demand changes are described by Poisson processes and the demand values are taken among a finite number of values.

These piecewise deterministic processes were introduced by Davis in [9] and some results about their control can be seen in [17]-[19], analytical related results can be seen in [11].

This type of problems belongs to the class of optimal control problems of jump processes with state space constraints. The space constraint means here that the trajectories of the controlled process have to remain in a given bounded closed subset (a polyhedron in our case) of \mathbb{R}^m .

The deterministic counterpart of this problem was studied in [1], [2], [12]-[15]. In that work, taking into account the switching costs, the optimal cost function was characterized as the viscosity solution of the associated Hamilton-Jacobi-Bellman (HJB) equation, see [3], [8], [10], [22].

Here, we generalize the results mentioned above to the case where demands vary randomly according to a piecewise deterministic process, previous drafts about these work can be seen in [20] and [21].

The paper is organized as follows:

- In §2 we describe the problem. We prove some properties of boundedness of the cost function. As this cost function is unbounded in a special part of the boundary, we introduce an approximate "bounded" problem defined in terms of a penalization parameter (denoted by "A" in the following). The penalized problem is defined in such a way that when the parameter "A" of penalization tends to infinity the solution of the approximate problem converges to the solution of the original problem.
- In §3 we study the existence, uniqueness and continuity of the optimal cost function V^A associated to the approximate problem and the HJB equation corresponding to this problem.
- In §4 we present a discretization procedure and we prove (in addition to the existence and uniqueness of the discrete solution) the convergence of the discrete solution to the continuous solution. We also give an estimate of the rate of convergence.

2 Description of the problem

2.1 Production system

At any time the machine is either idle or producing any of m different items. We denote with $D = \{0, 1, ..., m\}$, and we assign the following values to the machine setting

d = 0, the idle state of the machine;

 $d=1,\cdots,m$, when it is producing the item d.

For each item d = 1, ..., m, we define the problem data as follows:

- p_d the production quantity by unit time when the machine state is d.
- n_d the quantity of possible demands for item d.
- \mathcal{J} the set of possible demands,

$${\cal J} = \prod_{d=1}^m \{1,...,n_d\}, \; ext{and} \; \; J = |{\cal J}| = \prod_{d=1}^m n_d \, .$$

For each $j \in \mathcal{J}$, $r_j = (r_{1j}, \dots, r_{mj})$ is the demand vector by unit time.

- λ_{ij} the commutation rate between the states of demand i and j.
- M_d the inventory capacity constraint for item d.
- f(x,d) the instantaneous inventory holding/production cost.
- $q(d, \widetilde{d})$ the switching cost for the machine from state d to \widetilde{d} .
- α the discount rate.

We assume that the following conditions hold. The commutation costs satisfy:

$$\begin{cases}
q(d, d) = 0, & \forall d \in D, \\
q(d, \tilde{d}) \ge q_0 > 0, & \forall \tilde{d} \ne d, \\
q(d, \hat{d}) < q(d, \tilde{d}) + q(\tilde{d}, \hat{d}), & \forall d \ne \tilde{d} \ne \hat{d}.
\end{cases} \tag{1}$$

We also suppose instantaneous commutations and that the following compatibility condition between demands and productions holds:

$$\sum_{d=1}^{m} \frac{r_{dj}}{p_d} < 1 \qquad \forall j \in \mathcal{J}. \tag{2}$$

2.2 Admissible states

Let $y_d(t)$ be the inventory level of item d at time t, starting at $y_d(0) = x_d$. Therefore, for the system global state y, we have

$$y(t) \equiv (y_1(t), \dots, y_m(t)), \qquad (y_1(0), \dots, y_m(0)) = (x_1, \dots, x_m).$$

As neither backlogging nor production over capacity constraints are allowed for the inventory state y_d , the following restriction for y_d holds:

$$0 \le y_d \le M_d, \quad \forall d = 1, \dots, m.$$

In order to describe the admissible state space, we will need the following notation. Let

$$\Gamma(a_{1,\cdots,}a_{m}) = \left\{x \in \prod_{d=1}^{m} [0,M_{d}] : a(x) = (a_{1,\cdots,}a_{m})\right\},$$

where

$$a_i(x) = \left\{ egin{array}{ll} 0 & ext{if } x_i = 0, \ 1 & ext{if } x_i \in (0, M_i) \,, \ 2 & ext{if } x_i = M_i. \end{array}
ight.$$

If the stock levels of at least two items reach zero simultaneously, the shortage of at least one item is inevitable with any admissible control policy. Therefore, the admissible state space Q comprises only the set of points with at most one zero component, i.e.,

$$Q=igcup_{a}\left\{ \Gamma\left(a_{1},...,a_{i},...,a_{m}
ight) : ext{ at most one component }a_{i}=0
ight\} .$$

We denote ∂Q^+ the points of Q that are not admissible, i.e.,

$$\partial Q^{+}=igcup_{a}\left\{ \Gamma\left(a_{1},...,a_{i},...,a_{m}
ight) : ext{ at least two components }a_{i}=0
ight\} .$$

If we denote with Ω the interior points of Q, we have

$$\Omega = \{x : 0 < x_i < M_i, i = 1, ..., m\} = \Gamma(1, ..., 1).$$

We also define

$$\gamma_d^- = \bigcup_a \{ \Gamma(a_1, ..., a_d, ..., a_m) : a_d = 0 \} \cap Q,$$
(3)

$$\gamma_d^+ = \bigcup_a \{ \Gamma(a_1, ..., a_d, ..., a_m) : a_d = 2 \} \cap Q.$$
 (4)

2.3 System evolution

The state y follows an evolution given by

$$\frac{dy}{dt} = g(\beta(t), j) \quad \text{where} \quad g_d(\beta(t), j) = \begin{cases} -r_{dj} & \text{if } \beta \neq d, \\ p_d - r_{dj} & \text{if } \beta = d. \end{cases}$$
 (5)

The evolution of the system depends on the current state of demands. The state of demands r is given by a continuous time Markov chain with transition rates λ_{ij} between states of demand i and j.

Remark 2.1 Throughout the paper we suppose that the following inequalities hold

$$|f(x,d)| \le M_f \qquad \forall x \in \overline{Q}, \quad \forall d \in D,$$

$$q(d,\widetilde{d}) \le M_q \qquad \forall d,\widetilde{d} \in D,$$

$$||g(d,j)|| \le M_g \qquad \forall j \in \mathcal{J}, \quad \forall d \in D,$$

$$||f(x,d) - f(\overline{x},d)| \le L_f ||x - \overline{x}|| \quad \forall x, \overline{x} \in \overline{Q}, \quad \forall d \in D.$$

$$(6)$$

2.4 Admissible controls

An admissible control is given by a sequence of pairs (θ_i, d_i) where θ_i are the commutation times of the control (state of production) and d_i are the state of production (θ_i) are stopping times adapted to the process and d_i are random step functions also adapted to the process (see [4], [17])). The control must also verify the additional constraint condition: $y(t) \in Q$, $\forall t \in [0, \infty)$. We denote with B_x^{dj} the set of these admissible controls.

Remark 2.2 It can be proved that for the optimization purpose it is only necessary to consider the subset of Markovian admissible controls. Given a function $\mathcal{D}: Q \times D \times \mathcal{J} \longrightarrow D$, such that

$$\mathcal{D}(x, \mathcal{D}(x, d, j), j) = \mathcal{D}(x, d, j), \quad \forall x \in Q, \ \forall j \in \mathcal{J}, \ \forall d \in D, \tag{7}$$

the feedback control $d(\cdot)$ (see [10]) is defined as

$$d(t) = \mathcal{D}(y(t), d(t-), j(t)).$$

Under suitable additional conditions, the state production d(t) results a piecewise constant function with a finite number of switchings in any finite interval, i.e. $d = d_i$ in the interval $(\theta_i, \theta_{i+1}]$, with

$$0 = \theta_0 \le \theta_1 < \dots < \theta_i < \theta_{i+1} < \dots;$$

$$d_i \in \{0, 1, \dots, m\} ; d_i \ne d_{i+1}; i = 0, 1, \dots$$

Remark 2.3 Condition (7) is a technical restriction aimed to avoid the existence of instantaneous closed loops of control switchings.

2.5 Optimal cost function

Our purpose is to find an optimal feedback control policy that minimizes the criterion $J_x^{d\,j}(\beta)$ which takes into account the production cost and the commutation cost of control policies. In other words, we look for a policy $\bar{\beta}$ such that:

$$V_{d\,j}(x)=J_{x}^{d\,j}(\overline{\beta}\left(\cdot\right))=\inf\left\{ J_{x}^{d\,j}(\beta\left(\cdot\right)):\beta\left(\cdot\right)\in B_{x}^{d\,j}\right\} ,$$

where:

$$J_{x}^{dj}(\beta) = E\left\{\sum_{i=1}^{\infty} \left(\int_{\theta_{i-1}}^{\theta_{i}} f(y(s), d_{i-1})e^{-\alpha s} ds + q(d_{i-1}, d_{i}) e^{-\alpha \theta_{i}}\right)\right\}.$$

Here, j represents the initial state of demands. A special feature of our problem is that neither the shortage of products nor the production over the maximum stocks are allowed. This additional requirement imposes a constraint on the admissible trajectories and on the admissible policies.

2.6 Properties of the optimal cost function

The value function is rather regular at interior points, but it becomes singular at points $x \in \partial Q^+$. Specifically, we have the following properties:

• i) $\exists C_1 > 0$ (a constant independent of the discount rate α) such that

$$|V_{dj}(x)| \le C_1 \left(1 + \frac{1}{\alpha} - \log(d(x, \partial Q^+))\right),$$

• ii) $\lim_{x \to \partial Q^+} V_{dj}(x) = +\infty$.

In the next theorems we prove these properties. To simplify the proof we only consider the case $Q \subset \mathbb{R}^2$.

Theorem 2.1 Let $0 < b < \min(\frac{M_1}{p_1}, \frac{M_2}{p_2})$, $E = Q \cap \left\{ x \in \mathbb{R}^2 : \frac{x_1}{p_1} + \frac{x_2}{p_2} \le b \right\}$. Let $x \in Q \setminus E$, then there exists $C_1 > 0$ such that:

$$|V_{d,j}(x)| \le C_1 \left(\frac{1}{\alpha} + 1\right). \tag{8}$$

Proof. Without losing of generality we consider $p_1 = p_2 = 1$ (by a change of variables, we can always reduce the original problem to this case).

Let $\max(M_1, M_2) < \eta_1 < \eta_2 < M_1 + M_2$ and

$$B = \{x \in Q : \eta_2 < x_1 + x_2\},$$

$$\Xi = \{x \in Q : \eta_1 < x_1 + x_2 \le \eta_2\},$$

$$F = \{x \in Q : b \le x_1 + x_2 \le \eta_1\}.$$

$$(9)$$

We define the following feedback control policy $(\forall j \in \mathcal{J})$

$$\mathcal{D}(x,0,j) = 1, \quad x \in F \setminus (\gamma_{2}^{-} \cup \gamma_{1}^{+}) \\ \mathcal{D}(x,0,j) = 2, \quad x \in F \cap (\gamma_{2}^{-} \cup \gamma_{1}^{+}) \\ \mathcal{D}(x,1,j) = 1, \quad x \in (\Xi \cup F) \setminus (\gamma_{2}^{-} \cup \gamma_{1}^{+}) \\ \mathcal{D}(x,1,j) = 2, \quad x \in (\Xi \cup F) \cap (\gamma_{2}^{-} \cup \gamma_{1}^{+}) \\ \mathcal{D}(x,2,j) = 2, \quad x \in (\Xi \cup F) \setminus (\gamma_{1}^{-} \cup \gamma_{2}^{+}) \\ \mathcal{D}(x,2,j) = 1, \quad x \in (\Xi \cup F) \cap (\gamma_{1}^{-} \cup \gamma_{2}^{+}) \\ \mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{1}^{+} \\ \mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

$$\mathcal{D}(x,2,j) = 0, \quad x \in B \cap \gamma_{2}^{+}.$$

It can be proved (after some lengthy calculations) that, if we use this feedback control policy \mathcal{D} starting at a point $x \in Q \setminus E$, we obtain a control policy $\beta(.)$ whose associated switching times verify: $\forall \nu \geq 1$

$$0 < \epsilon \le \theta_{\nu+1} - \theta_{\nu} \,, \tag{11}$$

where ϵ is a positive constant defined in terms of η_1, η_2 and the data of the problem (but independent of the discount factor α).

In consequence, for the associated functional cost $J_x^{dj}(\beta)$ we have:

$$J_x^{dj}(\beta) = E\left\{\sum_{\nu=1}^{\infty} \int_{\theta_{\nu-1}}^{\theta_{\nu}} f(y(s), d_{\nu-1}) e^{-\alpha s} ds + q(d_{\nu-1}, d_{\nu}) e^{-\alpha \theta_{\nu}}\right\}$$

$$\leq \frac{M_f}{\alpha} + E\left\{\sum_{\nu=1}^{\infty} M_q e^{-\alpha \theta_{\nu}}\right\} \leq \frac{M_f}{\alpha} + E\left\{\sum_{\nu=1}^{\infty} M_q e^{-\alpha \nu \epsilon}\right\}$$

$$= \frac{M_f}{\alpha} + \frac{M_q}{1 - e^{\alpha \epsilon}} \leq \frac{M_f}{\alpha} + M_q(1 + \frac{1}{\alpha \epsilon})$$

$$\leq C_1(\frac{1}{\alpha} + 1),$$

as we wanted to prove.

Theorem 2.2 Let $x \in E$ then there exists $C_1 > 0$ (which depends only on problem data but not on the discount factor α) such that:

$$V_{dj}(x) \le C_1 \left(\frac{1}{\alpha} + 1 + (\log(d(x, \partial Q^+)))^-\right).$$

Proof. In order to simplify the proof we also consider here the case $p_1 = p_2 = 1$.

Let $x \in E$, and suppose $x_1 = 0$, $x_2 < b$. We apply the control policy defined in (10). So, at the switching time θ_{ν} we have

$$\begin{array}{lll} y(\theta_1) & = & (x_1^1,0) \\ y(\theta_2) & = & (0,x_2^2) \\ y(\theta_3) & = & (x_1^3,0) \\ \dots & \dots & \dots \\ y(\theta_{2\nu}) & = & (0,l^{\nu}) \\ y(\theta_{2\nu+1}) & = & (l^{\nu+1},0). \end{array}$$

It is clear that

$$\theta_{\nu+1} - \theta_1 \ge l^{\nu} \min_{j} \min_{d} \left(\frac{1}{r_{dj}}\right) \tag{12}$$

and

$$l^{\nu n+1} \ge \gamma \, l^{\nu},\tag{13}$$

where $l^0 = ||x||$ and

$$\gamma = \min(\min_{j} (1 - r_{1j}) \min_{i} \frac{1}{r_{2i}}, \min_{j} (1 - r_{2j}) \min_{i} \frac{1}{r_{1i}}). \tag{14}$$

From (2) it results $\gamma > 1$. In consequence, for a time $\overline{t} \leq \theta_{\overline{\nu}}$, where

$$\overline{\nu} = \left[\frac{\log b - \log ||x||}{\log \gamma} \right] + 1,$$

the system reaches $Q \setminus E$.

If after \bar{t} we apply the feedback policy defined in (10), we have for the corresponding cost

$$J_x^{dj}(\beta) \le \left(1 + \frac{\log b - \log ||x||}{\log \gamma}\right) M_q + \frac{M_f}{\alpha} + C_1 \left(\frac{1}{\alpha} + 1\right).$$

And so for a suitable constant C we have

$$J_x^{dj}(\beta) \le C \left(1 + \frac{1}{\alpha} + (\log ||x||)^{-} \right).$$

For the general case $x \in E$ it is possible to get a similar result and then we have the general relation

$$V_{dj}(x) \le C \left(1 + \frac{1}{\alpha} + (\log(||x||)^{-}) \right).$$

Theorem 2.3 For each $x \in Q$ it holds that

$$V_{d,i}(x) \ge -C_1 \log ||x|| - C_2. \tag{15}$$

Proof. Let $\beta(.) \in B_x^{dj}$. We want to obtain a bound of the first switching time θ_1 as a linear function of ||x||.

Always at least one of the stocks $y_d(\cdot)$ is a decreasing function in $[0, \theta_1]$ and the shortage of any item is forbidden, we have

$$\theta_1 \leq \max_d x_d \; \max_j \left(\tfrac{1}{r_{d\, j}} \right) \leq \|x\| \, \left\| \tfrac{1}{r} \right\|_\infty \, ,$$

where

$$\left\|\frac{1}{r}\right\|_{\infty} = \max_{j} \max\left(\frac{1}{r_{1\,j}}, \frac{1}{r_{2\,j}}\right).$$

INRIA

For a generic $\theta_{\nu+1}$ we have

$$\theta_{\nu+1} - \theta_{\nu} \le \|y(\theta_{\nu})\| \, \left\| \frac{1}{r} \right\|_{20} \, .$$
 (16)

By virtue of (6) we have

$$||y(\theta_{\nu+1})|| \le ||y(\theta_{\nu})|| + M_g(\theta_{\nu+1} - \theta_{\nu}) \le \chi ||y(\theta_{\nu})||,$$
 (17)

where

$$\chi = 1 + M_g \left\| \frac{1}{r} \right\|_{\infty}.$$

¿From (16) and (17) we get

$$\theta_{\nu} \le \left\| \frac{1}{r} \right\|_{\infty} \|x\|_{\infty} \frac{1 - \chi^{\nu}}{1 - \chi}. \tag{18}$$

Let us define $\overline{\nu} = \min\{\nu : \theta_{\nu} \geq 1\}$. Then we have

$$\overline{\nu} \ge \frac{\log\left(1 + \frac{-1 + \chi}{\left\|\frac{1}{r}\right\|_{\infty} \left\|x\right\|_{\infty}}\right)}{\log \chi} \tag{19}$$

and in consequence, for the corresponding functional value $J_x^{dj}(\beta)$ we have

$$J_x^{dj}(\beta) \ge -\frac{M_f}{\alpha} + (\overline{\nu} - 1)q_0 e^{-\alpha}.$$

So, by virtue of (19) we get

$$V(x) \ge -\frac{M_f}{\alpha} + e^{-\alpha}q_0 \left(\frac{\log\left(\frac{M_g}{||x||}\right)}{\log\chi} - 1\right)$$

then

$$V_{dj}(x) \ge -C_1 \log ||x|| - C_2, \qquad (20)$$

where

$$C_1 = e^{-\alpha} \frac{q_0}{\log \chi},$$

$$C_2 = \frac{M_f}{\alpha} + e^{-\alpha}q_0\left(1 - \frac{\log M_g}{\log \chi}\right).$$

2.7 Solution by perturbations

The singular behavior in ∂Q^+ brings technical difficulties both in the analytical sense and in the numerical approximation. For this reason we introduce a perturbed problem where external purchases are allowed. In this case a penalty cost A must be paid and the system jumps instantaneously to the point of joint maximum stock. We call $V_{dj}^A(x)$ the optimal cost corresponding to this problem. The relation between the two problems is the following: $\forall x \in Q, \forall d \in D, \forall j \in \mathcal{J}$,

- $V_{dj}^A(x) \leq V_{dj}(x)$,
- $V_{dj}^{\widetilde{A}}(x) \le V_{dj}^{A}(x), \forall A \ge \widetilde{A},$
- $\lim_{A \to +\infty} V_{dj}^A(x) = V_{dj}(x),$
- $\forall x \in Q, \exists \widetilde{A}(x) / V_{dj}^{A}(x) = V_{dj}(x) \forall A \geq \widetilde{A}(x).$

Remark 2.4

The singular behavior of V(x) when $x \to \partial Q^+$ is of type $-\log(d(x, \partial Q^+))$. From a practical point of view if we want to compute V in a compact K, the constant A can be chosen as

$$A = C(-\log(d(K, \partial Q^+))).$$

Remark 2.5 We consider in this work only the perturbed problem where the constant A verifies

$$A \ge \max(q(d, \widetilde{d}) : d, \widetilde{d} \in D). \tag{21}$$

For the sake of simplicity we will denote in the following with V the function that we have called V^A in the present paragraph.

3 The optimal cost function V

3.1 The function and its properties

In the following sections we present the dynamic programming principle (DPP) verified by the optimal cost function of our problem. To prove the existence, uniqueness and continuity of the solution of the set of integral equations and boundary conditions associated to the DPP, we introduce an operator P and we will obtain that V is the only fixed point of P.

Construction of an optimal feedback policy

When the optimal cost function V is known, optimal control policies can be found in the following way: given a state (x, d, j), an optimal policy is to continue the production of item d till the time of commutation

$$t_{x,d,j} = \inf\{t \ge 0 : V_{dj}(y(t)) = (SV)_{dj(t)}(y(t))\}, \tag{22}$$

which is a well defined non anticipative commutation time (see [6], [10]). In (22) we have used the operator S defined as

$$(SV)_{d\,j}(x) = \min(\min_{\widetilde{d} \neq d}(V_{\widetilde{d}\,j}(x) + q(d,\widetilde{d})), V_{d\,j}(e) + A),$$

being

$$e = (M_1, M_2, ..., M_m).$$

Remark 3.1 By virtue of (1), the technical condition (7) is implicitly verified.

3.2 Dynamic programming principle

The *Dynamic Programming Principle* allows us to establish the Hamilton-Jacobi-Bellman (HJB) equations associated to this problem and its associated boundary conditions (see [3], [4], [10], [22]).

3.2.1 The integral form of the Hamilton-Jacobi-Bellman equation

Definition 3.1 We use the following notation and auxiliary variables

$$\widetilde{\alpha}_{j} = \alpha + \sum_{i \neq j} \lambda_{ji},$$

$$\tau(x, d, j) = \sup\{t : x + t g(d, j) \in \Omega\}.$$
(23)

Remark 3.2 $\tau(x,d,j)$ (the time at which the trajectory reaches the boundary from the initial position x if there have not been demand changes) is a Lipschitz function of the initial position because this function is given by:

$$\tau(x,d,j) = \min\left(\frac{M_d - x_d}{p_d - r_{dj}}, \min_{\widetilde{d} \neq d} \left(\frac{x_{\widetilde{d}}}{r_{\widetilde{d}}}\right)\right).$$

This function is a minimum of Lipschitz functions and therefore it is a Lipschitz function, in fact

$$|\tau(x,d,j) - \tau(\overline{x},d,j)| \le L_{\tau} ||x - \overline{x}||,$$

where

$$L_{ au} = \max_{d=1,m} \max_{j \in \mathcal{J}} \max \left(rac{1}{p_d - r_{d\,j}}, rac{1}{r_{\widetilde{d}}}
ight).$$

The following form of the DPP can be proved using classical arguments and the Ito's formula corresponding to the process appearing in this production problem.

Theorem 3.1 Let V be continuous, then $\forall x \in \Omega, \forall d \in D, \forall j \in \mathcal{J}$ the following conditions are verified

1. $V_{dj}(x) \leq (SV)_{dj}(x)$.

2.
$$V_{dj}(x) \leq \int_{0}^{t} e^{-\widetilde{\alpha}_{j} s} (f(y(s), d) + \sum_{i \neq j} \lambda_{j,i} V_{d,i}(y(s))) ds + e^{-\widetilde{\alpha}_{j} t} V_{d,j}(x + t g(d, j)),$$

$$\forall t \leq \tau(x, d, j), being y(s) = x + s g(d, j).$$

3. If furthermore, for some point $x \in \Omega$, a strict inequality holds in 1, then there exists $t_{x,d,j} > 0$ such that

$$V_{dj}(x) = \int_{0}^{t} e^{-\widetilde{\alpha}_{j} s} (f(y(s), d) + \sum_{i \neq j} \lambda_{j,i} V_{di}(y(s))) ds + e^{-\widetilde{\alpha}_{j} t} V_{dj}(x + t g(d, j)), \quad (24)$$

$$\forall 0 \leq t \leq t_{x,d,j} \leq \tau(x,d,j).$$

Definition 3.2 It will be useful to define $t_{x,d,j}$ in the following way

$$t_{x,d,j} = \min \{ t : V_{dj}(x + tg(d,j)) = (SV)_{dj}(x + tg(d,j)) \} . \tag{25}$$

From the properties 1 and 3 it follows that $t_{x,d,j}$ defined in (25) verifies (24).

3.2.2 Boundary conditions for the HJB equation.

As the evolution of the system is restricted to the set \overline{Q} there are some conditions involving the values of the function V at the boundary ∂Q .

Theorem 3.2 In ∂Q the following boundary conditions are verified for all $d \neq 0$:

$$V_{\widetilde{d}j}(x) = (SV)_{\widetilde{d}j}(x) \qquad \forall x \in \gamma_d^-, \ \forall \widetilde{d} \neq d,$$

$$V_{dj}(x) = (SV)_{dj}(x) \qquad \forall x \in \gamma_d^+,$$

$$(26)$$

where γ_d^- and γ_d^+ are defined in (3) and (4) respectively.

3.3 A fixed point problem associated to the DPP

3.3.1 An auxiliary operator and its properties

Definition 3.3 Let P be the operator $P: B(\overline{Q})^{(m+1)\times J} \to B(\overline{Q})^{(m+1)\times J}$, where $B(\bar{\Omega})^{m+1)\times J}$ is the set of Borel-measurable and bounded functions, given by $(\forall d \in D, \forall j \in \mathcal{J}, \ \forall x \in Q)$

$$(Pw)_{d\,i}(x) =$$

$$\inf_{\tau \le \tau(x,d,j)} (\int_{0}^{\tau} e^{-\widetilde{\alpha}_{j} s} (f(y(s),d) + \sum_{i \ne j} \lambda_{ji} w_{di}(y(s))) ds + e^{-\widetilde{\alpha}_{j} \tau} (Sw)_{dj}(y(\tau))), \quad (27)$$

where y(s) = x + s g(d, j).

Definition 3.4 Let β_{xdj} be the function given by

$$\beta_{x\, d\, j}(\tau,w) = \int_0^\tau e^{-\widetilde{\alpha}_j\, s} (f(y(s),d) + \sum_{i\neq j} \lambda_{j\, i}\, w_{d\, i}(y(s))) ds + (Sw)_{d\, j}(x+\tau\,\, g(d,j)) e^{-\widetilde{\alpha}_j\, \tau},$$

then we can write the operator P as

$$(Pw)_{d\,j}(x) = \min_{\tau \le \tau(x,d,j)} \beta_{x\,d\,j}(\tau,w).$$

Let us denote by

$$\overline{\tau}(x, d, j) = \inf\{\tau : (Pw)_{dj}(x) = \beta_{xdj}(\tau, w)\}.$$
 (28)

Lemma 3.1 P is an operator from $(W^{1,\infty}(Q))^{(m+1)\times J}$ to $(W^{1,\infty}(Q))^{(m+1)\times J}$ and it verifies

$$\|\nabla Pw\|_{\infty} \le (1+\eta)(\|\nabla w\|_{\infty} + \rho),$$

where

$$\eta = 1 + L_{\tau} M_g + \frac{1}{\widetilde{\alpha}_j} \sum_{i \neq j} \lambda_{ji},$$

$$\rho = \frac{L_f}{\widetilde{\alpha}_j} + L_{\tau} (M_f + A \sum_{i \neq j} \lambda_{ji}).$$
(29)

In other words if w is a Lipschitz function (with associated Lipschitz constant L_w), then Pw is a Lipschitz function too, whose associated Lipschitz constant verifies

$$L_{Pw} = (1 + \eta)(L_w + \rho).$$

Proof.

We want to prove that

$$\begin{aligned} \| (Pw)_{dj}(x) - (Pw)_{dj}(\overline{x}) \| &= \left\| \min_{\tau \le \tau(x,d,j)} \beta_{x \, dj}(\tau,w) - \min_{\tau \le \tau(\overline{x},d,j)} \beta_{\overline{x} \, dj}(\tau,w) \right\| \\ &= \| \beta_{x \, dj}(\tau_x,w) - \beta_{\overline{x} \, dj}(\tau_{\overline{x}},w) \| \le L_{Pw} \| x - \overline{x} \| \, . \end{aligned}$$

where we denote with τ_x and $\tau_{\overline{x}}$ the times which realize the minimum of β associated to the initial conditions x and \overline{x} respectively.

We will suppose that $\tau(x,d,j) \leq \tau(\overline{x},d,j)$

• Case 1: $\tau_{\overline{x}} \leq \tau(x, d, j)$

$$(Pw)_{d\,j}(x) = \beta_{x\,d\,j}(\tau_x, w),$$

$$(Pw)_{d,i}(\overline{x}) = \beta_{\overline{x}d,i}(\tau_{\overline{x}}, w) \leq \beta_{\overline{x}d,i}(\tau_{x}, w)$$

then

$$\begin{split} &(Pw)_{d\,j}(\overline{x}) - (Pw)_{d\,j}(x) \leq \\ &\leq \beta_{\overline{x}\,d\,j}(\tau_x) - \beta_{x\,d\,j}(\tau_x) \\ &\leq \int_0^{\tau_x} e^{-\widetilde{\alpha}_j\,s} \left(|f(\overline{y}(s),d) - f(y(s),d)| + \sum_{i\neq j} \lambda_{j\,i} |w_{d\,i}(\overline{y}(s)) - w_{d\,i}(y(s))| \right) ds \\ &\quad + e^{-\widetilde{\alpha}_j\,\tau_x} |(Sw)_{d\,j}(\overline{x} + \tau_x\,g(d,j)) - (Sw)_{d\,j}(x + \tau_x\,g(d,j))| \\ &\leq \int_0^{\tau_x} e^{-\widetilde{\alpha}_j\,s} ||x - \overline{x}|| \left(L_f + L_w \sum_{i\neq j} \lambda_{j\,i} \right) ds + e^{-\widetilde{\alpha}_j\,\tau} L_w \left(1 + L_\tau M_g \right) ||x - \overline{x}|| \\ &\leq \frac{1}{\widetilde{\alpha}_j} \left(L_f + L_w \sum_{i\neq j} \lambda_{j\,i} \right) ||x - \overline{x}|| + L_w \left(1 + L_\tau M_g \right) ||x - \overline{x}|| \\ &\leq \left(L_w \left(1 + L_\tau M_g + \frac{1}{\widetilde{\alpha}_j} \sum_{i\neq j} \lambda_{j\,i} \right) + \frac{L_f}{\widetilde{\alpha}_j} \right) ||x - \overline{x}|| \,. \end{split}$$

We can also consider the following inequalities $(Pw)_{d\,i}(x) = \beta_{x\,d\,i}(\tau_x, w) \leq \beta_{x\,d\,i}(\tau_{\overline{x}}, w)$

 $(Pw)_{dj}(\overline{x}) = \beta_{\overline{x}dj}(\tau_{\overline{x}}, w)$ and by similar calculations we have

$$(Pw)_{dj}(x) - (Pw)_{dj}(\overline{x}) \le \left(L_w \left(1 + L_\tau M_g + \frac{1}{\widetilde{\alpha}_j} \sum_{i \ne j} \lambda_{ji} \right) + \frac{L_f}{\widetilde{\alpha}_j} \right) \|x - \overline{x}\|,$$

therefore

$$\|(Pw)_{dj}(x) - (Pw)_{dj}(\overline{x})\| \le \left(L_w\left(1 + L_\tau M_g + \frac{1}{\widetilde{\alpha}_j}\sum_{i \ne j}\lambda_{ji}\right) + \frac{L_f}{\widetilde{\alpha}_j}\right)\|x - \overline{x}\|.$$

• Case 2: $\tau(x,d,j) \le \tau_{\overline{x}} \le \tau(\overline{x},d,j)$

$$(Pw)_{dj}(x) = \beta_{xdj}(\tau_x) \le \beta_{xdj}(\tau(x,d,j)),$$

$$(Pw)_{dj}(\overline{x}) = \beta_{\overline{x}dj}(\tau_{\overline{x}}).$$

¿From these relations we have

$$\begin{split} &(Pw)_{dj}(x) - (Pw)_{dj}(\overline{x}) \leq \\ &\leq \beta_{x\,dj}(\tau(x,d,j)) - \beta_{\overline{x}\,dj}(\tau_{\overline{x}}) \\ &\leq \int_{0}^{\tau(x,d,j)} e^{-\widetilde{\alpha}_{j}\,s} \left(|f(y(s),d) - f(\overline{y}(s),d)| + \sum_{i\neq j} \lambda_{j\,i} \, |w_{d\,i}(y(s)) - w_{d\,i}(\overline{y}(s))| \right) ds \\ &+ \int_{\tau(x,d,j)}^{\tau_{\overline{x}}} e^{-\widetilde{\alpha}_{j}\,s} \left(f(\overline{y}(s),d) + \sum_{i\neq j} \lambda_{j\,i} \, w_{d\,i}(\overline{y}(s)) \right) ds \\ &e^{-\widetilde{\alpha}_{j}\tau(x,d,j)} (Sw)_{d\,j}(x + \tau(x,d,j) \, g(d,j)) - e^{-\widetilde{\alpha}_{j}\,\tau_{\overline{x}}} (Sw)_{d\,j}(\overline{x} + \tau_{\overline{x}} \, g(d,j)) \\ &\leq \frac{1}{\widetilde{\alpha}_{j}} \left(L_{f} + L_{w} \sum_{i\neq j} \lambda_{j\,i} \right) \|x - \overline{x}\| + \frac{1}{\widetilde{\alpha}_{j}} (M_{f} + A \sum_{i\neq j} \lambda_{j\,i}) \left(e^{-\widetilde{\alpha}_{j}\tau(x,d,j)} - e^{-\widetilde{\alpha}_{j}\,\tau_{\overline{x}}} \right) \\ &+ e^{-\widetilde{\alpha}_{j}\tau(x,d,j)} \left((Sw)_{d\,j}(x + \tau(x,d,j)g(d,j)) - (Sw)_{d\,j}(\overline{x} + \tau_{\overline{x}}g(d,j)) \right) \\ &\leq \frac{1}{\widetilde{\alpha}_{j}} \left(L_{f} + L_{w} \sum_{i\neq j} \lambda_{j\,i} \right) \|x - \overline{x}\| + (M_{f} + A \sum_{i\neq j} \lambda_{j\,i}) \|\tau_{\overline{x}} - \tau(x,d,j)\| \\ &+ L_{w}(1 + L_{\tau}M_{g}) \|x - \overline{x}\| \\ &\leq \left(\frac{1}{\widetilde{\alpha}_{j}} \left(L_{f} + L_{w} \sum_{i\neq j} \lambda_{j\,i} \right) + L_{\tau}(M_{f} + A \sum_{i\neq j} \lambda_{j\,i}) + L_{w}(1 + L_{\tau}M_{g}) \right) \|x - \overline{x}\| \\ &\leq \left(L_{w} \left(1 + L_{\tau}M_{g} + \frac{1}{\widetilde{\alpha}_{j}} \sum_{i\neq j} \lambda_{j\,i} \right) + \frac{L_{f}}{\widetilde{\alpha}_{j}} + L_{\tau}(M_{f} + A \sum_{i\neq j} \lambda_{j\,i}) \right) \|x - \overline{x}\| . \end{split}$$

We can also consider the following inequalities $(Pw)_{dj}(x) = \beta_{xdj}(\tau_x),$

 $(Pw)_{dj}(\overline{x}) = \beta_{\overline{x}\,dj}(\tau_{\overline{x}}) \le \beta_{\overline{x}\,dj}(\tau_x),$ obtaining in this case

$$(Pw)_{dj}(\overline{x}) - (Pw)_{dj}(x) \le \left(L_w \left(1 + L_\tau M_g + \frac{1}{\widetilde{\alpha}_j} \sum_{i \ne j} \lambda_{ji}\right) + \frac{L_f}{\widetilde{\alpha}_j}\right) \|x - \overline{x}\|,$$

therefore

 $\|(Pw)_{d\,j}(x)-(Pw)_{d\,j}(\overline{x})\|$

$$\leq \left(L_w\left(1 + L_\tau M_g + \frac{1}{\widetilde{\alpha}_j} \sum_{i \neq j} \lambda_{j\,i}\right) + \frac{L_f}{\widetilde{\alpha}_j} + L_\tau (M_f + A \sum_{i \neq j} \lambda_{j\,i})\right) \|x - \overline{x}\|.$$

Hence by symmetry between x and \overline{x} this inequality holds for any x, $\overline{x} \in \overline{Q}$. Then by virtue of (29) it results $L_{Pw} \leq \eta L_w + \rho$ and so we arrive at

$$||(Pw)_{d j}(x) - (Pw)_{d j}(\overline{x})|| \leq L_{Pw} ||x - \overline{x}||.$$

Remark 3.3 The following relation between the Lipschitz constants of $P^{\nu}w$ and w holds

$$L_{P^{\nu}w} \le (L_w + \rho)(\eta + 1)^{\nu} \quad \forall \nu \in N.$$

Corollary 3.1 $P: C(\overline{Q})^{(m+1)\times J} \to C(\overline{Q})^{(m+1)\times J}$.

Proof. Let $w \in C(\overline{Q})^{(m+1)\times J}$ and w^{ν} a sequence of elements of $(W^{1,\infty}(Q))^{(m+1)\times J}$ that approximates w in the following sense

$$\lim_{v \to \infty} \|w - w^{\nu}\|_{\infty} = 0. \tag{30}$$

It is easy to check that

$$\|Pw - P\overline{w}\|_{\infty} \le \|w - \overline{w}\|_{\infty} \tag{31}$$

and then by virtue of (30) and (31) Pw is the uniform limit of a sequence of Lipschitz continuous functions. In consequence Pw itself is a continuous function.

3.3.2 A fixed point problem. Existence and uniqueness of solution.

We consider now the fixed point problem

Find
$$W \in B(\overline{Q})^{(m+1)\times J}$$
 such that $W = PW$. (32)

We prove for this problem, the existence and uniqueness of solution.

Definition 3.5:

 \underline{w} is a subsolution of the operator P if it verifies

$$\underline{w}_{d\,j}(x) \le (P\underline{w})_{d\,j}(x) \quad \forall d \in D, \quad \forall j \in \mathcal{J}, \quad \forall x \in \overline{Q},$$

 \overline{s} is a supersolution of the operator P if it verifies

$$\overline{s}_{dj}(x) \ge (P\overline{s})_{dj}(x), \quad \forall d \in D, \quad \forall j \in \mathcal{J}, \quad \forall x \in \overline{Q}.$$

Remark 3.4 For any $u, v \in B(\overline{Q})^{(m+1)\times J}$ we write $u \leq v$ if $u_{dj} \leq v_{dj} \ \forall x \in \overline{Q}, \ \forall d \in D, \ \forall j \in \mathcal{J}.$

Lemma 3.2 The set of subsolutions of operator P is not empty.

Proof. We prove that if the constant value \underline{w} verifies $\underline{w} \leq \frac{-M_f}{\alpha}$, then \underline{w} is a subsolution. Applying the definition (27) we get

$$P\underline{w}_{dj} = \int_{0}^{\overline{\tau}} e^{-\widetilde{\alpha}_{j} \, s} \left(f(y(s), d) + \sum_{i \neq j} \lambda_{j \, i} \underline{w}_{d \, i} \right) ds + e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} \, S\underline{w}_{d \, j}$$

$$= \int_{0}^{\overline{\tau}} e^{-\widetilde{\alpha}_{j} \, s} \left(f(y(s), d) + \sum_{i \neq j} \lambda_{j \, i} \underline{w}_{d \, i} \right) ds + e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} \left(\underline{w}_{d \, j} + q(d, \widetilde{d}) \right)$$

$$\geq \int_{0}^{\overline{\tau}} e^{-\widetilde{\alpha}_{j} \, s} \left(-M_{f} + \sum_{i \neq j} \lambda_{j \, i} \underline{w}_{d \, i} \right) ds + e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} \left(\underline{w}_{d \, j} + q(d, \widetilde{d}) \right)$$

$$= \frac{\left(1 - e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} \right)}{\widetilde{\alpha}_{j}} \left(-M_{f} + \underline{w}_{d \, j} \sum_{i \neq j} \lambda_{j \, i} \right) + e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} \left(\underline{w}_{d \, j} + q(d, \widetilde{d}) \right)$$

$$\geq \frac{\left(1 - e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} \right)}{\widetilde{\alpha}_{j}} \left(-M_{f} - \alpha \, \underline{w}_{d \, j} \right) + \underline{w}_{d \, j} + e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} q_{0}$$

$$\geq \underline{w}_{d \, j} + e^{-\widetilde{\alpha}_{j} \, \overline{\tau}} q_{0} \geq \underline{w}_{d \, j}. \quad \text{INRIA}$$

And so \underline{w} is a subsolution.

Lemma 3.3 The set of supersolutions of the operator P is not empty.

Proof. Let

$$\rho = \max_{j \in \mathcal{J}} (\frac{\widetilde{\alpha}_j A + M_f (1 - e^{c\widetilde{\alpha}_j})}{\alpha (1 - e^{c\widetilde{\alpha}_j})}),$$

$$c = \min_{j \in \mathcal{J}} \min_{d \in D} (\tau(e, d, j)).$$

We define $\forall d \in D, \forall j \in \mathcal{J}$

$$\overline{s}_{dj}(x) = \begin{cases} \rho & x \neq e, \\ \rho - A & x = e. \end{cases}$$
(33)

With this definition, it is easy to check that \overline{s} is a supersolution.

Lemma 3.4 Given $\rho > 0$, $\exists \underline{w} = \underline{w}(\rho)$, $\overline{w}(\rho)$, $0 < \mu(\rho) \leq 1$ such that $\forall u, v \in B(\overline{Q})^{(m+1) \times J}$ verifying $\|u\| \leq \rho$, $\|v\| \leq \rho$ it holds that

- 1. $\underline{w} \le u \le \overline{w}$,
- 2. $\underline{w} \le v \le \overline{w}$,
- 3. $\underline{w} + \mu \ (\overline{w} \underline{w}) \le P\underline{w}$,
- 4. $P\overline{w} \leq \overline{w}$.

Proof. We consider

$$\underline{w}_{d\,j}(x) = \min\left(-\rho, \frac{-M_f}{\alpha}\right), \ \forall d \in D, \ \forall j \in \mathcal{J}, \ \forall x \in Q,$$
 (34)

$$\overline{w}_{dj}(x) = \overline{s}_{dj}(x) + \rho, \tag{35}$$

where $\overline{s}_{dj}(x)$ is given by (33).

As $||u|| \le \rho$, $||v|| \le \rho$, it becomes evident that properties 1) and 2) hold.

 \overline{s}_{dj} is a supersolution then if we add a constant to it, the new function is also a supersolution. Therefore $(P\overline{w})_{dj} \leq \overline{w}_{dj}$ and then property 4) holds.

By (34) we have

$$\underline{w}_{d\,j} \leq \frac{-M_f}{\alpha} \quad \Rightarrow \quad \underline{w}_{d\,j} + e^{-\widetilde{\alpha}_j\,\overline{\tau}} q_0 \leq (P\underline{w})_{d\,j} \quad \forall d \in D, \quad \forall j \in \mathcal{J}.$$

To obtain 3 it should be $\mu(\overline{w} - \underline{w}) \leq e^{-\widetilde{\alpha}_j \overline{\tau}} q_0$ or in an equivalent expression

$$\mu \le \frac{e^{-\widetilde{\alpha}_j \, \overline{\tau}} q_0}{(\overline{w} - \underline{w})},$$

because $\overline{w} - \underline{w} \neq 0$. Besides

$$\overline{w} - \underline{w} \ge \|\overline{s}\| + \rho + \frac{M_f}{\alpha},$$

as for any ρ

$$\frac{e^{-\widetilde{\alpha}_j \, \overline{\tau}} q_0}{\|\overline{s}\| + \rho + \frac{M_f}{\alpha}} < 1,$$

because $\|\overline{s}\| \ge e^{-\widetilde{\alpha}_j \, \overline{\tau}} q_0$ there exists $0 < \mu(\rho) \le 1$ such that 3 holds

$$0<\mu\leq \frac{e^{-\widetilde{\alpha}_j\,\overline{\tau}}q_0}{\|\overline{s}\|+\rho+\frac{M_f}{\alpha}}\leq \frac{e^{-\widetilde{\alpha}_j\,\overline{\tau}}q_0}{(\overline{w}-\underline{w})}\,.$$

Lemma 3.5 Let $u, v \in \underline{w}, \overline{w}$ and $0 < \mu \le 1$ given by the Lemma 3.4. Let $\zeta, \xi \in [0,1]$ such that

$$\xi (\underline{w} - u) \le v - u \le \zeta (v - \underline{w}),$$

then

$$(1 - \mu) \xi (\underline{w} - Pu) \le Pv - Pu \le (1 - \mu) \zeta (Pv - \underline{w}).$$

Proof.

$$u \ge v - \zeta \ (v - \underline{w}) = (1 - \zeta)v + \zeta \ \underline{w}.$$

INRIA

By the properties of monotony and concavity of operator the P, we have

$$Pu \ge (1 - \zeta)Pv + \zeta P\underline{w}$$
.

Using property 3) from Lemma 3.4, we have $Pu \ge (1-\zeta)Pv + \zeta (\underline{w} + \mu(\overline{w} - \underline{w}))$. Then

$$Pu - Pv \ge -\zeta Pv + \zeta \left(\underline{w} + \mu(\overline{w} - \underline{w}) \right)$$

$$\ge -\zeta Pv + \zeta \left(\underline{w} + \mu(Pv - \underline{w}) \right)$$

$$= \zeta \left(-Pv + \underline{w} - \mu(\underline{w} - Pv) \right)$$

$$= \zeta (1 - \mu)(\underline{w} - Pv).$$

In consequence

$$Pv - Pu \le \zeta(1 - \mu)(Pv - \underline{w}).$$

In the same form, as

$$v \ge u + \xi(\underline{w} - u) = (1 - \xi)u + \xi\underline{w}$$

we obtain

$$Pv \ge (1 - \xi)Pu + \xi P\underline{w}$$

and from here, it results

$$(1-\mu)\xi(w-Pu) \le Pv - Pu.$$

Theorem 3.3

- 1. There exists $W \in C(\bar{\Omega})$ such that PW = W
- 2. $\forall w \in C(\bar{\Omega}) \text{ it results } \lim_{\nu \to \infty} P^{\nu} w = W$
- 3. The following rate of convergence holds

$$||P^{\nu}w - W|| \le K(\rho)(1 - \mu(\rho))^{\nu},$$

where $0 < \mu(\rho) \le 1$, $K(\rho) = \|\overline{w}\| + \|\underline{w}\|$ are given by Lemma 3.4 with $\rho = \|w\|$.

Proof. Let $u, v \in C(\overline{\Omega}), \rho = \max(\|u\|, \|v\|)$ and $\overline{w}, \underline{w}$ given by Lemma 3.4, i.e.

$$\underline{w} \le u \le \overline{w},$$

$$\underline{w} \le v \le \overline{w}$$
.

If we define v' = Pv, u' = Pu, $\zeta' = \zeta(1 - \mu)$ by Lemma 3.5 we have

$$v' - u' \leq (1 - \mu)\zeta(v' - \underline{w}),$$

$$v' - u' \le \zeta'(v' - \underline{w}).$$

In consequence, again by Lemma 3.5 we have

$$Pv' - Pu' \leq (1 - \mu)\zeta'(Pv' - \underline{w}),$$

$$P^2v - P^2u \le (1-\mu)^2\zeta(P^2v - w),$$

finally by induction we obtain

$$P^{\nu}v - P^{\nu}u \le (1 - \mu)^{\nu}\zeta(P^{\nu}v - \underline{w}). \tag{36}$$

As $P\overline{w} \leq \overline{w}$ and $Pv \leq P\overline{w}$ by the monotony of P, we have $P^{\nu}v \leq \overline{w}$ and considering (36) it results

$$\limsup_{\nu \to \infty} \left(P^{\nu} v - P^{\nu} u \right) \le 0.$$

In a similar way, we can obtain

$$\liminf_{\nu \to \infty} \left(P^{\nu} v - P^{\nu} u \right) \ge 0,$$

then

$$\lim_{\nu \to \infty} \left(P^{\nu} v - P^{\nu} u \right) = 0.$$

We shall prove now that both sequences $v^{\nu} = P^{\nu}v$ and $u^{\nu} = P^{\nu}u$ are convergent. We take, in particular

 $\widehat{u} = \underline{w}, \ \widehat{v} = \overline{w}$ and we define

$$\widehat{v}^{
u} = P^{
u} \overline{w}$$

$$\hat{u}^{\nu} = P^{\nu}\underline{w}.$$

As $P\overline{w} \leq \overline{w}$, \hat{v}^{ν} is decreasing due to the monotony of P and by induction we have

$$P^{\nu+1}\overline{w} \le P^{\nu}\overline{w} \le \overline{w}.$$

In a similar way \widehat{u}^{ν} is increasing and in consequence it is verified that

$$\underline{w} \le \widehat{u}^{\nu} \le \widehat{u}^{\nu+1} \le \widehat{v}^{\nu+1} \le \widehat{v}^{\nu} \le \overline{w}.$$

Then v^{ν} and u^{ν} are convergent to the same point W because using (36) with \hat{u} and \hat{v} we obtain

$$0 \leq \widehat{v}^{\nu} - \widehat{u}^{\nu} \leq (1 - \mu)^{\nu} (\|\overline{w}\| + \|\underline{w}\|).$$

Moreover as

$$|(P^{\nu}v)_{d\,j}(x) - (P^{\nu}u)_{d\,j}(x)| \le ||\widehat{v}^{\nu} - \widehat{u}^{\nu}||, \quad \forall d \in D, \quad \forall j \in \mathcal{J},$$

is verified, the following rate of convergence holds

$$||P^{\nu}w - W|| \le K(\rho)(1 - \mu(\rho))^{\nu},$$

with $0 < \mu(\rho) \le 1$, $K(\rho) = \|\overline{w}\| + \|\underline{w}\|$ given by Lemma 3.4 with $\rho = \|w\|$.

As u and v are arbitrary, we obtain the uniqueness of the limit and of the fixed point of P.

As the convergence of $P^{\nu}w$ to W is uniform, the fixed point of P is a continuous function because (choosing as initial point a continuous function) it is the uniform limit of a sequence of continuous functions.

3.3.3 Equivalence between the DPP and the fixed point problem

Remark 3.5 ¿From the definition of $\bar{\tau}$ and the properties that V verifies (Theorem 3.1) it is easy to prove that the unique fixed point of P is V.

Theorem 3.4 If V verifies (DPP) then V is the fixed point of P.

Proof.

• Case $V_{dj}(x) = (SV)_{dj}(x)$

Let $0 < t \le \tau(x, d, j)$ by 1 and 2 of (DPP) (Theorem 3.1) we have

$$V_{dj}(x) \leq \int_0^t e^{-\widetilde{\alpha}_j s} (f(y(s), d) + \sum_{i \neq j} \lambda_{ji} V_{di}(y(s))) ds + e^{-\widetilde{\alpha}_j t} V_{dj}(x + t g(d, j))$$

$$\leq \int_0^t e^{-\widetilde{\alpha}_j s} (f(y(s), d) + \sum_{i \neq j} \lambda_{ji} V_{di}(y(s))) ds + e^{-\widetilde{\alpha}_j t} (SV)_{dj}(x + t g(d, j)),$$

$$(37)$$

then

$$V_{d\,j}(x) = (PV)_{d\,j}(x). \tag{38}$$

• Case $V_{di}(x) < (SV)_{di}(x)$

By 3 of (DPP) we have

$$V_{dj}(x) = \int_0^{t_{x\,d\,j}} e^{-\widetilde{\alpha}_j \, s} (f(y(s), d) + \sum_{i \neq j} \lambda_{j\,i} V_{d\,i}(y(s))) ds$$
$$+ e^{-\widetilde{\alpha}_j \, t_{x\,d\,j}} V_{d\,j}(x + t_{x\,d\,j} \, g(d, j)).$$

By definition of t_{xdj} we have $V_{dj}(x+t_{xdj}g(d,j)=(SV)_{dj}(x+t_{xdj}g(d,j))$ and so

$$V_{dj}(x) = \int_{0}^{t_{xdj}} e^{-\widetilde{\alpha}_{j} s} (f(y(s), d) + \sum_{i \neq j} \lambda_{ji} V_{di}(y(s))) ds$$

$$+ e^{-\widetilde{\alpha}_{j} t_{xdj}} (SV)_{dj} (x + t_{xdj} g(d, j)).$$
(39)

In addition, by 1 and 2 of (DPP) it is verified

$$V_{dj}(x) \leq \int_0^t e^{-\widetilde{\alpha}_j s} (f(y(s), d) + \sum_{i \neq j} \lambda_{ji} V_{di}(y(s))) ds$$

$$+ e^{-\widetilde{\alpha}_j t} (SV)_{di} (x + t g(d, j)),$$

$$(40)$$

then from (39) and (40) we get

$$V_{dj}(x) = \min_{t \le \tau(x,d,j)} \left(\int_0^t e^{-\widetilde{\alpha}_j s} (f(y(s),d) + \sum_{i \ne j} \lambda_{ji} V_{di}(y(s))) ds + e^{-\widetilde{\alpha}_j t} (SV)_{dj} (x + t g(d,j)) \right)$$

$$= (PV)_{dj}(x).$$
(41)

From (38) and (41) we conclude that V is a fixed point of P.

3.3.4 Hölder continuity of the optimal cost function

The solution V of the problem is the fixed point of the operator

$$P: C(\overline{\Omega})^{(m+1)\times J} \to C(\overline{\Omega})^{(m+1)\times J}$$

given by $(\forall d \in D, \forall j \in \mathcal{J}, \ \forall x \in Q)$,

$$(Pw)_{d\,i}(x) =$$

$$\inf_{\tau \leq \tau(x,d,j)} (\int\limits_0^\tau e^{-\widetilde{\alpha}_j \, s} (f(y(s),d) + \sum_{i \neq j} \lambda_{j\,i} \, w_{d\,i}(y(s))) ds + e^{-\widetilde{\alpha}_j \, \tau} (Sw)_{d\,j}(y(\tau))).$$

Theorem 3.5 The fixed point of operator P is a Hölder-continuous function.

Proof. We know from Theorem 1 that the following rate of convergence holds for the sequence $u^{\nu} = P^{\nu}w$

$$||V - w^{\nu}|| < K \varepsilon^{\nu} \text{ with } 0 < \varepsilon < 1, \forall \nu \in \mathbb{N}.$$

We start the sequence w^{ν} from a Lipschitz function w (with associated Lipschitz constant L_w), hence

$$\begin{aligned} |V(x) - V(\overline{x})| & \leq |V(x) - w^{\nu}(x)| + |w^{\nu}(x) - w^{\nu}(\overline{x})| + |w^{\nu}(\overline{x}) - V(\overline{x})| \\ & \leq K\xi^{\nu} + (L_w + \rho)(\eta + 1)^{\nu} \|x - \overline{x}\| + K\xi^{\nu} \\ & \leq 2K e^{\nu \log(\xi)} + (L_w + \rho) e^{\nu \log(\eta + 1)} \|x - \overline{x}\| \quad \forall \nu \in N. \end{aligned}$$

Let us consider on the entire IR the function

$$F(t) = 2K e^{t \log(\xi)} + (L_w + \rho) e^{t \log(\eta + 1)} \|x - \overline{x}\|.$$

We search the minimum of this function and we will denote with \overline{t} the value which realizes that minimum (to simplify this presentation we will suppose, without losing of generality, that the value \overline{t} given by this optimization is a natural number; the general case can be carried out using similar arguments and obtaining bounds of the same form). So, for the minimizing \overline{t} we have

$$2K \log(\xi) e^{\overline{t} \log(\xi)} + (L_w + \rho) \log(\eta + 1) e^{\overline{t} \log(\eta + 1)} ||x - \overline{x}|| = 0$$

hence

$$e^{\overline{t}(\log(\eta+1)-\log(\xi))} = \frac{-2K\log(\xi)}{(L_w+\rho)\,\log(\eta+1)\,\|x-\overline{x}\|}.$$

We define

$$C = \frac{-2K\log(\xi)}{(L_w + \rho)\log(\eta + 1)},$$

$$\gamma = \frac{-\log(\xi)}{\log(\eta + 1) - \log(\xi)}.$$

Obviously it is valid that

$$0 < \gamma < 1$$
.

It results

$$e^{\overline{t}\log(\xi)} = \left(C \|x - \overline{x}\|^{-1}\right)^{-\gamma} = C^{-\gamma} \|x - \overline{x}\|^{\gamma},$$

$$e^{\overline{t}\log(\eta + 1)} = \left(C \|x - \overline{x}\|^{-1}\right)^{1 - \gamma}.$$

Hence, for \overline{t} , the following equality holds

$$2K e^{\overline{t}\log(\xi)} + (L_w + \rho) e^{\overline{t}\log(\eta + 1)} \|x - \overline{x}\| = 2KC^{-\gamma} \|x - \overline{x}\|^{\gamma} + (L_w + \rho)C^{1-\gamma} \|x - \overline{x}\|^{\gamma}$$
and then, defining c as

$$c = 2KC^{-\gamma} + (L_w + \rho)C^{1-\gamma},$$

we get

$$||V(x) - V(\overline{x})|| \le c ||x - \overline{x}||^{\gamma}.$$

We conclude that V is Hölder continuous with parameter γ .

27

4 Discrete problem

4.1 Elements of the discrete problem

To define the discrete problem, we introduce an approximation which comprises a discretization of the space $W^{1,\infty}(\Omega)$ and equation (32). We use the techniques and results presented in [5]-[7] and [12, 13].

4.1.1 Domain Approximation

We identify the discretization of the space variables with the parameter k, which also indicates the size of discretization. Let h > 0; for each $j \in \mathcal{J}$, we define the uniform discretization B^{jk} of \mathbb{R}^m given by:

$$\bullet \quad B^{j\,k} = \left\{ \sum_{d=0}^m \zeta_d \; e^d_j : \zeta_d \text{ is integer} \right\},\,$$

$$\bullet \quad h_j^0 = \left(1 - \sum_{d=1}^m \frac{r_{dj}}{p_d}\right) h,$$

$$\bullet \quad h_j^d = \frac{r_{d\,j}}{p_d}\,h,$$

•
$$e_j^0 = (-r_{1j}, ..., -r_{dj}, ..., -r_{mj}) h_j^0$$

•
$$e_j^d = \left(-r_{1\,j},...,-r_{(d-1)\,j},p_d-r_{d\,j},-r_{(d+1)\,j},...,-r_{m\,j}\right)h_j^d$$

For each state of demand j we approximate Q with $Q_{jk} = \bigcup_{\mu} S_{\mu}^{jk}$, where $\left\{S_{\mu}^{jk}\right\}$ is the maximum set of polyhedrons of \mathbb{R}^m which verify

$$S_{\mu}^{j\,k} = x_{\mu}^{j} + \left\{ \sum_{d=1}^{m} \xi_{d} e_{j}^{d} : \xi_{d} \in [0,1] \right\}, x_{\mu}^{j} \in B^{j\,k}, S_{\mu}^{j\,k} \subset Q.$$

We define

$$k_j = \max_{\mu} (\operatorname{diam} S_{\mu}^{jk}), \qquad \qquad k = \max_{j \in \mathcal{J}} (k_j).$$

We denote $\mathcal{V}^{j\,k}=\left\{x_{\mu}^{j},\;\mu=1,...,N_{j}\right\}$ the set of nodes of $Q_{j\,k}$, where N_{j} is the cardinal of $\mathcal{V}^{j\,k}$.

Remark 4.1 If k is small enough, for any two vertices of V^{jk} , there always exists a path given by a system trajectory, (in fact, an especial trajectory without demand changes) which joins the first vertex to the second one.

4.1.2 Approximation of the boundary

We define $\forall d = 1, ..., m, \ \forall j \in \mathcal{J}$,

$$\begin{split} \gamma_{k,\,d,\,j}^+ &= \left\{ x_\mu^j \in \mathcal{V}^{j\,k} : x_\mu^j + h^d\,g(d,j) \notin Q_{j\,k} \right\}, \\ \gamma_{k,\,d,\,j}^- &= \left\{ x_\mu^j \in \mathcal{V}^{j\,k} : x_\mu^j + h^{\widetilde{d}}\,g(\widetilde{d},j) \notin Q_{j\,k}, \forall \widetilde{d} \neq d \right\}. \end{split}$$

4.1.3 Approximation space \overline{F}_k

We divide each quadrilateral element $S_{\mu}^{j\,k}$ in simplices such that the edges are coincident with lines of the form $x_{\mu}^{j}+s\,g(d,\,j),\,s\geq0$. We consider the set \overline{F}_{k} of functions

 $w: \left(\prod_{j\in J} Q_{j\,k}\right) \times D \to \mathbb{R}, \ w_{d\,j}(\cdot) \in W^{1,\,\infty}(Q_{j\,k}), \text{ such that in each simplex } w_{d\,j}(\cdot) \text{ is an affine function of the type}$

$$a_0 + \sum_{i=1}^m a_i \, x_i \, .$$

It is obvious that any $w \in \overline{F}_k$ is entirely characterized by the values $w_{dj}(x^j_\mu), x^j_\mu \in \mathcal{V}^{jk}$,

$$d \in D, j \in \mathcal{J}, \mu = 1, ..., N_j.$$

4.2 The discrete HJB equation

4.2.1 A discrete fixed point problem

We define

$$(\mathcal{L}_{k}w)_{d\,j}(x_{\mu}^{j}) = \begin{cases} \frac{1}{1+\widetilde{\alpha}_{j}\,h_{j}^{d}} & \left(w_{d\,j}(x_{\mu}^{j} + h_{j}^{d}\,g(d,\,j)) + h_{j}^{d}\left(f(x_{\mu}^{j},d) + \sum_{i\neq\,j}\lambda_{j\,i}\,w_{d\,i}(\pi_{Q_{i\,k}}(x_{\mu}^{j}))\right)\right), \\ \forall x_{\mu}^{j} \in \left(\mathcal{V}^{j\,k} \setminus \left(\gamma_{k,\,d,\,j}^{+} \cup \left(\bigcup_{r\,\neq\,d}\gamma_{k,\,r,\,j}^{-}\right)\right)\right), \\ +\infty & \forall x_{\mu}^{j} \in \left(\gamma_{k,\,d,\,j}^{+} \cup \left(\bigcup_{r\,\neq\,d}\gamma_{k,\,r,\,j}^{-}\right)\right), \end{cases}$$

where $\pi_{Q_{ik}}(x_{\mu}^{j})$ is the projection of x_{μ}^{j} over the set of

$$(S_k w)_{dj}(x_{\mu}^j) = \min(\min_{\widetilde{d} \neq d}(w_{\widetilde{d}j}(x_{\mu}^j) + q(d, \widetilde{d})), w_{dj}(\pi_{Q_{ik}}(e)) + A),$$

where $\pi_{Q_{ik}}(e)$ is the projection of e over the set Q_{ik} .

In this form, $(\mathcal{L}_k w)_{dj}(x^j_\mu)$ is a natural discretization of (32) and it includes the boundary conditions (26).

We define $P_k: \overline{F}_k \to \overline{F}_k$ such that $\forall x_u^j \in \mathcal{V}^{jk}, \forall d \in D, \ \forall j \in \mathcal{J}$

$$(P_k w)_{dj}(x^j_{\mu}) = \min\left((\mathcal{L}_k w)_{dj}(x^j_{\mu}), (\mathcal{S}_k w)_{dj}(x^j_{\mu})\right). \tag{42}$$

and the following discrete problem:

Problem P^k : Find the fixed point of operator P_k .

4.2.2Existence and uniqueness of the discrete solution

Using the techniques introduced in [16] we can prove the following characterization of the unique solution U^k of problem P^k

Theorem 4.1 There exists a unique fixed point of operator P_k , i.e. $\exists!\ U^k$ such that $U^k = P_k U^k$. Moreover $\forall w \in \overline{F}_k$ we have $U^k = \lim_{\nu \to \infty} (P_k)^{\nu} w$ and the following estimation of the convergence rate holds

$$||P_k^{\nu}w - U^k|| \le K(\rho)(1 - \mu(\rho))^{\nu},$$
 (43)

where $0 < \mu(\rho) \le 1$ and $K(\rho) > 0$, ρ depends on ||w||.

To prove this theorem we use the techniques given in [13]. To use this techniques we should prove that the set of supersolutions and the set of subsolutions are not empty, i.e. there exist, at least, two functions \overline{s} and \overline{w} such that:

a)
$$P_k \overline{s} \leq \overline{s}$$
 b) $P_k \overline{w} \geq \overline{w}$

a) Let \overline{s} be the function given by

$$\overline{s}_{d\,j}(x_{\mu}^{j}) = \left\{ \begin{array}{ll} \frac{M_{f}}{\alpha} + \frac{M_{q}}{\eta\alpha}, & x_{\mu}^{j} \in \left(\mathcal{V}^{j\,k} \setminus \left(\gamma_{k,\,d,\,j}^{+} \cup \left(\bigcup_{r\,\neq\,d} \gamma_{k,\,r,\,j}^{-}\right)\right)\right), \\ \frac{M_{f}}{\alpha} + \frac{M_{q}}{\eta\alpha} + M_{q}, & x_{\mu}^{j} \in \left(\gamma_{k,\,d,\,j}^{+} \cup \left(\bigcup_{r\,\neq\,d} \gamma_{k,\,r,\,j}^{-}\right)\right), \end{array} \right. \forall d, \forall j \in \left(\mathcal{V}^{j\,k} \setminus \left(\gamma_{k,\,d,\,j}^{+} \cup \left(\bigcup_{r\,\neq\,d} \gamma_{k,\,r,\,j}^{-}\right)\right)\right),$$

where η verifies

$$\eta \le \min_{d \mid j} \left(h_j^d \right). \tag{44}$$

We want to show that \overline{s} is a supersolution.

We consider two cases:

(i)
$$x_{\mu}^{j} \in \left(\mathcal{V}^{j k} \setminus \left(\gamma_{k,d,j}^{+} \cup \left(\bigcup_{r \neq d} \gamma_{k,r,j}^{-}\right)\right)\right).$$

$$(ii) \ x_{\mu}^{j} \in \left(\gamma_{k,d,j}^{+} \cup \left(\bigcup_{r \neq d} \gamma_{k,r,j}^{-}\right)\right).$$

Case (i)

$$\begin{split} (P_k \overline{s})_{dj}(x^j_\mu) & \leq \frac{1}{1+\widetilde{\alpha}_j} h^d_j \left(\overline{s}_{dj}(x^j_\mu + h^d_j g(d,j)) + h^d_j (f(x^j_\mu, d) + \sum_{i \neq j} \lambda_{ji} \ \overline{s}_{di}(\pi_{Q_{ik}}(x^j_\mu))) \right) \\ & \leq \frac{1}{1+\widetilde{\alpha}_j} h^d_j (\frac{M_f}{\alpha} + \frac{M_q}{\eta \alpha} + M_q + h^d_j (M_f + \sum_{i \neq j} \lambda_{ji} (\frac{M_f}{\alpha} + \frac{M_q}{\eta \alpha}))) \\ & = \frac{1}{1+\widetilde{\alpha}_j} h^d_j \left(M_f \left(\frac{1}{\alpha} + h^d_j + \frac{h^d_j}{\alpha} \sum_{i \neq j} \lambda_{ji} \right) + M_q \left(\frac{1}{\eta \alpha} + 1 + \frac{h^d_j}{\eta \alpha} \sum_{i \neq j} \lambda_{ji} \right) \right) \\ & = \frac{1}{1+\widetilde{\alpha}_j} h^d_j \left(\frac{M_f}{\alpha} \left(1 + \widetilde{\alpha}_j h^d_j \right) + \frac{M_q}{\eta \alpha} \left(1 + \eta \alpha + h^d_j \sum_{i \neq j} \lambda_{ji} \right) \right) \\ & \leq \frac{M_f}{\alpha} + \frac{M_q}{\eta \alpha} = \overline{s}_{dj}(x^j_\mu), \end{split}$$

this last inequality holds by virtue of (44).

Case (ii)

$$(P_k \overline{s})_{dj}(x_{\mu}^j) = (S\overline{s})_{dj}(x_{\mu}^j) = q(d, \widetilde{d}) + \overline{s}_{\widetilde{d}j}(x_{\mu}^j) \leq \frac{M_f}{\alpha} + \frac{M_q}{\eta \alpha} + M_q = \overline{s}_{dj}(x_{\mu}^j).$$
 The analysis of cases (i) and (ii) proves that \overline{s} is a supersolution.

b) Let \overline{w} be the function given by

$$\overline{w}_{dj} = -\frac{M_f}{\alpha}, \ \forall d \in D, \forall j \in \mathcal{J}.$$

We want to show that \overline{w} is a subsolution. Since $q(d, \tilde{d}) \geq 0$ we have

$$(S_k \overline{w})_{dj} \ge \overline{w}_{dj}, \ \forall d \in D, \forall j \in \mathcal{J}.$$

Let us see that the operator L_k verifies

$$(\mathcal{L}_k \overline{w})_{d,i} \geq \overline{w}, \ \forall d \in D, \forall j \in \mathcal{J}.$$

$$(\mathcal{L}_{k}\overline{w})_{dj}(x_{\mu}^{j}) = \frac{1}{1+\widetilde{\alpha}_{j}h_{j}^{d}} \left(\overline{w}_{dj}(x_{\mu}^{j} + h_{j}^{d}g(d, j)) + h_{j}^{d}(f(x_{\mu}^{j}, d) + \sum_{i \neq j} \lambda_{ji} \ \overline{w}_{di}(\pi_{Q_{ik}}(x_{\mu}^{j}))) \right)$$

$$\geq \frac{1}{1+\widetilde{\alpha}_{j}h_{j}^{d}} \left(-\frac{M_{f}}{\alpha} - h_{j}^{d}M_{f} - h_{j}^{d}\frac{M_{f}}{\alpha} \sum_{i \neq j} \lambda_{ji} \right)$$

$$= \frac{-M_{f}}{1+\widetilde{\alpha}_{j}h_{j}^{d}} \left(\frac{M_{f} + \alpha h_{j}^{d} + h_{j}^{d} \sum_{i \neq j} \lambda_{ji}}{\alpha} \right)$$

$$\geq -\frac{M_{f}}{\alpha} = \overline{w}_{dj}(x_{\mu}^{j}).$$

Then we have $\forall d \in D, \forall j \in \mathcal{J}$

$$\overline{w}_{dj} \leq \min\left((\mathcal{L}_k \overline{w})_{dj}^k, (S_k \overline{w})_{dj} \right)$$

and so \overline{w} is a subsolution of P_k .

The remaining part of the proof is analogous to what we have made for the continuous operator P and it is here omitted for sake of briefness.

33

4.3 Convergence results

For the convergence of the discretization procedure to the solution of the original continuous problem, we have the following result.

Theorem 4.2 The following rate of convergence holds

$$\|U^k - V\|_{\infty} \leq K h^{\gamma}.$$

Proof. Let h be the positive value associated to the parameter of discretization k of the domain Ω , U^k the discrete solution associated to this parameter, then U^k is given by

$$U_{dj}^k(x_{\mu}^j) = \min\left((\mathcal{L}_k U^k)_{dj}(x_{\mu}^j), (\mathcal{S}_k U^k)_{dj}(x_{\mu}^j) \right) \forall x_{\mu}^j \in \mathcal{V}^{jk}, \forall d \in D, \ \forall j \in \mathcal{J},$$

We want to estimate the difference between this function and the solution of the original problem.

We consider first the difference: $V - U^k$. Let

$$\Delta_1 = \max\{V_{d\,j}(x_i) - U_{d\,j}^k(x_i), x_i \in \mathcal{V}^{j\,k}, j \in \mathcal{J}, d \in D\}.$$

Then, if we call x_0 the point that realizes this maximum, we have

$$U_{dj}^{k}(x_{0}) = \min\{(1 - \tilde{\alpha}_{j} \ h_{dj})U_{dj}^{k}(x_{0} + h_{dj} g(d, j)) + h_{dj} (f(x_{0}, d) + \sum_{i \neq j} \lambda_{ji} \ U_{di}^{k}(\pi_{Q_{ik}}x_{0})), \ (\mathcal{S}_{k} U^{k})_{dj}(x_{0})\}.$$

By using a recursive argument we can assume that the minimum is attained by the first component appearing in the min operation, i.e.

$$U_{dj}^{k}(x_{0}) = (1 - \widetilde{\alpha}_{j} \ h_{dj}) U_{dj}^{k}(x_{0} + h_{dj} \ g(d, j)) + h_{dj}(f(x_{0}, d) + \sum_{i \neq j} \lambda_{ji} \ U_{di}^{k}(\pi_{Q_{i}}(x_{0}))).$$

Then
$$x_0 \notin \left(\gamma_{h,d,j}^+ \cup (\bigcup_{r \neq d} \gamma_{h,r,j}^-)\right)$$
 and so $x_0 + h_{dj} g(d,j) \in Q_{jk} \subset \Omega$; in consequence

$$h_{d\,j} < \tau\left(x_0,d,j\right) = \sup\{t: x_0 + t\,g(d,j) \in \Omega\}$$

and V_{dj} verifies:

$$V_{dj}(x_0) \leq \int_{0}^{h_{dj}} e^{-\widetilde{\alpha}_j s} (f(y(s), d) + \sum_{i \neq j} \lambda_{ji} V_{di}(y(s))) ds + e^{-\widetilde{\alpha}_j h_{dj}} V_{dj}(x_0 + h_{dj} g(d, j)).$$

Therefore we have

$$\begin{split} \Delta_1 &= V_{dj}(x_0) - U_{dj}^k(x_0) \\ &\leq \int_0^{h_{dj}} e^{-\widetilde{\alpha}_j \, s} (f(y\,(s)\,,d) + \sum_{i \neq j} \lambda_{j\,i} V_{di}(y(s))) ds + e^{-\widetilde{\alpha}_j \, h_{dj}} \, V_{dj}(x_0 + h_{dj} \, g(d,j)) \\ &- \left((1 - \widetilde{\alpha}_j \, h_{dj}) U_{dj}^k(x_0 + h_{dj} \, g(d,j)) + h_{dj}(\, f(x_0,d) + \sum_{i \neq j} \lambda_{j\,i} \, U_{di}^k(\pi_{Q_{ik}}(x_0))) \right) \\ &\leq \int_0^{h_{dj}} e^{-\widetilde{\alpha}_j \, s} (|f(y\,(s)\,,d) - f(x_0,d)| + \sum_{i \neq j} \lambda_{j\,i} |V_{di}(y(s)) - U_{di}^k(\pi_{Q_{ik}}(x_0)))| ds \\ &+ V_{dj}(x_0 + h_{dj} \, g(d,j)) \, e^{-\widetilde{\alpha}_j \, h_{dj}} - (1 - \widetilde{\alpha}_j \, h_{dj}) U_{dj}^k(x_0 + h_{dj} \, g(d,j)) \\ &\leq \int_0^{h_{dj}} e^{-\widetilde{\alpha}_j \, s} (L_f \, h_{dj} + \sum_{i \neq j} \lambda_{j\,i} (|V_{d\,i}(y(s)) - V_{d\,i}(x_0)| \\ &+ |V_{d\,i}(x_0) - V_{d\,i}(\pi_{Q_{i\,k}}(x_0))| + |V_{d\,i}(\pi_{Q_{i\,k}}(x_0)) - U_{d\,i}^k(\pi_{Q_{i\,k}}(x_0))))| \, ds \\ &+ (1 - \widetilde{\alpha}_j \, h_{d\,j}) \left(V_{d\,j}(x_0 + h_{d\,j} \, g(d,j)) - U_{d\,j}^k(x_0 + h_{d\,j} \, g(d,j)) \right) + O(h_{d\,j}^2) \\ &\leq (L_f \, h_{d\,j} + \sum_{i \neq j} \lambda_{j\,i} (2L_V \, h_{d\,j}^\gamma + \Delta_1)) h_{d\,j} + (1 - \widetilde{\alpha}_j \, h_{d\,j}) \Delta_1 + O(h_{d\,j}^2) \end{split}$$

In consequence we obtain

$$\Delta_1(1 - h_{dj} \sum_{i \neq j} \lambda_{ji} - 1 + \widetilde{\alpha}_j \ h_{dj}) \leq (L_f h_{dj} + \sum_{i \neq j} \lambda_{ji} L_V \ h_{dj}^{\gamma}) h_{dj} + O(h_{dj}^2),$$

which implies

$$\Delta_1 \leq \frac{1}{\alpha} \left(L_f h_{dj} + \sum_{i \neq j} \lambda_{ji} L_V h_{dj}^{\gamma} \right) + O(h_{dj}).$$

Then for any other node of $Q_{jk} \, \forall j$, $\forall d$ it is verified the same estimation. For any x in the domain Q_{jk} there exists a point, which we denote by $x_i \in Q_{jk}$ such that $||x - x_i|| \leq h_{dj}$. Therefore, taking in to account that V_{dj} is Hölder continuous and that U_{dj}^k is an affine function we get

$$\left| V_{dj}(x) - U_{dj}^{k}(x) \right| \le \Delta_1 + C \|x - x_i\|^{\gamma}.$$

Then for all $x \in \Omega$

$$V_{dj}(x) - U_{dj}^{k}(x) \le \frac{1}{\alpha} \left(L_{f} h_{dj} + \sum_{i \neq j} \lambda_{ji} L_{V} h_{dj}^{\gamma} \right) + O(h_{dj}) + O(h_{dj}).$$

Remembering that $h_{0j} = \left(1 - \frac{r_{dj}}{p_d}\right)h$ and $h_{dj} = \frac{r_{dj}}{p_d}h$, if we denote by $K = \max_{dj} \left\{ \left(1 - \frac{r_{dj}}{p_d}\right), \frac{r_{dj}}{p_d} \right\}$ we have

$$V_{dj}(x) - U_{dj}^k(x) \le \frac{K}{\alpha} \left(L_f h + \sum_{i \ne j} \lambda_{ji} L_V h^{\gamma} \right) + O(h^{\gamma}).$$

We consider now the difference $u^h - V$. Let \overline{x} be such that

$$\Delta_2 = U_{dj}^k(\overline{x}) - V_{dj}(\overline{x}) = \max_{d \ j \ x} \{ U_{dj}^k(x) - V_{dj}(x) \}.$$

The function U_{dj}^k is given by

$$U_{dj}^k(x_\mu^j) = \min\left((\mathcal{L}_k U^k)_{dj}(x_\mu^j), (\mathcal{S}_k u^h)_{dj}(x_\mu^j) \right) \forall x_\mu^j \in \mathcal{V}^{j,k}, \forall d \in D, \ \forall j \in \mathcal{J},$$

then

$$U_{dj}^{k}(x_{\mu}^{j}) \leq \frac{1}{1 + \widetilde{\alpha}_{j} h_{dj}} (U_{dj}^{k}(x_{\mu}^{j} + h_{dj} g(d, j)) + h_{dj} (f(x_{\mu}^{j}, d) + \sum_{i \neq j} \lambda_{ji} U_{di}^{k}(\pi_{Q_{ik}}(x_{\mu}^{j}))))$$

$$(1 + \tilde{\alpha}_{j} h_{dj}) U_{dj}^{k}(x_{\mu}^{j}) \leq U_{dj}^{k}(x_{\mu}^{j} + h_{dj} g(d, j))$$

$$+ h_{dj}(f(x_{\mu}^{j}, d) + \sum_{i \neq j} \lambda_{ji} U_{di}^{k}(\pi_{Q_{ik}}(x_{\mu}^{j})))$$

$$\tilde{\alpha}_{j} h_{dj} U_{dj}^{k}(x_{\mu}^{j}) \leq U_{dj}^{k}(x_{\mu}^{j} + h_{dj} g(d, j)) - U_{dj}^{k}(x_{\mu}^{j})$$

$$+ h_{dj}(f(x_{\mu}^{j}, d) + \sum_{i \neq j} \lambda_{ji} U_{di}^{k}(\pi_{Q_{ik}}(x_{\mu}^{j})))$$

$$\tilde{\alpha}_{j} h_{dj} U_{dj}^{k}(x_{\mu}^{j}) \leq D_{dj} h_{dj} + h_{dj}(f(x_{\mu}^{j}, d) + \sum_{i \neq j} \lambda_{ji} U_{di}^{k}(\pi_{Q_{ik}}(x_{\mu}^{j}))).$$

$$(45)$$

where $D_{dj} = \frac{U_{dj}^k(x_{\mu}^j + h_{dj} g(d, j)) - U_{dj}^k(x_{\mu}^j)}{h_{dj}}$ is the discrete derivative. The function U_{dj}^k is affine along the edges (which coincide with segments of lines of the type $x_{\mu}^j + s \ g(d, j), \ s \ge 0$). So in (45) we can replace h_{dj} by $\hat{h}_{dj} \le h_{dj}$ being \hat{h}_{dj} such that

$$V_{dj}(\overline{x}) = \int_{0}^{\widehat{h}_{dj}} e^{-\widetilde{\alpha}_{j} s} (f(y(s), d) + \sum_{i \neq j} \lambda_{ji} V_{di}(y(s))) ds + V_{dj}(\overline{x} + \widehat{h}_{dj} g(d, j)) e^{-\widetilde{\alpha}_{j} \widehat{h}_{dj}}.$$

In consequence we have

$$\widetilde{\alpha}_j \, \widehat{h}_{d\,j} \, U^k_{d\,j}(x^j_\mu) \leq D_{d\,j} \, \widehat{h}_{d\,j} + \widehat{h}_{d\,j} (\, f(x^j_\mu,d) \, + \, \sum_{i \neq \, j} \lambda_{j\,i} \, U^k_{d\,i} (\pi_{Q_{i\,k}}(x^j_\mu))) \, .$$

Moreover there exists an x_i such that $x_i \in Q_{jk}$, $x_i \notin \left(\gamma_{h,d,j}^+ \cup (\bigcup_{r \neq d} \gamma_{h,r,j}^-)\right)$ and

$$U_{d\,j}^k(\overline{x}) - U_{d\,j}^k(x_i) = O(h_{d\,j}^{\gamma})$$

Then we have

$$U_{d\,j}^k(\overline{x}) \leq (1-\widetilde{\alpha}_j\,\widehat{h}_{d\,j})\,U_{d\,j}^k(\overline{x}+\widehat{h}_{d\,j}\,g(d,\,j)) + \widehat{h}_{d\,j}(\,f(\overline{x},d) + \sum_{i\neq\,j}\lambda_{j\,i}\,U_{d\,i}^k(\pi_{Q_{i\,k}}(\overline{x}))) + \widehat{h}_{d\,j}O(h_{d\,j}^{\gamma})$$

$$\begin{split} &\Delta_2 &= U_{dj}^k(\overline{x}) - V_{dj}(\overline{x}) \\ &\leq \int_0^{\widehat{h}_{dj}} e^{-\widetilde{\alpha}_j \, s} (|f(\overline{x},d) - f(y(s),d)| + \sum_{i \neq j} \lambda_{ji} \left| U_{di}^k(\pi_{Q_{ik}}(\overline{x})) - V_{di}(y(s)) \right|) ds \\ &+ (1 - \widetilde{\alpha}_j \, \widehat{h}_{dj}) U_{dj}^k(\overline{x} + \widehat{h}_{dj} \, g(d,j)) - V_{dj}(\overline{x} + \widehat{h}_{dj} \, g(d,j)) \, e^{-\widetilde{\alpha}_j \, \widehat{h}_{dj}} + \widehat{h}_{dj} O(h_{dj}^{\gamma}) \\ &\leq \int_0^{h_{dj}} e^{-\widetilde{\alpha}_j \, s} (L_f \, \widehat{h}_{dj} \, + \sum_{i \neq j} \lambda_{ji} (\left| U_{di}^k(\pi_{Q_{ik}}(\overline{x})) - V_{di}(\pi_{Q_{ik}}(\overline{x})) \right| \\ &+ |V_{di}(\pi_{Q_{ik}}(\overline{x})) - V_{di}(\overline{x})| + |V_{di}(\overline{x}) - V_{di}(y(s))|)) ds \\ &+ (1 - \widetilde{\alpha}_j \, \widehat{h}_{dj}) \Delta_2 + o(\widehat{h}_{dj}) + \widehat{h}_{dj} O(h_{dj}^{\gamma}) \\ &\leq (L_f \, \widehat{h}_{dj} \, + \sum_{i \neq j} \lambda_{ji} (2L_V \, \widehat{h}_{dj}^{\gamma} + \Delta_1)) \widehat{h}_{dj} + (1 - \widetilde{\alpha}_j \, \widehat{h}_{dj}) \Delta_1 + o(\widehat{h}_{dj}) + \widehat{h}_{dj} O(h_{dj}^{\gamma}) \, . \end{split}$$

Therefore it results

$$\Delta_2(1-\widehat{h}_{dj}\sum_{i\neq j}\lambda_{ji}-1+\widetilde{\alpha}_j|\widehat{h}_{dj})\leq (L_f|\widehat{h}_{dj}+\sum_{i\neq j}\lambda_{ji}L_V|\widehat{h}_{dj}^{\gamma})|\widehat{h}_{dj}+O(\widehat{h}_{dj}^2)+\widehat{h}_{dj}O(h_{dj}^{\gamma})$$

$$\Delta_2 \leq \frac{1}{\alpha} \left(L_f \, \hat{h}_{dj} + \sum_{i \neq j} \lambda_{ji} L_V \, \hat{h}_{dj}^{\gamma} \right) + O(h_{dj}^{\gamma}).$$

Similar to that we have done for Δ_1 we have $\forall x, \ \forall d, \ \forall j$

$$U_{dj}^k(x) - V_{dj}(x) \le \frac{K_2}{\alpha} \left(L_f h + \sum_{i \neq j} \lambda_{ji} L_V h^{\gamma} \right) + O(h^{\gamma}),$$

then

$$\left\|U^k - V\right\|_{\infty} \le rac{K_2}{lpha} \left(L_f h + \sum_{i \ne j} \lambda_{j\,i} L_V h^{\gamma}\right) + O(h^{\gamma}).$$

5 Applications

We have applied the above presented numerical procedure to an example with m=2 items, being the discount rate $\alpha=0.1$.

Production rates: $p_1 = p_2 = 1$.

Demand's data: $\mathcal{J} = \{1, 2, 3, 4\}, J = 4.$

$r_{11} = 0.07415$	$r_{21} = 0.37230$
$r_{12} = 0.07415$	$r_{22} = 0.06741$
$r_{13} = 0.32300$	$r_{23} = 0.37230$
$r_{14} = 0.32300$	$r_{24} = 0.06741$

Commutation rates: λ_{ij}

i/j	1	2	3	4
1	0	0.03	0.031	0
2	0.2	0	0	0.031
3	0.2	0	0	0.03
4	0	0.2	0.2	0

Maximum stocks: $M_1 = 0.525, M_2 = 1.67.$

The instantaneous cost function is linear in both variables and it does not depend on the parameter d, i.e.

$$f(x_1, x_2) = 4x_1 + 5x_2$$

Commutation costs:

d/\widetilde{d}	0	1	2
0		7	7
1	7		7
2	7	7	

Computational times: The program computes 12 tables of 600 independent values (the values of $u_{dj}^h(x_i)$, j=1,...,4; d=0,1,2; i=1,...,600). It uses to do that computational task a time of 29,6 seconds in a PC Pentium 133 Mhz. In Figures

5 APPLICATIONS 39

1-4 we show the results of simulation corresponding to the use of the sub-optimal control policy given by the computational procedure for an operation of 87 time units.

Conclusions

In this paper we have analyzed the problem of optimal scheduling of a production system comprising a multi-item single machine with piecewise deterministic demands.

We have obtained the solution as a feedback control in terms of the optimal cost function. We have established that this function is Hölder continuous. Using dynamic programming techniques, we have characterized the optimal cost function as the unique solution of a fixed point problem associated to the problem.

We have analyzed the structure of this problem, its solution and a numerical method of approximation. We have presented a discretization procedure for the numerical solution based on the finite element method. We have shown that the solution of the discrete problem is reduced to find the unique fixed point of a contractive non-linear operator $P^h: \mathbb{R}^n \to \mathbb{R}^n$ and we have given explicit error estimates. Finally, we have presented an application of this methodology of approximation.

Acknowledgments


The authors would like to thank:


- L.S. Aragone and S.C. Di Marco for their careful revision of the manuscript.
- CONICET for support given through the grant PID BID-CONICET N°213.
- The authorities of INRIA for the support given through the Cooperation Project INRIA-Instituto de Matemática Beppo Levi.

Address Elina M. Mancinelli - Roberto L.V. González Instituto de Matemática Beppo Levi, F.C.E.I.A. Universidad Nacional de Rosario Pellegrini 250 - 2000 Rosario Argentina 5 APPLICATIONS


41


$\underline{\mathbf{FIGURES}}$

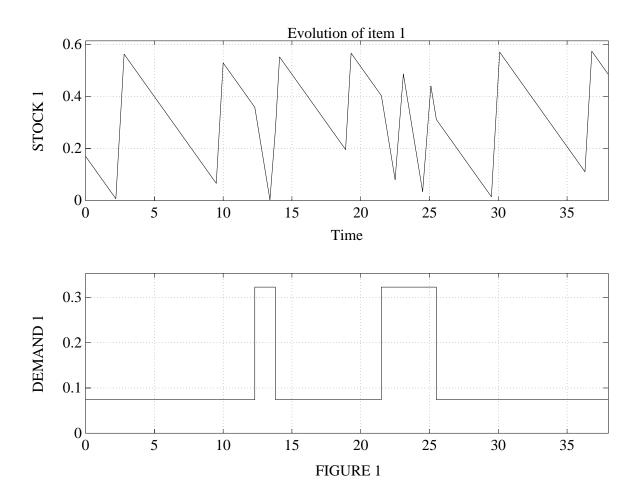

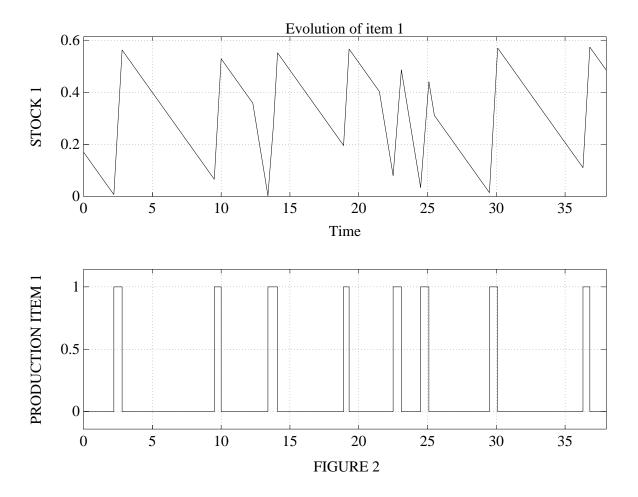

5 APPLICATIONS 43

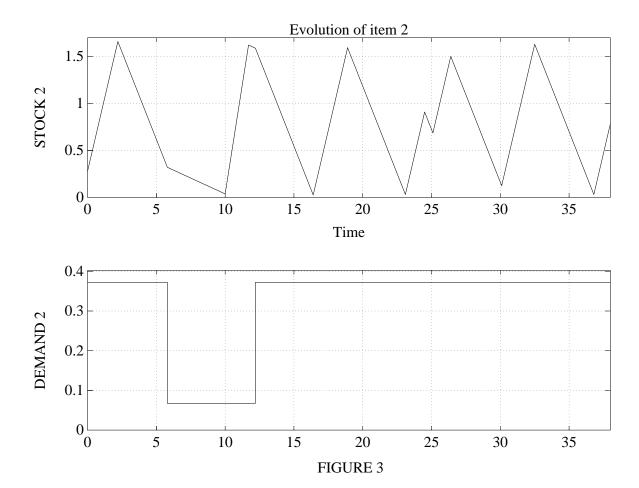

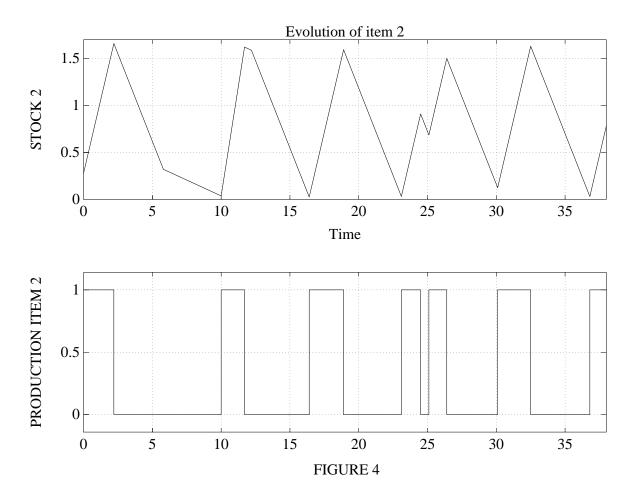

REFERENCES 45

References

[1] Aragone L.S., González R.L.V. Fast computational procedure for solving multiitem single machine lot scheduling optimization problem, Journal of Optimization Theory and Applications, Vol. 93, N° 3, (to appear June, 1997).

- [2] Aragone L.S., González R.L.V., A fast computational procedure to solve the multi-item single machine lot scheduling optimization problems. The average cost case, Rapport de Recherche N° 2984, INRIA, Rocquencourt, France, 1996.
- [3] Bensoussan A., Lions J.L., Applications des inéquations variationnelles en contrôle stochastique, Dunod, Paris, 1978.
- [4] Bensoussan A., Lions J.L., Contrôle impulsionnel et inéquations quasivariationnelles, Dunod, Paris, 1982.
- [5] Capuzzo Dolcetta I., Ishii H., Approximate solution of the Bellman equation of deterministic control theory, Applied Mathematics & Optimization, Vol. 11, pp. 161-181, 1984.
- [6] Ciarlet P.G., Discrete maximum principle for finite-difference operators, Aequationes Mathematicae, Vol. 4, N°3, pp. 338-352, 1970.
- [7] Ciarlet P.G., Numerical analysis for the finite element methods, Presses de l'Université de Montréal, Montréal, 1976.
- [8] Crandall M.G., Evans L.C., Lions P.L., Some properties of viscosity solutions of Hamilton-Jacobi equations, Trans. Amer. Math. Soc., Vol. 282, pp. 487-502, 1984.
- [9] Davis M.H.A., Piecewise-deterministic Markov processes: A general class of nondiffusion models, Journal of the Royal Statistical Society, Series B, Vol. 46, pp. 353-388, 1984.
- [10] Fleming W.H., Soner H.M., Controlled Markov processes and viscosity solutions, Springer Verlag, New York, 1993.
- [11] Garroni M.G., Menaldi J.L., Green functions for second order parabolic integrodifferential problems, Longman, Wiley, New York, 1992.

- [12] González R.L.V., Muramatsu K., Rofman E., Quasi-variational inequality approach to multi-item single machine lot scheduling problem, In System Modeling and Optimization, Lecture Notes in Control and Information Sciences Vol. 180, pp. 885-893, Springer Verlag, New York, 1992.
- [13] González R.L.V., Muramatsu K., Rofman E., Quasi-variational inequality approach to multi-item single machine lot scheduling problem, Rapport de Recherche N°2057, INRIA, Rocquencourt, France, 1993.
- [14] González R.L.V., Rofman E., Sur des solutions non bornées de l'équation de Bellman associée aux problèmes de commutation optimale avec contraints sur l'état, Comptes Rendus Acad. Sc. Paris, Serie I, Tome 316, pp. 1193-1198, 1993.
- [15] González R.L.V., Rofman E., On unbounded solutions of Bellman's equation associated to optimal switching control problems with state constraints, Applied Mathematics & Optimization, Vol. 31, pp. 1-17, 1995.
- [16] Hanouzet B., Joly J.L., Convergence uniforme des iterés définissant la solution d'une inéquation quasi variationnelle abstraite, Comptes Rendus Acad. Sc. Paris, Serie A, Tome 286, pp. 735-738, 1978.
- [17] Lenhart S.M., Viscosity solutions associated with switching control problems for piecewise deterministic processes, Houston Journal of Mathematics, Vol. 13, N°3, pp. 405-426, 1987.
- [18] Lenhart S.M., Liao Y.C., Integro-differential equations associated with optimal stopping time of a piecewise deterministic processes, Stochastics, Vol. 15, pp. 183-207, 1985.
- [19] Lenhart S.M., Liao Y.C., Switching control of piecewise deterministic processes, Journal of Optimization Theory and Applications, Vol. 59, N°1, pp. 99-115, 1988.
- [20] Mancinelli E.M., Optimización de máquinas multiproducto con demandas seccionalmente determinísticas, Mecánica Computacional, Vol. 14, pp. 561-570, AMCA, Santa Fe, Argentina, 1994.
- [21] Mancinelli E.M., Valenzuela M.A., Optimización de un sistema de producción con demanda seccionalmente determinística, Proceedings 23 JAIIO, pp. 191-201, SADIO, Buenos Aires, Argentina, 1994.

[22] Soner H.M., Optimal control with state-space constraint II, SIAM J. Control and Opt., Vol. 26, pp. 1110-1122, 1986.



Unit´e de recherche INRIA Lorraine, Technopôle de Nancy-Brabois, Campus scientifique,
615 rue du Jardin Botanique, BP 101, 54600 VILLERS LÈS NANCY
Unit´e de recherche INRIA Rennes, Irisa, Campus universitaire de Beaulieu, 35042 RENNES Cedex
Unit´e de recherche INRIA Rhône-Alpes, 655, avenue de l'Europe, 38330 MONTBONNOT ST MARTIN
Unit´e de recherche INRIA Rocquencourt, Domaine de Voluceau, Rocquencourt, BP 105, 78153 LE CHESNAY Cedex
Unit´e de recherche INRIA Sophia-Antipolis, 2004 route des Lucioles, BP 93, 06902 SOPHIA-ANTIPOLIS Cedex

Éditeur
INRIA, Domaine de Voluceau, Rocquencourt, BP 105, 78153 LE CHESNAY Cedex (France)
http://www.inria.fr
ISSN 0249-6399