



HAL
open science

4D hyperbolic regular quantum codes

Vivien Londe

► **To cite this version:**

Vivien Londe. 4D hyperbolic regular quantum codes. Journées Informatique Quantique 2017, Nov 2017, Bordeaux, France. hal-01671456

HAL Id: hal-01671456

<https://inria.hal.science/hal-01671456>

Submitted on 22 Dec 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

4D hyperbolic regular quantum codes

Vivien Londe, Anthony Leverrier, Gilles Zémor

Inria Paris, Equipe Secret
Institut de Mathématiques de Bordeaux
JIQ'17

November 10, 2017

Table of contents

Quantum error correction

Homological quantum codes

Surface codes


4-dimensional codes

Quantum error correcting codes

- ▶ aim: protect k qubits of information.
- ▶ k logical qubits
but n physical qubits ($n > k$)
→ codespace of dimension 2^k in a 2^n Hilbert space.
- ▶ distance d of the code proportional to the maximal number of physical qubits which can be corrupted without corrupting the information carried by the logical qubits.
→ $[[n, k, d]]$ quantum error correcting code
- ▶ asymptotics of k and d when $n \rightarrow \infty$

Families of codes


- ▶ stabilizer codes: the codespace is the 1-eigenspace of a set of commuting stabilizers.
- ▶ CSS codes: each stabilizer is a tensor product of X and I matrices or a tensor product of Z and I matrices.
- ▶ LDPC codes: each stabilizer has a bounded number of X or Z factors and each qubit is non trivially acted on by a bounded number of stabilizer.

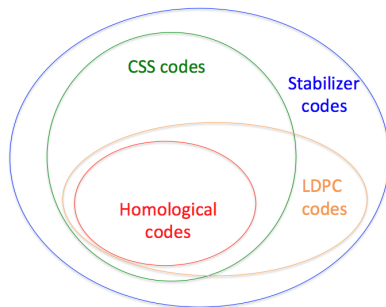

- ▶ homological codes: The stabilizers are defined from a cellulation of a manifold.

Example of homological code: Toric code [Kitaev 2002]

- ▶ cellulation of the torus by squares.
- ▶ To each edge corresponds a physical qubit.
- ▶ To each face corresponds a Z-type stabilizer.
- ▶ To each vertex corresponds an X-type stabilizer.




A torus is obtained by identifying left and right sides and identifying up and down sides of the square.

Stabilizers commute because each (face, vertex) pair shares an even number of edges.


Example of homological code: Toric code [Kitaev 2002]

- ▶ The Z-type stabilizer corresponding to the red face acts like Z on qubits 1, 10, 4 and 11.
- ▶ The X-type stabilizer corresponding to the blue vertex acts like X on qubits 8, 18, 9 and 15.




Stabilizers commute because each (face, vertex) pair shares an even number of edges.

Detection of errors




represents a codestate $|\psi_0\rangle$.
All stabilizers have eigenvalue 1.




represents the state $X_{17}|\psi_0\rangle$.
red stabilizers have eigenvalue -1.

Detection of errors



represents a codestate $|\psi_0\rangle$.
All stabilizers have eigenvalue 1.




represents the state $X_{17}|\psi_0\rangle$.
red stabilizers have eigenvalue -1.


$$Z_{stab.}|\psi_0\rangle = |\psi_0\rangle$$

$$\begin{aligned} Z_{red\ stab.} X_{17}|\psi_0\rangle &= -X_{17} Z_{red\ stab.}|\psi_0\rangle \\ &= -X_{17}|\psi_0\rangle \end{aligned}$$


Detection of errors




represents a codestate $|\psi_0\rangle$.
All stabilizers have eigenvalue 1.



state $X_{17}X_{18}|\psi_0\rangle$.
red stabilizers have eigenvalue -1.




represents the state $X_{17}|\psi_0\rangle$.
red stabilizers have eigenvalue -1.




state $X_{16}X_{17}X_{18}X_{19}|\psi_0\rangle$:
codestate different from $|\psi_0\rangle$.

Geometric interpretation of k


- ▶ The code dimension is the rank of the first homology group H_1 of the manifold.
- ▶ Informally, it is the number of different loops of the manifold.



$$k = 2 = \text{rank}(H_1)$$

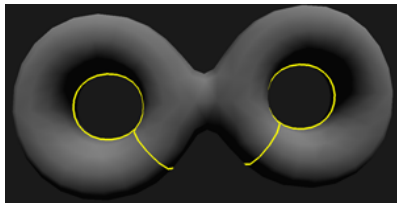


$$k = 4 = \text{rank}(H_1)$$



$$k = 8 = \text{rank}(H_1)$$


Geometric interpretation of n and d

- ▶ number of physical qubits n proportional to the area of the manifold.
- ▶ minimal distance d proportional to the systole of the manifold.
- ▶ the systole is the length of the shortest non contractible loop of the manifold.



$$d = \text{systole} \approx 20$$

$$n = 2 \times \text{area} \approx 800$$



$$d = \text{systole} = \text{length of red circle}$$

Schläfli symbols

Schläfli symbols are defined recursively:


- ▶ $\{4\}$ is a square.



Schläfli symbols

Schläfli symbols are defined recursively:



- ▶ $\{4\}$ is a square.
- ▶ $\{4,3\}$ is the regular polyhedron such that each vertex is incident to 3 squares ($\{4\}$): the cube.



Schläfli symbols

Schläfli symbols are defined recursively:



- ▶ $\{4\}$ is a square.
- ▶ $\{4,3\}$ is the regular polyhedron such that each vertex is incident to 3 squares ($\{4\}$): the cube.
- ▶ $\{4,3,3\}$ is the regular polytope such that each edge is incident to 3 cubes ($\{4,3\}$): the hypercube.



Regular tessellation


- ▶ $\{4,4\}$ is the regular tessellation of euclidean plane such that each vertex is incident to 4 squares. It is the grid of the toric code.
- ▶ $\{5,4\}$ is the regular tessellation such that each vertex is incident to 5 squares. It is a tessellation of the hyperbolic plane.
- ▶ The automorphism group Γ of the $\{5,4\}$ tessellation admits the following presentation:

$$\Gamma = \langle \rho_0, \rho_1, \rho_2 \mid \rho_0^2 = \rho_1^2 = \rho_2^2 = (\rho_0\rho_1)^5 = (\rho_1\rho_2)^4 = id \rangle$$




Regular map

- ▶ Quotienting by a normal subgroup of the automorphism group of the regular tessellation Γ yields a closed surface with the local structure of the regular tessellation.



$\{6,4\}_3$ regular map



topology of the $\{6,4\}_3$ regular map

- ▶ To this tessellated closed surface corresponds a quantum error correcting code.

Limits of surface codes

- ▶ Tradeoffs for reliable quantum information storage in surface codes and color codes [Delfosse 2013]:

$$kd^2 \leq C(\ln k)^2 n$$

- toric codes family: $k = 2$ and $d = \theta(\sqrt{n})$
- hyperbolic codes family: $k = \theta(n)$ and $d = \theta(\ln n)$

Codes based on cellulations of 4-manifolds can overcome this bound.

4-dimensional codes

- ▶ Cellulation of a 4-dimensional manifold by polytopes.
 - To each 2-cell corresponds a qubit.
 - To each 3-cell corresponds a Z-type stabilizer.
 - To each 1-cell (edge) corresponds an X-type stabilizer.

4-dimensional codes

- ▶ Cellulation of a 4-dimensional manifold by polytopes.
 - To each 2-cell corresponds a qubit.
 - To each 3-cell corresponds a Z-type stabilizer.
 - To each 1-cell (edge) corresponds an X-type stabilizer.
- ▶ Logical qubits correspond to 2-dimensional holes.
 - the number k of logical qubits is the rank of the second homology group of the manifold.

4-dimensional codes

- ▶ Cellulation of a 4-dimensional manifold by polytopes.
 - To each 2-cell corresponds a qubit.
 - To each 3-cell corresponds a Z-type stabilizer.
 - To each 1-cell (edge) corresponds an X-type stabilizer.
- ▶ Logical qubits correspond to 2-dimensional holes.
 - the number k of logical qubits is the rank of the second homology group of the manifold.
- ▶ Minimal distance d is proportional to the 2-systole of the manifold.
 - it is the smallest area of a surface surrounding a 2-dimensional hole.

4-dimensional tessellations

- ▶ $\{4,3,3,4\}$ is the canonical grid of euclidean 4-space.
($\{4,3,3\}$ is a 4-dimensional hypercube)

4-dimensional tessellations

- ▶ $\{4,3,3,4\}$ is the canonical grid of euclidean 4-space.
($\{4,3,3\}$ is a 4-dimensional hypercube)
- ▶ $\{4,3,3,5\}$ is a regular tessellation of hyperbolic 4-space \mathbb{H}_4 .

4-dimensional tessellations

- ▶ $\{4,3,3,4\}$ is the canonical grid of euclidean 4-space.
($\{4,3,3\}$ is a 4-dimensional hypercube)
- ▶ $\{4,3,3,5\}$ is a regular tessellation of hyperbolic 4-space \mathbb{H}_4 .
- ▶ The automorphism group Γ of $\{4,3,3,5\}$ can be represented as a discrete subgroup of $SO(1,4)$, the isometry group of \mathbb{H}_4 .

4-dimensional tessellations

- ▶ $\{4,3,3,4\}$ is the canonical grid of euclidean 4-space.
($\{4,3,3\}$ is a 4-dimensional hypercube)
- ▶ $\{4,3,3,5\}$ is a regular tessellation of hyperbolic 4-space \mathbb{H}_4 .
- ▶ The automorphism group Γ of $\{4,3,3,5\}$ can be represented as a discrete subgroup of $SO(1,4)$, the isometry group of \mathbb{H}_4 .
- ▶ Congruence subgroups of this representation yield normal subgroups of Γ .

Codes associated to these 4-manifolds

- ▶ We thus obtain closed 4-manifold with the $\{4,3,3,5\}$ local structure.
- ▶ $k = \theta(n)$ and $d \geq n^{0.2}$ asymptotically.
- ▶ $kd^2 \geq (\ln k)^2 n$ asymptotically.
- ▶ regularity useful for decoding algorithms.

Advantages of 4-dimensional hyperbolic regular codes

- ▶ Syndromes are cycles of edges.
→ no need to pair vertices like with surface codes

Advantages of 4-dimensional hyperbolic regular codes

- ▶ Syndromes are cycles of edges.
→ no need to pair vertices like with surface codes
- ▶ Hyperbolicity makes syndromes more redundant than in euclidean space.
→ since the boundary of a hyperbolic disk is linear in its area.

Advantages of 4-dimensional hyperbolic regular codes

- ▶ Syndromes are cycles of edges.
→ no need to pair vertices like with surface codes
- ▶ Hyperbolicity makes syndromes more redundant than in euclidean space.
→ since the boundary of a hyperbolic disk is linear in its area.
- ▶ Regularity of the tessellation allows one to design explicit efficient decoding algorithms.

Normal subgroups of $\Gamma_{\{4,3,3,5\}}$

- ▶ $\Gamma_{\{4,3,3,5\}} = \langle R_i \mid i \in \{0, \dots, 4\} \rangle$

with $PR_iP^{-1} \in \mathcal{M}_{5,5}(\mathcal{O}_{\mathbb{Q}[\sqrt{5}]})$ for $i \in \{0, \dots, 4\}$

$\mathcal{O}_{\mathbb{Q}[\sqrt{5}]}$ is the ring of integers of the number field $\mathbb{Q}[\sqrt{5}]$.

- ▶ If \mathcal{I} is an ideal of $\mathcal{O}_{\mathbb{Q}[\sqrt{5}]}$, there is a group homomorphism:
 $\phi_{\mathcal{I}} : \mathcal{M}_{5,5}(\mathcal{O}_{\mathbb{Q}[\sqrt{5}]}) \rightarrow \mathcal{M}_{5,5}(\mathcal{O}_{\mathbb{Q}[\sqrt{5}]}/\mathcal{I})$
 $\text{Ker}(\phi_{\mathcal{I}})$ is a normal subgroup of $\Gamma_{\{4,3,3,5\}}$ (called a congruence subgroup).

Summary and Outlooks

Summary:

- ▶ To a tessellated closed manifold and an integer i corresponds a quantum code where qubits are identified with i -faces of the manifold.

Summary and Outlooks

Summary:

- ▶ To a tessellated closed manifold and an integer i corresponds a quantum code where qubits are identified with i -faces of the manifold.
- ▶ 4-dimensional homological codes can outperform surface codes.

Summary and Outlooks

Summary:

- ▶ To a tessellated closed manifold and an integer i corresponds a quantum code where qubits are identified with i -faces of the manifold.
- ▶ 4-dimensional homological codes can outperform surface codes.
- ▶ The regularity of the $\{4,3,3,5\}$ construction leads to an explicit decoding algorithm.

Summary and Outlooks

Summary:

- ▶ To a tessellated closed manifold and an integer i corresponds a quantum code where qubits are identified with i -faces of the manifold.
- ▶ 4-dimensional homological codes can outperform surface codes.
- ▶ The regularity of the $\{4,3,3,5\}$ construction leads to an explicit decoding algorithm.

Outlooks:

- ▶ Find an explicit decoding algorithm for Z-type errors.

Summary and Outlooks

Summary:

- ▶ To a tessellated closed manifold and an integer i corresponds a quantum code where qubits are identified with i -faces of the manifold.
- ▶ 4-dimensional homological codes can outperform surface codes.
- ▶ The regularity of the $\{4,3,3,5\}$ construction leads to an explicit decoding algorithm.

Outlooks:

- ▶ Find an explicit decoding algorithm for Z -type errors.
- ▶ Investigate the performance of this family of code with respect to a noise model.

Summary and Outlooks

Summary:

- ▶ To a tessellated closed manifold and an integer i corresponds a quantum code where qubits are identified with i -faces of the manifold.
- ▶ 4-dimensional homological codes can outperform surface codes.
- ▶ The regularity of the $\{4,3,3,5\}$ construction leads to an explicit decoding algorithm.

Outlooks:

- ▶ Find an explicit decoding algorithm for Z-type errors.
- ▶ Investigate the performance of this family of code with respect to a noise model.

Thank you for your attention!