

#### SVJedi: Structural variation genotyping using long reads

Lolita Lecompte, Pierre Peterlongo, Dominique Lavenier, Claire Lemaitre

#### ▶ To cite this version:

Lolita Lecompte, Pierre Peterlongo, Dominique Lavenier, Claire Lemaitre. SVJedi: Structural variation genotyping using long reads. HiTSeq 2019 - Conference on High Throughput Sequencing, Jul 2019, Basel, Switzerland. hal-02290884

#### HAL Id: hal-02290884 https://inria.hal.science/hal-02290884v1

Submitted on 18 Sep 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# **SVJedi :** Structural variation genotyping using long reads

Lolita Lecompte<sup>1</sup>, Pierre Peterlongo<sup>1</sup>, Dominique Lavenier<sup>1</sup>, Claire Lemaitre<sup>1</sup>

<sup>1</sup>Univ Rennes, Inria, CNRS, IRISA, F-35000 Rennes, France







 $\mathbf{O} \mathbf{M} \mathbf{I} \mathbf{R} \mathbf{I} \mathbf{S} \mathbf{A}$ 

#### Introduction

Structural variations (SVs) are DNA segments that have been moved regarding another reference genome. The number of known SVs is increasing, especially with the development of third generation sequencing technologies, which produce long reads data.

#### SV discovery


### SV genotyping


Given a reference genome, discover SVs be-|Given a set of already known variants for a tween a sequencing sample and a reference | species, assess the presence or absence of each variant in a given sequencing sample. genome.


**Discovery vs.** Genotyping

SVIM (2019), Sniffles (2018), pbsv (2018), There is **no known method** for SV genotyping NanoSV (2017)with long reads.

# Method - SVJedi

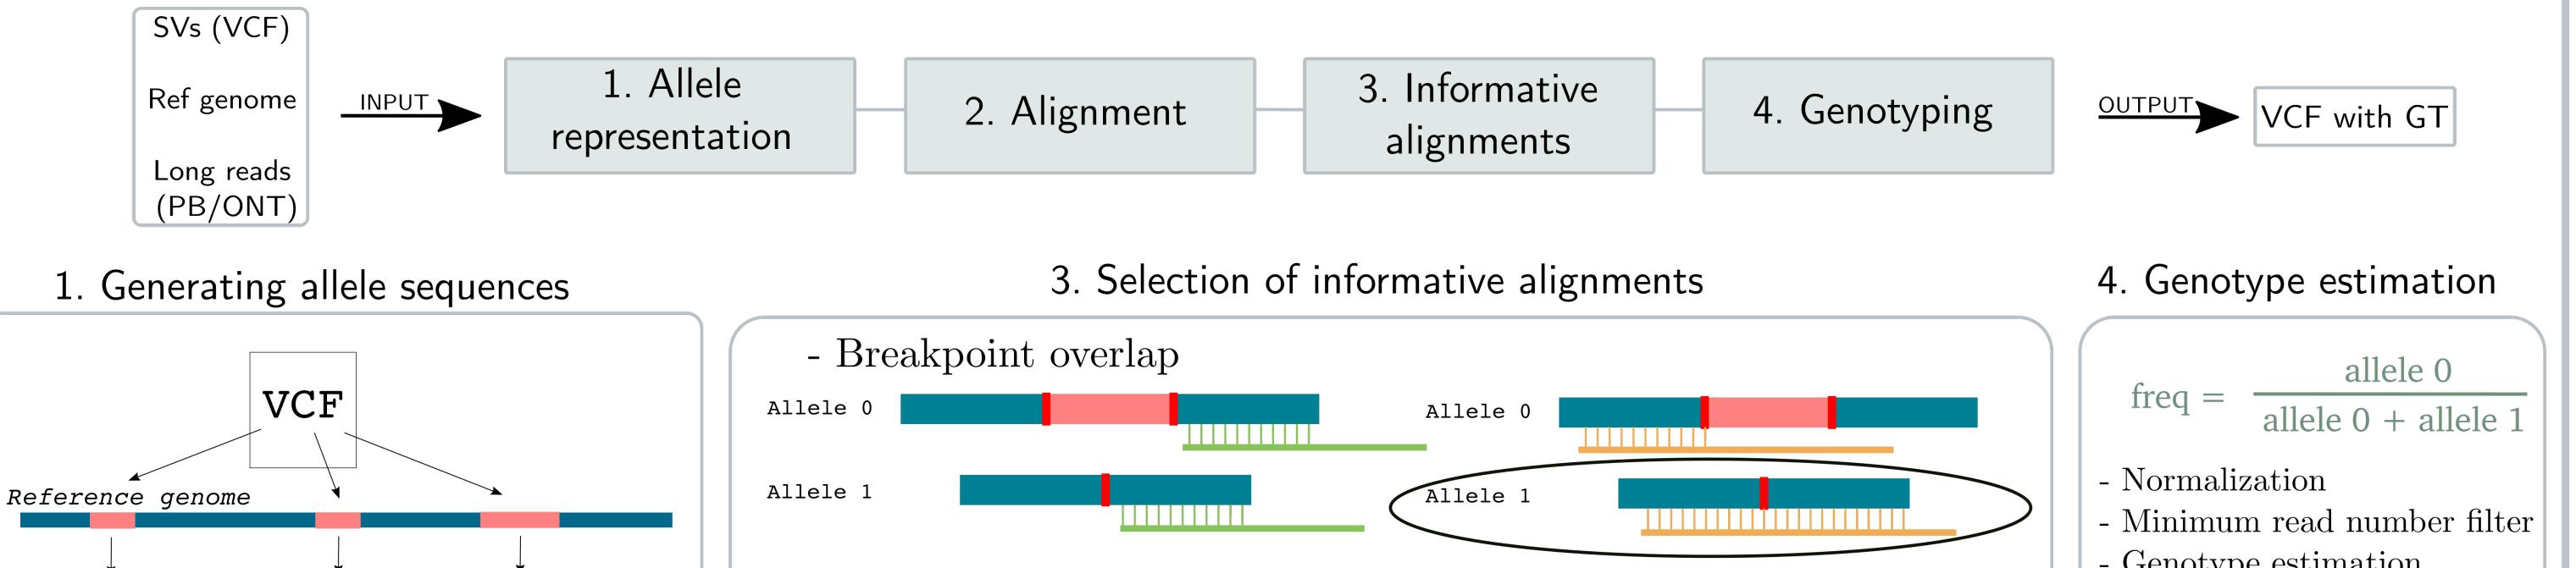

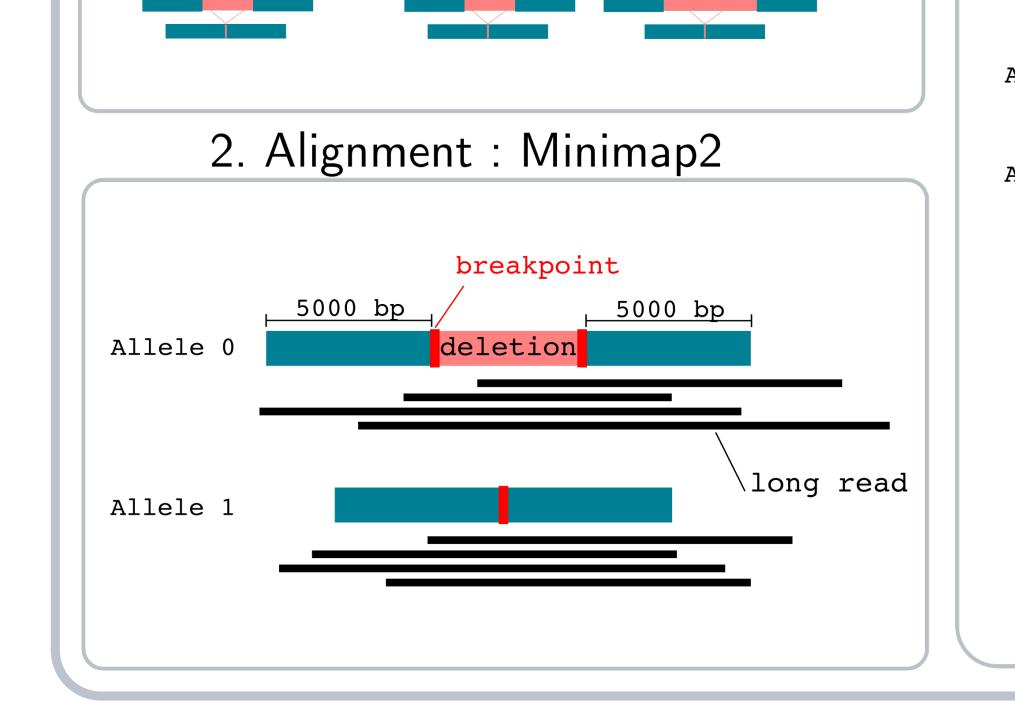

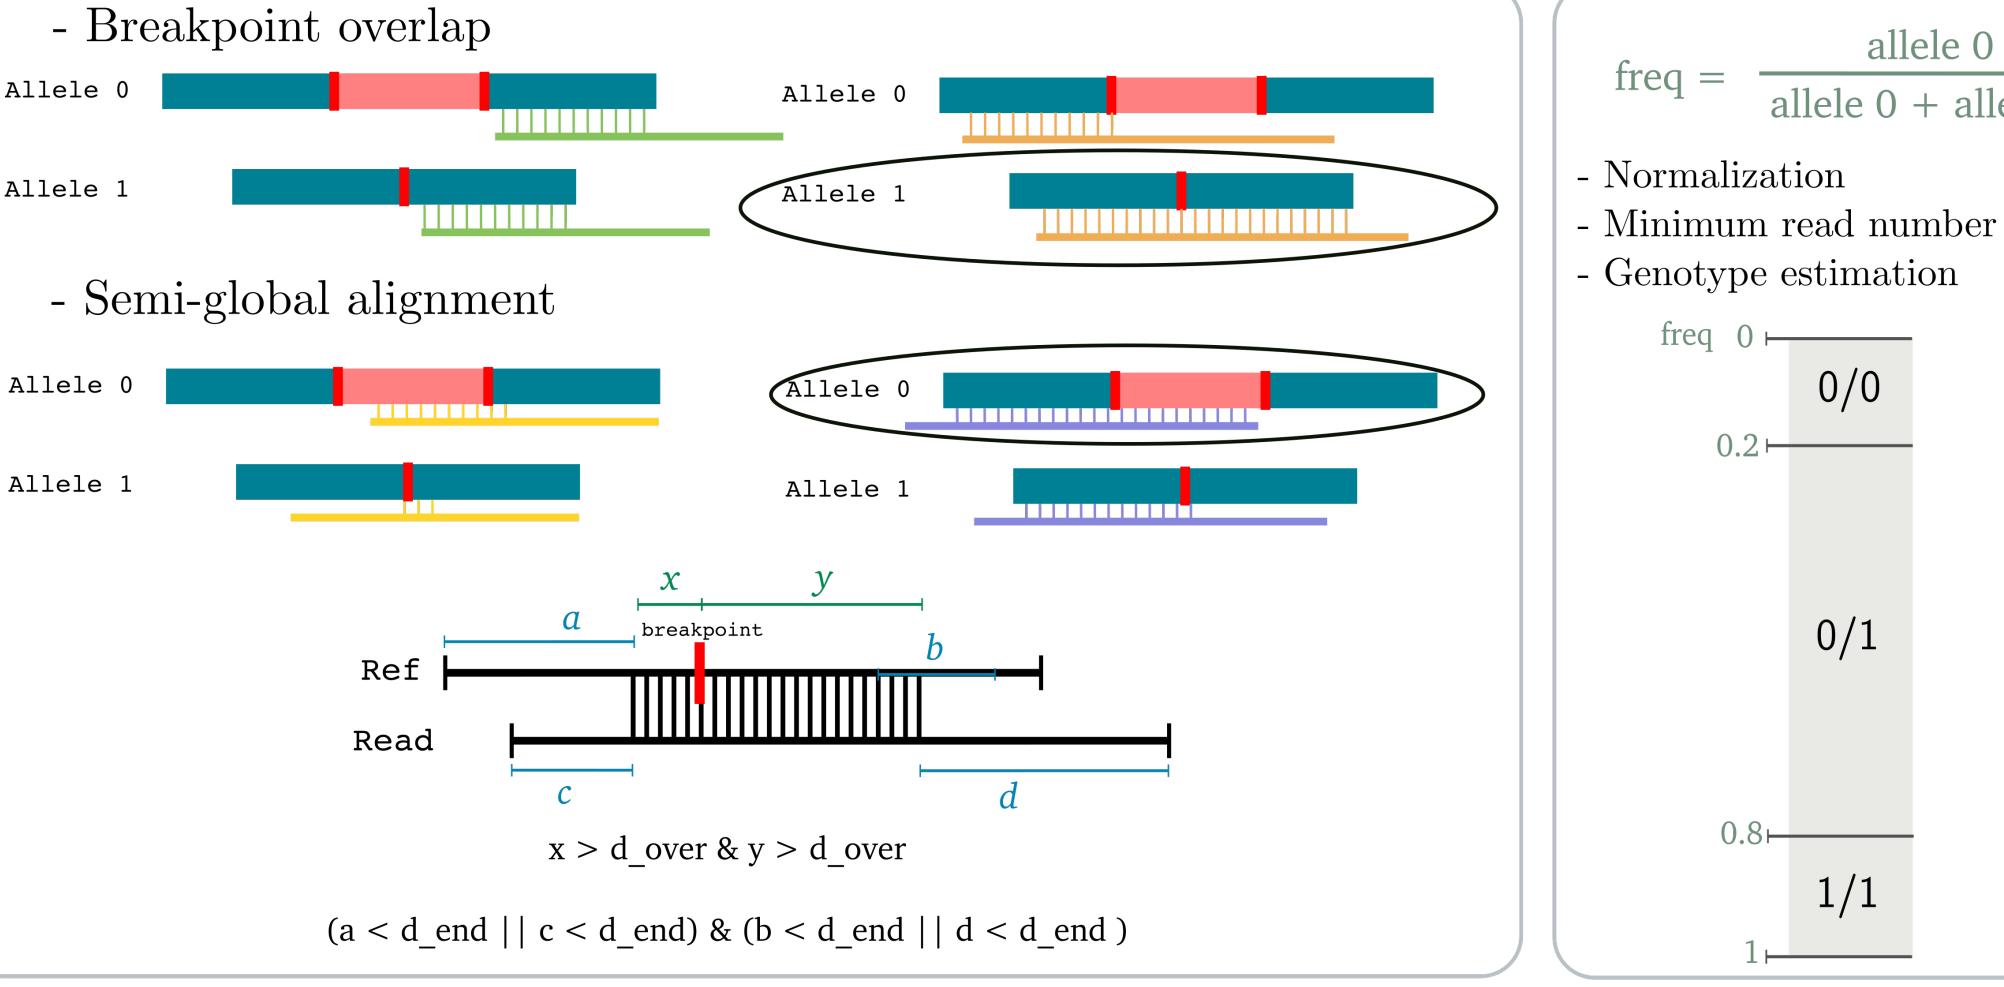

#### Results on a simulated dataset


Does SV discovery tools correctly estimate genotypes?

Simulated dataset

- **1,000 deletions** selected on the human chromosome 1 from dbVar (50 bp - 10 k bp)
- Equally distributed : 0/0, 0/1, 1/1
- Long reads simulated with SimLoRD [1] 16 % error rate, 20X sequence depth

		SVJedi				
		0/0	0/1	1/1	./.	
q	0/0	330	3	0	0	
Trut	0/1	19	305	6	4	
	1/1	3	10	311	9	

Precision : 95.85 %

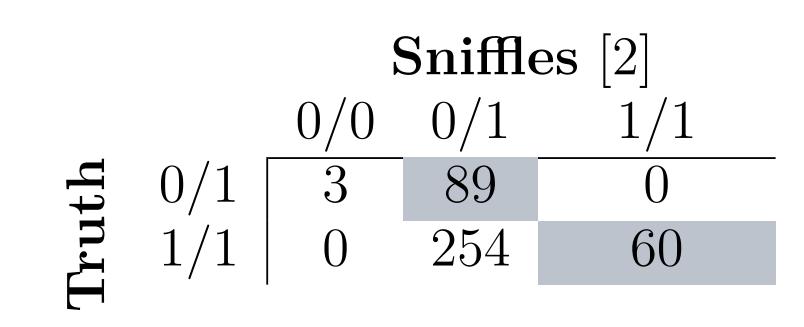

Recall : 60.87 %Precision : 36.70 %

80.9 % of 1/1 deletions are wrongly genotyped as 0/1

Results on a real dataset


classify

## Conclusion

► New method to genotype SVs using long reads data.



- Sample: NA12878
- Data: Nanopore WGS consortium (37X)

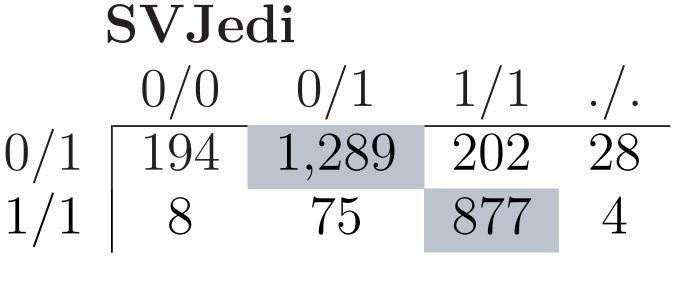

- Identity : 81.89 % 2,677svclassify 3: Predicted genotypes = 98.81 %confidence delehigh Runtime : 2h35 (40 CPU) tions
- **SVclassify SVJedi** 2,677 2,645 2,166 479 511
- ► Importance of dedicated genotyping methods.
- Currently only applied to deletions.
- ► Implementation: SVJedi

https://github.com/llecompte/SVJedi Contact: lolita.lecompte@inria.fr



- References
- Bianca K Stöcker, Johannes Köster, and Sven Rahmann. Simlord: simulation of long read data. Bioinformatics, 32(17):2704–2706, 2016. |1|
- Fritz J Sedlazeck, Philipp Rescheneder, Moritz Smolka, Han Fang, Maria Nattestad, Arndt von Haeseler, and Michael C Schatz. Accurate detection of complex structural variations using  $\left[2\right]$ single-molecule sequencing. Nature methods, 15(6):461, 2018.
- Hemang Parikh, Marghoob Mohiyuddin, Hugo YK Lam, Hariharan Iyer, Desu Chen, Mark Pratt, Gabor Bartha, Noah Spies, Wolfgang Losert, Justin M Zook, et al. svclassify: a method 3 to establish benchmark structural variant calls. BMC genomics, 17(1):64, 2016.