



Federating Digital Contact Tracing using Structured Overlay Networks

Silvia Ghilezan, Simona Kašterović, Luigi Liquori, Bojan Marinković, Zoran Ognjanović, Tamara Stefanović

► To cite this version:

Silvia Ghilezan, Simona Kašterović, Luigi Liquori, Bojan Marinković, Zoran Ognjanović, et al.. Federating Digital Contact Tracing using Structured Overlay Networks. 2021. hal-03127890v2

HAL Id: hal-03127890

<https://inria.hal.science/hal-03127890v2>

Preprint submitted on 6 Feb 2021 (v2), last revised 13 Oct 2021 (v4)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Federating Digital Contact Tracing using Structured Overlay Networks

Silvia Ghilezan ^{1, 2}, Simona Kašterović ², Luigi Liquori ⁴,
Bojan Marinković ³, Zoran Ognjanović ¹, and Tamara
Stefanović ²

¹Mathematical Institute of the Serbian Academy of Sciences and
Arts, Belgrade, Serbia

²Faculty of Technical Sciences, University of Novi Sad, Serbia

³Clarivate, Serbia

⁴INRIA & Université Côte d’Azur, France

1 Introduction

One of the biggest challenges of today is to slow down the spreading of SARS-CoV-2 virus producing Covid-19 pandemics; *Prevention, Testing, Tracing* are the main pillars of the solution. Contact Tracing of an infected person is essential to control the spread of the disease.

Tracing. Contact tracing is the process of identifying, notifying, and monitoring people who came in close contact with an individual who tested positive for any infectious disease, like Covid-19, while he/she was infectious. Contact tracing benefits the fight with the pandemic at multiple levels. Identifying and quarantining close contacts limits their ability to spread the disease. Therefore, in a period in which the disease and its effects are still being investigated, contact tracing plays a key role in preventing the further spread of the disease. Furthermore, contact tracing data helps medical experts to find the origin of the virus and learn more about the nature of the virus.

Manual Contact Tracing. Contact tracing has mostly been done manually since many centuries ago just by taking note on a simple piece of paper the list of persons and goods you get in contacts (see e.g. *La Peste* by A. Camus [1]). In the actual days, manual contact tracing could be exploited using simple telephone calls. Identifying contacts is done through an interview with the person infected with the virus. Each person is then contacted by phone. Health department should quickly alert people who are close contacts that they may have been exposed to the virus. The sooner the contacts are notified, the lower the risk of the spreading further. However, due to the highly contagious nature

of the SARS-CoV-2 virus and the fact that symptoms can manifest after many days (or even never, see *asymptomatic cases*), manual contact tracing does not give satisfactory results. Health departments and authorities do not have enough employees to do manual contact tracing. It must be further emphasized that the SARS-CoV-2 can be transmitted not only by direct contact, but also by indirect contact. The reason is that infected people can leave virus droplets on any physical object they touch. In this case, manual contact tracing is ineffective. For the reasons stated above, digital contact tracing has been considered already at the beginning of the Covid-19 pandemic.

1.1 Problem

There is a plethora of digital contract tracing applications in use all over the world fighting the Covid-19 pandemics [4]. They are developed on very different paradigms, centralized [2] vs. decentralized [6], GPS based (very few indeed because of a clear violation of privacy) vs. Bluetooth Low Energy based (the majority). The rush to make these applications work in the shortest time led to their great diversity. The most important open problem is their interoperability. There are many ongoing efforts to make a federation of these different system. Herein, we address this problem and propose a solution based on mathematical models of overlay networks.

1.2 Contributions

We develop a formal federation overlay network, called *BubbleAntiCovid19* (BAC19), for connecting different digital contact tracing applications, which are currently in use all over the world. The model is based on the well-known model of Structured Overlay Networks protocols like e.g. Chord [22, 23], Kademlia [19], Synapse [14]. We prove that BAC19 provides a complete and fully exhaustive retrieving procedure of people that get in touch with other people having tested positive to the Covid-19 disease. Hence, BAC19 is proven to be a simple yet powerful *interconnection* of already existing digital contact tracing applications that - by construction - do not communicate with each others as such providing their efficient interoperability.

As far as we know, the mathematical model and techniques presented in this paper have not been considered in other approaches.

1.3 Overlay networks in a nutshell.

Structured Overlay Networks are suitable model of scalable and efficient organisation of resources on the Internet. They represent logical organisation, independent on underlying network infrastructure that physically connects available assets. Overlay networks have been proven as very resilient tool in the situation when some parts of the underlying infrastructure fail or become overloaded or corrupted.

1.4 Organization of the paper

The rest of the paper is organized as follows. Section 2 presents classifications of digital contact tracing applications. Section 3 reviews Chord and Synapse protocols of overlay networks. Section 4 introduces the BAC19 system and proves the completeness and full exhaustiveness of the retrieving procedure. Section 5 presents a discussion on other proposals for providing interoperable frameworks for digital contact tracing. Section 6 concludes the paper. Appendix A gives an overview of different digital contact tracing applications that are in current use against the pandemics.

2 Digital Contact Tracing Applications

Advances in digital technology have enabled smartphones and other digital devices to be used for contract tracing. Particularly, more and more countries are showing interest in digital contact tracing applications (DCT apps) implemented for smartphones. Despite the great variety among these applications, all contact tracing apps work on the principle of automatic data exchange with nearby devices. When a user of a particular contact tracing app is identified as infected, a special report is uploaded to the DCT app server. Based on that report, close contacts of the infected person (also DCT app users) are informed that they have been in a contact with a positive user and/or the app calculates their exposure risk. The identity of the infected persons is not disclosed in order to protect their privacy. Existing contact tracing apps can be classified based on two criteria:

- Contact-tracing technology;
- System architecture.

More information about the classification of existing contact tracing apps can be found in [21, 24].

2.1 Classification by contact-tracing technology

In order for two people to be in close contact, they need to stay in the same place, at a short distance, for a long enough period of time. Therefore, the main data type used by the contact tracing apps is location data. There are various technologies for collecting and tracking location data, and contact tracing apps can be divided into two major categories depending on whether they track absolute or relative location:

- Absolute location apps – Apps that track the absolute location of their users are mostly based on GPS technology. Location data is stored in the form of geolocation coordinate pair. These apps are also known as Geolocation-based DCT apps.

- Relative location apps – Apps that track relative location of their users are mostly based on Bluetooth technology. These apps are also known as proximity DCT apps. A boarding pass or a ticket for a specific event can also be considered as relative location data. In order to use this kind of data, some contact tracing apps deploy QR code technology.

2.2 Classification by system architecture

Since the data is collected from users, their processing should be addressed. When it comes to DCT app data managing, the responsibility can be on a central authority or on each user individually. Therefore, contact tracing apps can be divided into three major categories depending on the architecture of the underlying system:

- Centralized apps - data are solely managed by a central server;
- Semi-Centralized apps - multiple nodes can manage the data, but the control is centralized;
- Decentralized apps - each user is managing his/her data.

It should be stated that some generally decentralized apps have some centralized aspects mainly related to user registration.

We will provide an overview of the existing contact tracing applications based on the above classifications in Appendix A. The results are summarized in Figure 2 which is motivated by [21].

2.3 Geolocation-based apps.

Geolocation-based DCT apps record a past geo-trajectories of every user, and the calculation of exposure risk of a user is based on the intersection of its past trajectories and trajectories of patients. We give a brief review of existing Geolocation-based apps in Appendix A.1.

Two main advantages of geolocation-based DCT apps are the following:

- 1) Geolocation-based DCT apps are compatible with manual contact tracing. Compatibility of geolocation-based DCT apps and manual contact tracing has mutual benefits. On one hand, past geo-trajectories of a patient can be added to an app by contact tracer even if the patient did not use the app. This enables the app to warn more users. On the other hand, the app can give the information about places with higher exposure risk to a contact tracer, so that the contact tracer can identify high-risk service workers.
- 2) Another advantage is that geolocation-based DCT apps can recognize patterns of disease's spreading and locations with higher exposure risk, and they can inform health authorities about it.

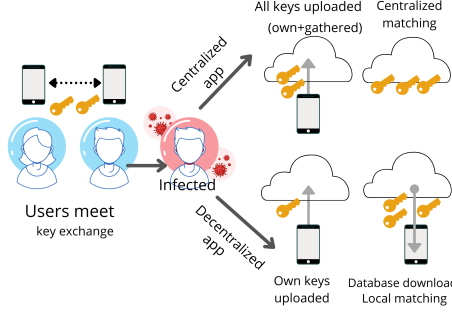


Figure 1: Centralized vs Decentralized bluetooth-based apps

Nevertheless, geolocation-based DCT apps have also disadvantages. One of the major challenges is privacy concerns, which cause low adoption rate of these applications. User's privacy can be violated in several ways. Recording all user's trajectories can result in revealing user's personal information such as identity, home address, work address, the identity of the patient and revealing user's exposure risk to other users. These problems have been elaborated in more details in [3].

2.4 Bluetooth-based apps

Bluetooth-based DCT apps record direct contacts of the users. A device generates a unique, randomized identifier and assigns it to a user. There are two kinds of identifiers: static, identifiers do not change over time, and dynamic, identifiers change over time. During a direct contact devices exchange identifiers and save received identifiers. Once a user is identified as positive in application, other users can calculate their exposure risk by checking whether they received a patient's identifier. We give a brief review of the existing Bluetooth-based apps in Appendix A.2.

Depending on whether the exposure risk is calculated by the central server or the user's device, we have centralized and decentralized apps, respectively (see Figure 1 motivated by [12]).

Centralized apps raise privacy concerns and questions about massive surveillance. People often do not trust server and as a consequence there is a low adoption rate of these applications. On the other hand, advantage of centralized apps is the possibility for health authority to make a transmission graph and learn more about the virus. Also, the possibility of false positive users is reduced.

As we have already observed, privacy issues lead to low adoption rate and decrease the efficiency of the application. In order to solve the problem of distrust of the central server, decentralized apps were designed. However, decentralized methods also raise some privacy concerns, for example the identity of a patient can be easily revealed.




Figure 2: Classification of analyzed applications

The major disadvantage is that bluetooth-based DCT apps work only if both users have installed the *same* application.

In order to take advantage of both types of these apps, Bluetooth-GPS apps were designed, see Appendix A.3. Given the different characteristics of DCT apps, the question arises whether it is possible to aggregate their data in order to more effectively track contacts. The answer can be found in overlay networks.

3 Overlay Networks

As mentioned in Section 1, overlay networks are the way to organize available assets.

Some overlay networks are implemented in a form of Distributed-Hash-Tables (DHTs). One of DHT protocols is the Chord protocol. It was introduced in [22, 23]. Nodes that are part of a Chord system form a ring shaped network. The basic operations of a Chord node are entering and leaving system and mapping given key onto the corresponding node of the system using consistent hashing.

The correctness and efficiency of the Chord’s protocol lookup procedure was in the focus of several papers, e.g. [22, 23, 16, 18]. However, these properties will not be in the focus of our paper. Our goal is to deliver information of every affected node, so we will not use any presented improvements to speed up the process of getting results, but to linearly pass every node in a Chord network, to be sure that no information is missed.

Interconnection of several overlay networks is a very hard problem since different networks may use different protocols, and even in the case of several DHT networks that use the same protocol (e.g. Chord) it is enough that every overlay network uses *its own hash function* and information between two of them cannot be exchanged. A proposal to solve this issue was given by defining the Synapse protocol in [14]. Its performances were analyzed in [15], whereas one real-life proof of concept was developed in [17]. For the purpose of this paper we will consider the so called, *white-box* version of the Synapse protocol

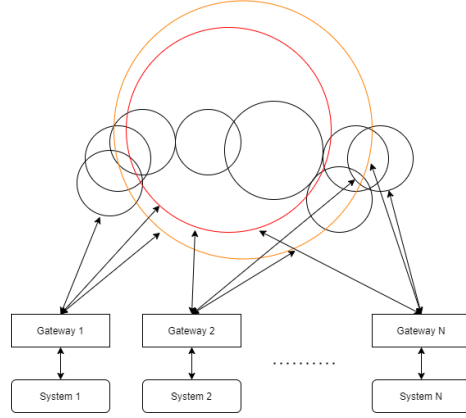


Figure 3: BAC19 Federation Overlay Network

that, in short, allow to consider all the keys as they were using the same hash table (see [14] for details). Again, since we will use linear search procedure in one Chord network we can be sure that information will be retrieved if it exists in the system.

4 System BAC19

BAC19 federation consists of several Chord networks:

- a network for each person/device of his/hers first contacts (black circles in Figure 3),
- dedicated *red* network to connect all infected persons (red circle in Figure 3),
- dedicated *amber* network to connect all the first contacts of infected persons (amber circle in Figure 3),

and

- *Gateways* (black rectangles in Figure 3) as the connections to the existing digital contact tracing systems (black rounded corners rectangles in Figure 3).

The first connection between the proposed extension and an existing system for contact tracing is called *Gateway*. The purpose of a *Gateway* is to maintain communication between two parts and to transform messages in a way that both sides can communicate efficiently.

The most important thing is to maintain the mappings between identifiers (IDs) used on both sides of a *Gateway*. As we could see in Section 2, some systems periodically change IDs, so the possibility to trace those changes is


```

FINDSUCCESSOR =
For Given key
//successor(id(Me)) is responsible for key
if member_of(key, id(Me), successor(id(Me))) then
| Respond With successor(id(Me))
else
| //Me forwards query to its successor
| Forward Query To successor(id(Me))
end

```

Algorithm 1: FindSuccessor

vital for functioning of our system. Regarding IDs, our goal is to have one identifier per one person/device regardless of how many systems it appears in. We argue that this is possible to achieve. First, it is possible to use sufficiently large codomain of the hash function (e.g. 2^{128}). Also, it is possible to select enough parameters of a person/device so that it can be uniquely identified. We are not storing any other attribute of a person/device except newly introduced identifier in our extension.

More precisely, with respect to the specifications that are provided in [16, 15] we need to introduce the following changes:

- the set $Network = \{red, amber, net_1, \dots, net_N\}, N \in \mathbb{N}$, to denote all possible networks, where N is the number of possible persons/devices in the proposed extension;
- the set $Time$ and the function $contact_time() : (Chord \cup \{amber\}) \times Chord \rightarrow Time$ to denote the time of the contact between two persons;
- the external function $current_date()$ to get the current date.

To obtain *completeness* and *full exhaustiveness* of the retrieval procedure the rule FINDSUCCESSOR, which finds a responsible node for a given ID, is changed as in the way presented in the above Algorithm 1. With this proposal we are not compromising performances of the extension by much. Since number of contacts of a person is relatively small, it is manageable to allow increasing the complexity of the worst case retrieval from $O(\log N)$ to $O(N)$. In the predefined time-slots our extension will receive the following information from a system:

- all identified infected cases since the last import,
- all confirmed cases that are not infected anymore since the last import,
- all identified contacts since the last import in the form of the tuple $\langle id_i, id_j, t \rangle$ with the meaning that persons id_i and id_j had a risk contact at t timestamp. For the purpose of providing privacy protection timestamp should be kept at the precision of days. Unfortunately, this type of communication is not possible with the systems that are categorized as decentralized

```

For all  $inf \in NewCases$ 
  Invoke PUT Of Network  $red$  To Store  $inf$ 
For all  $id \in net_{inf}$ 
  if  $contacttime(amber, id) < t$  or  $contacttime(amber, id) = undef$ 
  then
    | Set  $contacttime(amber, id) = t$ 
  end

```

Algorithm 2: Put

```

For all  $inf \in Healed$ 
  Invoke LEAVE Of Network  $red$  for  $inf$ 
Algorithm 3: Leave

```

Bluetooth systems, since the fact that contact tracing computation is performed at users devices and not shared with the central storage. These systems can only share newly identified cases and their time of recovery (see Algorithm 4).

```

Set  $contacttime(id_i, id_j) = t$ 
Set  $contacttime(id_j, id_i) = t$ 
Algorithm 4: Set contact time

```

Also, if needed it is possible to introduce the new *Gateway* with the purpose to enter manually recognized contacts to the system.

When information is received from origin systems, as the first step BAC19 will connect all newly recognized infected cases to the *red* network, as well as to remove all cured. A node will remain in the *red* network until her recovering is confirmed. All IDs that are recognized as the risk contacts of a person/device (e.g. id_i) will be added to its bubble. They will stay there until $t + 14$ days, where t is the time of their contact. If the id_i is the member of the *red* network all the members of its network will be added to the *amber* network and stay there during the same time frame $t + 14$ days. If a contact is already in the *amber* network timestamp will be updated to the higher value.

During the opposite way of communication, BAC19 will pass on information to all nodes in the *amber* network to *Gateways*. If an identifier is recognized in the set of mappings for the particular origin system, the corresponding information is transferred to the origin system to alert (if not already) the person/device that she/it had risk contact with an infected person at stored timestamp. Also, BAC19 is capable to send information on the second level contacts (the result is stored in the set *Result*):

Namely, for all nodes of the *amber* network it is possible to go through every origin bubble and pass those identifiers to the *Gateways*. Then the origin systems can inform those persons that they should increase their awareness since they are second level contacts.

Using the results from [16, 15] we prove the following statement:

```

For all  $net_{id_i} \in Network \setminus \{red\}$ 
  For all  $id_j \in net_{id_i}$ 
    if  $contacttime(id_i, id_j) + 14 \text{ days} > currentdate()$  then
      | Invoke LEAVE Of Network  $id_j$  for  $id_i$ 
    end
  end

```

Algorithm 5: Leave of network

```

seq
  Invoke GET all nodes from amber and store the result in Amber
  For all  $id \in Amber$ 
    Invoke GET all nodes from  $net_{id}$  and append the result to Result
  endseq

```

Algorithm 6: Get all nodes

Theorem 1. *The proposed extension stores and retrieves only up-to-date information on Covid-19 positive cases (identified by the origin systems) and their contacts and makes it available to all origin systems.*

Proof Sketch. The execution of the proposed extension is performed in the controlled environment. Due to the scheduled time intervals for execution of different tasks, the nodes' leaving from the bubbles will not happen during the unstable states, i.e. only scenarios defined with [16, Theorems 5.3 and 5.4] will be allowed. Also, using the fact that the rule FINDSUCCESSOR is changed, all nodes will be contacted during the search procedure. Thus, the retrieving procedure of the Synapse protocol [15] is complete and fully exhaustive. \square

5 Discussion

The paper [25] proposes building a common API. This approach is rather similar to the extension proposed by this paper. However, these approaches have also two significant differences:

- while [25] building API connection points between each of two different origin systems that are connected, our extension proposes a version to common bus where each of the origin systems communicate with the proposed extension and in this way reduces and simplifies number of connection points that needs to be maintained when several origin systems are connected;
- with BAC19 we are simplifying also information that is being exchanged, and we do not violate privacy in the origin systems (since our extension does not collect information of origin DCT system).

A guideline on Interoperability specifications for cross-border transmission chains between approved apps by the European Community [5] proposes a Federation Gateway Service for synchronizing the diagnosis keys (keys of infected

users) across backend servers of each national app. However, this approach focuses only on Google/Apple exposure notification apps because the majority of European countries have developed this kind of apps, and also because one Google/Apple exposure notification app can detect the contact with a user of another Google/Apple exposure notification app. In this paper we do not focus on a certain type of DCT apps, we want to achieve the connection between them regardless the contact-tracing technology and their system architecture. We leave to the the reader to envisage the following scenario:

- Alice lives in the region which has centralized DCT *System A*, while Bob lives in the region which has centralized DCT *System B*. Bob has spent some time in the region A, and both of them are traveling together side by side with negative RT-PCR tests. However, Bob developed symptoms of Covid-19 after couple of days and was confirmed as positive.

If *System A* and *System B* are part of BAC19, it would be enough that only one of Alice and Bob had installed system from the other region just in the time of travel for Alice to be informed that she is the first contact of a infected person.

6 Conclusions

In this paper we have presented BAC19 a new and efficient overlay network connecting existing systems for digital contact tracing. The advantages of BAC19 (its usage) are:

- a person does not install anything new on his/her mobile device (except a new application which is used in the region that this person is visiting);
- the overlay does not store any personal sensitive information;
- the overlay is independent regarding how the origin system calculated contacts or is it based on Bluetooth or GPS technology;
- the overlay supports manual entry of recognized contacts;
- there are no new highly complicated calculations of possible contacts beside those that are performed by the original contact tracing systems.

The presented extension BAC19 is the so called forward tracing system (finding all contacts of an infected person). We plan to explore the possibilities to adapt BAC19 to also enable backward tracing (finding the source of infection using contacts).

A DCT apps - overview

A.1 Geolocation-based DCT apps

Home Quarantine. At the beginning of the COVID-19 pandemic, Ministry of Digital Affairs of Poland developed the Home Quarantine app [20]. This is

a typical example of a centralized app which deploys GPS technology. It is developed to support the authorities, especially the police and social services, with adequate information about people undergoing mandatory home quarantine. Users are also required to upload their digital photos. So, aside the GPS technology the app also uses face recognition. The app is mandatory for anyone who has developed coronavirus symptoms. It should be emphasized that Poland also developed the ProteGO Safe app for alerting users of close contact with an infected person based on The (Google/Apple) Exposure Notification (GAEN) system.

The Shield (HaMagen). In March 2020, Israeli Ministry of Health developed The Shield app [13]. This is a typical example of a decentralized app which deploys GPS technology. Location data is stored in the phone. If a user tests positive, he/she can upload his/her location history to the central server. Once the user uploaded his/her location history, it is added into a JSON file that is updated with new data on an hourly basis. Matching the locations happens on the phone. If the match is found, the app shows you the exact time and location. The app is later updated to work with Bluetooth technology but on a voluntary basis, every user can choose whether to use the proximity data or not.

A.2 Bluetooth-based DCT apps

Blue-Trace protocol apps. Singapore’s Government Technology Agency in collaboration with Ministry of Health in March 2020 released the TraceTogether app [10] that allows digital contact tracing using the custom BlueTrace protocol. Australia has later adopted the protocol and released the CovidSafe app [7]. Contact tracing is done using Bluetooth Low Energy and proximity data is encrypted and stored only on the users phone. Users in the contact log are identified using anonymous time-shifting ”temporary IDs”. If a user tests positive for the infection, the Ministry of Health requests his/her contact log. The user has the right to choose whether to share the contact log or not. If the user chooses to share the log, the contact log is uploaded to a central server and the health authority is then responsible for matching the log to contact detail and informing close contacts of the infected user. These apps are examples of Bluetooth-based semi-centralized apps. It should also be noted that Singapore solved the problem of tracing people who don’t use smartphones by enabling the app to work with Token - a physical Bluetooth-based device.

ROBERT protocol app. The French National Assembly released the Stop-Covid app in May 2020. The app has later been renamed TousAntiCovid [8]. It allows digital contact tracing using the ROBust and privacy-presERving proximity Tracing protocol (ROBERT protocol). It also deploys Bluetooth technology and belongs to the category of semi-centralized apps. The difference between this app and apps based on the BlueTrace protocol relates to confirmation of positive users. More precisely, in France when a person is confirmed to be positive, the lab gives a patient a QR code and the scanned code is the proof for the app that you are infected. It is up to you to share this information with

the app, and if you choose to share this information with a central server, the server is responsible for alerting your close contacts.

Google/Apple exposure notification apps. In April 2020 Google and Apple announced the joint work on decentralized Bluetooth-based protocol named The (Google/Apple) Exposure Notification (GAEN) system [11]. Many states then developed different apps using the Google/Apple Exposure Notification framework including Austria (Stopp Corona app), Germany (Corona-Warn-App), Italy (Immun), Canada (COVID Alert) etc. The principle by which applications work is as follows. During a close contact, user’s phones exchange random Bluetooth identifiers. These identifiers change frequently and the information about exchanged ID’s is stored on the user’s phone. When a user gets infected, he/she can decide to upload ID’s he/she was using the last 14 days to the server. Phones of all users periodically download the list of ID’s which belong to the infected users and does the matching locally.

A.3 Bluetooth-GPS apps

Apps that deploy both Bluetooth and GPS technology are rare. One app of this kind is the *Aarogya Setu app* [9], developed by National Informatics Centre that comes under the Ministry of Electronics and Information Technology, Government of India. Aarogya Setu is following the semi-centralized approach, and is one of the world’s fastest growing applications. The app mainly uses proximity data and GPS data are recorded only once in 30 minutes. The location data is mainly used to identify the locations where you might have caught the infection and identify potential hotspots that may be developing when multiple infected people visit the same place. Interaction between users is recorded by exchange of Device Identification Numbers (DiD’s) which are static. Contact tracing data is kept on the phone. Council of Medical Research (ICMR) shares the list of COVID-19 positive persons with the Aarogya Setu server, and information about contact tracing is uploaded to the server only if you are tested positive. The central server is then responsible for alerting your close contacts.

References

- [1] Albert Camus. *La peste*. Gallimard, 1947.
- [2] Claude Castelluccia, Nataliia Bielova, Antoine Boutet, Mathieu Cunche, Cédric Lauradoux, Daniel Le Métayer, and Vincent Roca. ROBERT (ROBust and privacy-presERving proximity Tracing protocol). Technical report, Inria and Fraunhofer AISEC, 2020.
- [3] Xiang Cheng, Hanchao Yang, Archanaa S. Krishnan, Patrick Schaumont, and Yaling Yang. KHOVID: interoperable privacy preserving digital contact tracing. *CoRR*, abs/2012.09375, 2020.
- [4] ETSI E4P. Comparison of existing pandemic contact tracing systems. Technical report, ETSI, 04 2021.

- [5] eHealth Network. Interoperability specifications for cross-border transmission chains between approved apps, 2020.
- [6] Carmela Troncoso et al. Decentralized Privacy-Preserving Proximity Tracing. Technical report, École Polytechnique Fédérale de Lausanne, ETH Zurich, KU Leuven, Delft University of Technology, University College London, Helmholtz Centre for Information Security, University of Torino, ISI Foundation, 2020.
- [7] Government of australia, covidsafe. <https://www.covidsafe.gov.au/> Accessed January 9, 2021.
- [8] Government of france, tousanticovid. <https://gitlab.inria.fr/stopcovid19> Accessed January 10, 2021.
- [9] Government of india, aarogya setu. <https://aarogya.setu.gov.in/> Accessed January 10, 2021.
- [10] Government of singapore, tracetogether. <https://www.tracetogether.gov.sg/> Accessed January 9, 2021.
- [11] Jaap-Henk Hoepman. A critique of the google apple exposure notification (gaen) framework. *ArXiv*, abs/2012.05097, 2020.
- [12] Jianwei Huang, Vinod Yegneswaran, Phillip Porras, and Guofei Gu. On the privacy and integrity risks of contact-tracing applications, 2020.
- [13] Israel ministry of health, hamagen. <https://govextra.gov.il/ministry-of-health/hamagen-app/download-en/> Accessed January 9, 2021.
- [14] Luigi Liquori, Cédric Tedeschi, Laurent Vanni, Francesco Bongiovanni, Vincenzo Ciancaglini, and Bojan Marinkovic. Synapse: A scalable protocol for interconnecting heterogeneous overlay networks. In Mark Crovella, Laura Marie Feeney, Dan Rubenstein, and S. V. Raghavan, editors, *NET-WORKING 2010, 9th International IFIP TC 6 Networking Conference, Chennai, India, May 11-15, 2010. Proceedings*, volume 6091 of *Lecture Notes in Computer Science*, pages 67–82. Springer, 2010.
- [15] Bojan Marinkovic, Vincenzo Ciancaglini, Zoran Ognjanovic, Paola Glavan, Luigi Liquori, and Petar Maksimovic. Analyzing the exhaustiveness of the synapse protocol. *Peer Peer Netw. Appl.*, 8(5):793–806, 2015.
- [16] Bojan Marinkovic, Paola Glavan, and Zoran Ognjanovic. Proving properties of the chord protocol using the ASM formalism. *Theor. Comput. Sci.*, 756:64–93, 2019.
- [17] Bojan Marinković, Luigi Liquori, Vincenzo Ciancaglini, and Zoran Ognjanović. A distributed catalog for digitized cultural heritage. In Marjan

- Gusev and Pece Mitrevski, editors, *ICT Innovations 2010 - Second International Conference, ICT Innovations 2010, Ohrid, Macedonia, September 12-15, 2010. Revised Selected Papers*, volume 83 of *Communications in Computer and Information Science*, pages 176–186, 2010.
- [18] Bojan Marinkovic, Zoran Ognjanovic, Paola Glavan, Anton Kos, and Anton Umek. Correctness of the chord protocol. *Comput. Sci. Inf. Syst.*, 17(1):141–160, 2020.
 - [19] Petar Maymounkov and David Mazières. Kademlia: A peer-to-peer information system based on the XOR metric. In Peter Druschel, M. Frans Kaashoek, and Antony I. T. Rowstron, editors, *Peer-to-Peer Systems, First International Workshop, IPTPS 2002, Cambridge, MA, USA, March 7-8, 2002, Revised Papers*, volume 2429 of *Lecture Notes in Computer Science*, pages 53–65. Springer, 2002.
 - [20] Ministry of foreign affairs republic of poland, home quarantine. <https://www.gov.pl/web/diplomacy/home-quarantine-monitoring-by-taketaask> Accessed January 10, 2021.
 - [21] Patrick Ocheja, Yang Cao, Shiyao Ding, and Masatoshi Yoshikawa. Quantifying the privacy-utility trade-offs in covid-19 contact tracing apps, 2020.
 - [22] Ion Stoica, Robert Tappan Morris, David R. Karger, M. Frans Kaashoek, and Hari Balakrishnan. Chord: A scalable peer-to-peer lookup service for internet applications. In Rene L. Cruz and George Varghese, editors, *Proceedings of the ACM SIGCOMM 2001 Conference on Applications, Technologies, Architectures, and Protocols for Computer Communication, August 27-31, 2001, San Diego, CA, USA*, pages 149–160. ACM, 2001.
 - [23] Ion Stoica, Robert Tappan Morris, David Liben-Nowell, David R. Karger, M. Frans Kaashoek, Frank Dabek, and Hari Balakrishnan. Chord: a scalable peer-to-peer lookup protocol for internet applications. *IEEE/ACM Trans. Netw.*, 11(1):17–32, 2003.
 - [24] Qiang Tang. Privacy-preserving contact tracing: current solutions and open questions, 2020.
 - [25] Marko Vukolic. On the interoperability of decentralized exposure notification systems. *CoRR*, abs/2006.13087, 2020.