



**HAL**  
open science

## Assessing a new form of BCI user learning

Khadijeh Sadatnejad, Fabien Lotte

► **To cite this version:**

Khadijeh Sadatnejad, Fabien Lotte. Assessing a new form of BCI user learning. International Virtual BCI Meeting, Jun 2021, online, Belgium. hal-03518488

**HAL Id: hal-03518488**

**<https://inria.hal.science/hal-03518488v1>**

Submitted on 9 Jan 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Assessing a new form of BCI user learning

Khadijeh Sadatnejad<sup>1\*</sup>, Fabien Lotte<sup>1,2</sup>

<sup>1</sup> Inria Bordeaux Sud-Ouest, Talence, France; <sup>2</sup> LaBRI (CNRS / Univ. Bordeaux / Bordeaux INP), Talence, France  
 \*200 avenue de la Vieille Tour, 33405 Talence cedex, France. E-mail: [seyedchkhadijeh.sadatnejad@inria.fr](mailto:seyedchkhadijeh.sadatnejad@inria.fr)

*Introduction:* Optimizing BCI user training requires to understand it and thus to discover various possible user learning forms. The *classDis* metric [1], which aims at quantifying class separability, may not capture potential user adaptation to the BCI classifier. Indeed, we suspect that, with BCI training, some users may learn to produce EEG patterns that are not more discriminant, but that become increasingly more similar to what the classifier expect, i.e., training EEG data, thus increasing classification accuracy. Thus, here we aim at studying and quantifying whether users' online (test) EEG data becomes increasingly more similar to the training EEG data with training.

*Material, Methods and Results:* To do so, we choose some robust landmarks from both the training and test sets and propose a Test-Train Adaptation (TTA) metric. TTA computes the average Riemannian distance,  $d_R$ , between these landmarks in the training and test sets:  $TTA = (\sum_{ci} d_R(\bar{C}_{train}^{(ci)}, \bar{C}_{test}^{(ci)}) / \sigma_{train}^{(ci)} + d_R(\bar{C}_{train}, \bar{C}_{test}) / \sigma_{train}) / (N_c + 1)$ , with  $\bar{C}_{train}^{(ci)}$  the mean and  $\sigma_{train}^{(ci)}$  the standard deviation of class  $ci$  training Spatial Covariance Matrices (SCMs) and  $N_c$  the class number [2]. Decreasing TTA values may suggest increasing adaptation of user's test EEG signals to the classifier training set. We assessed user learning on a CYBATHLON dataset [3] (1 user for 10 sessions) and a Mental Tasks (MT) dataset [4] (16 users for 6 sessions each). For both, we reduced between-session non-stationarity using SCMs recentering to the mean of either the baseline or each session first run as in [3,4]. We evaluated BCI users learning using Pearson correlation between run index and Classification Accuracy (CA), *classDis*, or TTA. For the CYBATHLON dataset (Fig. 1.(a)), results revealed significant learning effects using TTA in 8-24 Hz ( $\rho = -0.56$ ,  $p = 0.05$ ) and CA ( $\rho = 0.68$ ,  $p = 0.01$ ) while *classDis* did not show significant learning. On the MT dataset (Fig 1. (b)), 4 users showed significant learning with TTA (mean  $\rho = -0.47$ ,  $p = 0.03$ ), 4 with *classDis* (mean  $\rho = 0.56$ ,  $p = 0.04$ ) and 2 with CA (mean  $\rho = 0.51$ ,  $p = 0.03$ ) in 8-30 Hz. These frequency sub-bands were used in the online experiments. Only one user showed significant learning with all three metrics.

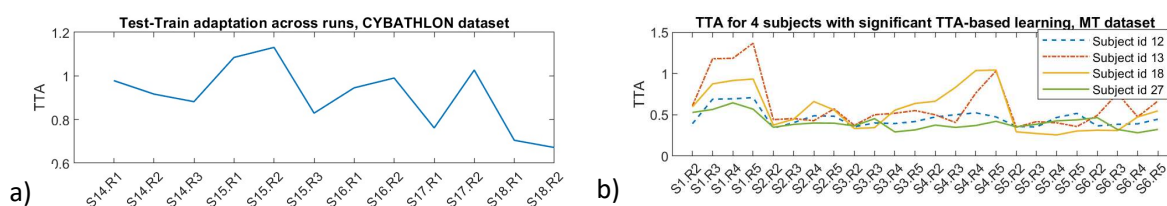


Figure 1. (a) TTA on test sessions (CYBATHLON dataset) (b) TTA for subjects with significant learning effects (MT data set).

*Discussion:* The observed inconsistencies between learning metrics suggest that there is not a single type of BCI user learning, and that users' adaptation to the classifier is one of them.

*Significance:* TTA can quantify this new type of learning, and thus may be used in the future to better understand and refine BCI user training to each user learning progress.

*Acknowledgments:* This work was supported by the ERC (grant ERC-2016-STG-714).

## References

- [1] Lotte, F., & Jeunet, C. JNE, 2018 [2] Nielsen F, Rajendra B. Matrix information geometry. 2013.  
 [3] Benaroch C, Sadatnejad et al, Front Hum Neuros, 2021 [4] Jeunet et al, PloS one 10, no. 12, 2015.