



# Triangulations, CGAL, and hyperbolic surfaces

Monique Teillaud

## ► To cite this version:

Monique Teillaud. Triangulations, CGAL, and hyperbolic surfaces. Renormalization, computation and visualization in Geometry, Number Theory and Dynamics, Sep 2023, Marseille (CIRM, Centre International de Rencontres Mathématiques), France. hal-04241550

HAL Id: hal-04241550

<https://inria.hal.science/hal-04241550v1>

Submitted on 5 Jul 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

Triangulations,  
**CGAL**,  
and  
hyperbolic surfaces



1

Monique Teillaud

*Inria*



UNIVERSITÉ  
DE LORRAINE

Thanks to the organizers!


Thanks to the organizers!

I'm leaving on Wednesday afternoon 😞




# Introduction

# Delaunay triangulation in $\mathbb{R}^d$



# Delaunay triangulation in $\mathbb{R}^d$

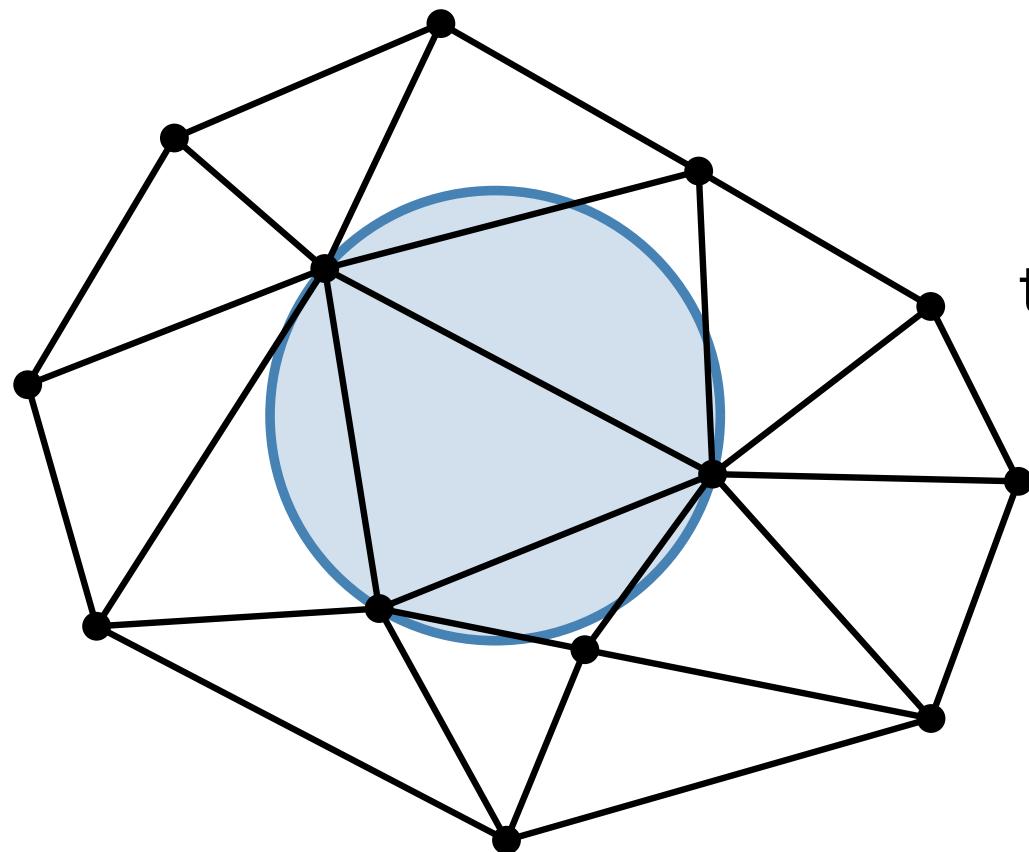


set of points  $\mathcal{P}$

triangulation of  $CH(\mathcal{P})$

s.t.

circumscribed balls  
are empty

# Delaunay triangulation in $\mathbb{R}^d$

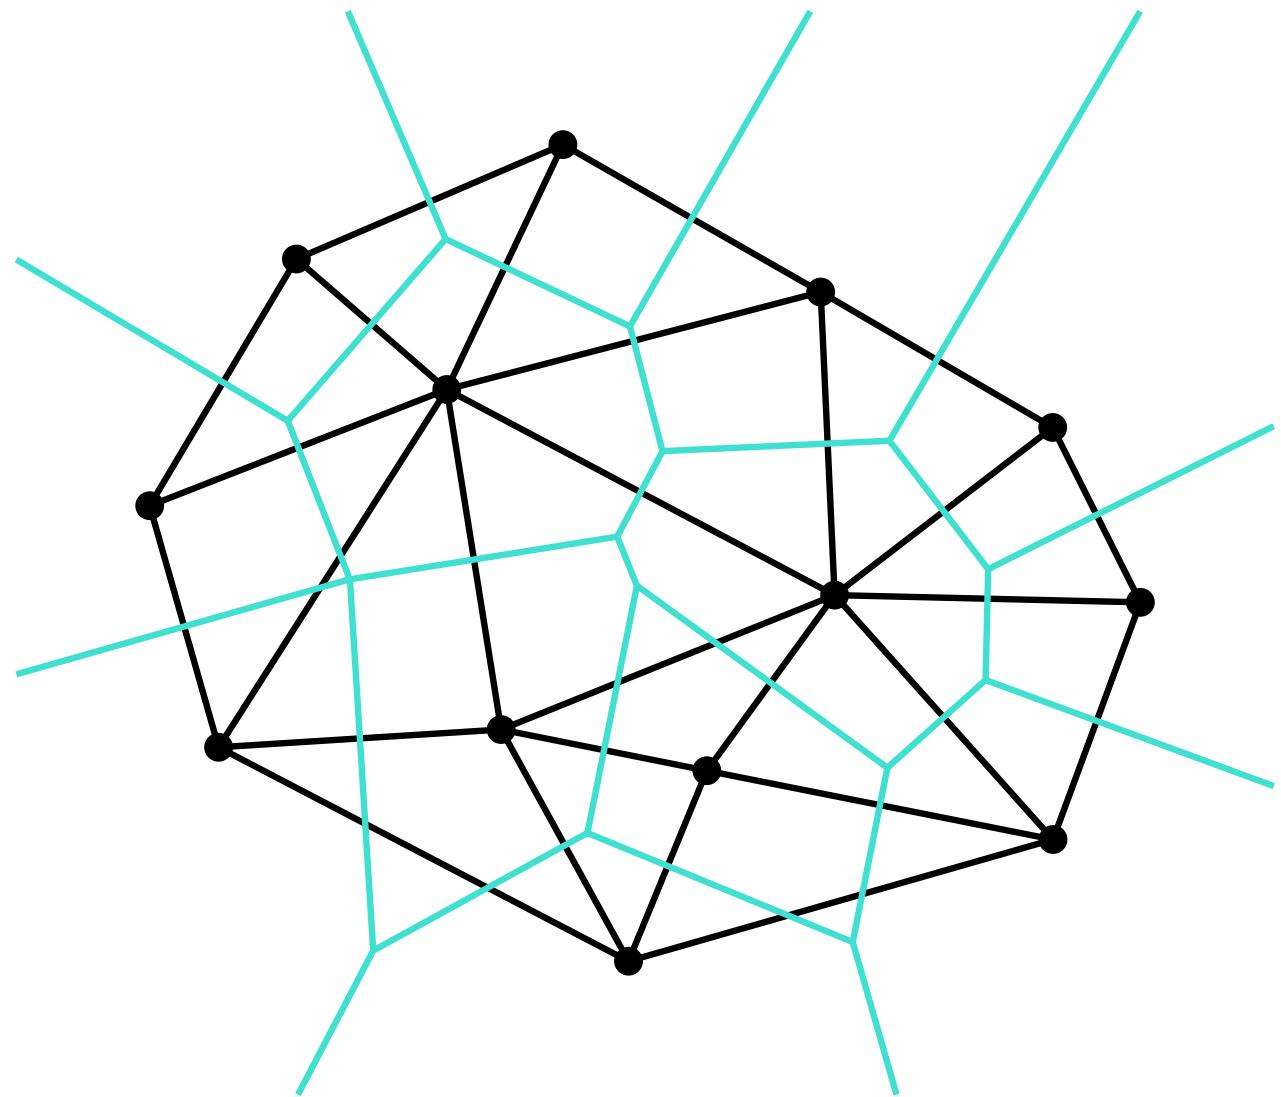



set of points  $\mathcal{P}$

dual  
Voronoi diagram

# Delaunay triangulation in $\mathbb{R}^d$

Many applications

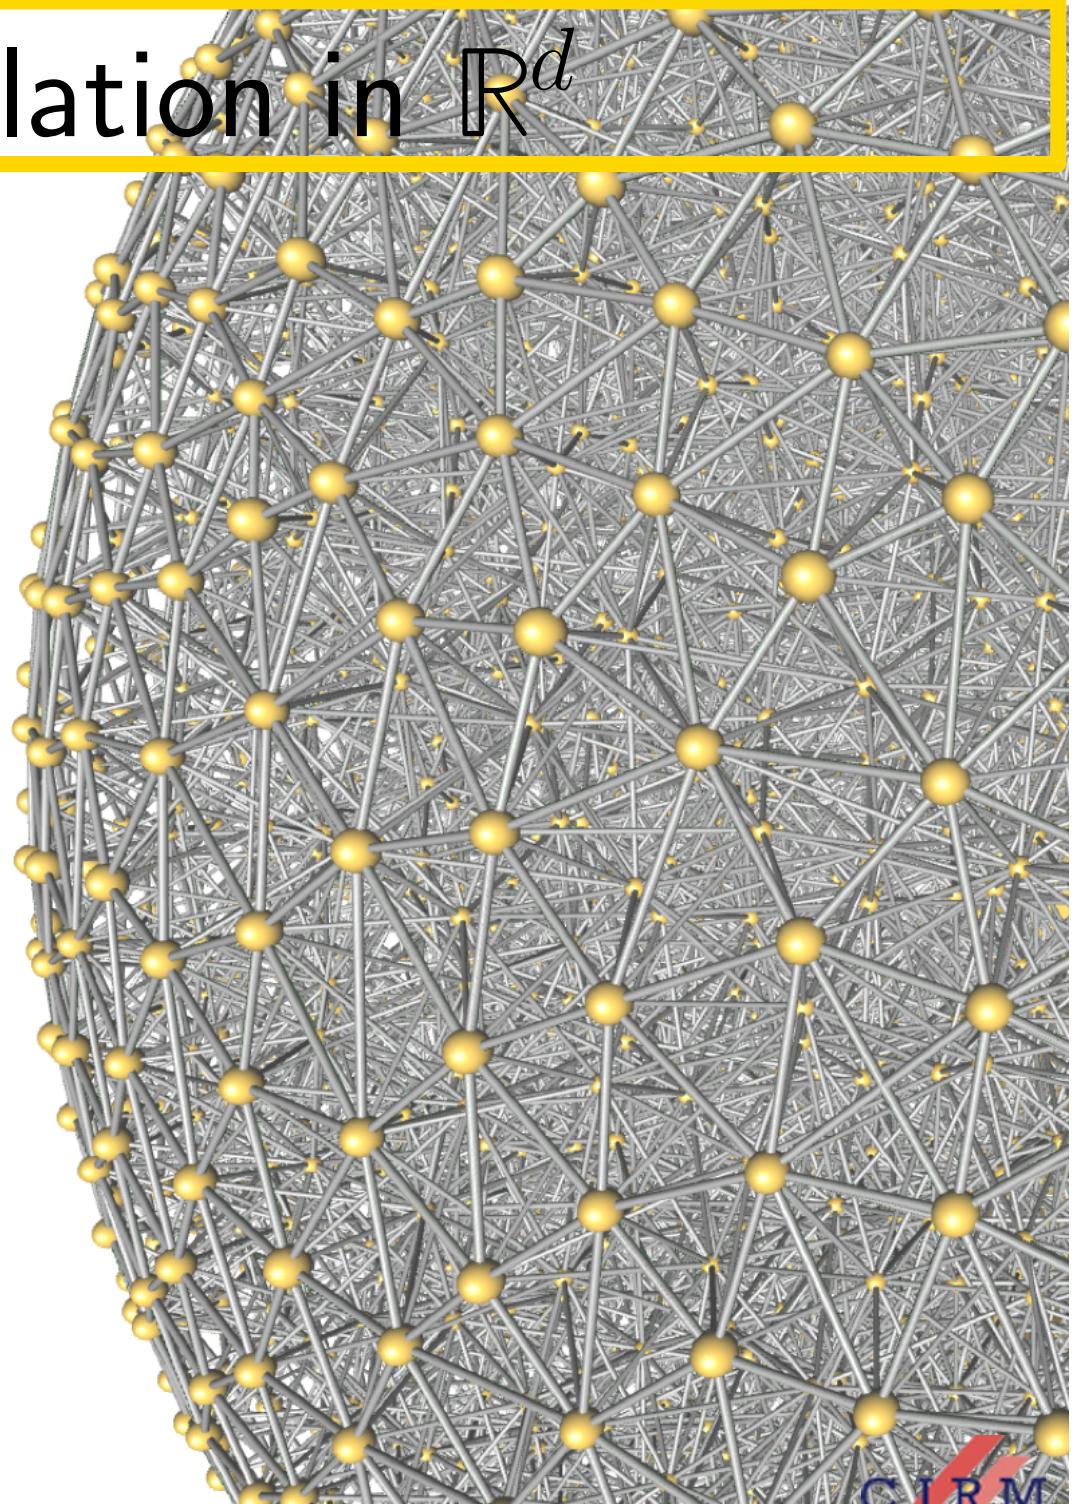

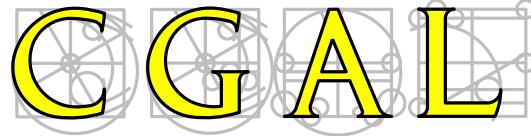

[www.cgal.org](http://www.cgal.org)

## *The Computational Geometry Algorithms Library*

Open source project

LGPLv3+ / Commercial

## *The Computational Geometry Algorithms Library*

Open source project

LGPLv3+ / Commercial


C++

Genericity/flexibility through templates


Robustness through Exact Geometric Computation [Yap]

Exact *predicates*  $\rightsquigarrow$  exact decisions

> 100 chapters in the manual

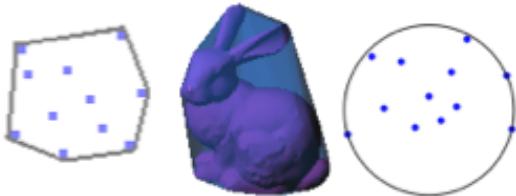


Bounding Volumes

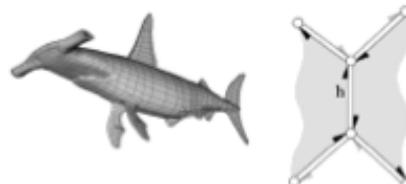


Polyhedral Surface




BooleanOperations

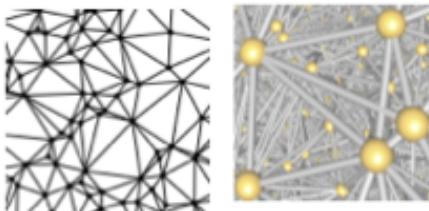


Triangulations

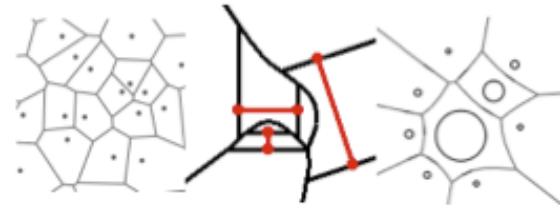

Voronoi Diagrams

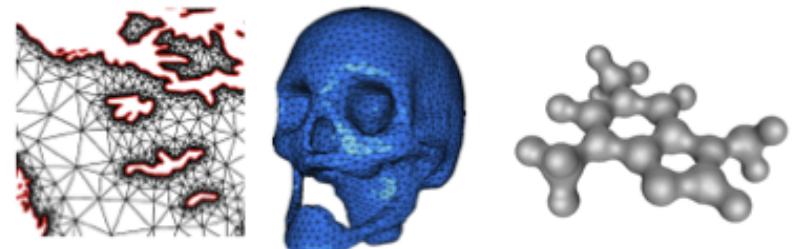


Mesh Generation

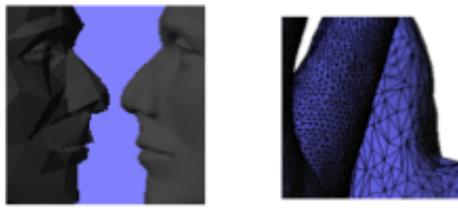


Subdivision

Simplification



Parameterization




Streamlines




Ridge Detection



Neighbour Search




Kinetic Data structures



Lower Envelope



Arrangement




Intersection Detection




Minkowski Sum



PCA




Polytope distance




QP Solver

> 100 chapters in the manual

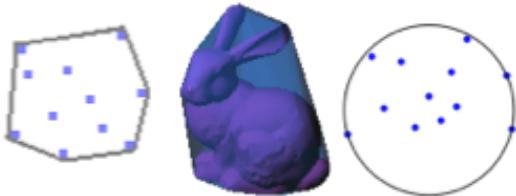


Bounding Volumes

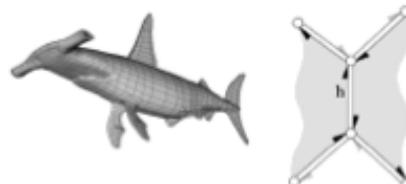


Polyhedral Surface




BooleanOperations

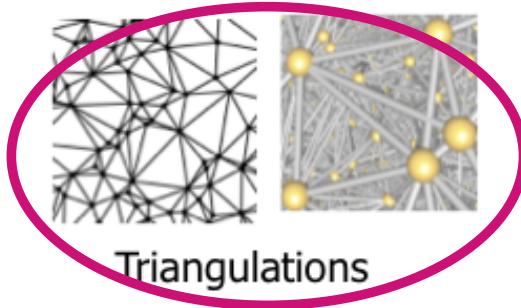

Triangulations

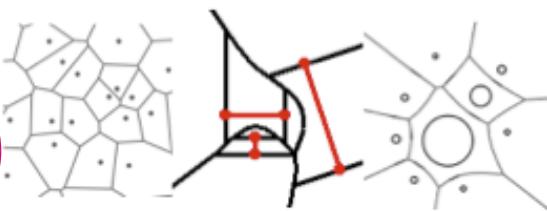

Voronoi Diagrams

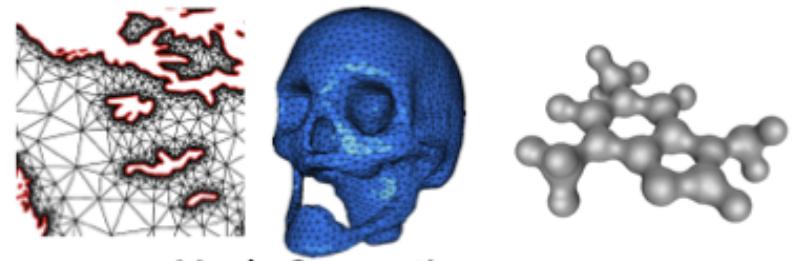

Mesh Generation




Subdivision

Simplification



Parameterization




Streamlines




Ridge Detection




Neighbour Search




Kinetic Data structures



Lower Envelope



Arrangement




Intersection Detection




Minkowski Sum



PCA



Polytope distance



QP Solver

2D Triangulations (1997)

3D Triangulations (2000)

and meshes (2009)

dD Triangulations (2015)

2D Periodic Triangulations (2013)

Flat torus

square/cubic domain  
*(general in progress)*

3D Periodic Triangulations (2009)

and meshes (2018)

2D Hyperbolic Triangulations (2019)

Bolza surface

2D Periodic Hyperbolic Triangulations (2019)

Triangulations on the 2D sphere (2021)

*install CGAL dependencies + Qt (example MacOS)*

```
brew install cgal  
brew install qt5
```

*download CGAL sources with examples and demos:*

```
https://github.com/CGAL/cgal/releases/  
CGAL-5.6.zip
```

*set up environment variables*

```
CGAL_DIR=/Users/teillaud/CGAL-5.6  
Qt5_DIR=/opt/homebrew/Cellar/qt@5/5.15.10_1/lib/cmake
```

*compile demos*

```
cd CGAL_DIR/demo/Your_favorite_package  
mkdir build; cd build  
cmake ..  
make
```

*run the demo(s)*


Triangulation\_d < Geom\_traits, TDS >

$d = 2, 3$

Triangulation\_d < Geom\_traits, TDS >

$d = 2, 3$

### geometry

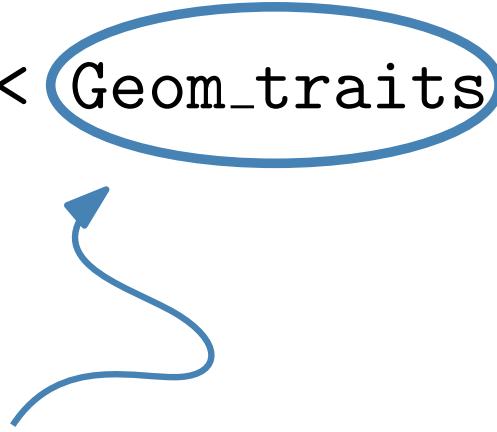

objects (points, etc)

predicates (e.g., in\_circle)

constructions (e.g., circumcenter)

Triangulation\_d < Geom\_traits, TDS >


$d = 2, 3$

## geometry

objects (points, etc)

predicates (e.g., in\_circle)

constructions (e.g., circumcenter)

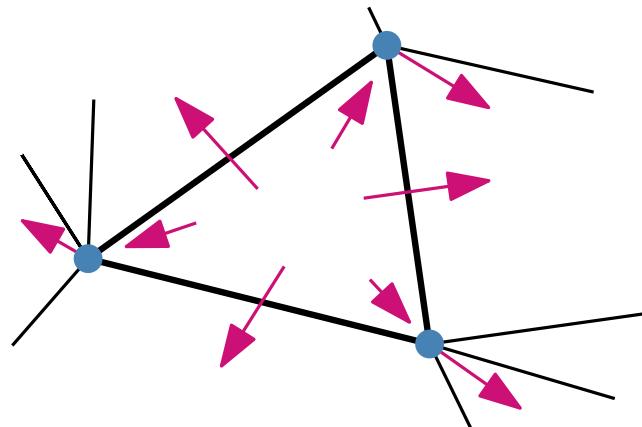

## combinatorics

Cell =  $d$ -simplex

→  $d$  vertices

→  $d$  adjacent cells

Vertex

point

→ one incident cell

# [Incremental] Algorithms

# Bowyer's fill-hole algorithm


$\mathbb{R}^d$

[ Bowyer 1981 ] [ Watson 1981 ]

# Bowyer's fill-hole algorithm

$\mathbb{R}^d$


[ Bowyer 1981 ] [ Watson 1981 ]

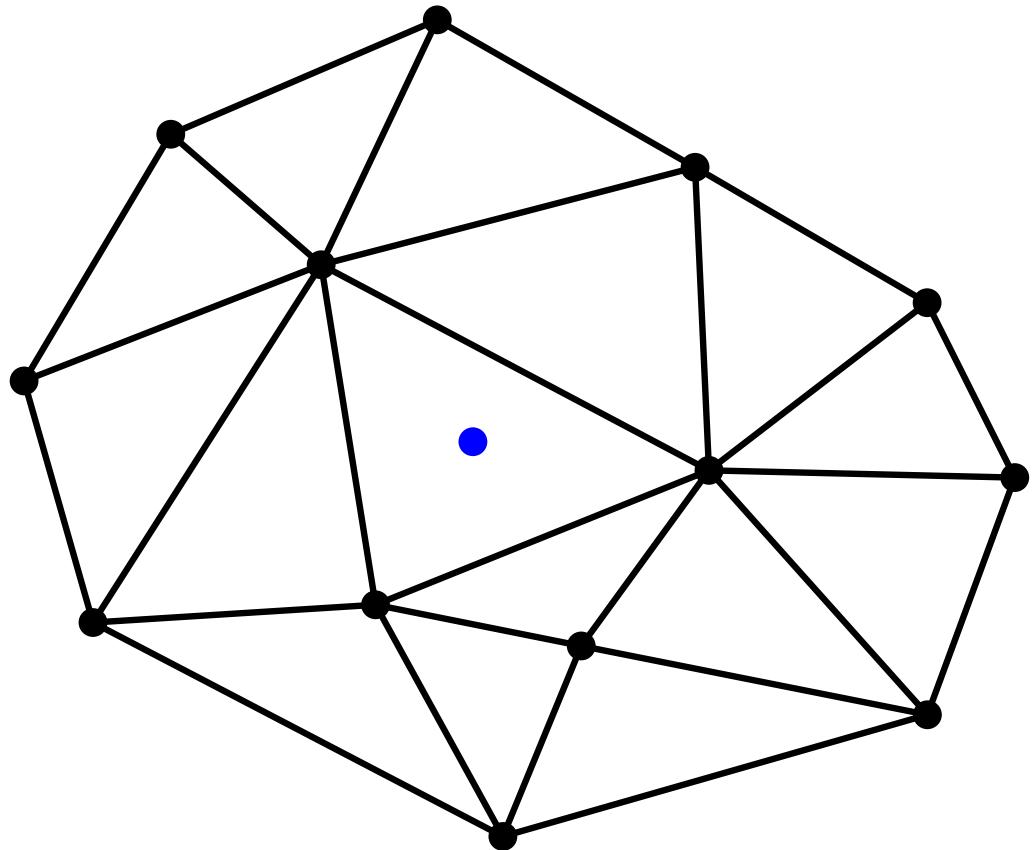

# Bowyer's fill-hole algorithm

$\mathbb{R}^d$

[ Bowyer 1981 ] [ Watson 1981 ]

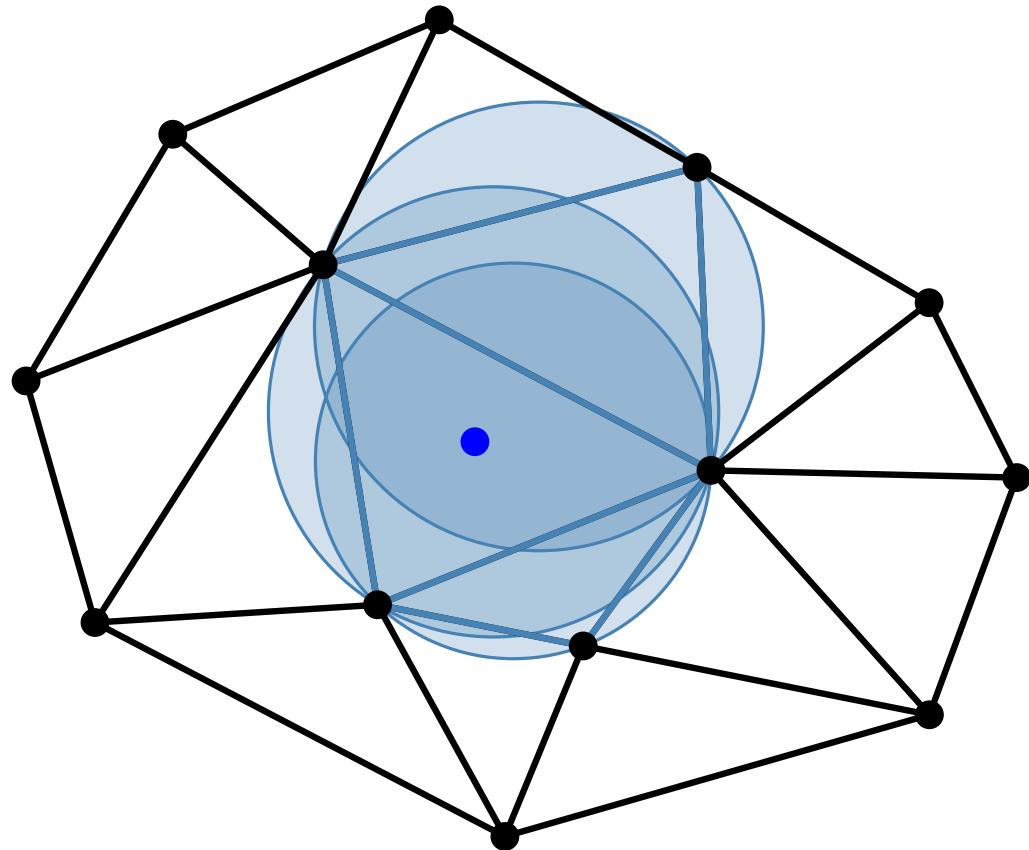


find simplices in conflict

# Bowyer's fill-hole algorithm

$\mathbb{R}^d$

[ Bowyer 1981 ] [ Watson 1981 ]

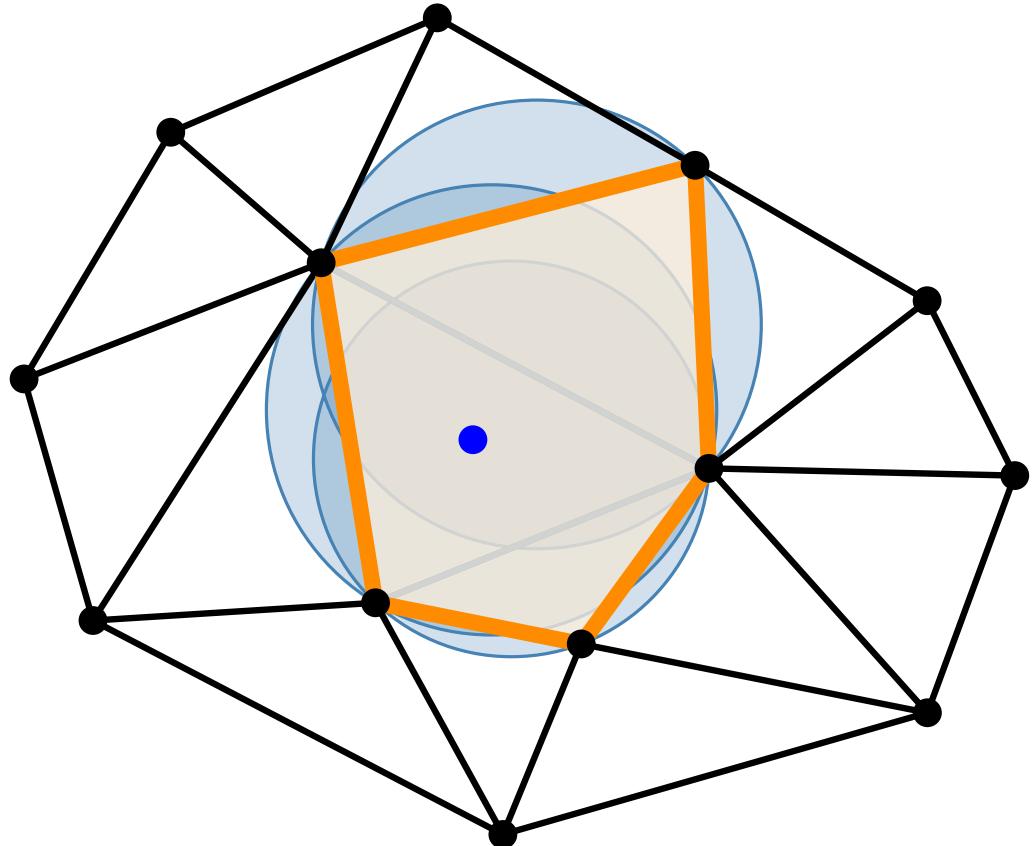


*the conflict region forms a topological ball*

# Bowyer's fill-hole algorithm

$\mathbb{R}^d$


[ Bowyer 1981 ] [ Watson 1981 ]

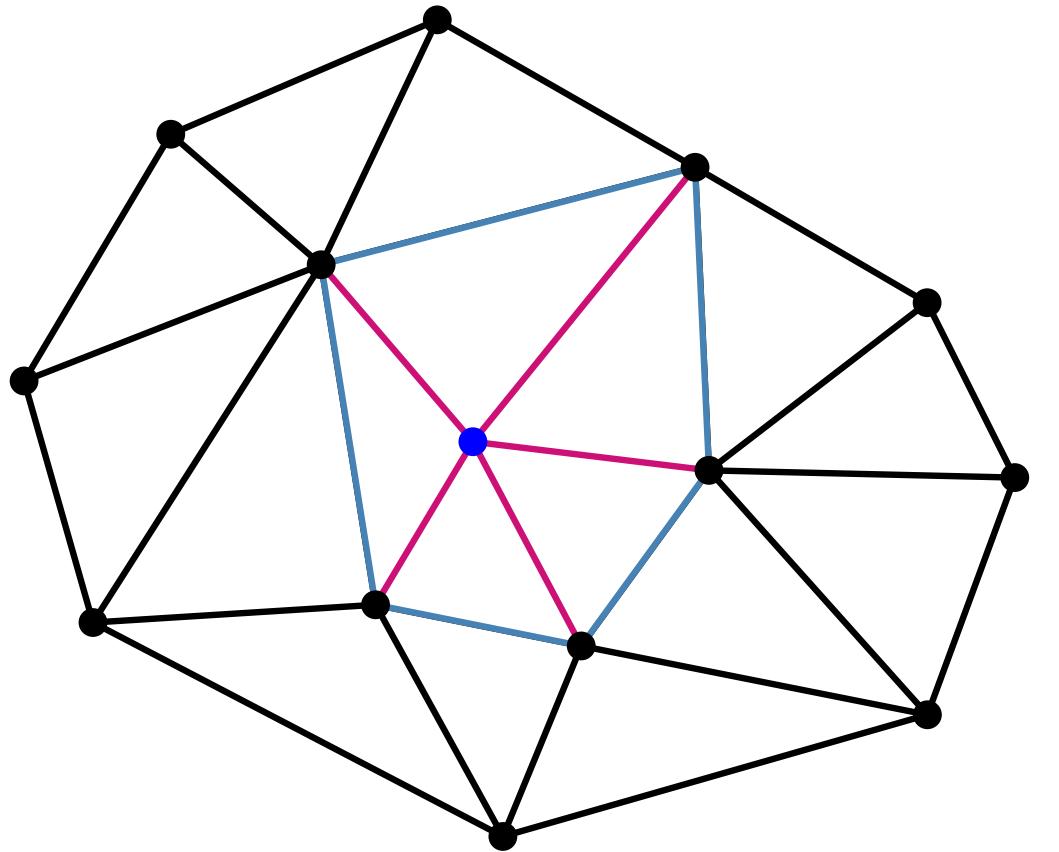

create new simplices

# Bowyer's fill-hole algorithm

$\mathbb{R}^d$

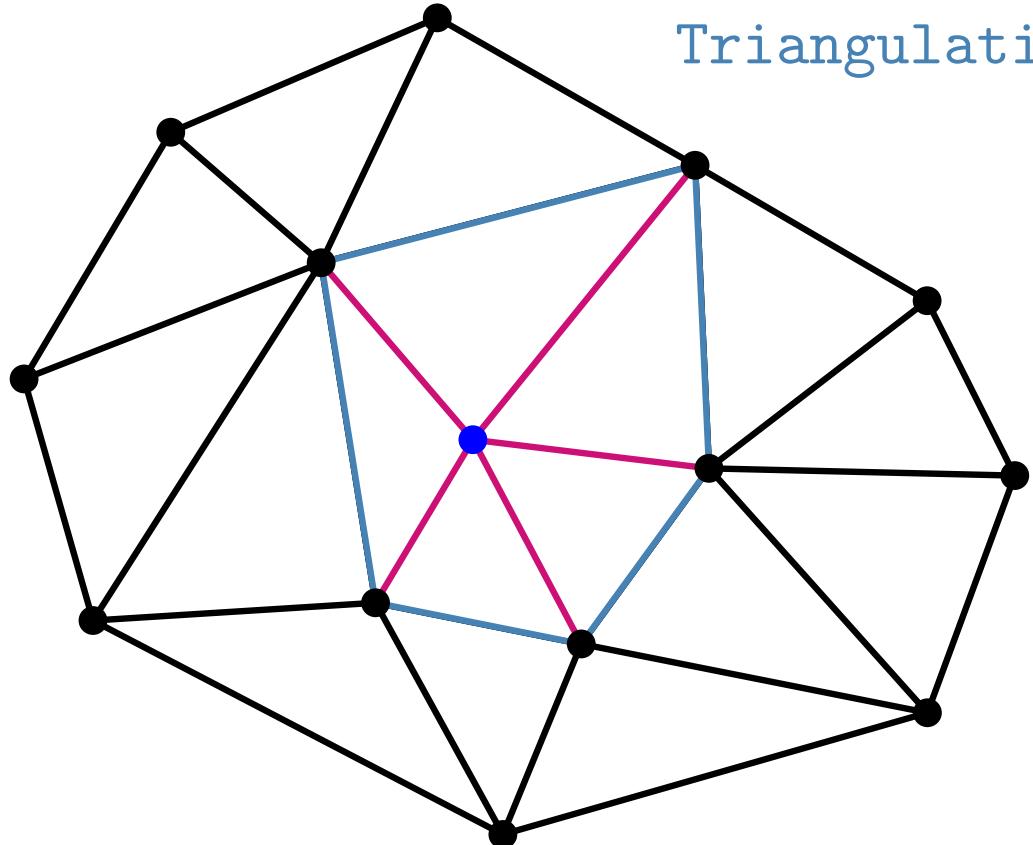

Triangulation < Geom\_traits, TDS >

find simplices in conflict

Triangulation  
using Geom\_traits

create new simplices

TDS

allows for

- clean
- efficient

implementation

[T. CGAL'00] [Pion, T. CGAL'01\*]

# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]


[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

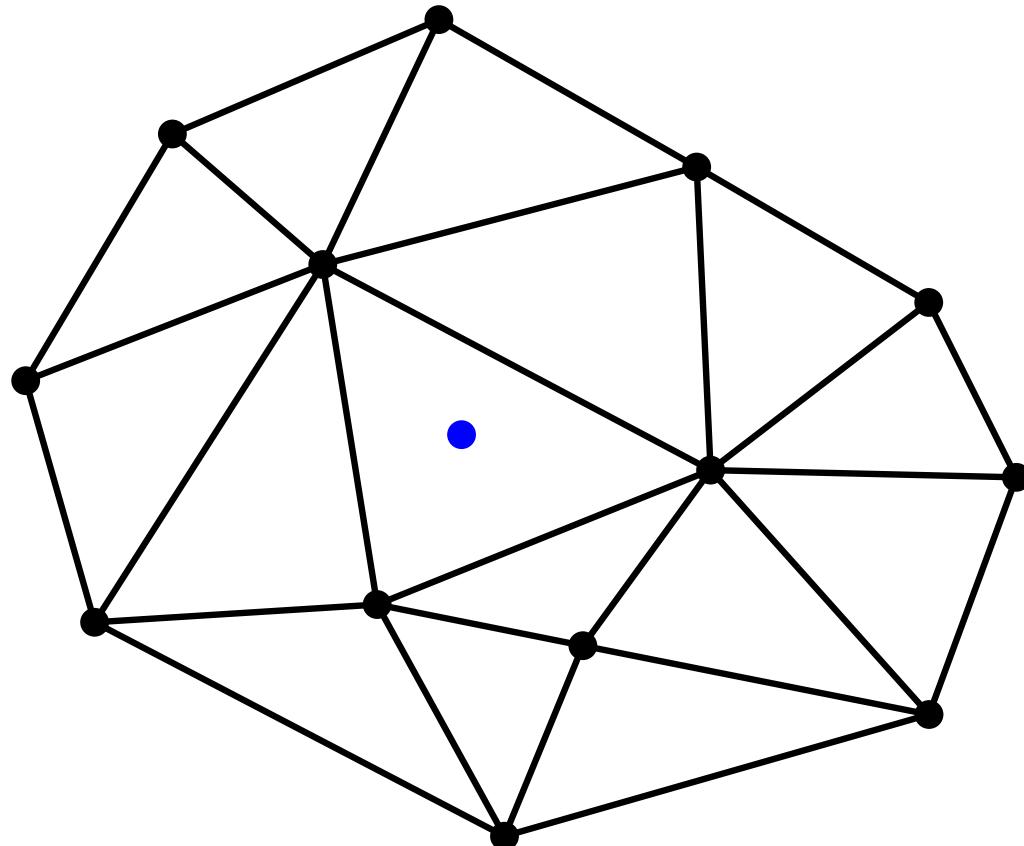


# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

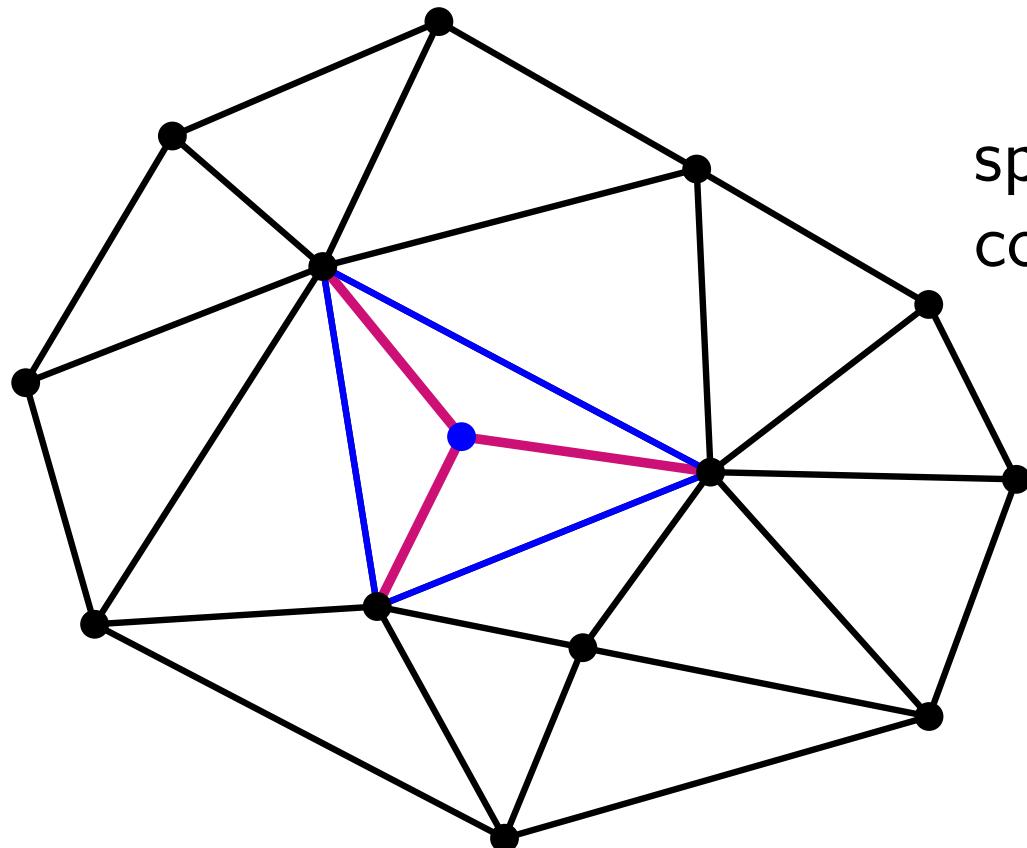


split the triangle  
containing the new point

# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

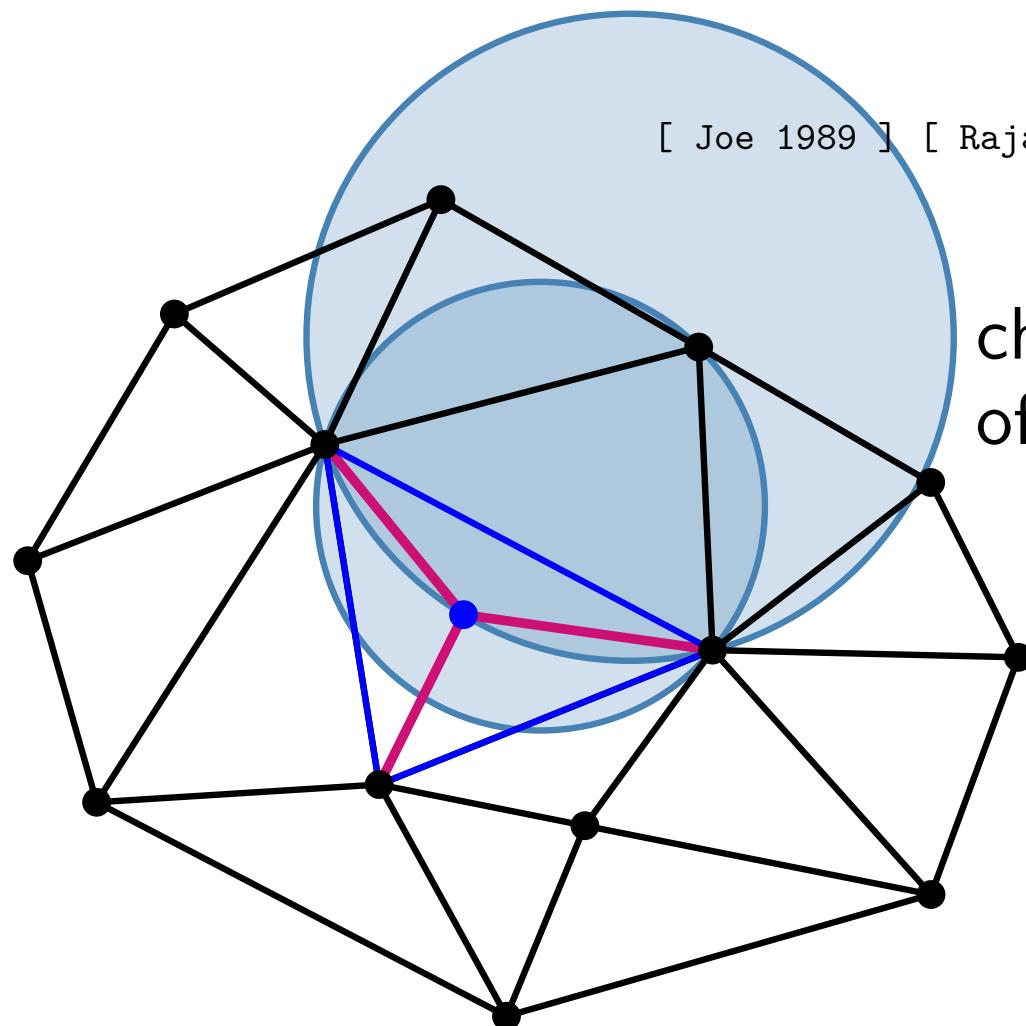


check each edge  
of a new triangle

# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

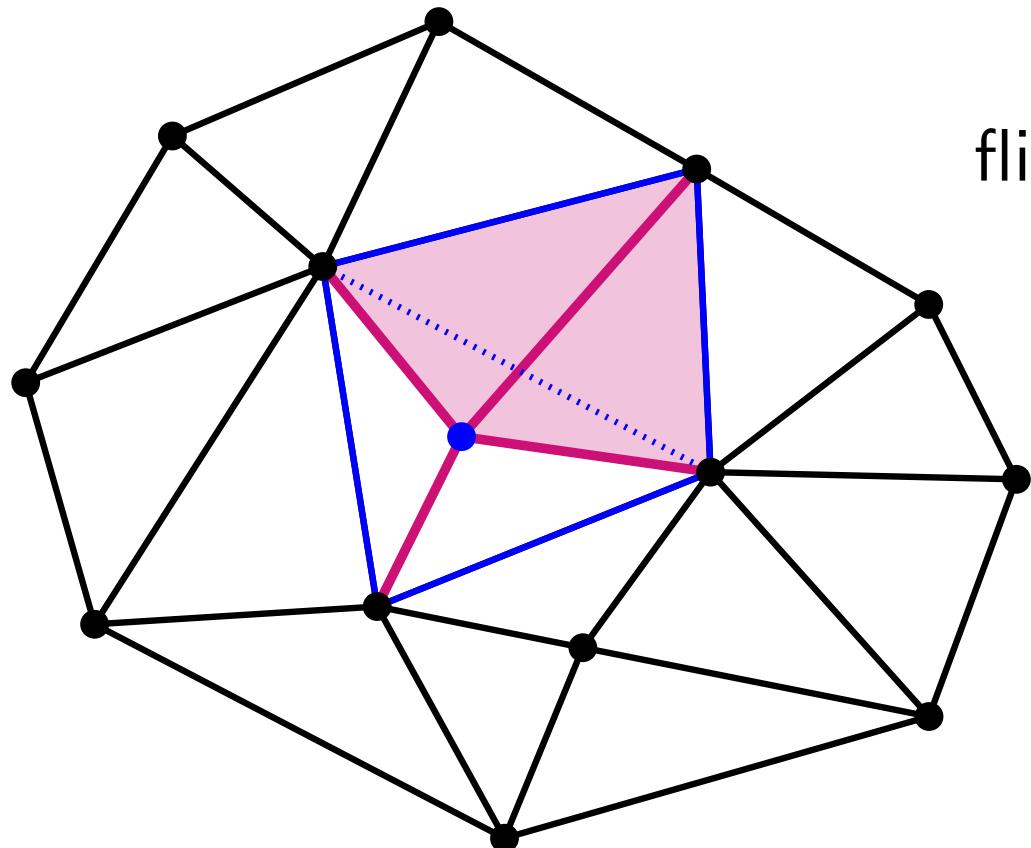


# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

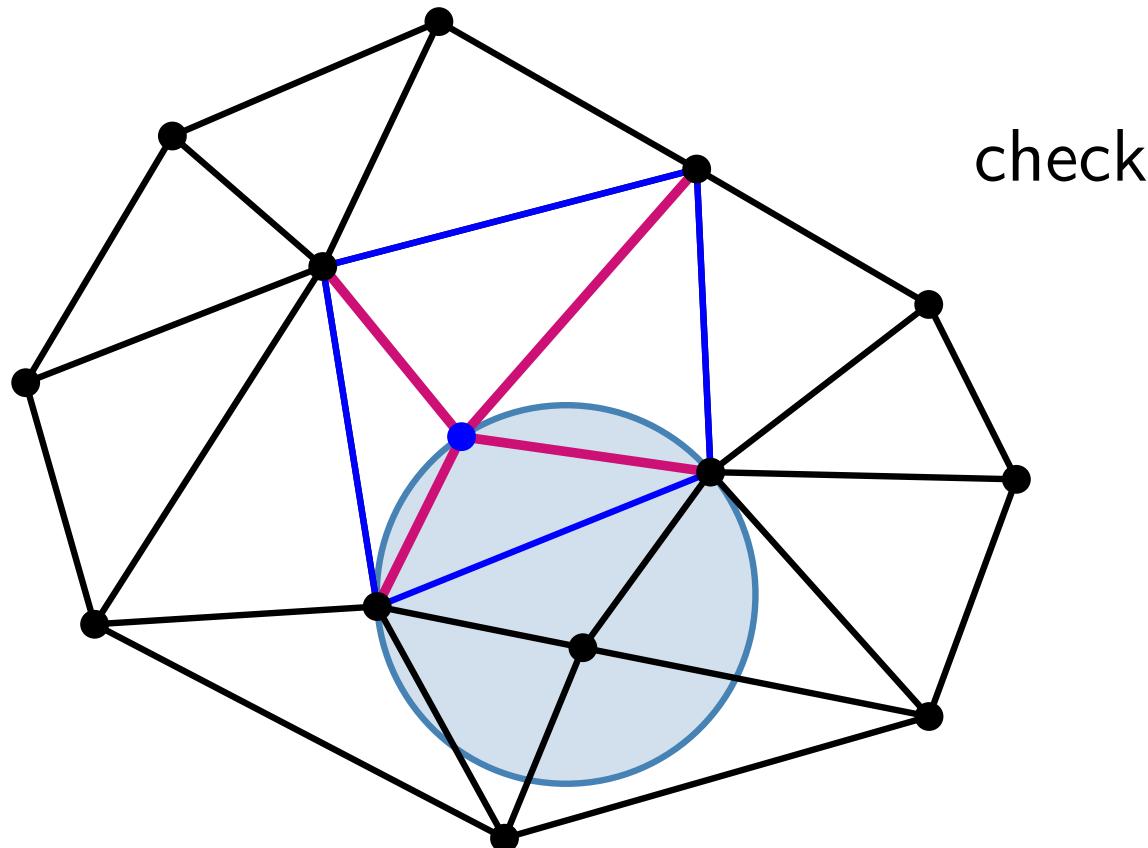


# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

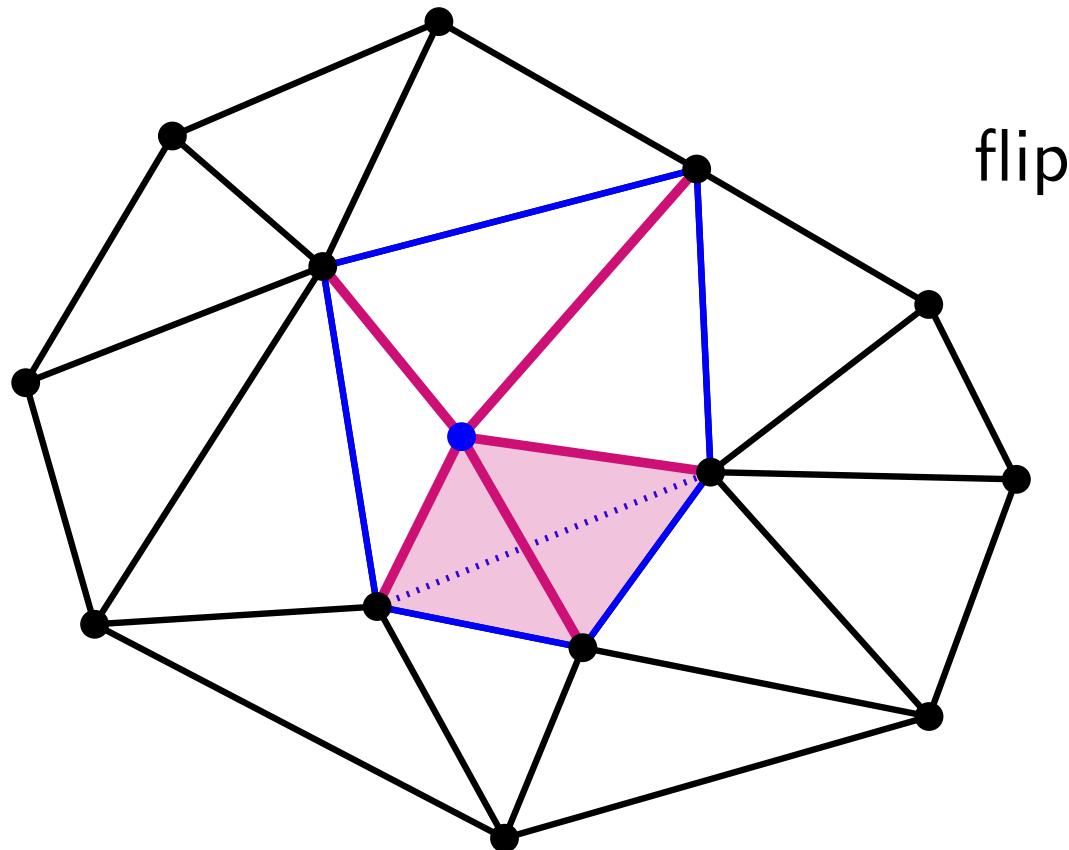


# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]

[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

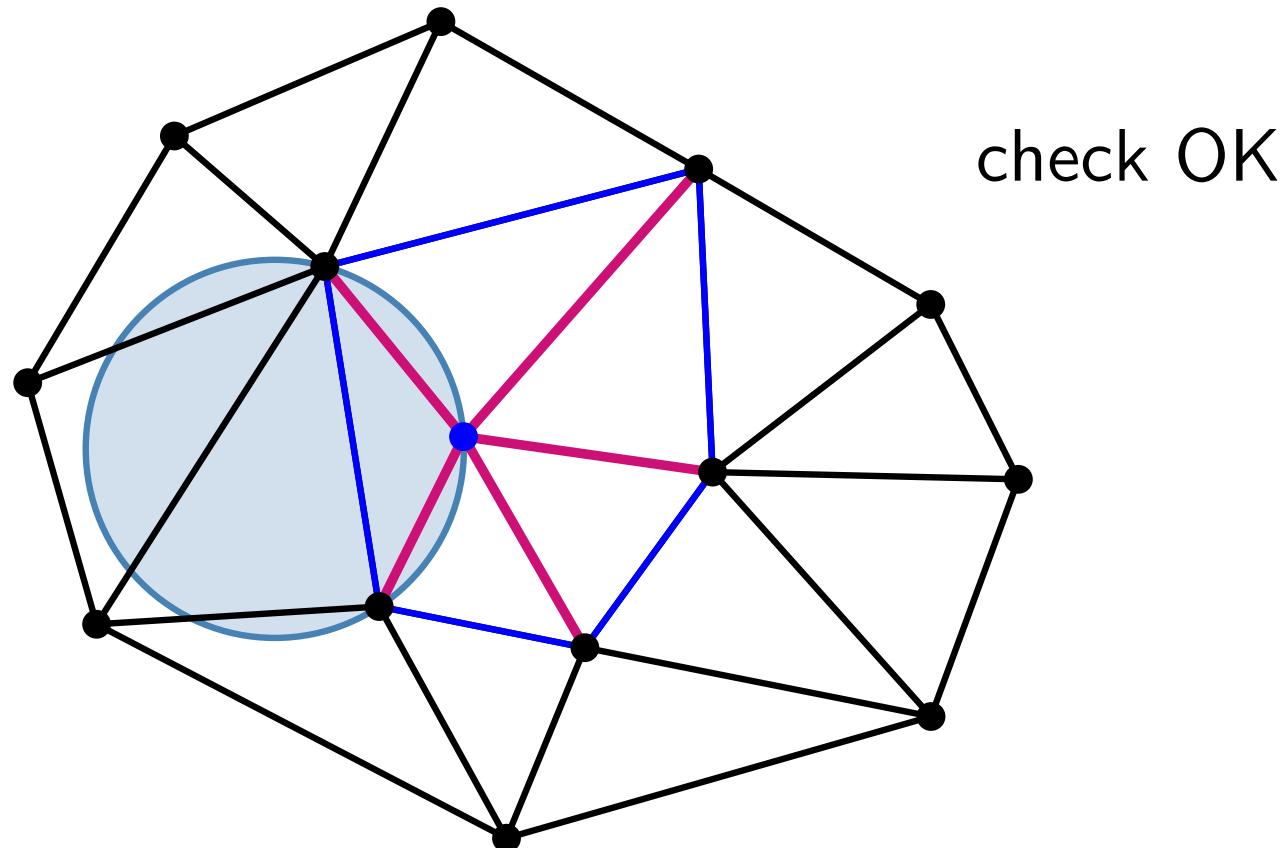


# Lawson's flip algorithm

$\mathbb{R}^d$

[ Lawson 1977 ]


[ Joe 1989 ] [ Rajan 1991 ] [ Edelsbrunner Shah 1996 ]

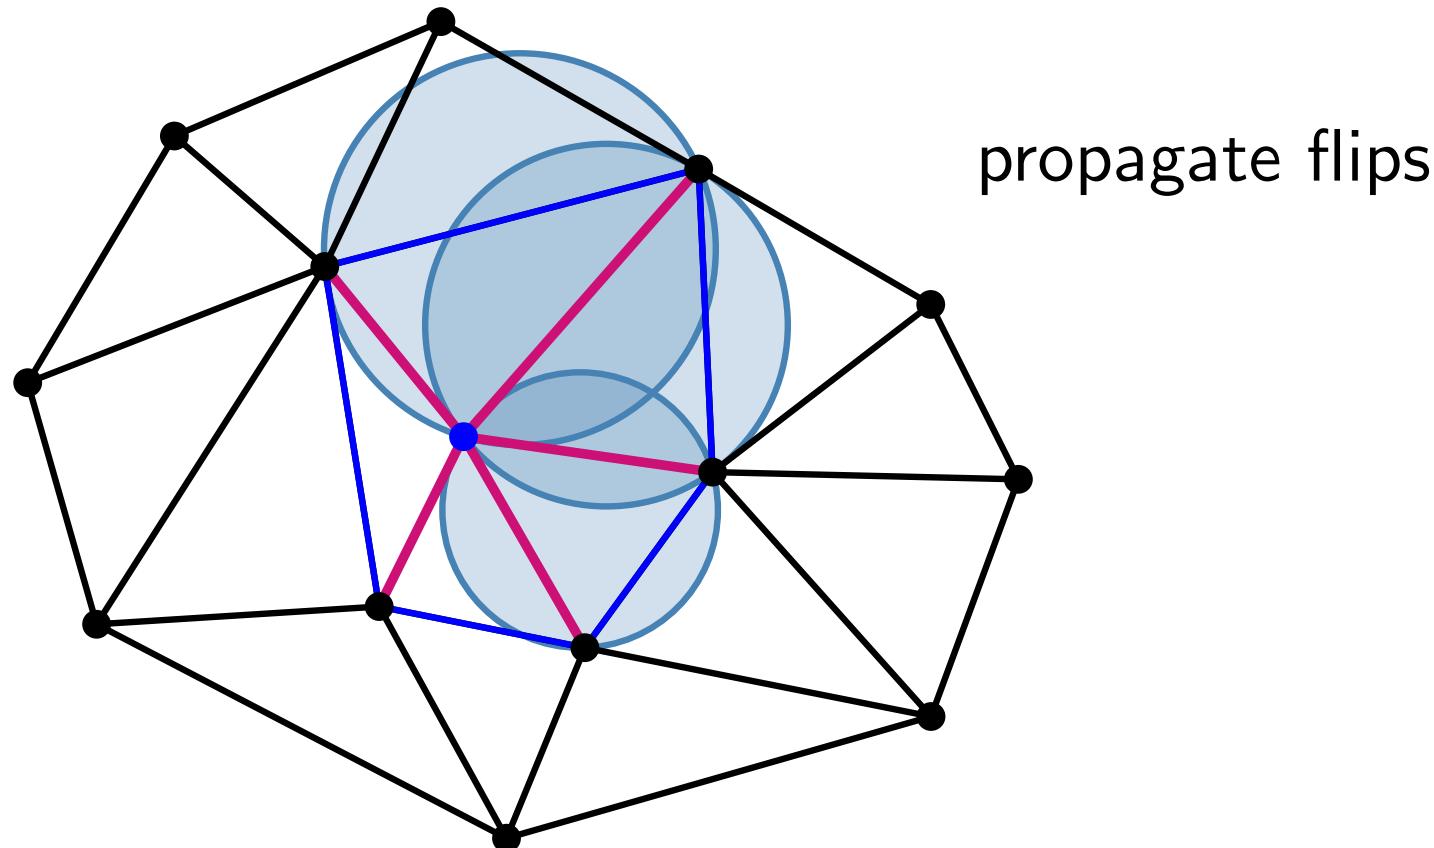

# Lawson's flip algorithm

$\mathbb{R}^d$

at each step

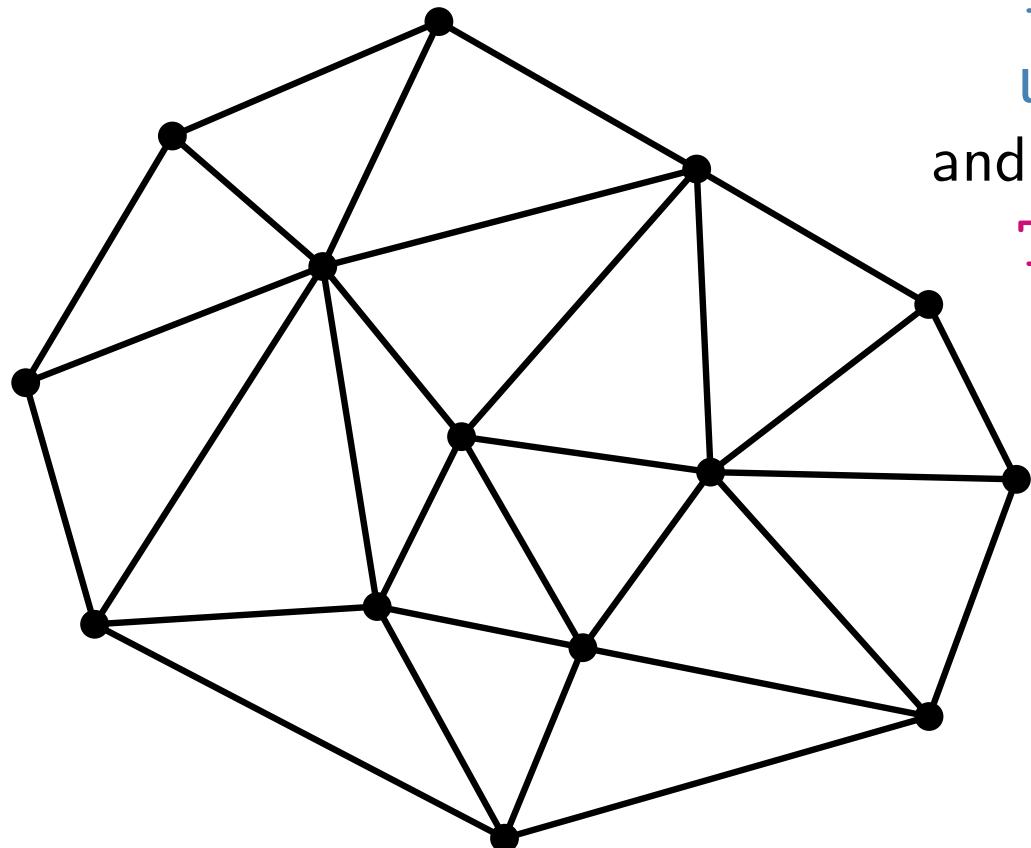

Triangulation  
using Geom\_traits  
and  
TDS


hard to maintain

early version of  
 in  $\mathbb{R}^2$

[ Yvinec CGAL'97 ]

# Implementation “details”


# Implementation “details”

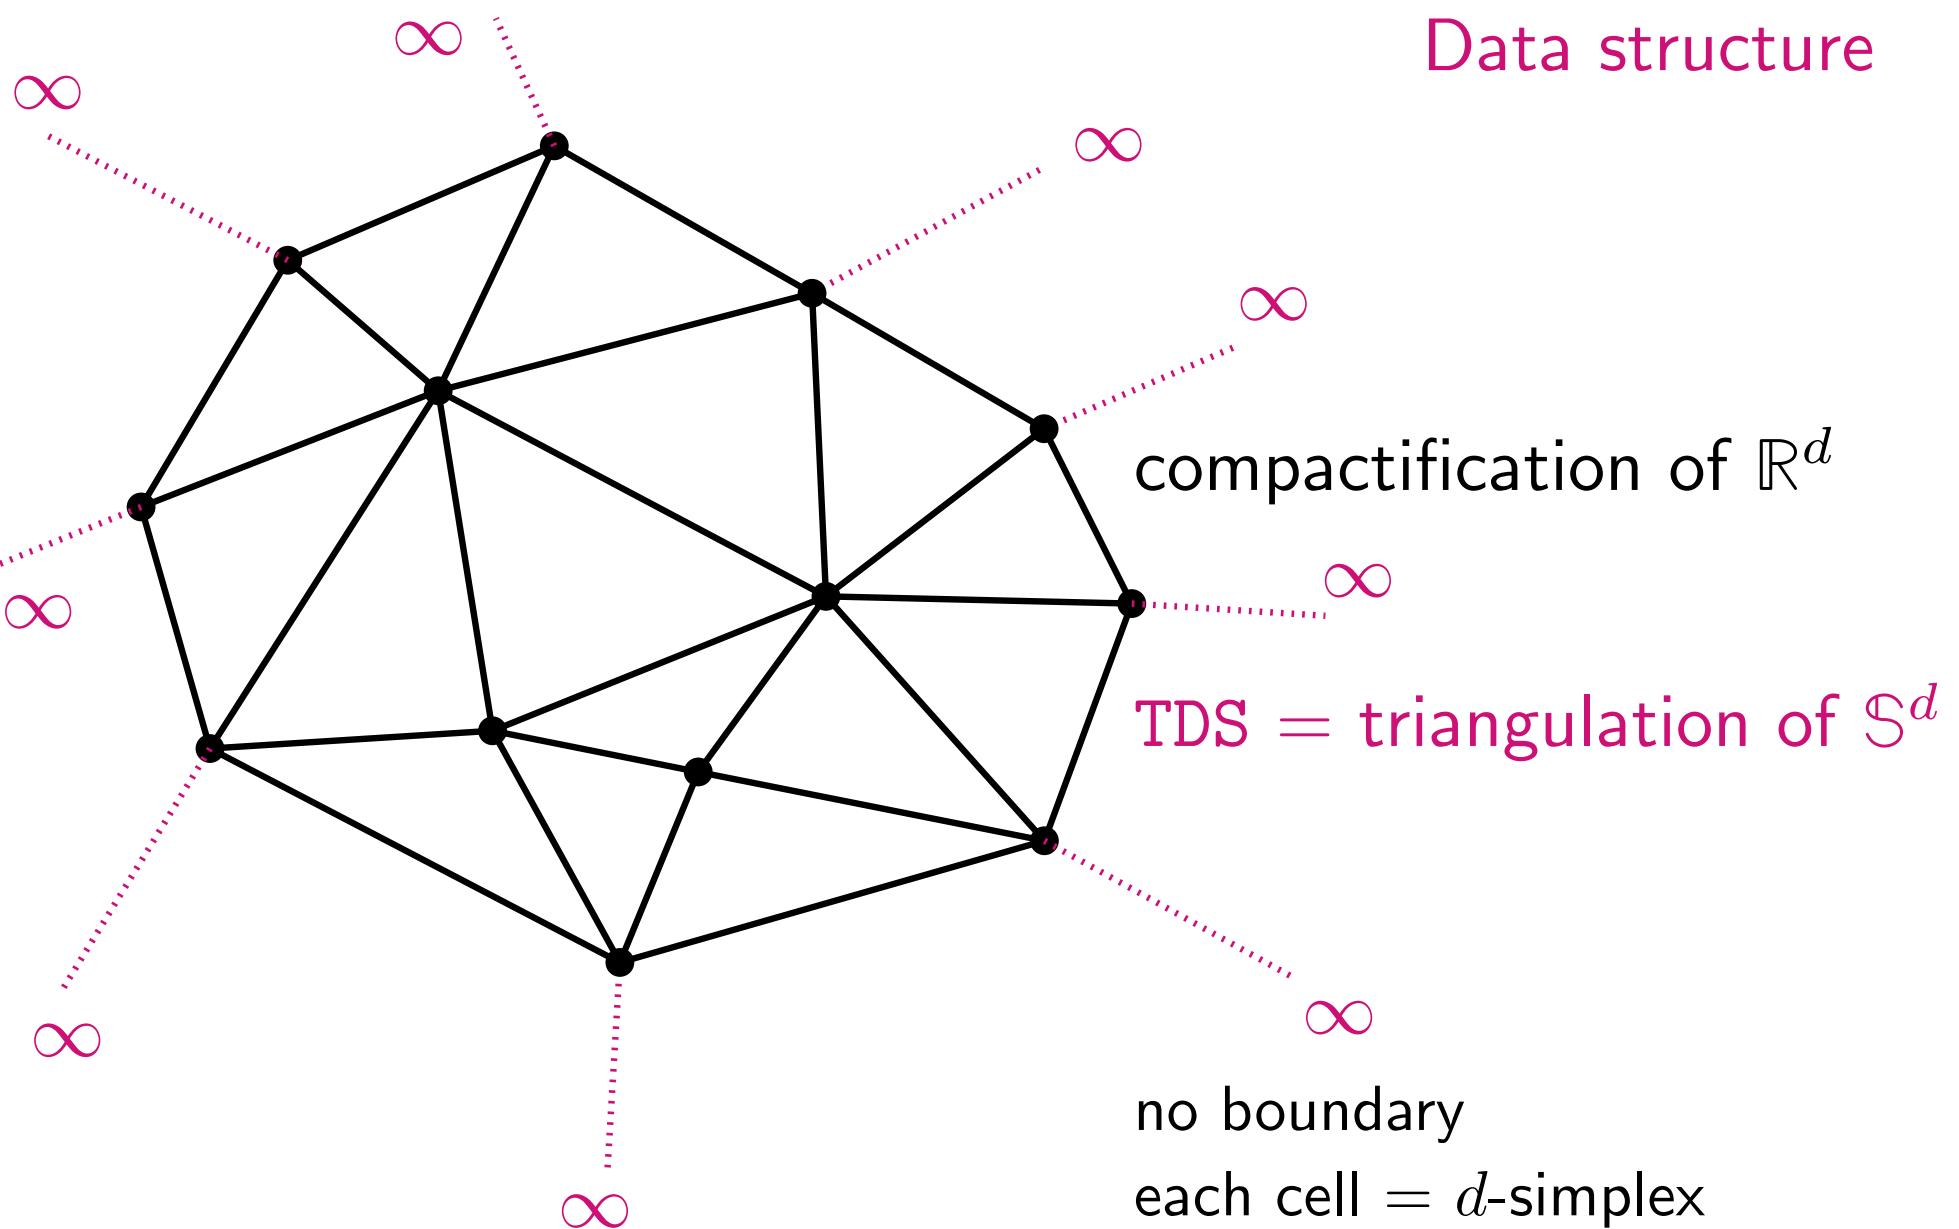


# Implementation “details”

## Robustness

### Predicates

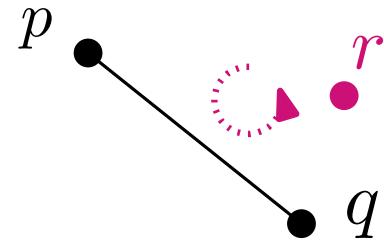

$$\text{orient}(p, q, r) = \text{sign} \begin{vmatrix} 1 & 1 & 1 \\ p_x & q_x & r_x \\ p_y & q_y & r_y \end{vmatrix}$$

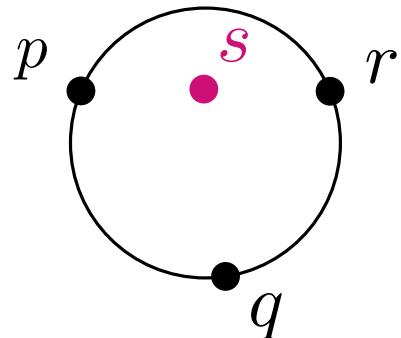

$$\text{in\_disk}(p, q, r, s) = \text{sign} \begin{vmatrix} 1 & x_p & y_p & x_p^2 + y_p^2 \\ 1 & x_q & y_q & x_q^2 + y_q^2 \\ 1 & x_r & y_r & x_r^2 + y_r^2 \\ 1 & x_s & y_s & x_s^2 + y_s^2 \end{vmatrix}$$

*center and radius are **not** computed*

sign of polynomial expression

rational input points

# Implementation “details”

Robustness

Arithmetic issues

Exact Geometric Computation paradigm [Yap]

exact predicates  $\neq$  exact arithmetics

Filtering

easy cases are more frequent

$\implies$  cost  $\simeq$  cost of approximate (double) computation

# Implementation “details”

Robustness

Arithmetic issues

Approximate evaluation  $P^a(x)$   
+ Error  $\epsilon$

Filtering

$$P^a(x) > \epsilon$$

?

Yes

No

$\text{Sign}(P(x)) = \text{Sign}(P^a(x))$

Exact computation

# Implementation “details”

Robustness

Degenerate cases

**symbolic perturbation**

only perturbs the `in_sphere` predicate


[Devillers, T. SODA'03, CGTA'11]

# Implementation “details”

Algorithmic tricks to improve efficiency

# Delaunay triangulation in $\mathbb{H}^2$


# Hyperbolic triangulations

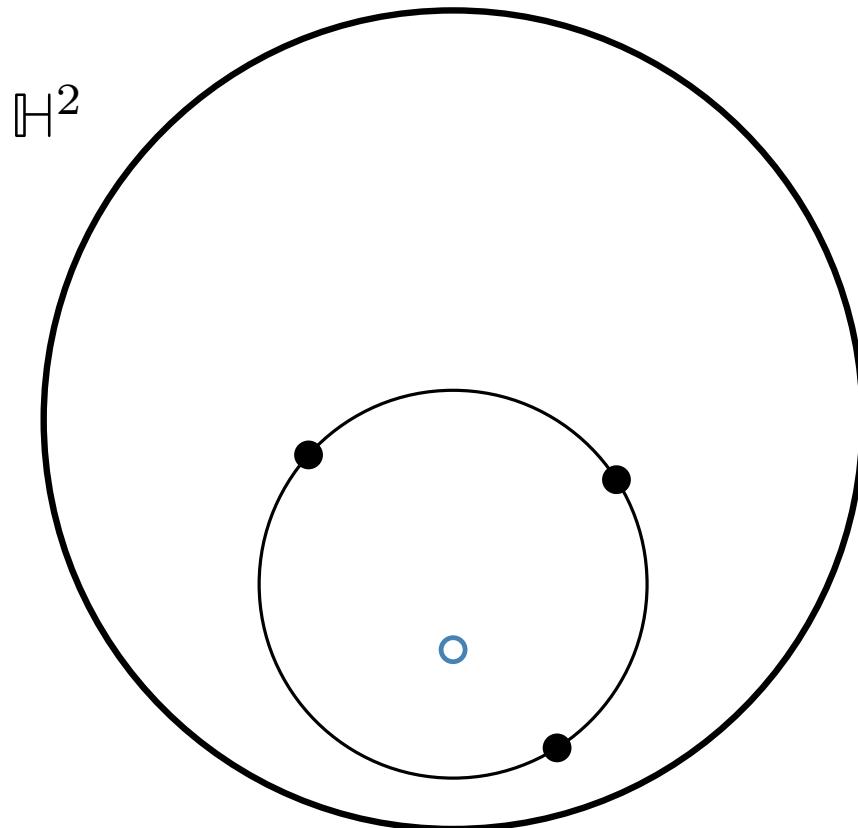

hyperbolic circles are Euclidean circles

→ same combinatorics as Euclidean Delaunay triangulation

# Hyperbolic triangulations

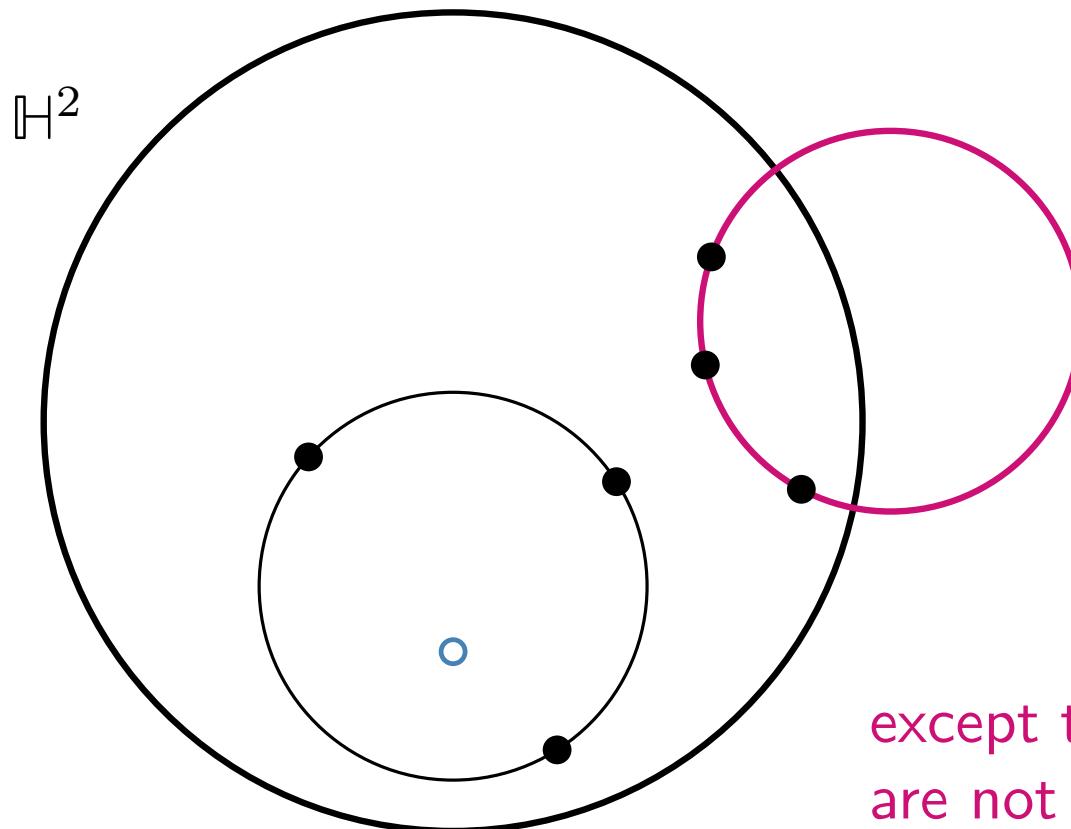

[Bogdanov, Devillers, T. JoCG'14]

except that some Euclidean circles  
are not compact

hyperbolic circles are Euclidean circles

→ same combinatorics as Euclidean Delaunay triangulation


# Hyperbolic triangulations

Hyperbolic\_Delaunay\_triangulation\_2

inherits from

Delaunay\_triangulation\_2

[Bogdanov, Iordanov, T. CGAL'19]

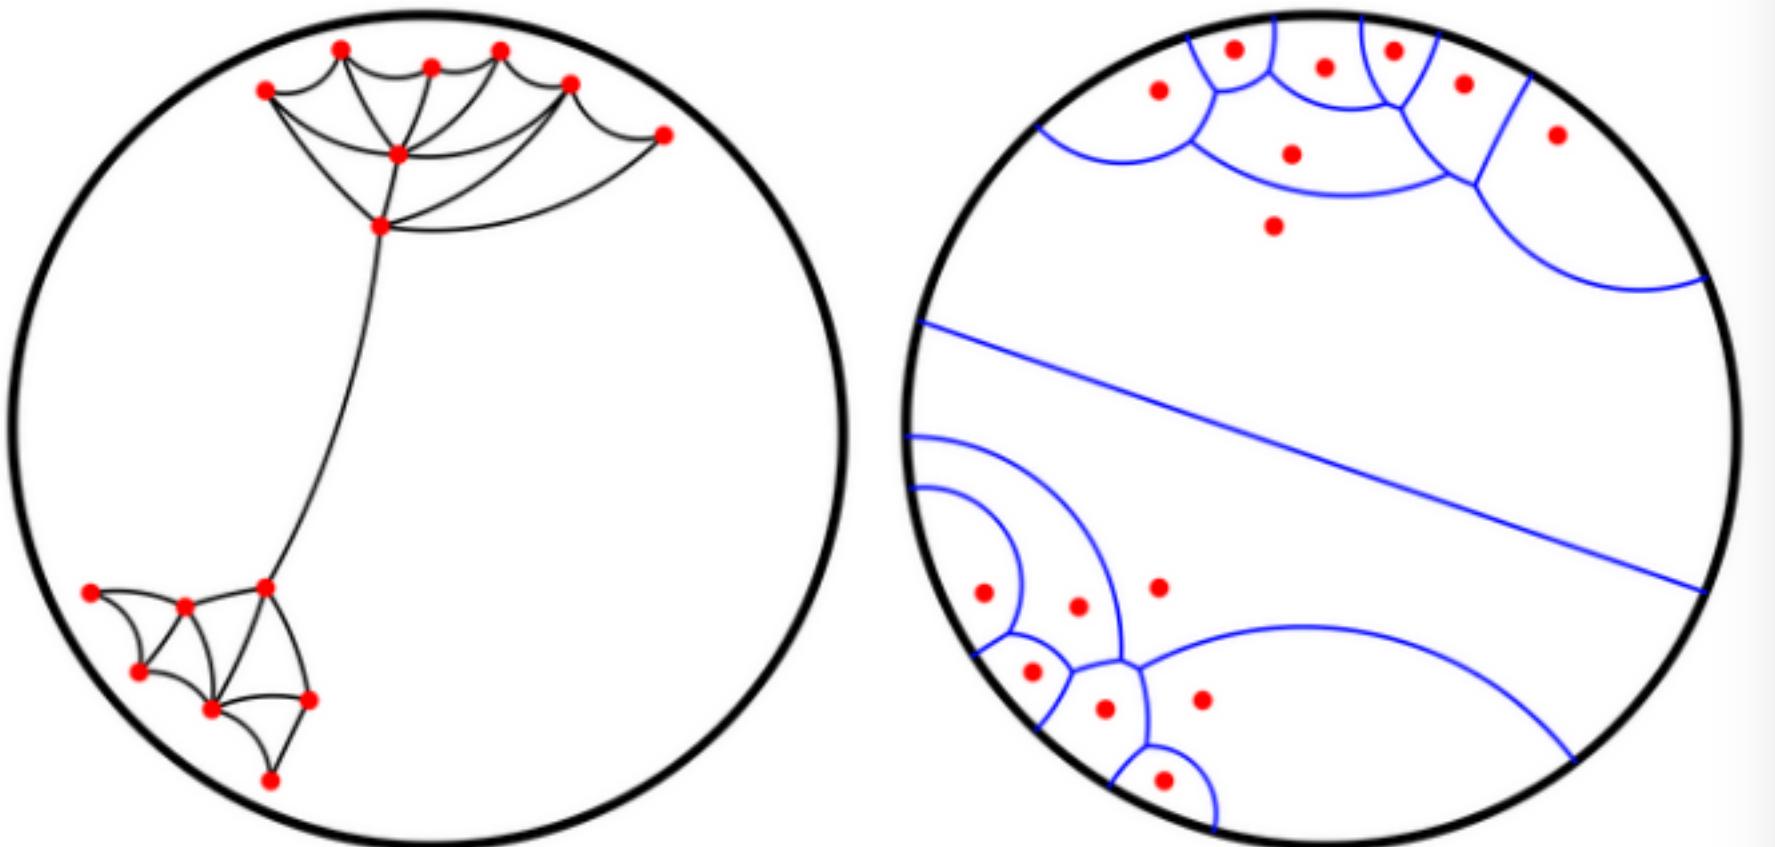

# Surfaces

# Closed oriented surfaces

# Closed oriented surfaces

genus 1

$$\mathbb{T}_u^2 \sim \mathbb{R}^2 / (\mathbb{Z}e_1 + \mathbb{Z}u) \quad \text{flat torus}$$
$$e_1 = (1, 0), u = (u_x, u_y)$$

# Closed oriented surfaces

genus 1

$$\mathbb{T}_u^2 \sim \mathbb{R}^2 / (\mathbb{Z}e_1 + \mathbb{Z}u) \quad \text{flat torus}$$

$$e_1 = (1, 0), u = (u_x, u_y)$$

genus  $\geq 2$

$$S \sim \mathbb{H}^2 / G$$

$G$  Fuchsian group

= discrete group of  
orientation preserving isometries of  $\mathbb{H}^2$

isometric to fundamental group  $\pi_1(S)$

# Closed oriented surfaces

genus 1

$$\mathbb{T}_u^2 \sim \mathbb{R}^2 / (\mathbb{Z}e_1 + \mathbb{Z}u) \quad \text{flat torus}$$

$$e_1 = (1, 0), u = (u_x, u_y)$$

genus  $\geq 2$

$S \sim \mathbb{H}^2 / G$  non-Abelian  
Poincaré disk model  $G$  Fuchsian group  
= discrete group of orientation preserving isometries of  $\mathbb{H}^2$   
isometric to fundamental group  $\pi_1(S)$

# Closed oriented surfaces

genus 1

universal cover

$$\mathbb{T}_u^2 \sim \mathbb{R}^2 / (\mathbb{Z}e_1 + \mathbb{Z}u) \quad \text{flat torus}$$
$$e_1 = (1, 0), u = (u_x, u_y)$$

genus  $\geq 2$

universal cover

$$S \sim \mathbb{H}^2 / G$$

$G$  Fuchsian group  
= discrete group of orientation preserving isometries of  $\mathbb{H}^2$

isometric to fundamental group  $\pi_1(S)$

Poincaré disk model

# Closed oriented surfaces

genus 1

universal cover

$$\mathbb{T}_u^2 \sim \mathbb{R}^2 / (\mathbb{Z}e_1 + \mathbb{Z}u) \quad \text{flat torus}$$
$$e_1 = (1, 0), u = (u_x, u_y)$$

genus  $\geq 2$

universal cover

$$S \sim \mathbb{H}^2 / G$$




$G$  Fuchsian group  
= discrete group of orientation preserving isometries of  $\mathbb{H}^2$

isometric to fundamental group  $\pi_1(S)$

Poincaré disk model


# Delaunay triangulation

flat torus

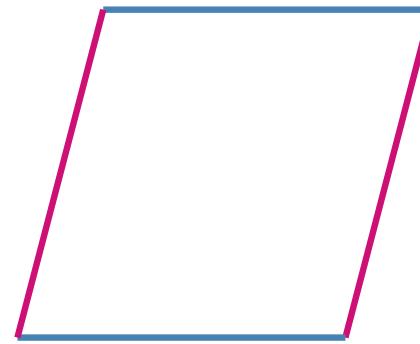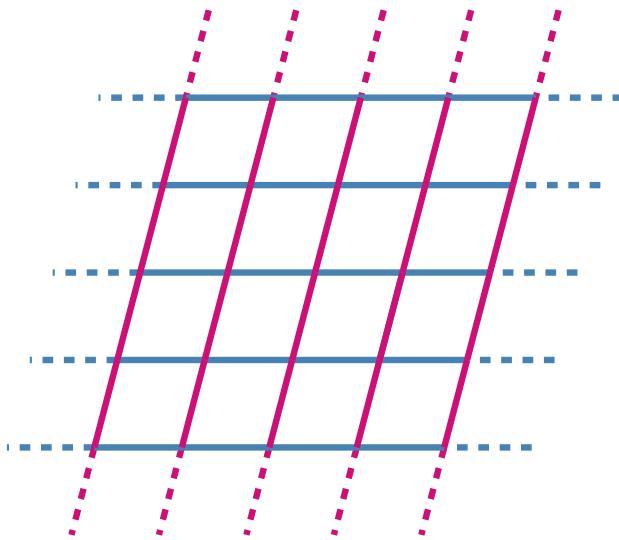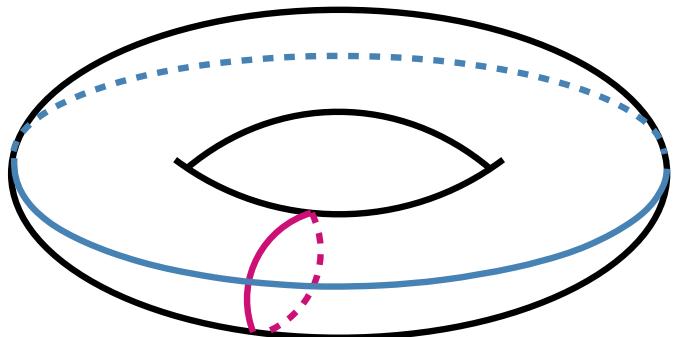


universal covering space

# Delaunay triangulation

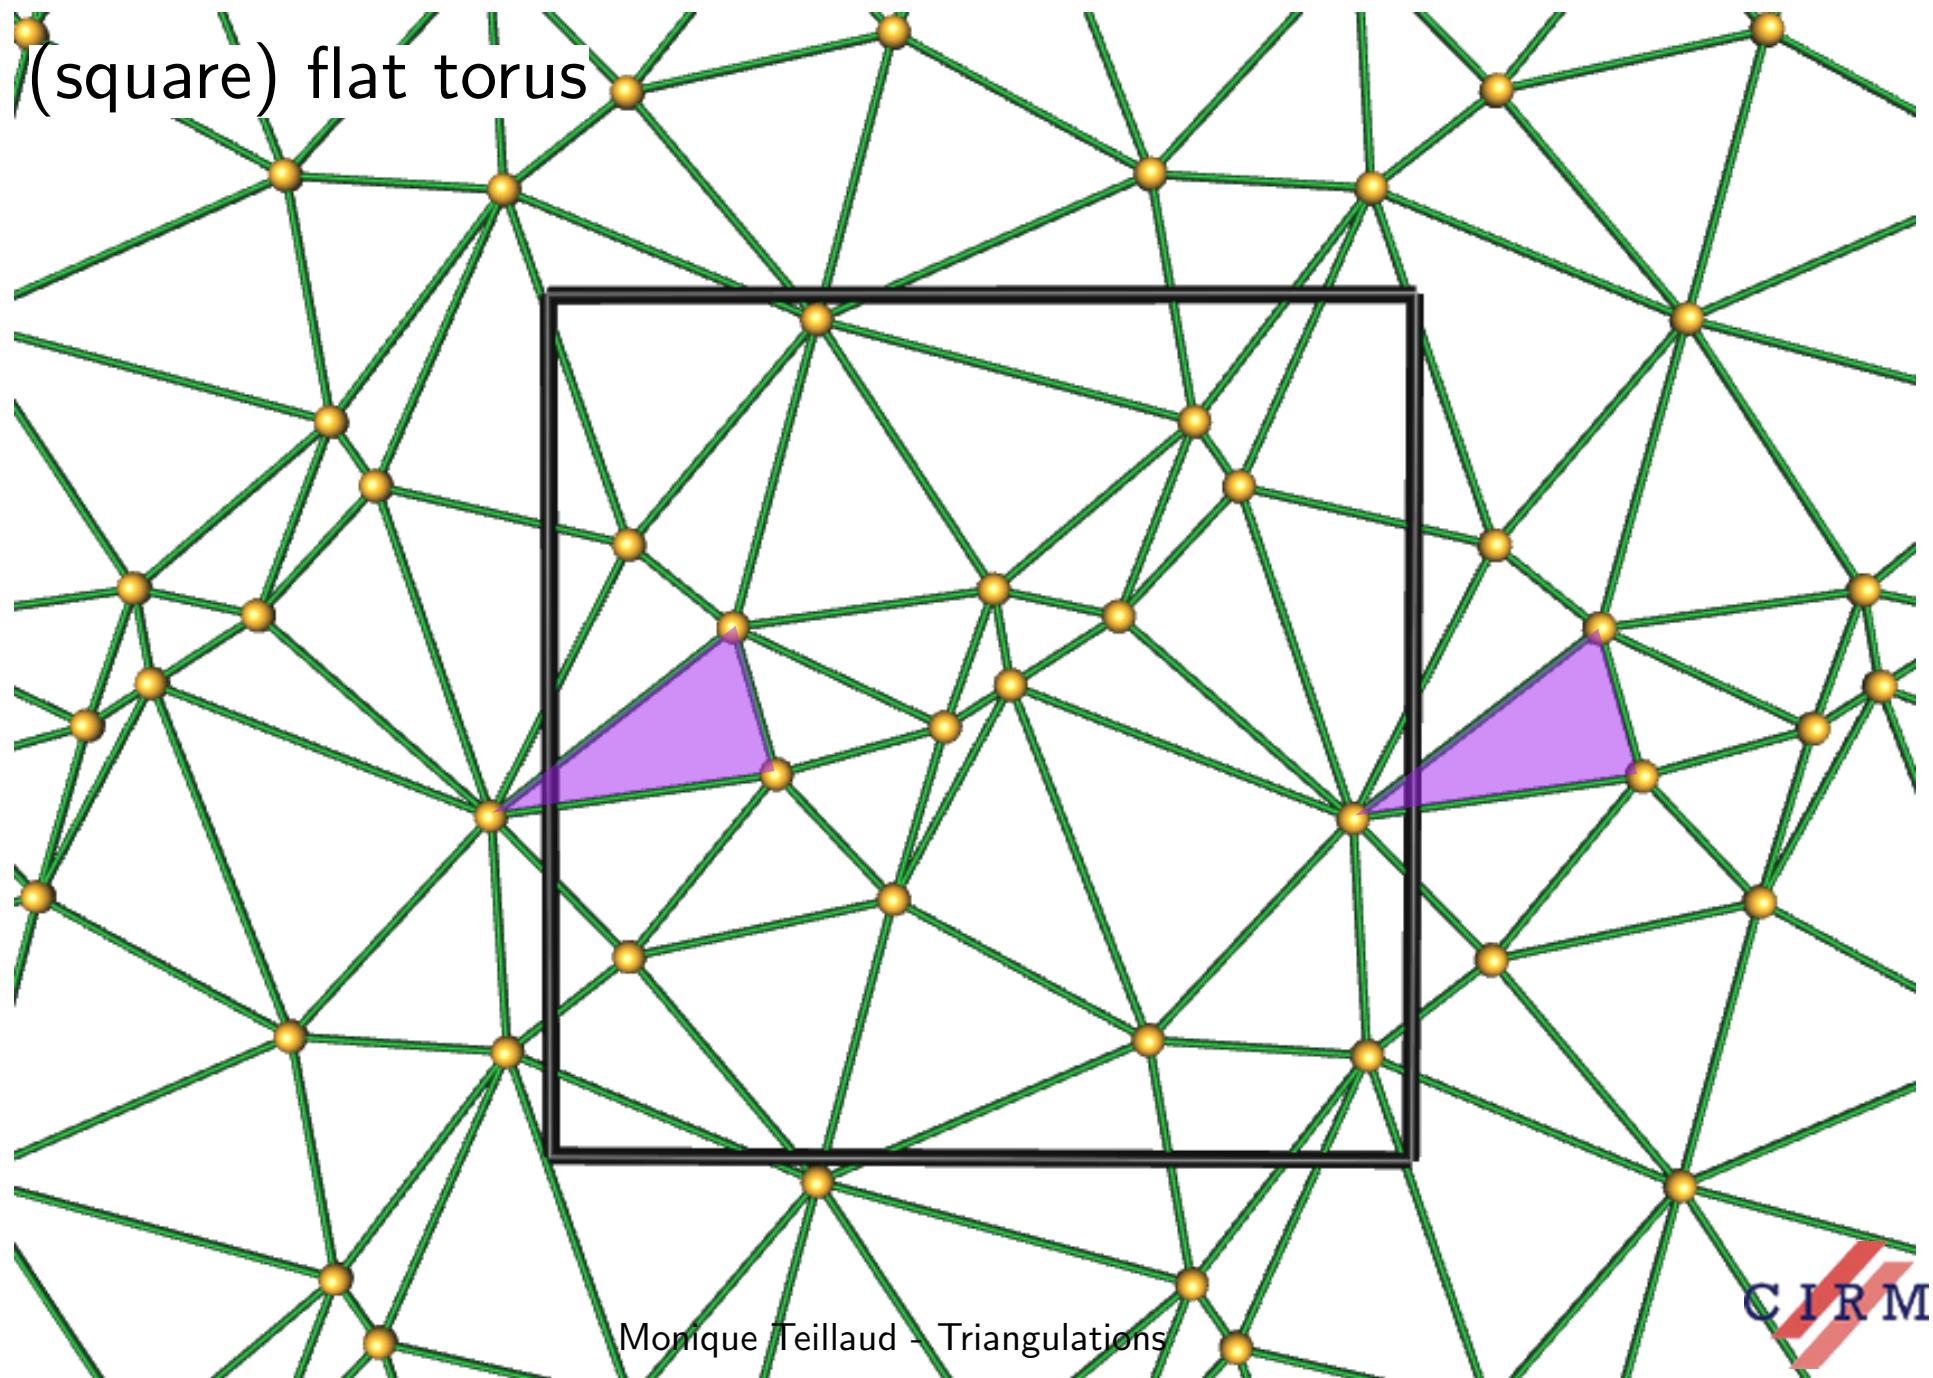

# Delaunay triangulation


(square) flat torus

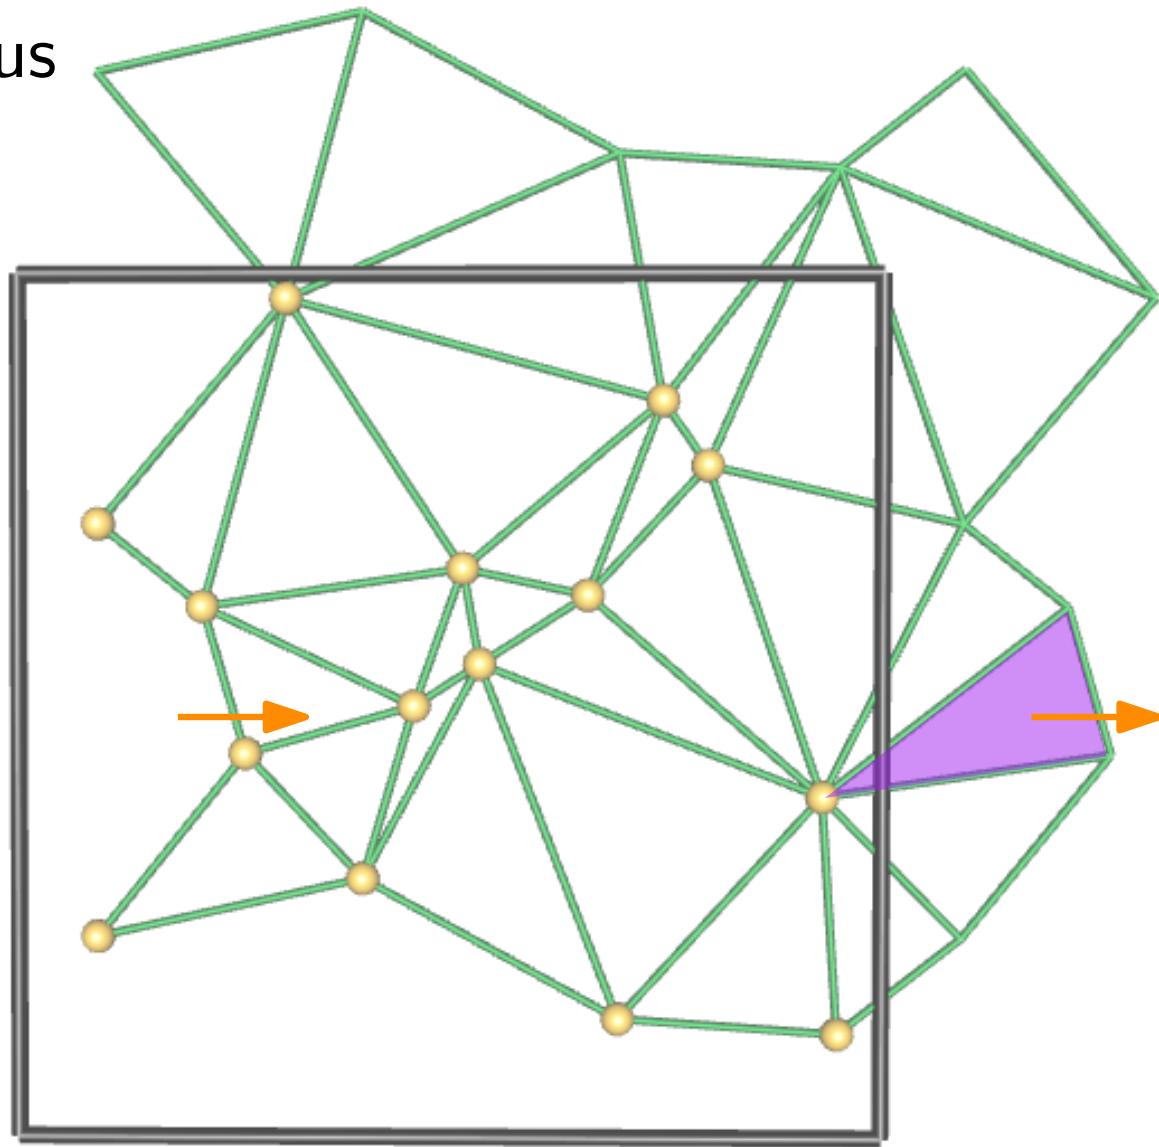

# Delaunay triangulation

(cubic) 3D flat torus


Astrophysics

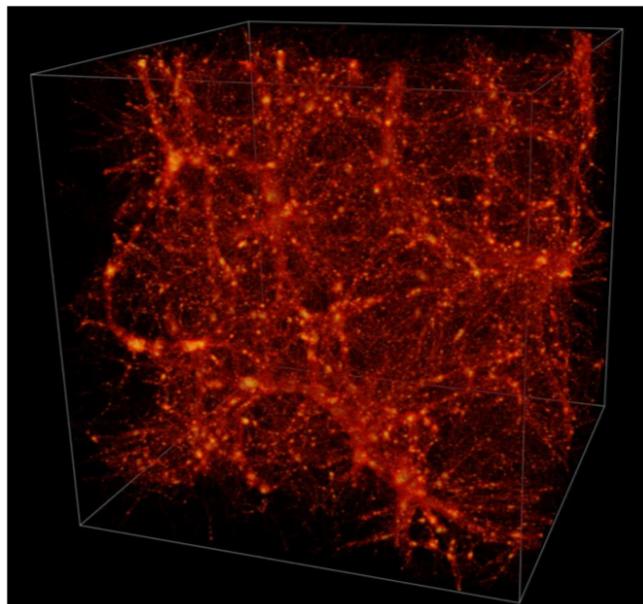


[v.d. Weijgaert<sup>+</sup>]

[SoCG'12 video]

Particle physics  
Nanostructures  
etc

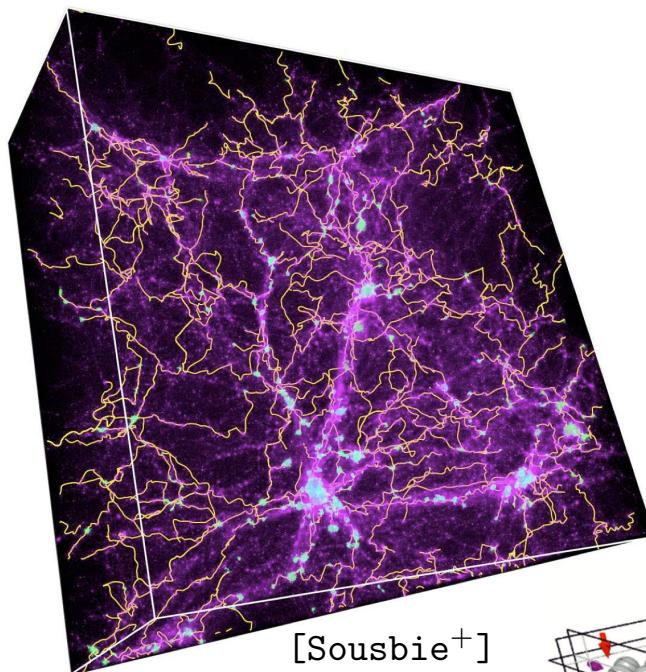


Granular materials

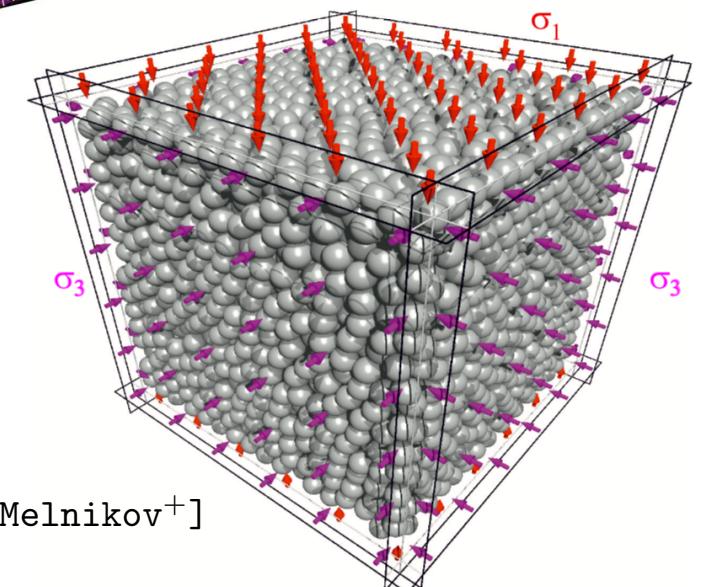

[Melnikov<sup>+</sup>]


# Delaunay triangulation

(Bolza) hyperbolic surface

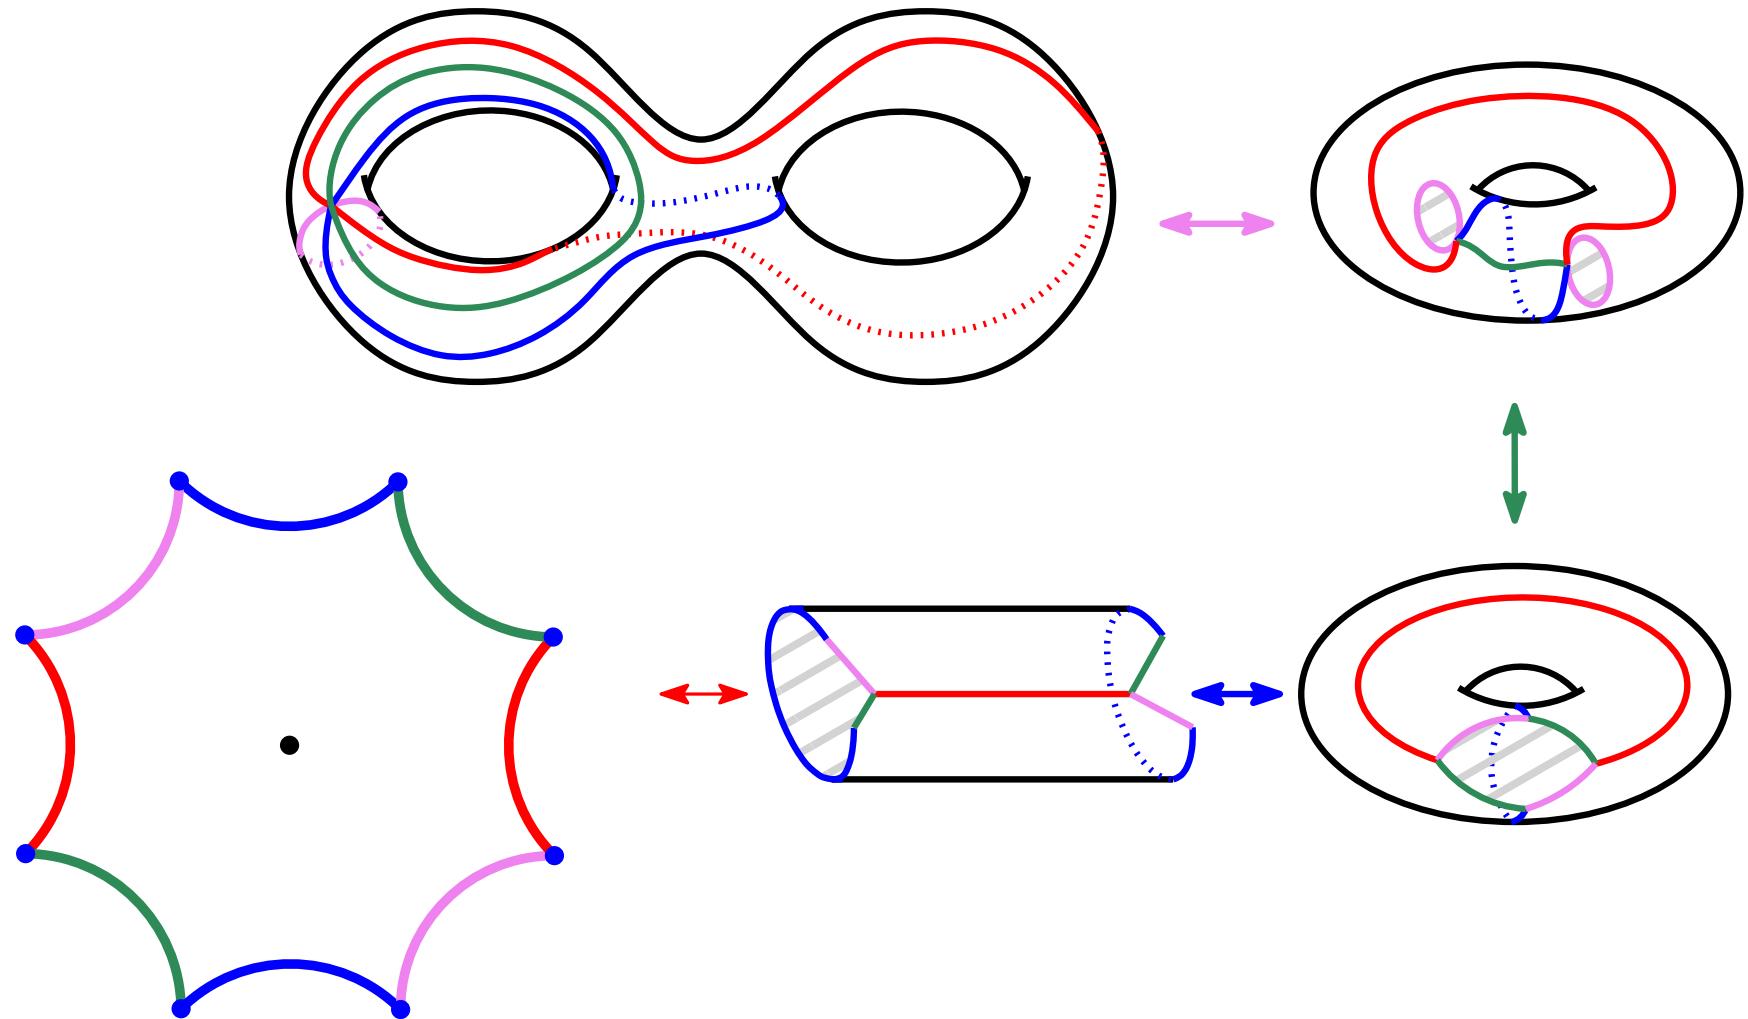


# Delaunay triangulation

(Bolza) hyperbolic surface

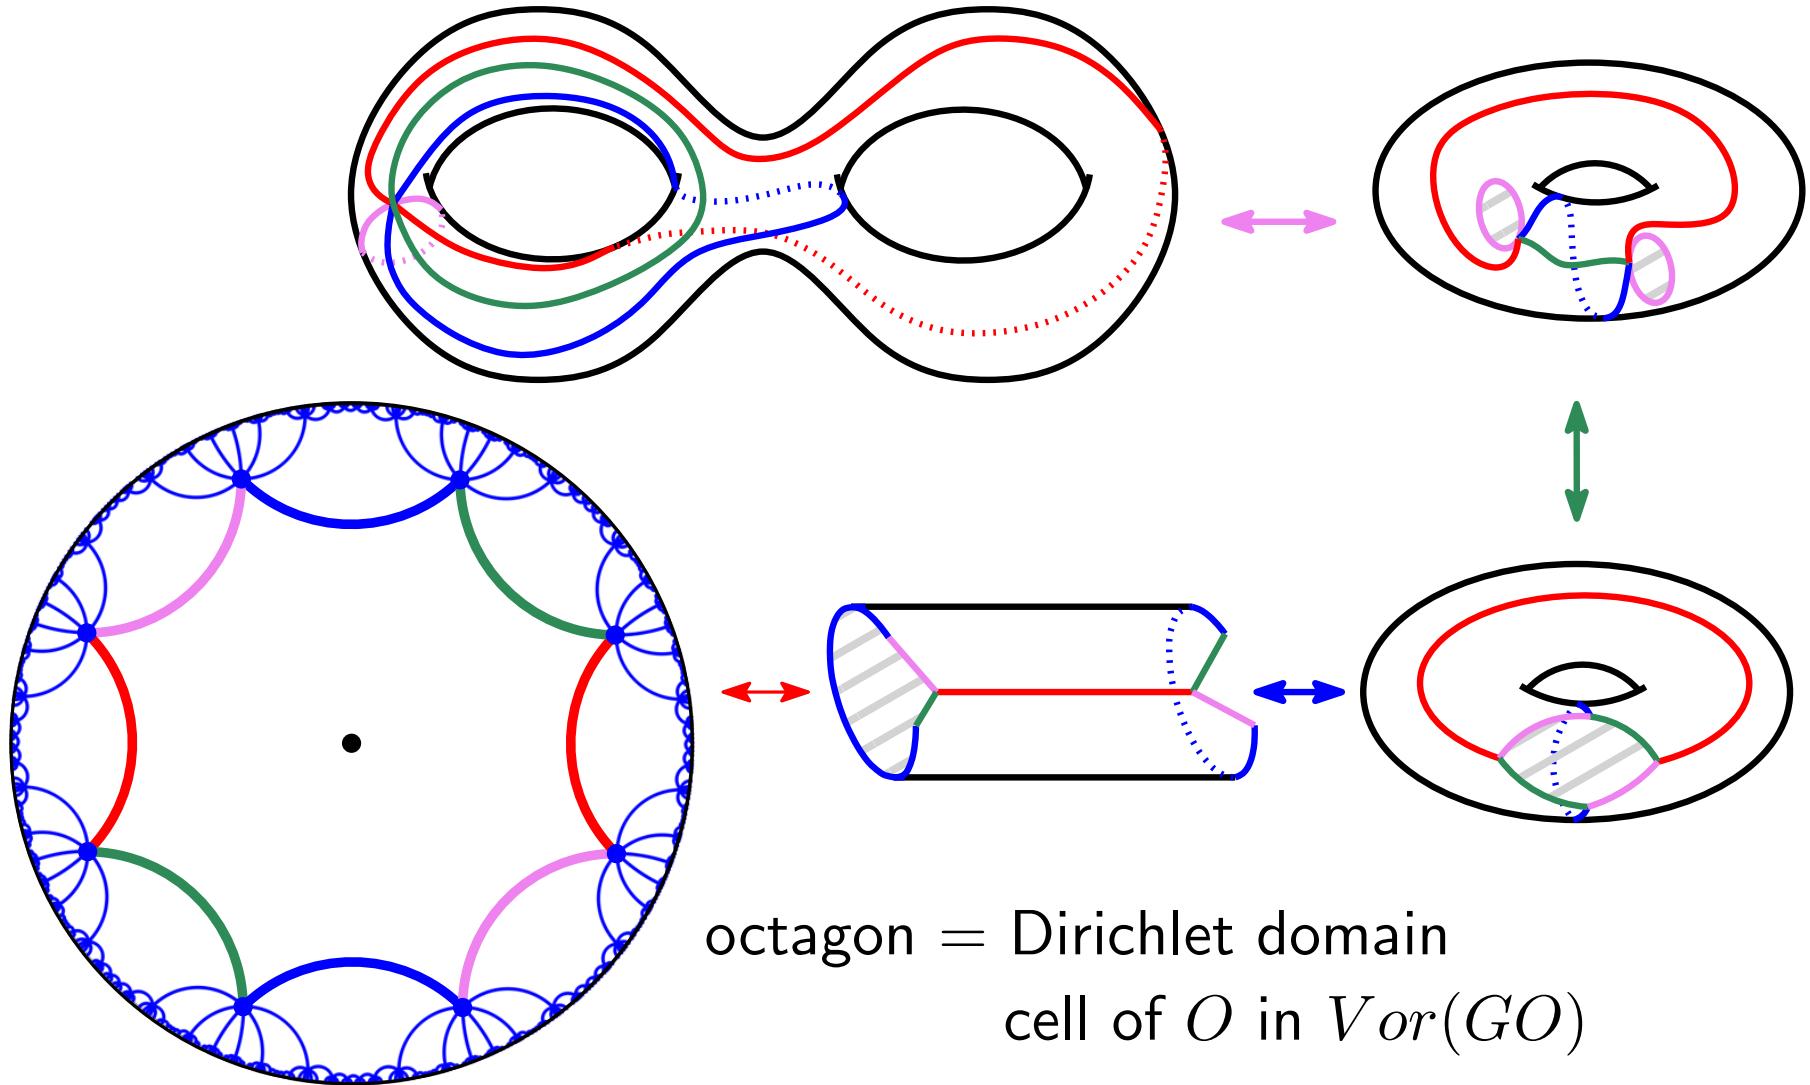


# Delaunay triangulation

(Bolza) hyperbolic surface

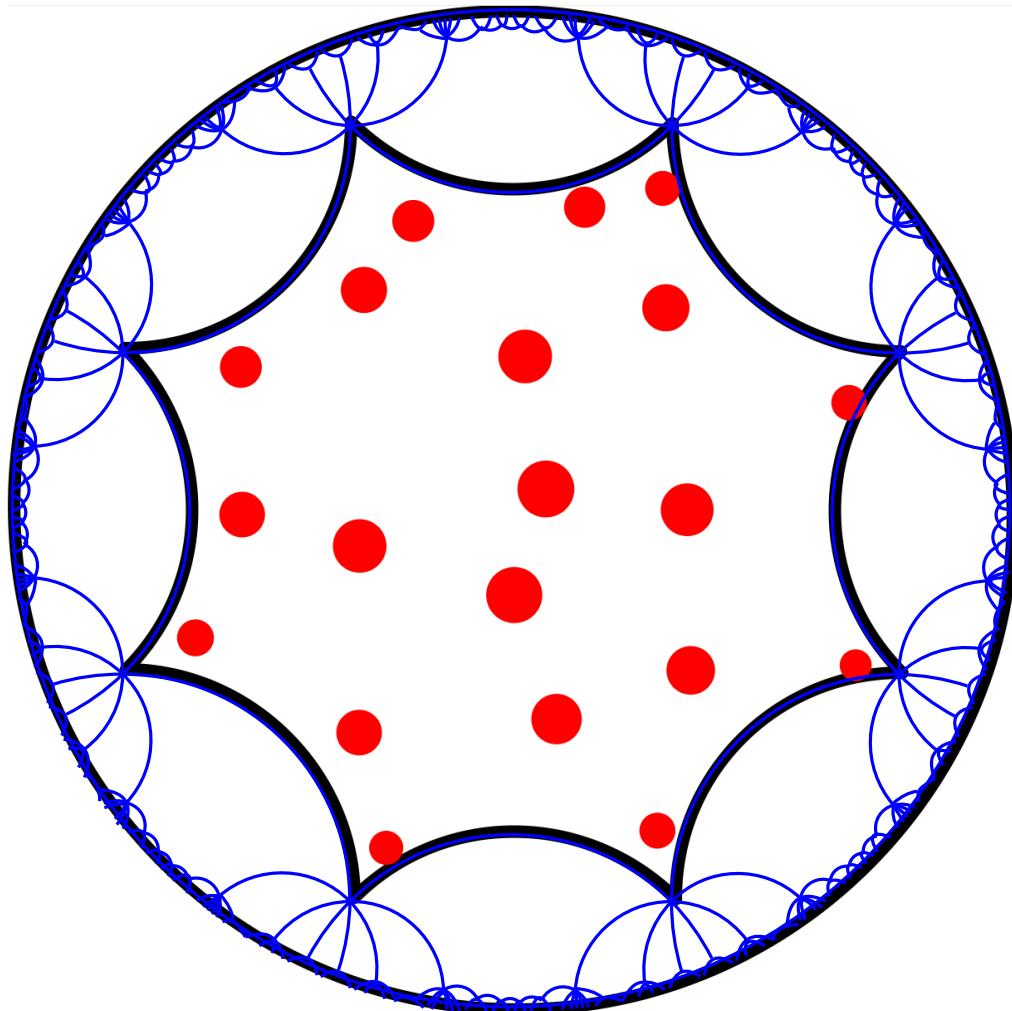


# Delaunay triangulation

(Bolza) hyperbolic surface

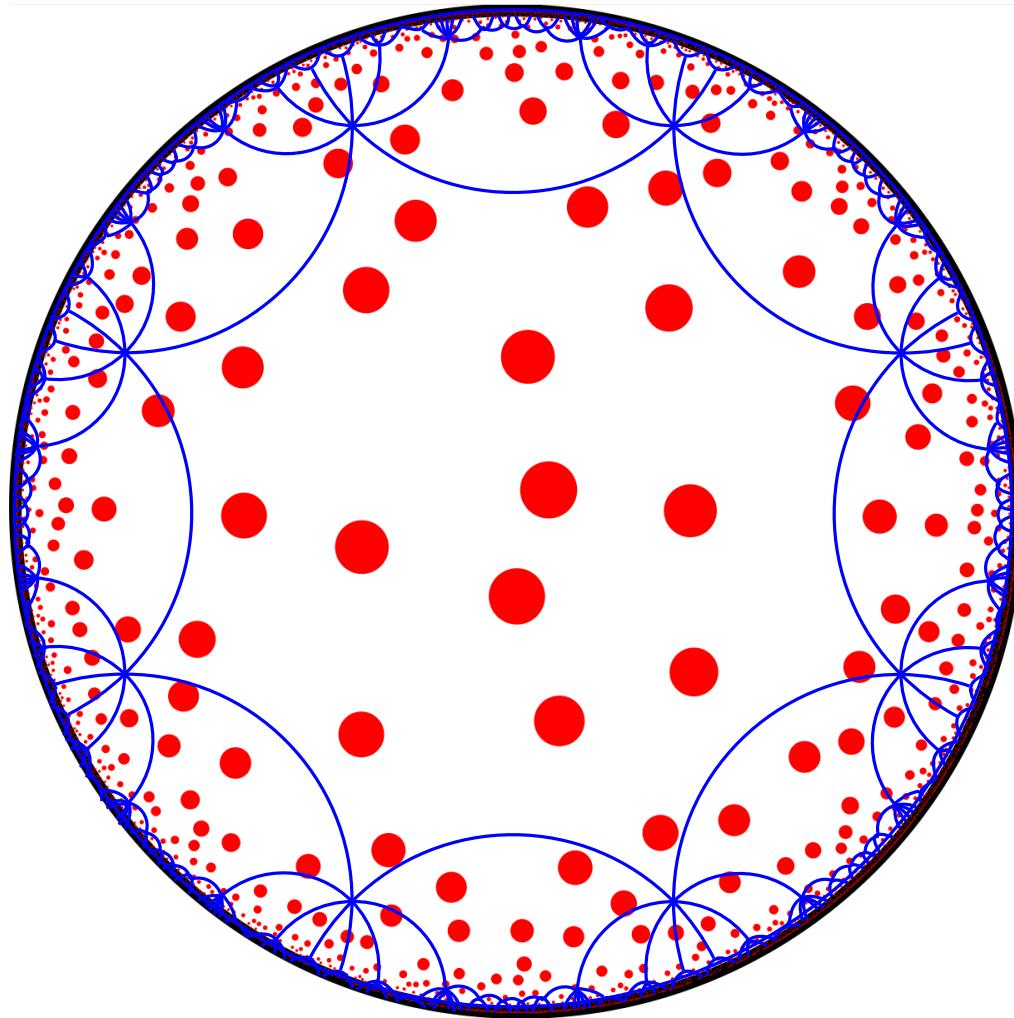


# Delaunay triangulation

(Bolza) hyperbolic surface

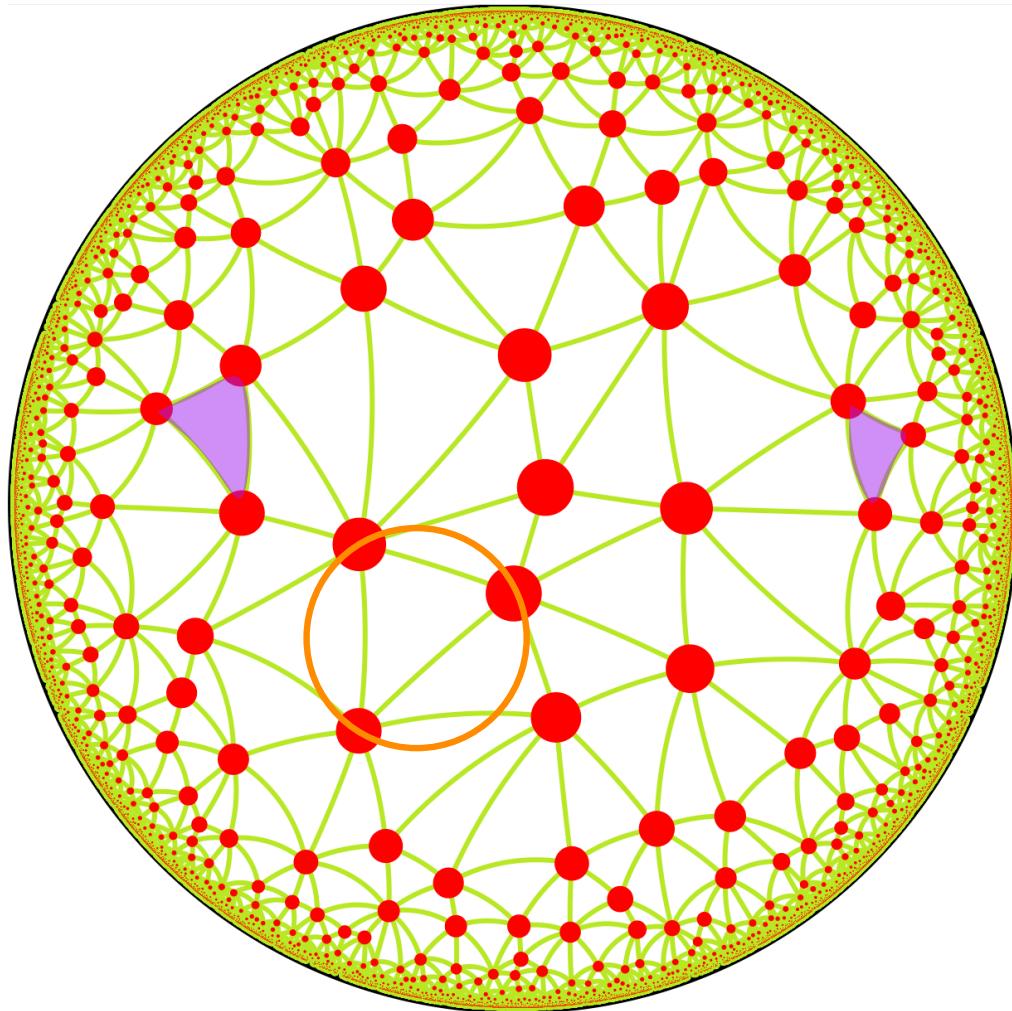


# Delaunay triangulation

(Bolza) hyperbolic surface

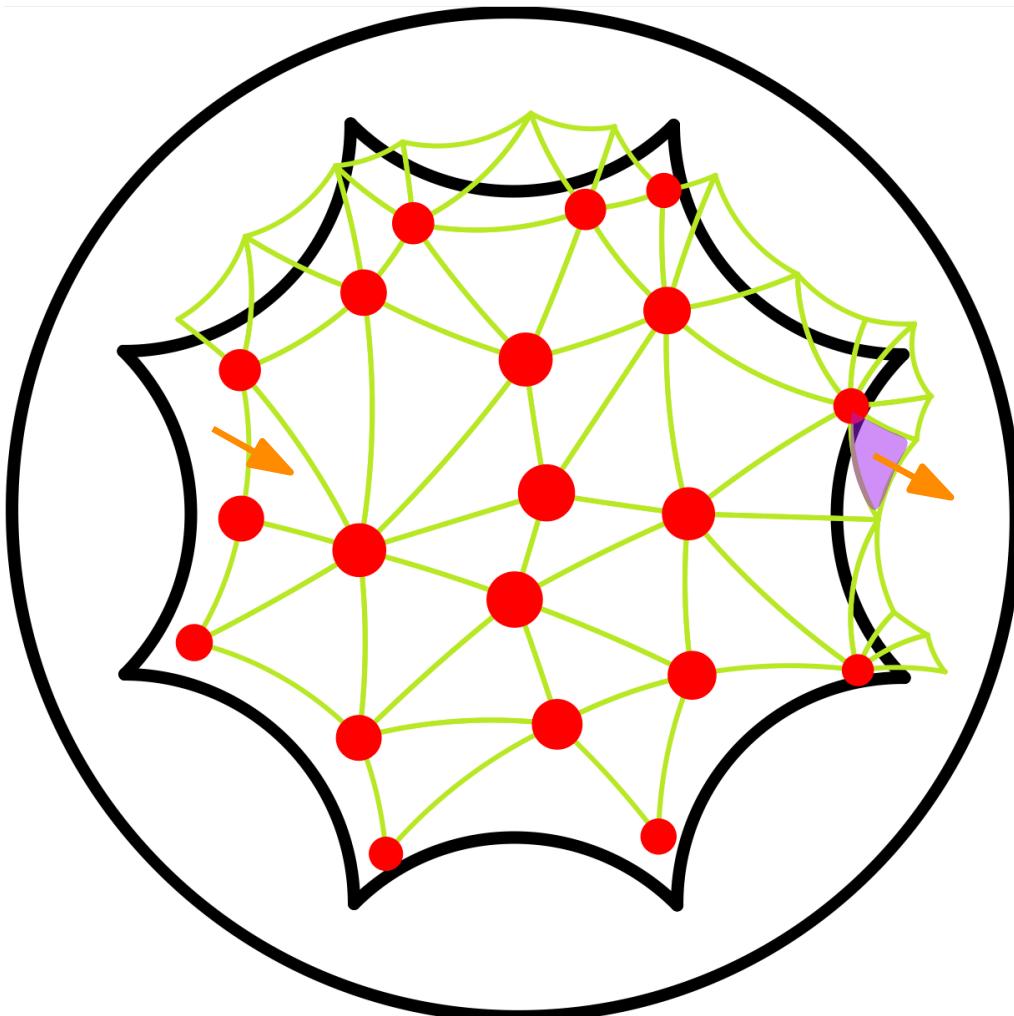

# Bowyer's algorithm on a surface

# Back to $\mathbb{R}^2$

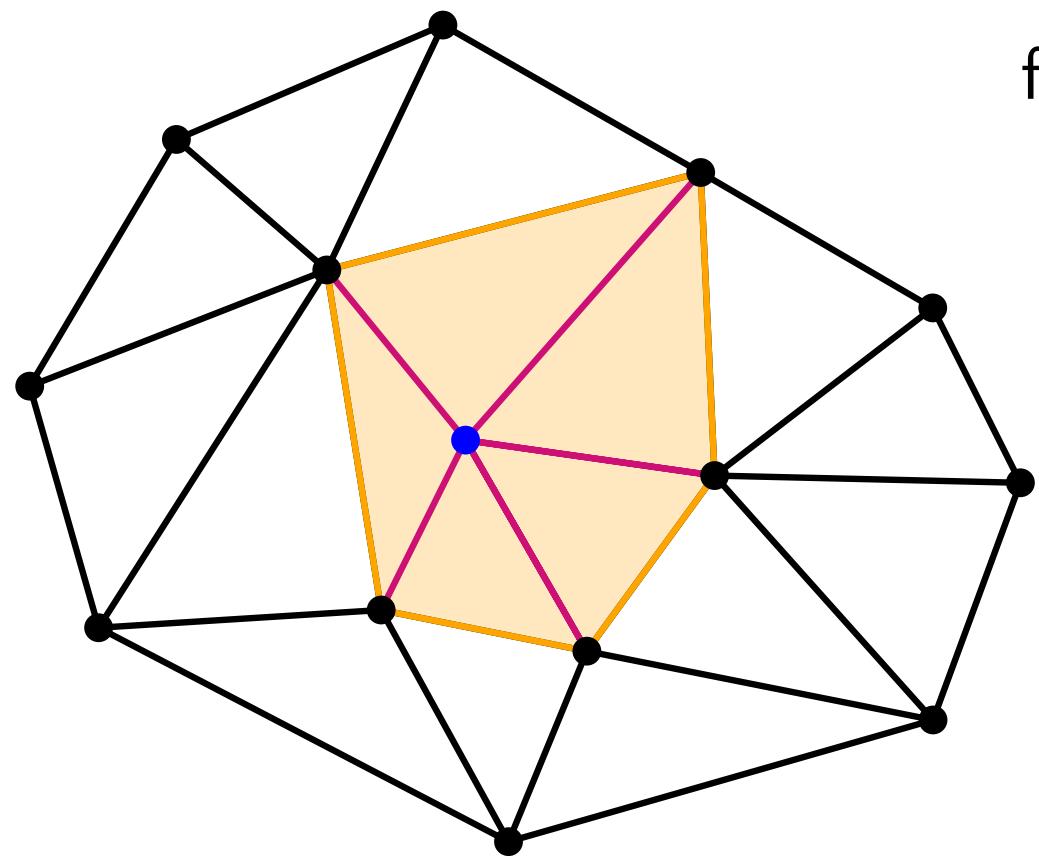


fill the hole

*the hole is  
a topological disk*

[ Bowyer 1981 ] [ Watson 1981 ]

# On a surface

*Validity condition*

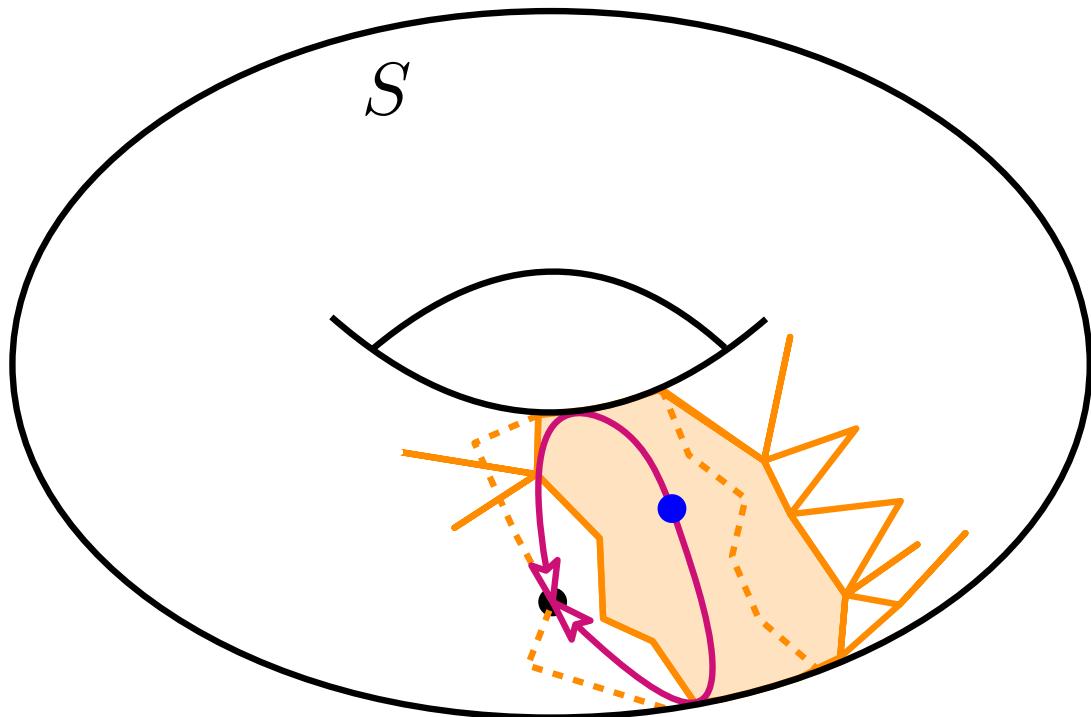

the hole is **not always**  
a topological disk

multiple geodesics between two points

If

$$sys(S) > 2\Delta(\mathcal{Q})$$

then

the hole is  
a topological disk

when inserting points in any set  $\mathcal{P} \supseteq \mathcal{Q}$

# On a surface

*Validity condition*

If

diameter of the largest empty disks  
in the universal cover

$$sys(S) > 2\Delta(Q)$$

✓  
**systole** = length of a shortest  
non-contractible curve on  $S$

*do not contain any point in  $\pi^{-1}(Q)$*

then

**the hole is  
a topological disk**


when inserting points in any set  $\mathcal{P} \supseteq Q$

# On a surface

*Validity condition*

$$sys(S) > 2\Delta(Q)$$

Proof

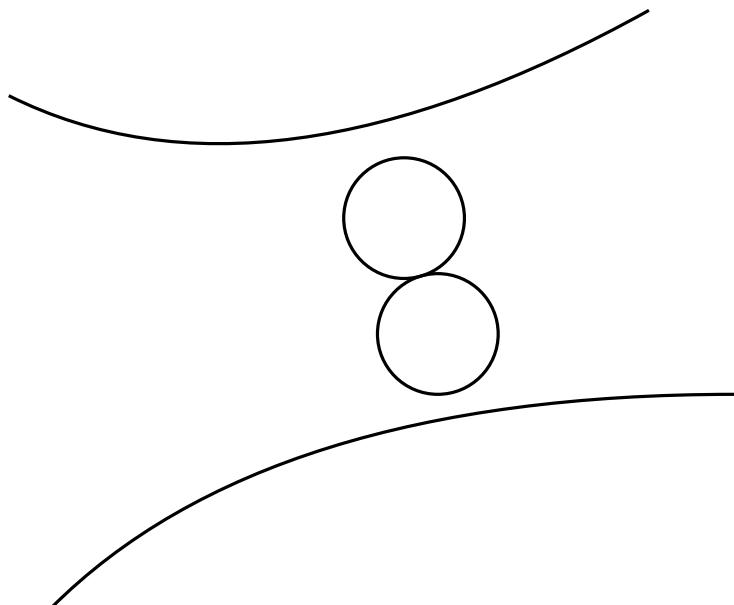


[ Caroli T. ESA'09 DCG'16 ] [ Bogdanov T. Vegter SoCG'16 ]

# On a surface

*Validity condition*

$$sys(S) > 2\Delta(Q)$$

Proof

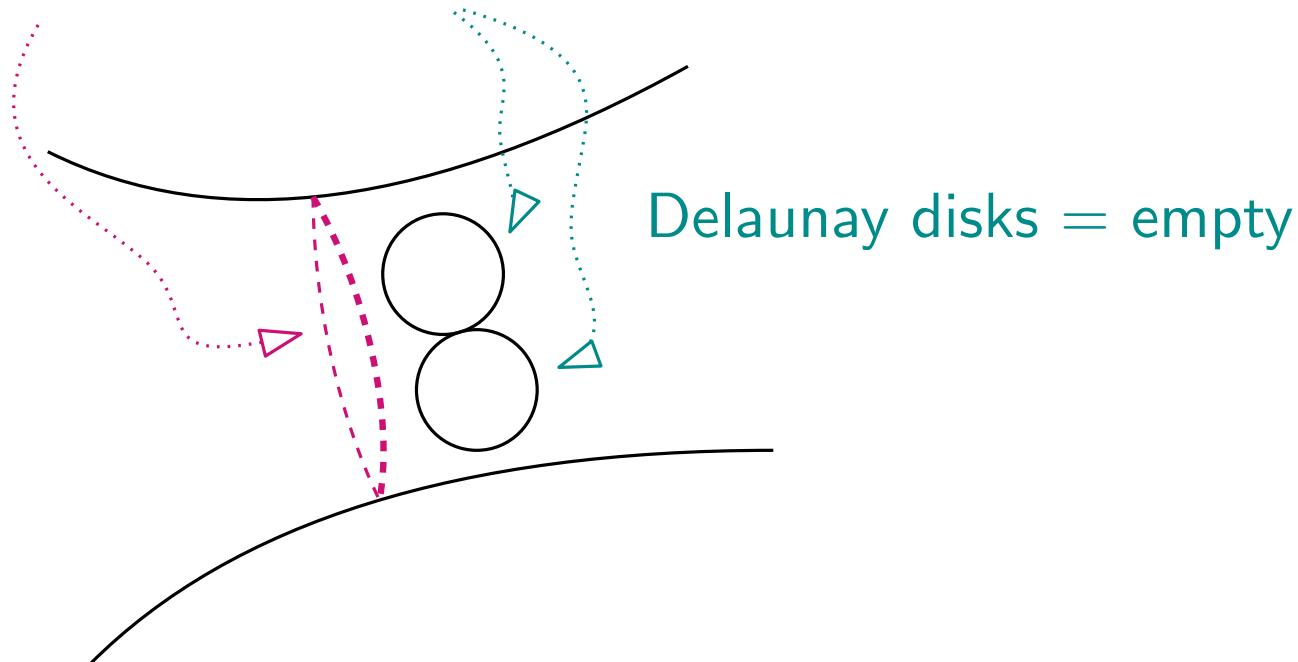


[ Caroli T. ESA'09 DCG'16 ] [ Bogdanov T. Vegter SoCG'16 ]

# On a surface

*Validity condition*

$$sys(S) > 2\Delta(Q)$$

Proof

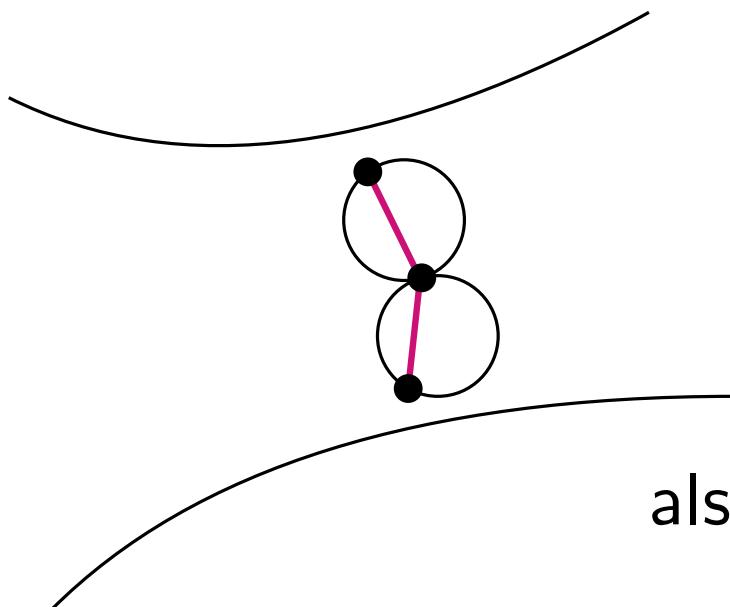

two Delaunay edges  
cannot form a cycle

also in  $DT(\mathcal{P})$  for  $\mathcal{P} \supseteq \mathcal{Q}$


$DT(\mathcal{P})$  is a simplicial complex

# On a surface

*Validity condition*

$$sys(S) > 2\Delta(Q)$$

Proof

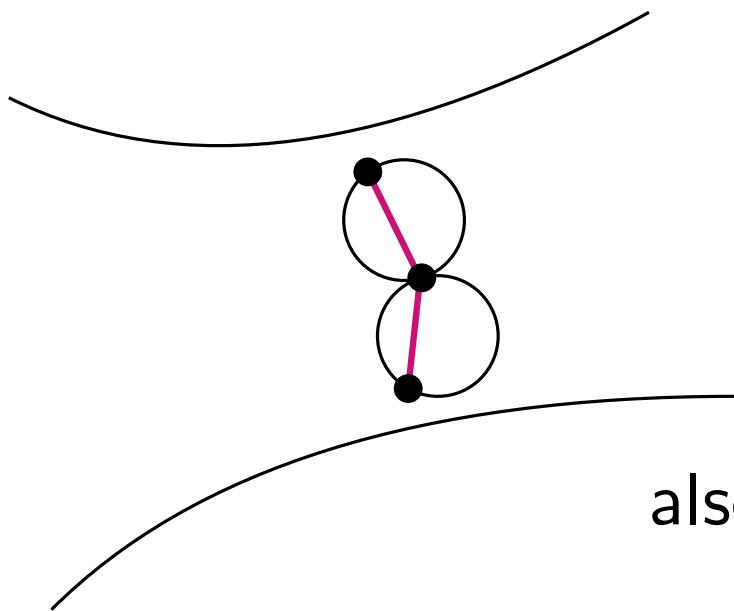

two Delaunay edges  
cannot form a cycle

also in  $DT(\mathcal{P})$  for  $\mathcal{P} \supseteq Q$

$DT(\mathcal{P})$  is a simplicial complex

the hole is  
a topological disk

□

# Bowyer's algorithm

“dummy” points

Initialize the Delaunay triangulation in  $\mathbb{H}^2$  with  $\mathcal{Q}$  s.t.

$$\textcolor{violet}{sys}(S) > 2\Delta(\mathcal{Q})$$

Compute the DT directly on the surface

Insert input points

Remove the points of  $\mathcal{Q}$  if possible

# Bowyer's algorithm

“dummy” points

Initialize the Delaunay triangulation in  $\mathbb{H}^2$  with  $\mathcal{Q}$  s.t.

$$\textcolor{violet}{sys}(S) > 2\Delta(\mathcal{Q})$$

Compute the DT directly on the surface

Insert input points

Remove the points of  $\mathcal{Q}$  if possible



3D cubic flat torus [ Caroli T. CGAL'09 ]

2D square flat torus [ Kruithof CGAL'13 ]

Bolza surface [ Iordanov T. CGAL'19 ]

# Bowyer's algorithm

“dummy” points

Initialize the Delaunay triangulation in  $\mathbb{H}^2$  with  $\mathcal{Q}$  s.t.

$$\textcolor{violet}{sys}(S) > 2\Delta(\mathcal{Q})$$

Compute the DT directly on the surface

Insert input points

Remove the points of  $\mathcal{Q}$  if possible

Questions

$$\textcolor{violet}{sys}(S) ?$$

Algorithms computing  $\mathcal{Q}$  ?

*High degree algebraic numbers*

Number of points in  $\mathcal{Q}$  ?

Bounds for *generalized* Bolza surfaces

[ Ebbens Iordanov T. Vegter JoCG'22 ]

# Another approach

Bowyer

Initialize the Delaunay triangulation in  $\mathbb{H}^2$  with  $\mathcal{Q}$

$$sys(S) > 2\Delta(\mathcal{Q})$$

Compute the DT directly on the surface in  $\mathbb{H}^2$

Insert input points

Remove the points of  $\mathcal{Q}$  if possible

Project to the surface

# Another approach

Bowyer

Initialize the Delaunay triangulation in  $\mathbb{H}^2$  with  $\mathcal{Q}$

$$sys(S) > 2\Delta(\mathcal{Q})$$

Compute the DT directly on the surface in  $\mathbb{H}^2$

Insert input points

Remove the points of  $\mathcal{Q}$  if possible

Project to the surface

## Questions

How far do we need to go?

How many copies of points do we need?

# Another approach

Bowyer

knowing a **Dirichlet** domain

flat torus:  $\leqslant 13$

lattice reduction


[ Dolbilin Huson 1997 ]

project as soon as  
validity condition holds

[ Osang Rouxel-Labbé T. ESA'20 ]

[ Osang Rouxel-Labbé T. CGAL To Appear ]

$$sys(S) > 2\Delta(Q)$$

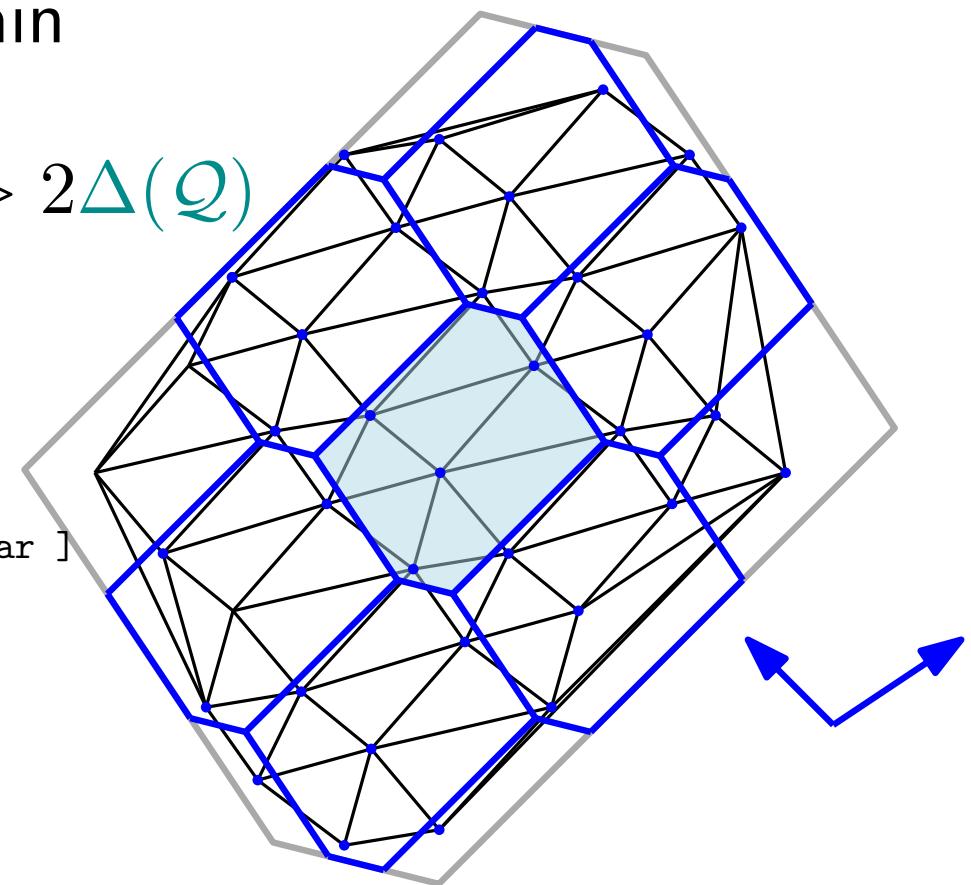

## Questions

How far do we need to go?

How many copies of points do we need?

# Another approach

Bowyer

knowing a **Dirichlet** domain

flat torus:  $\leqslant 13$

lattice reduction

[ Dolbilin Huson 1997 ]

project as soon as  
validity condition holds

[ Osang Rouxel-Labbé T. ESA'20 ]

[ Osang Rouxel-Labbé T. CGAL To Appear ]


general hyperbolic surface:  
 $O((12g)^{12g-6})$

[ Despré Kolbe T. HAL'20 ]

## Questions


How far do we need to go?

How many copies of points do we need?

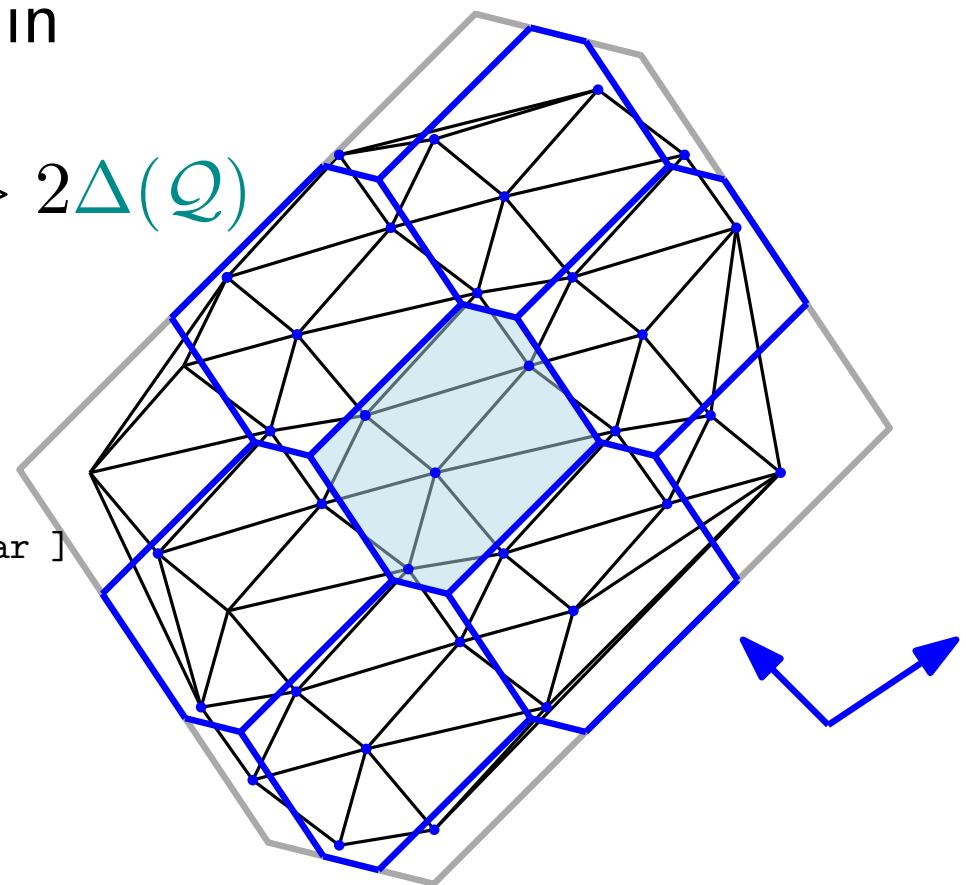

# Flip algorithm on a surface

# Back to $\mathbb{R}^2$

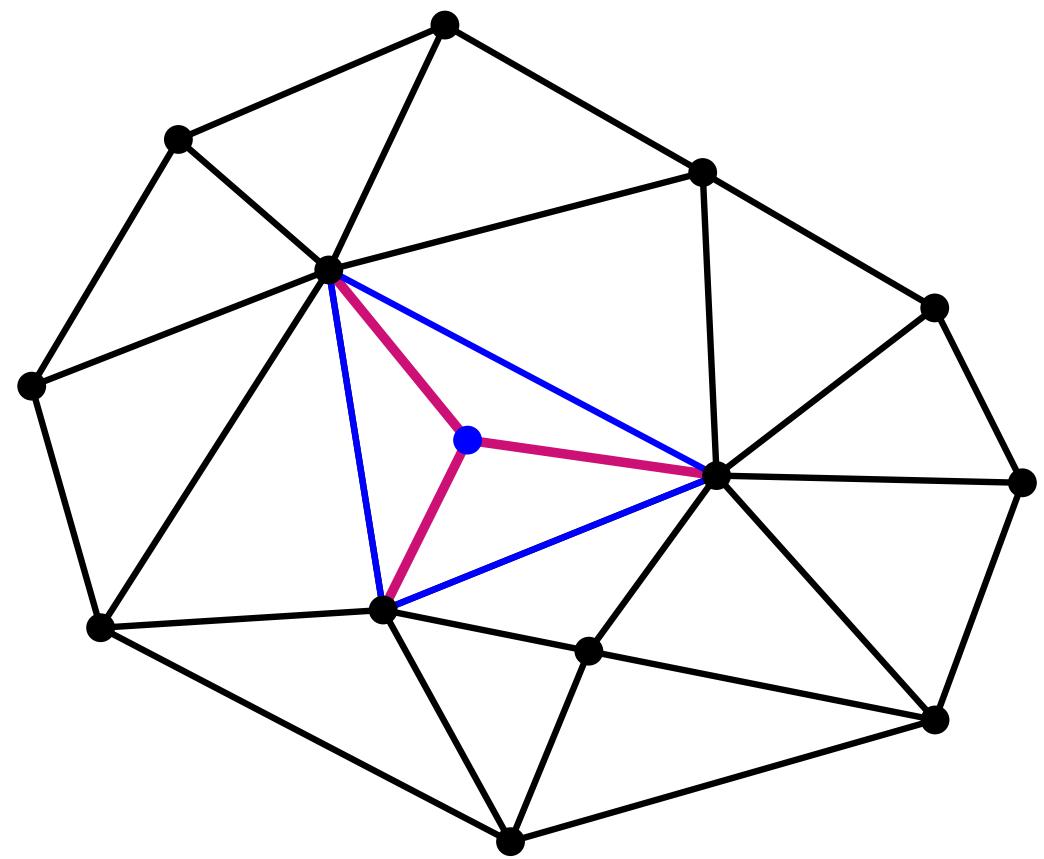


[ Lawson 1977 ]

21 - 1

Monique Teillaud - Triangulations

# Back to $\mathbb{R}^2$

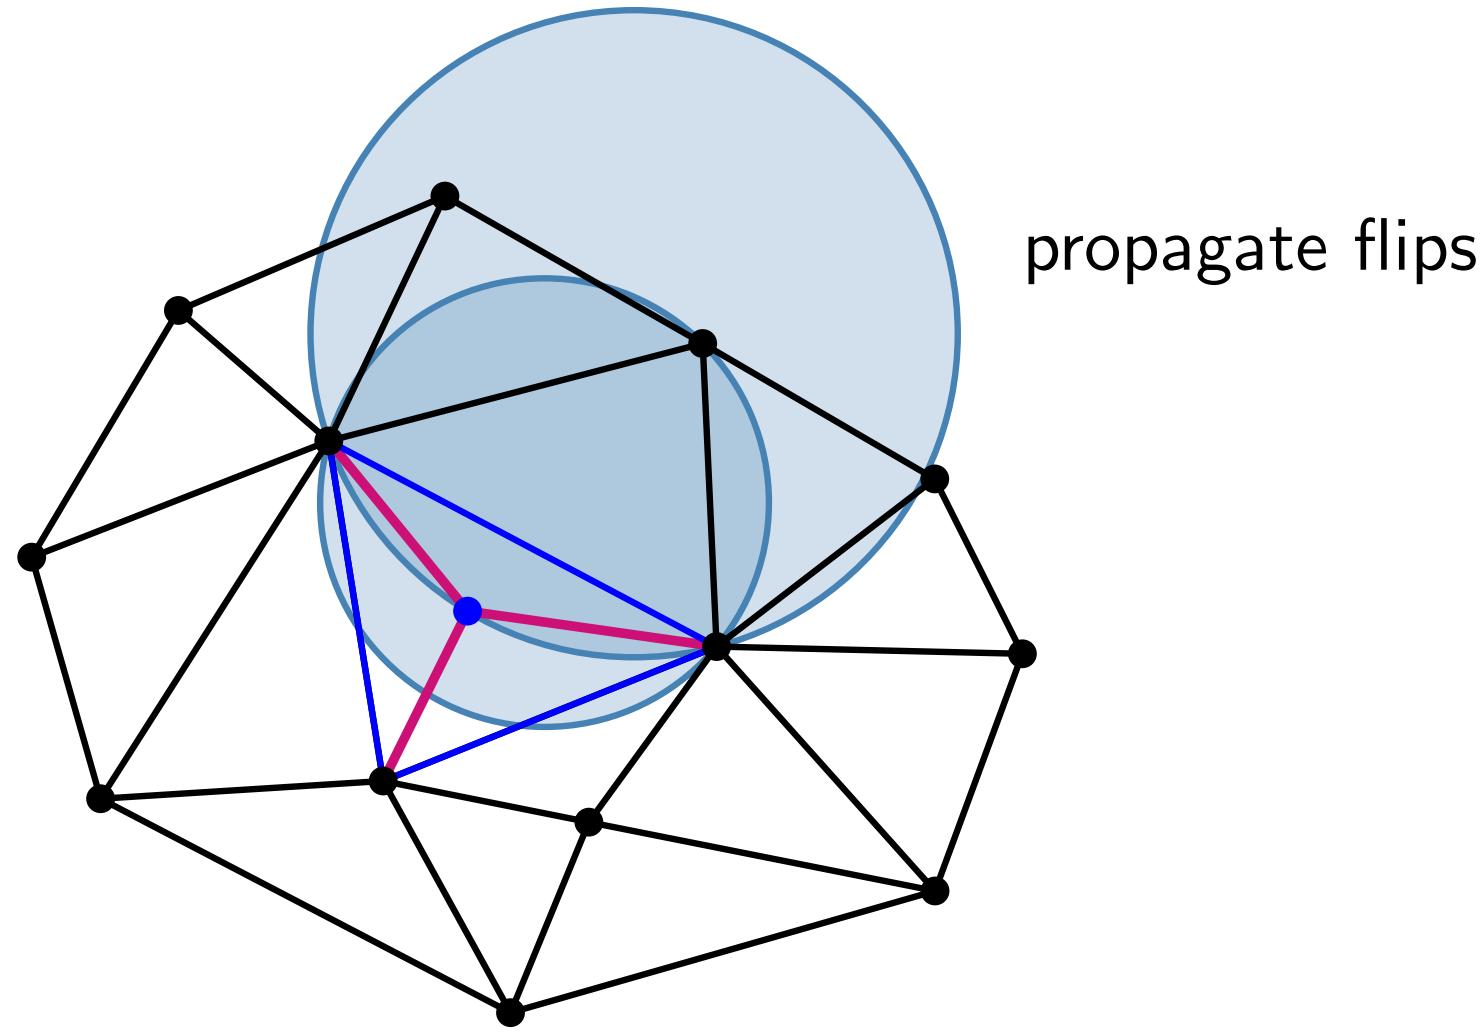

[ Lawson 1977 ]


21 - 2

Monique Teillaud - Triangulations

# A stronger result

$n$  points in  $\mathbb{R}^2$

The flip graph of triangulations is connected

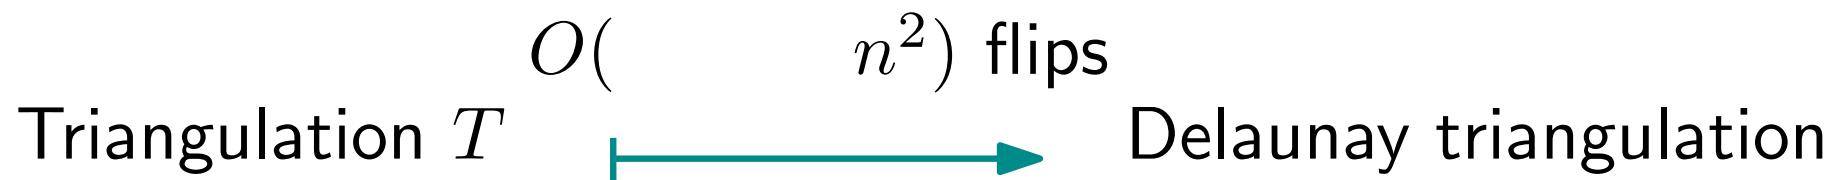

[ Hurtado *et al.* DCG'99 ]

# A stronger result

$n$  points on a **surface**

The flip graph of **geometric** triangulations is connected

the edges of the equivalent geodesic triangulation do not intersect


Triangulation  $T$   Delaunay triangulation

$O(f(g, T) n^2)$  flips

The Delaunay triangulation is geometric

[ Despré Schlenker T. SoCG'20 ]

# Diameter

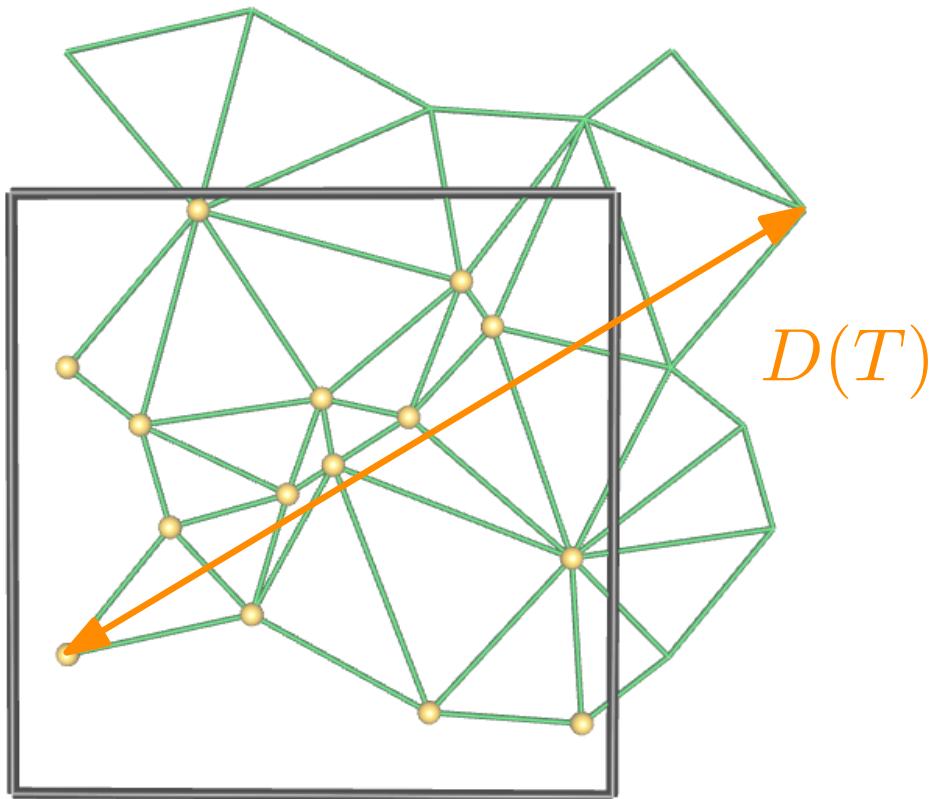

smallest diameter  
of a connected  
union of lifts  
 $\tilde{t} \in \pi^{-1}(t), t \in T$

$\Omega$  fundamental domain

# Diameter

A flip can never create an edge longer than  $2D(T)$


Proof

# Diameter

A flip can never create an edge longer than  $2D(T)$

Proof

$v$  on the surface,  $\tilde{v} \in \pi^{-1}(v)$   $z = 1$

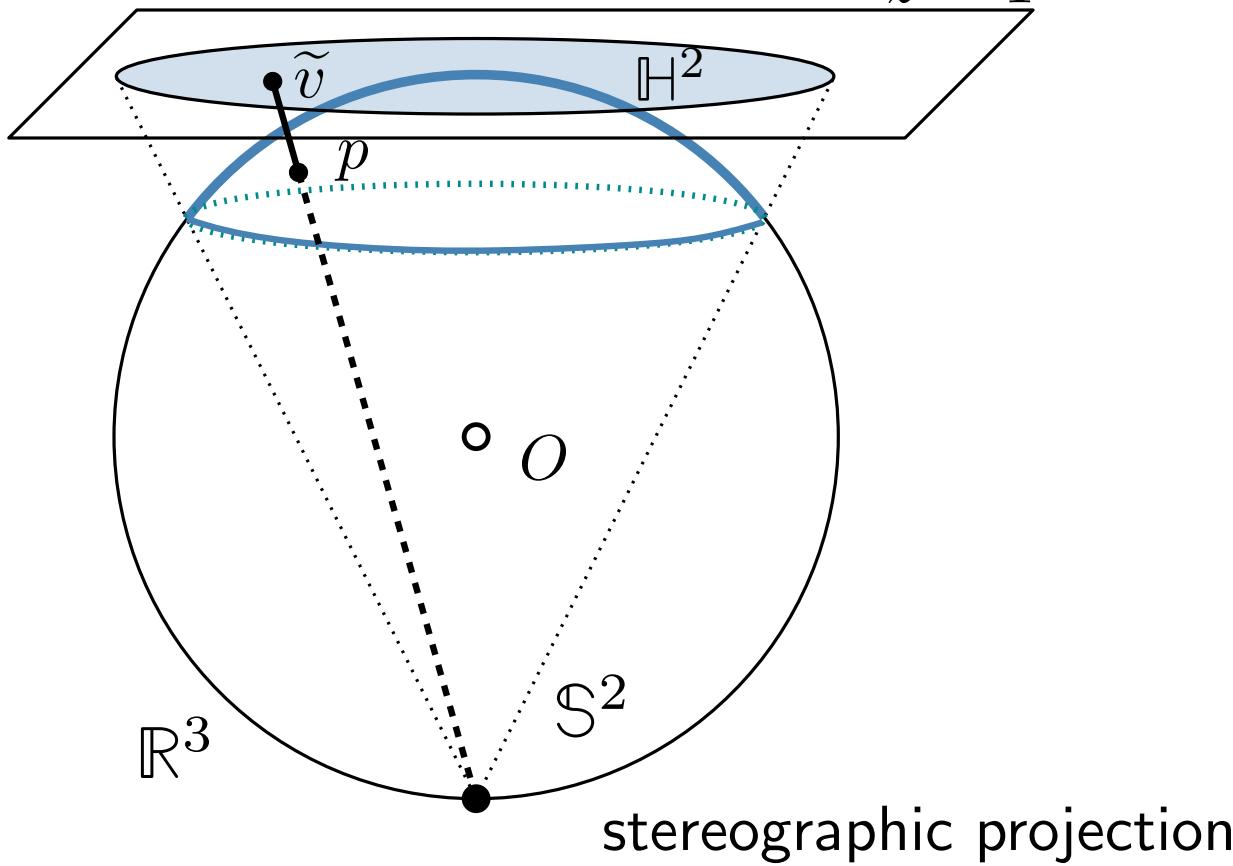


[ Despré Schlenker T. SoCG'20 ]

# Diameter

A flip can never create an edge longer than  $2D(T)$


Proof

$v$  on the surface,  $\tilde{v} \in \pi^{-1}(v)$   $z = 1$

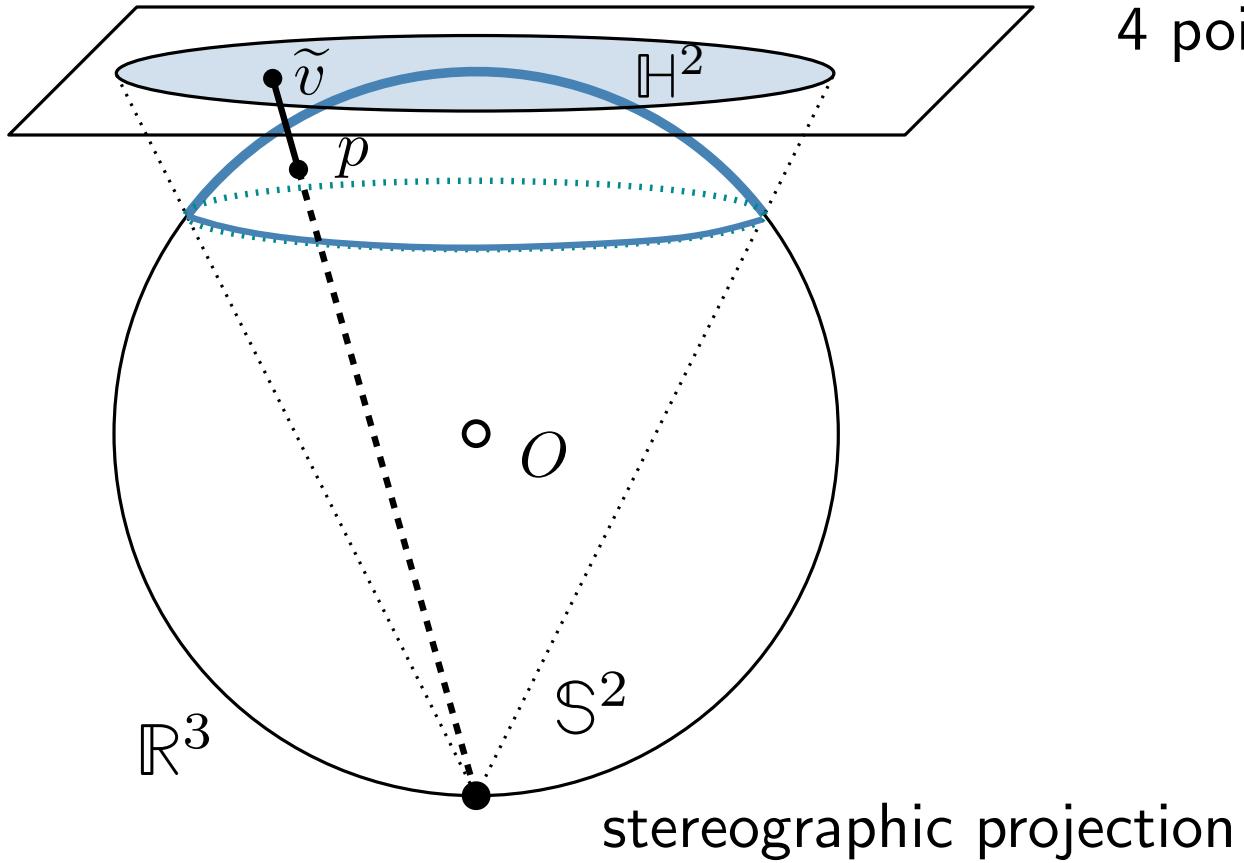

flip in  $\mathbb{H}^2$

4 points on  $\mathbb{S}^2$

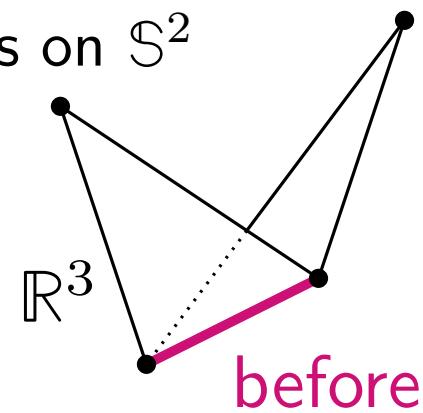


# Diameter

A flip can never create an edge longer than  $2D(T)$


Proof

$v$  on the surface,  $\tilde{v} \in \pi^{-1}(v)$

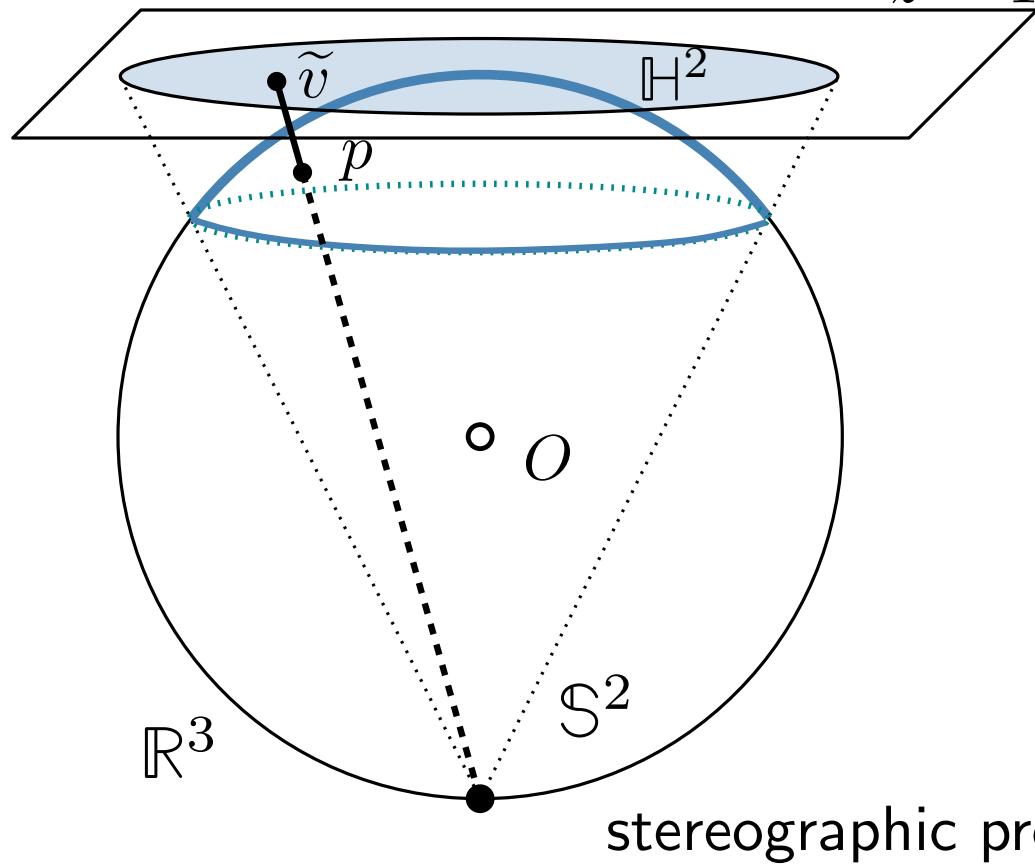

flip in  $\mathbb{H}^2$

4 points on  $S^2$

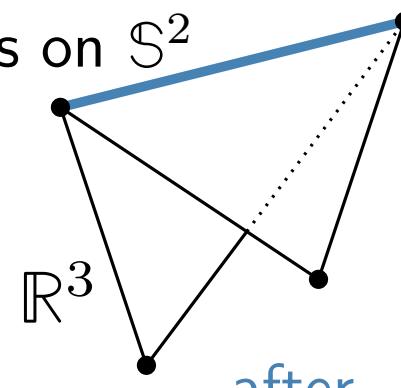


Delaunay  $\leftrightarrow$  convex polyhedron  
an edge can never reappear

# Diameter

A flip can never create an edge longer than  $2D(T)$


Proof

$v$  on the surface,  $\tilde{v} \in \pi^{-1}(v)$

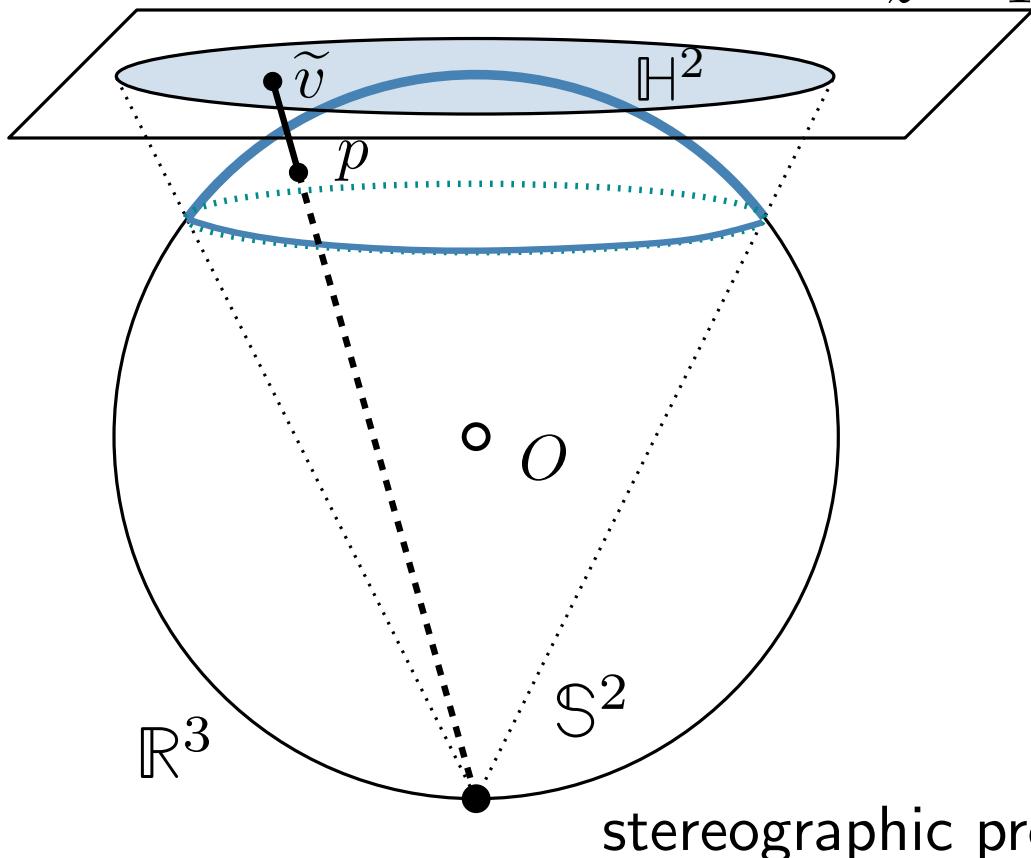

flip in  $\mathbb{H}^2$

4 points on  $\mathbb{S}^2$

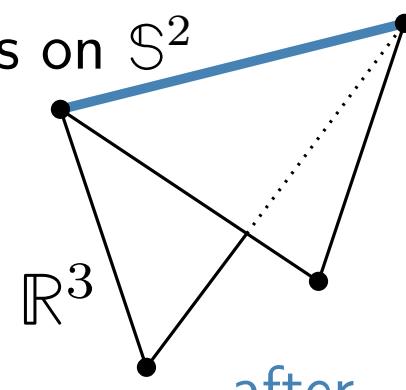

Delaunay  $\leftrightarrow$  convex polyhedron  
an edge can never reappear

sequence of flips  
 $\leadsto$  sequence of surfaces  
 $\Sigma_0 \subset \dots \subset \Sigma_k \subset \dots$


[ Despré Schlenker T. SoCG'20 ]

# Diameter

A flip can never create an edge longer than  $2D(T)$

Proof

$\tilde{e}$  edge of  $T_k$   
longer than  $2D(T)$

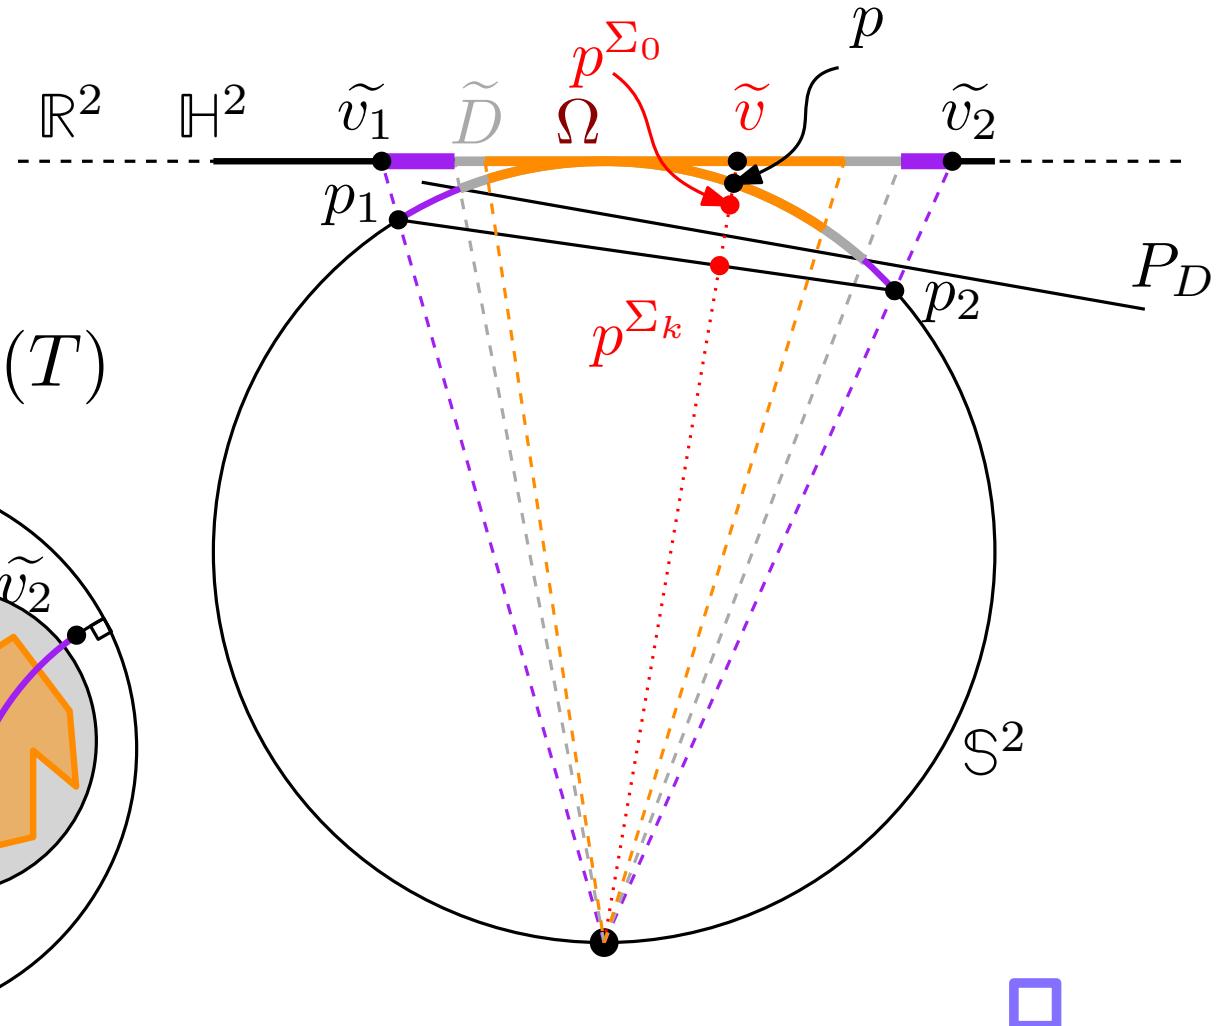

[ Despré Schlenker T. SoCG'20 ]


# Diameter

( in fact  $2L(T)$  )

A flip can never create an edge longer than  $2D(T)$

Proof

$\tilde{e}$  edge of  $T_k$   
longer than  $2D(T)$

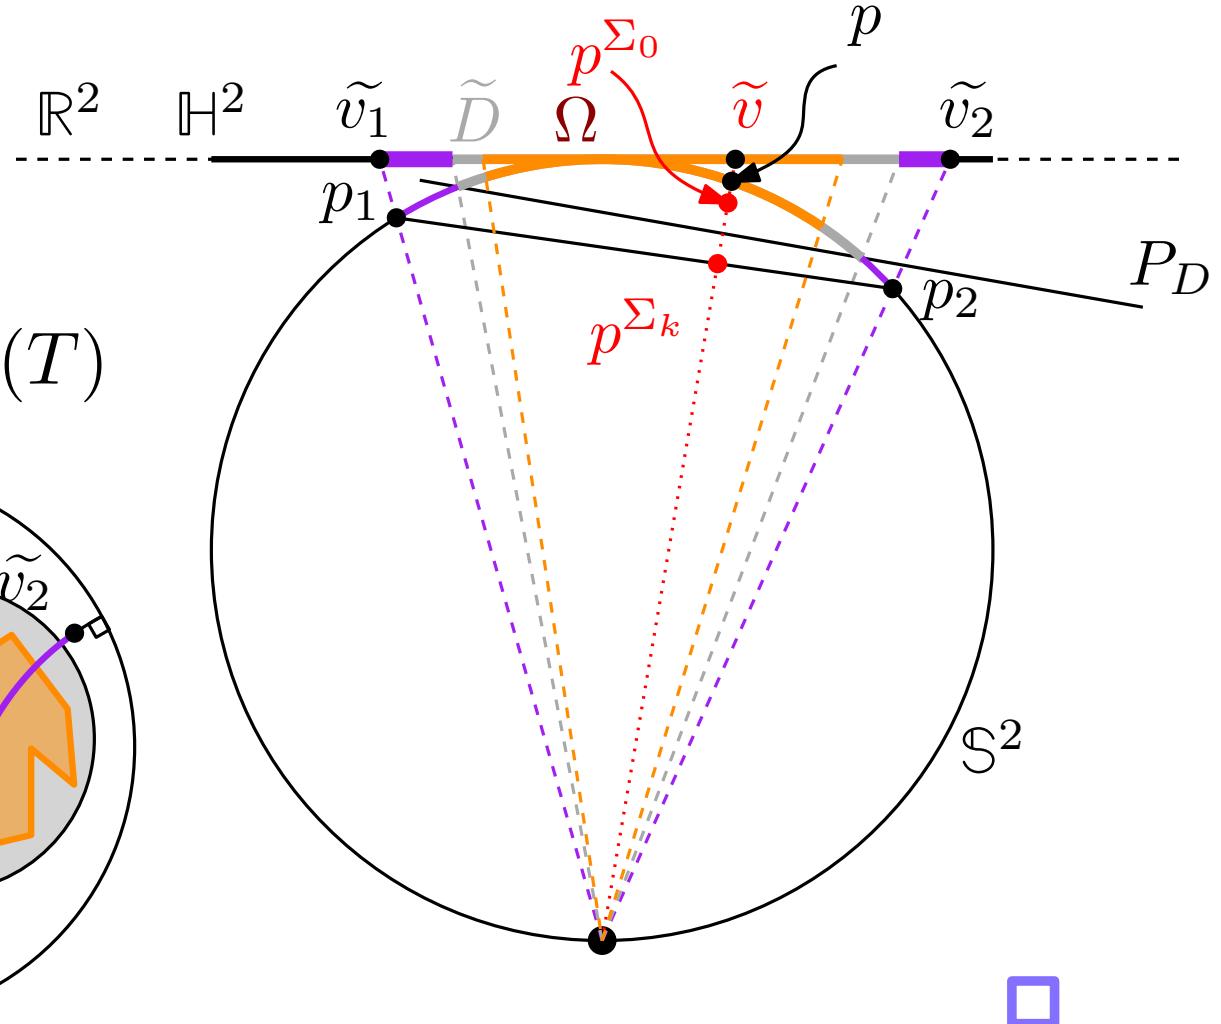

[ Despré Schlenker T. SoCG'20 ]


# Flat torus

*Connectivity*

Proof

in  $\mathbb{R}^2$

$w(T) = \sum_{t \in T} (\text{ number of points in } \text{open\_disk}(t))$   
all disks are compact

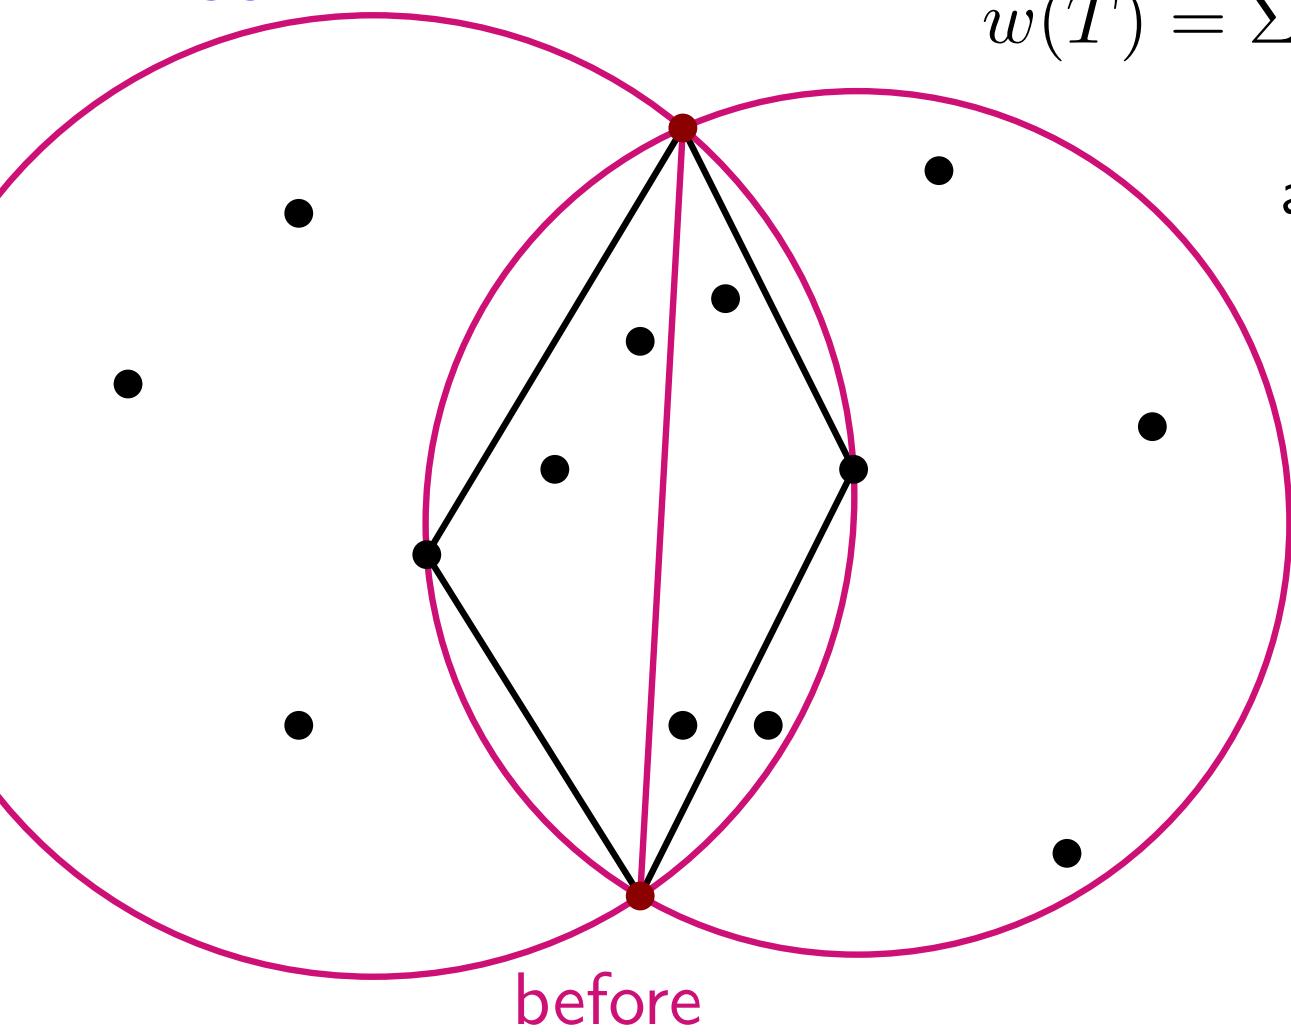

[ Despré Schlenker T. SoCG'20 ]

24 - 1

Monique Teillaud - Triangulations

CIRM

# Flat torus

*Connectivity*

Proof


in  $\mathbb{R}^2$

$w(T) = \sum_{t \in T} (\text{ number of points in } \text{open\_disk}(t))$   
all disks are compact

$$w(T') \leq w(T) - 2$$

⇒ termination

⇒ connectivity

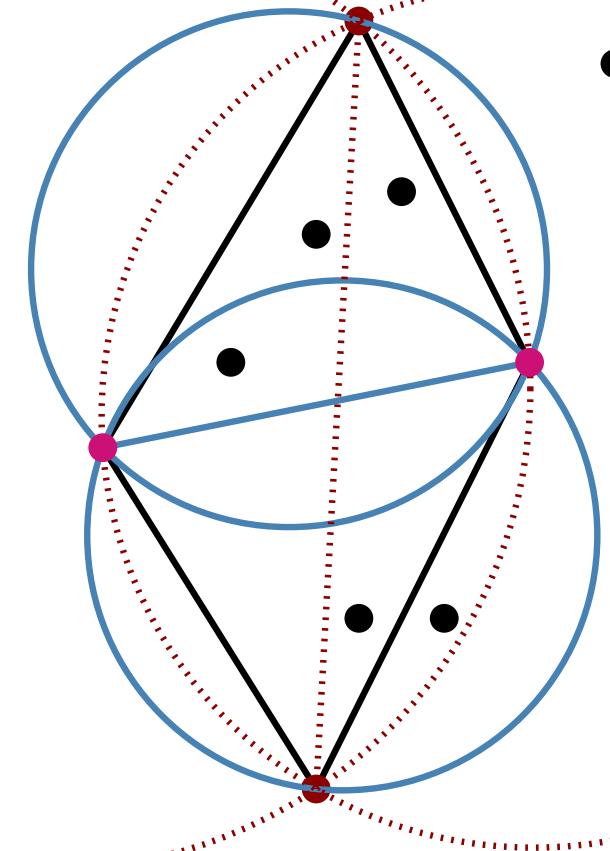

[ Despré Schlenker T. SoCG'20 ]

24 - 2

Monique Teillaud - Triangulations

CIRM

# Flat torus

*Complexity*

$\mathbb{T}_u$ ,  $n$  points, triangulation  $T$

$C_u \cdot D(T) \cdot n^2$  flips to the Delaunay triangulation

[ Dubois CCCG'22 ]

# Hyperbolic surface


*Connectivity*

Proof

in  $\mathbb{H}^2$

$$w(T) = \sum_{t \in T} \left( \frac{\text{number of points}}{\text{in disk}(t)} \right)$$

disks not always compact

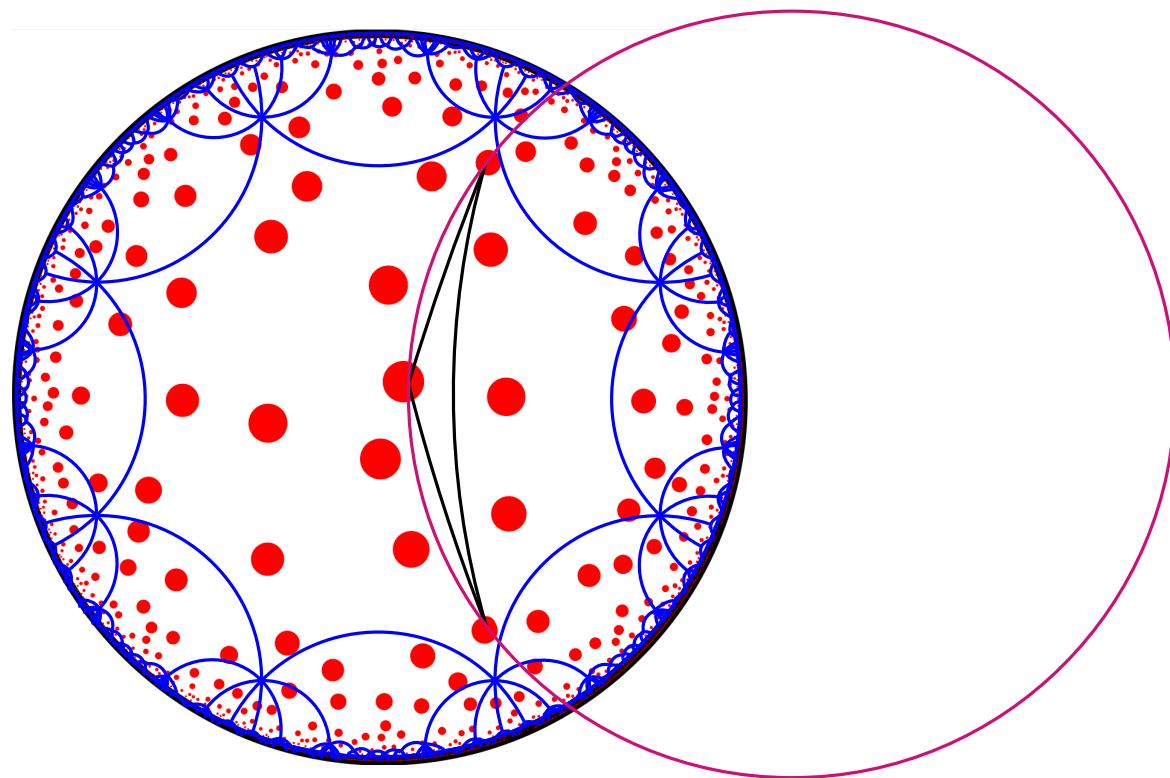

[ Despré Schlenker T. SoCG'20 ]

25 - 1

Monique Teillaud - Triangulations

CIRM

# Hyperbolic surface

*Connectivity*


Proof

in  $\mathbb{H}^2$

$$w(T) = \sum_{t \in T} \left( \frac{\text{number of points}}{\text{in disk}(t)} \right)$$

disks not always compact

edges are shorter than  $2D(T)$

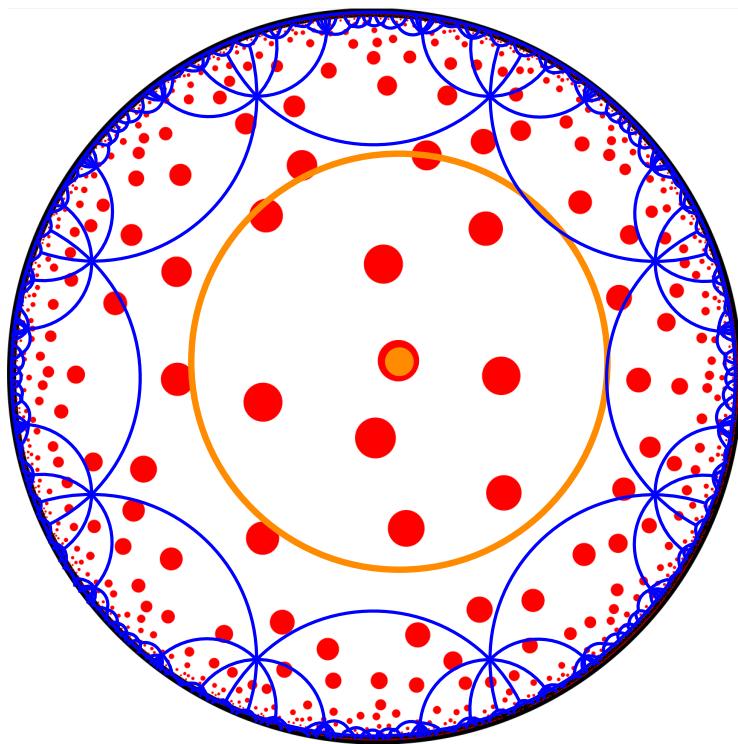

compact disk

(but area is exponential)

finite number of possible edges

$\implies$  termination

$\implies$  connectivity



[ Despré Schlenker T. SoCG'20 ]

25 - 2

Monique Teillaud - Triangulations

# Hyperbolic surface

*Complexity*

surface  $S$ ,  $n$  points, triangulation  $T$

$\leqslant C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

# Hyperbolic surface

*Complexity*

surface  $S$ ,  $n$  points, triangulation  $T$

$\leqslant C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

Sketch of proof

count non-homotopic simple **paths**

known: closed curves

[ Fathi Laudenbach Poénaru SMF'79 ]

[ Despré Schlenker T. SoCG'20 ]

25 - 4

Monique Teillaud - Triangulations




# Hyperbolic surface

Complexity

surface  $S$ ,  $n$  points, triangulation  $T$

$\leq C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

Sketch of proof

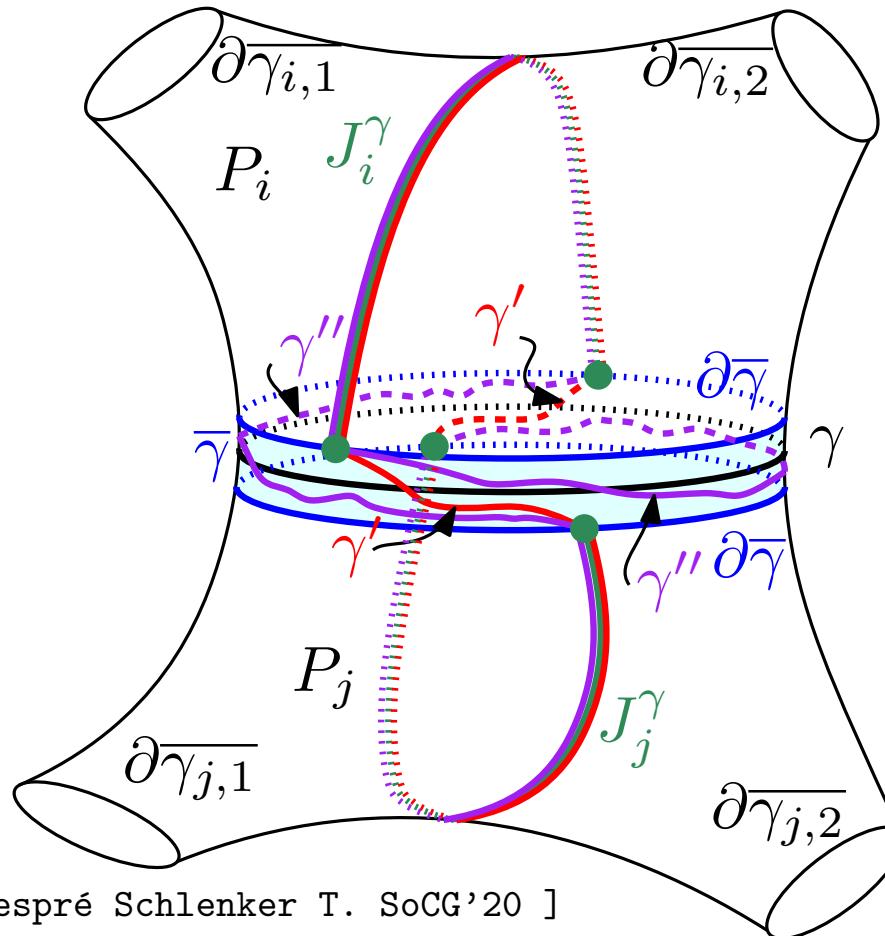

[ Despré Schlenker T. SoCG'20 ]

count non-homotopic simple **paths**

known: closed curves

[ Fathi Laudenbach Poénaru SMF'79 ]

path  $f = (v_1, v_2)$

normal form homotopic to  $f$

$f = (v_1, w_1) \cup (w_1, w_2) \cup (w_2, v_2)$

$w_i$  on annulus boundary

“push” twists in annuli

“normal” coordinates

w.r.t. short pants


# Hyperbolic surface

*Complexity*


surface  $S$ ,  $n$  points, triangulation  $T$

$\leqslant C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

Sketch of proof

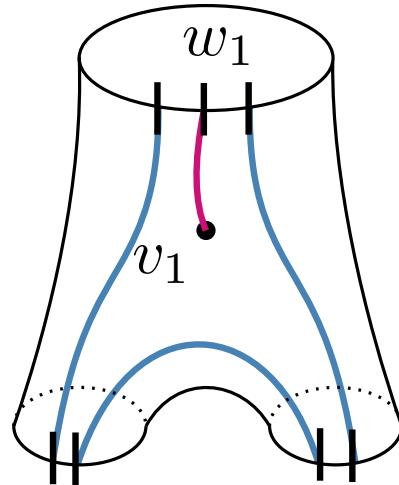

bound on length

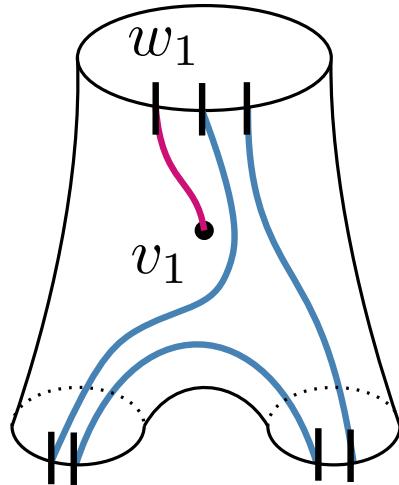

$= 6g - 4$  Dehn Thurston coordinates

count possible coordinates and possible paths



[ Despré Schlenker T. SoCG'20 ]

# Hyperbolic surface

*Complexity*

surface  $S$ ,  $n$  points, triangulation  $T$


$\leq C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

Is the bound (close to) tight?

Experimental analysis


# Representation

genus 2 surface

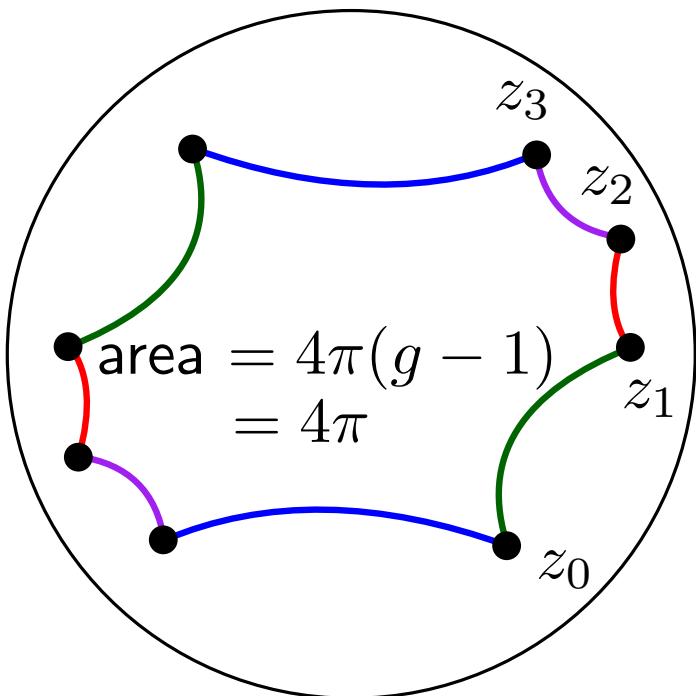

admissible symmetric octagon


[ Aigon-Dupuy, Buser, etc Math. Phys. '05 ]

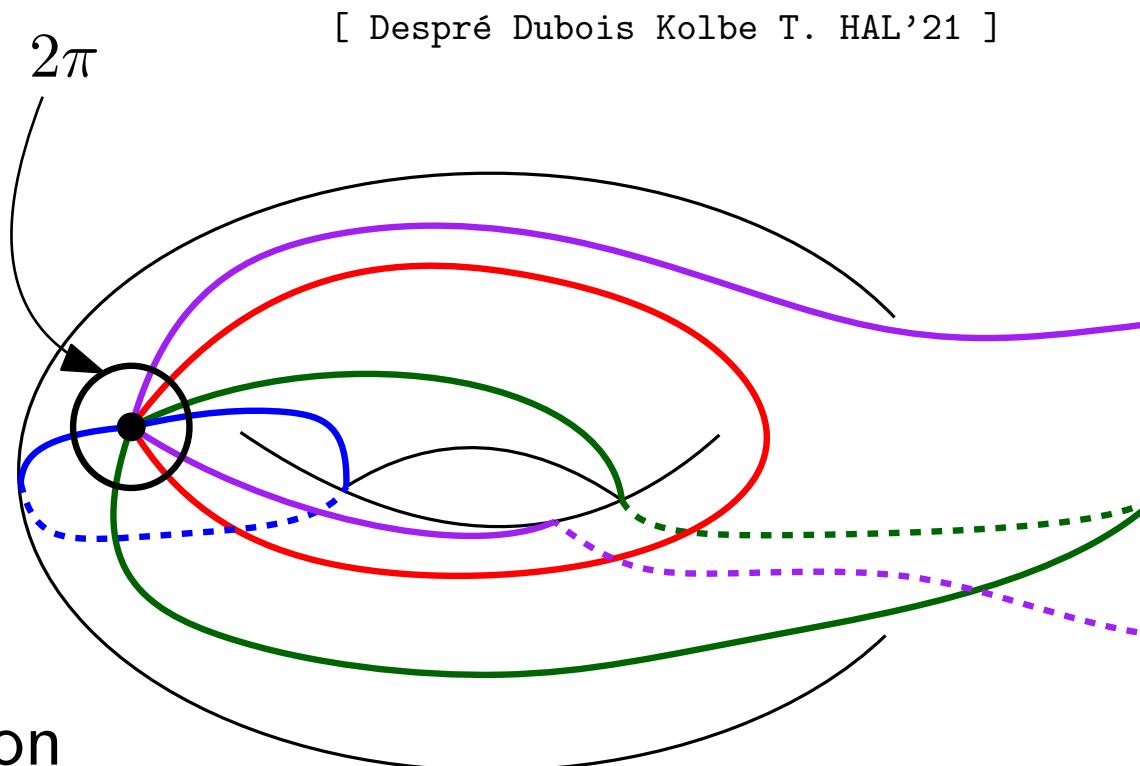

# Representation

*genus 2 surface*

[ Despré Dubois Kolbe T. HAL'21 ]

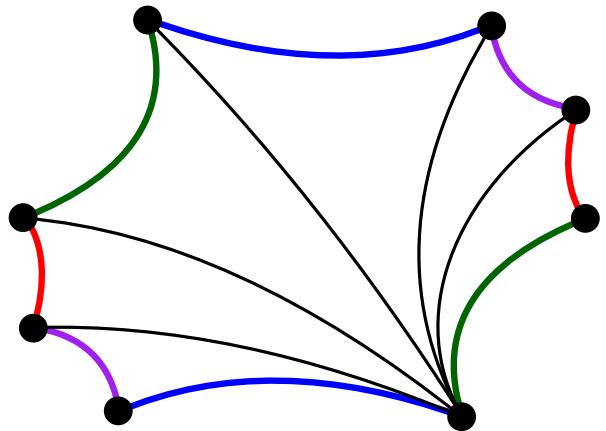


triangulation


# Representation

genus 2 surface

[ Despré Dubois Kolbe T. HAL'21 ]

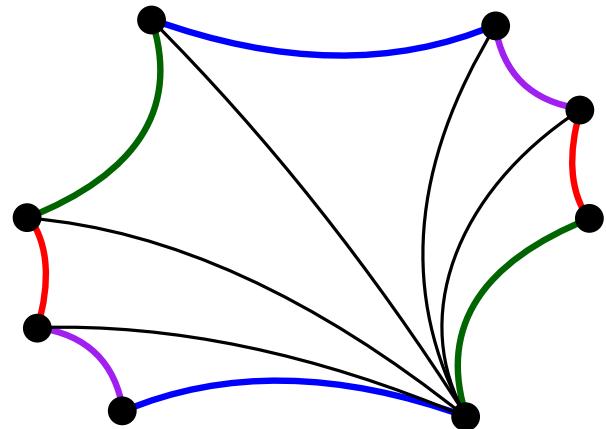


combinatorial map

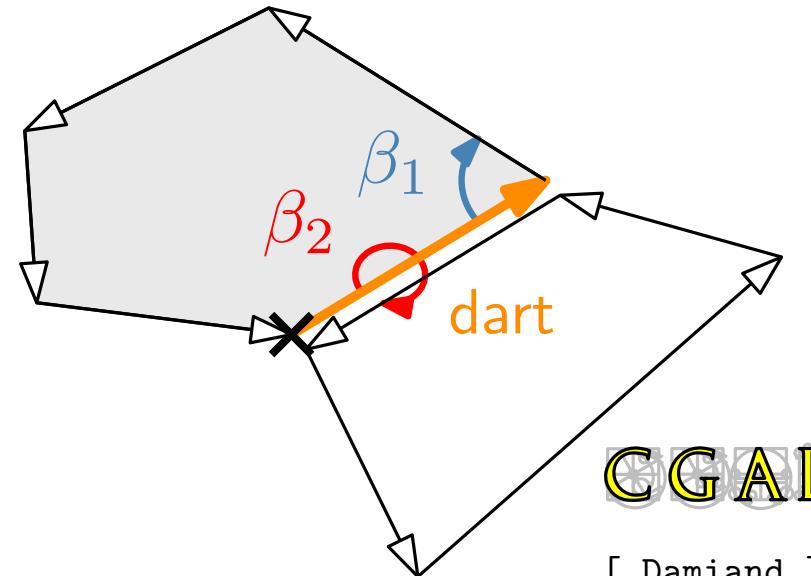


# Representation

genus 2 surface

[ Despré Dubois Kolbe T. HAL'21 ]

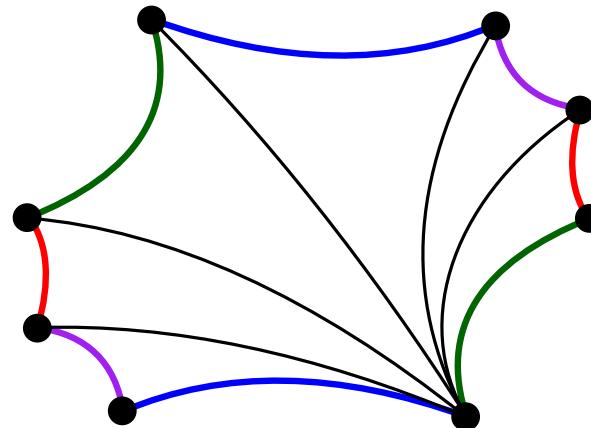


triangulation

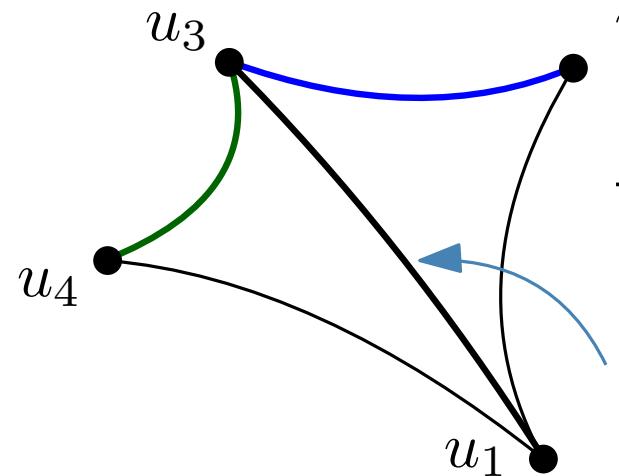

forget points  
maintain cross-ratios

$$[u_1, u_2, u_3, u_4] = \frac{(u_4 - u_2)(u_3 - u_1)}{(u_4 - u_1)(u_3 - u_2)}$$

combinatorial map

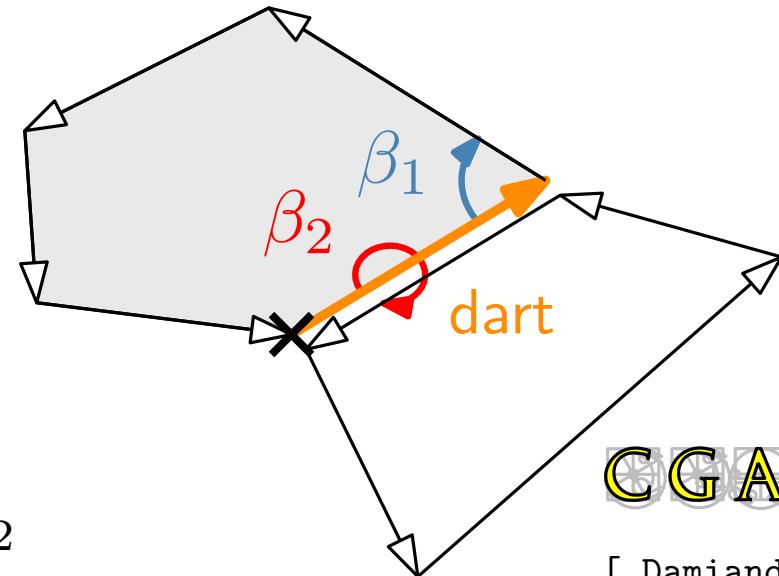

[ Damiand ]


# Representation

genus 2 surface

[ Despré Dubois Kolbe T. HAL'21 ]

Practical issue

high degree algebraic numbers

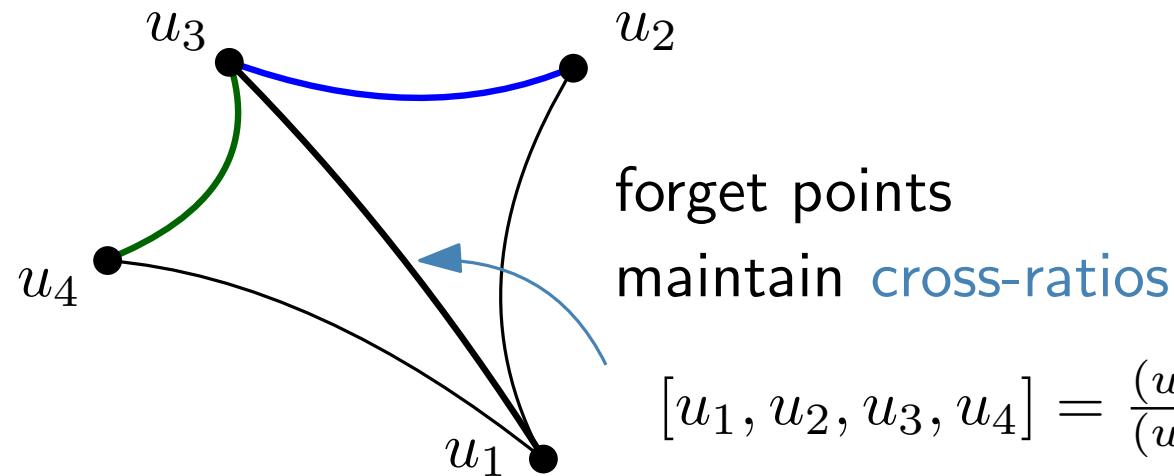

# Representation

genus 2 surface

[ Despré Dubois Kolbe T. HAL'21 ]

Practical issue

high degree algebraic numbers

Density result

Given: admissible  $(z_0, z_1, z_2, z_3)$  and  $\varepsilon > 0$

$\exists$  rational admissible  $(\mathbf{z}_0, \mathbf{z}_1, \mathbf{z}_2, \mathbf{z}_3)$

$\forall k, \mathbf{z}_k \in B(z_k, \varepsilon)$

# Dependence on diameter

surface  $S$ ,  $n$  points, triangulation  $T$  [ Despré Dubois Kolbe T. HAL'21 ]  
 $\leq C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

need triangulations with large diameter

 use Dehn twists


# Dependence on diameter

surface  $S$ ,  $n$  points, triangulation  $T$   
 $\leq C_{metric} \cdot D(T)^{6g-4} \cdot n^2$  flips to the Delaunay triangulation

[ Despré Dubois Kolbe T. HAL'21 ]

need triangulations with large diameter

use Dehn twists along side pairings

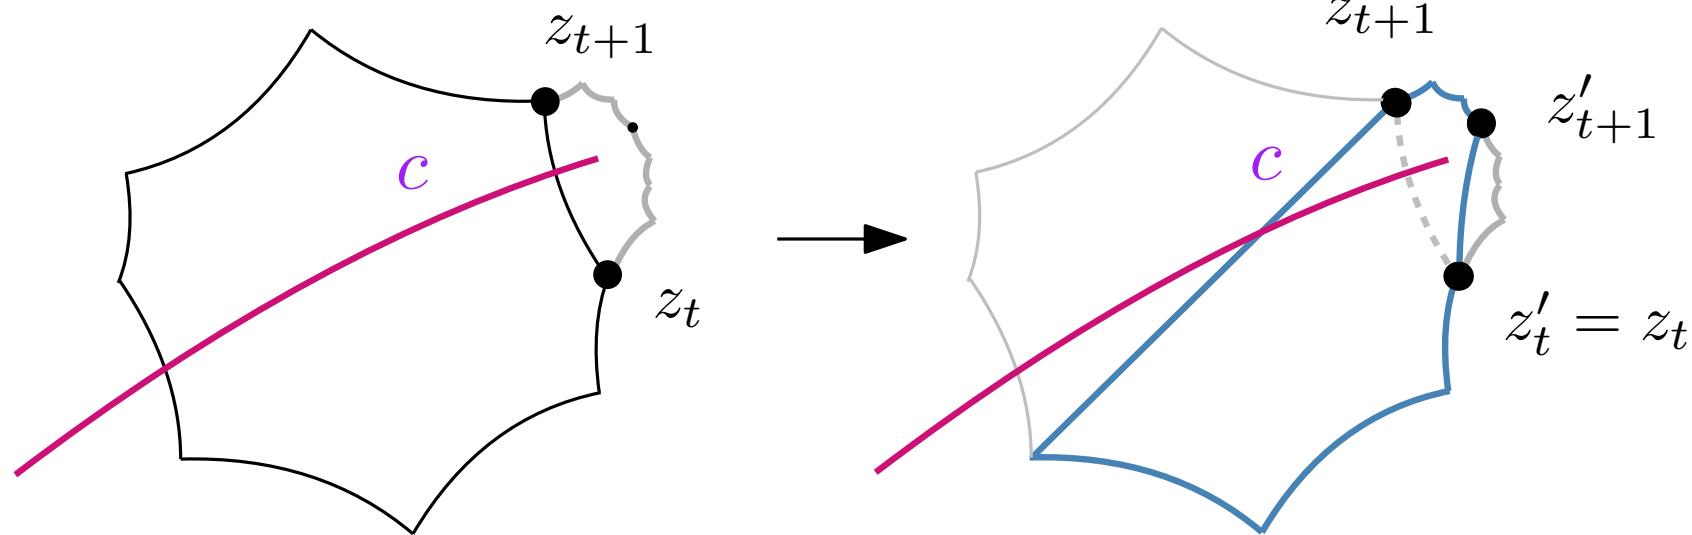

same surface, larger diameter

# Experiments

[ Despré Dubois Kolbe T. HAL'21 ]

2 types

Power sequences of twists

Random sequences of twists


on a large number of octagons

# Experiments

*power*

number of flips

[ Despré Dubois Kolbe T. HAL'21 ]

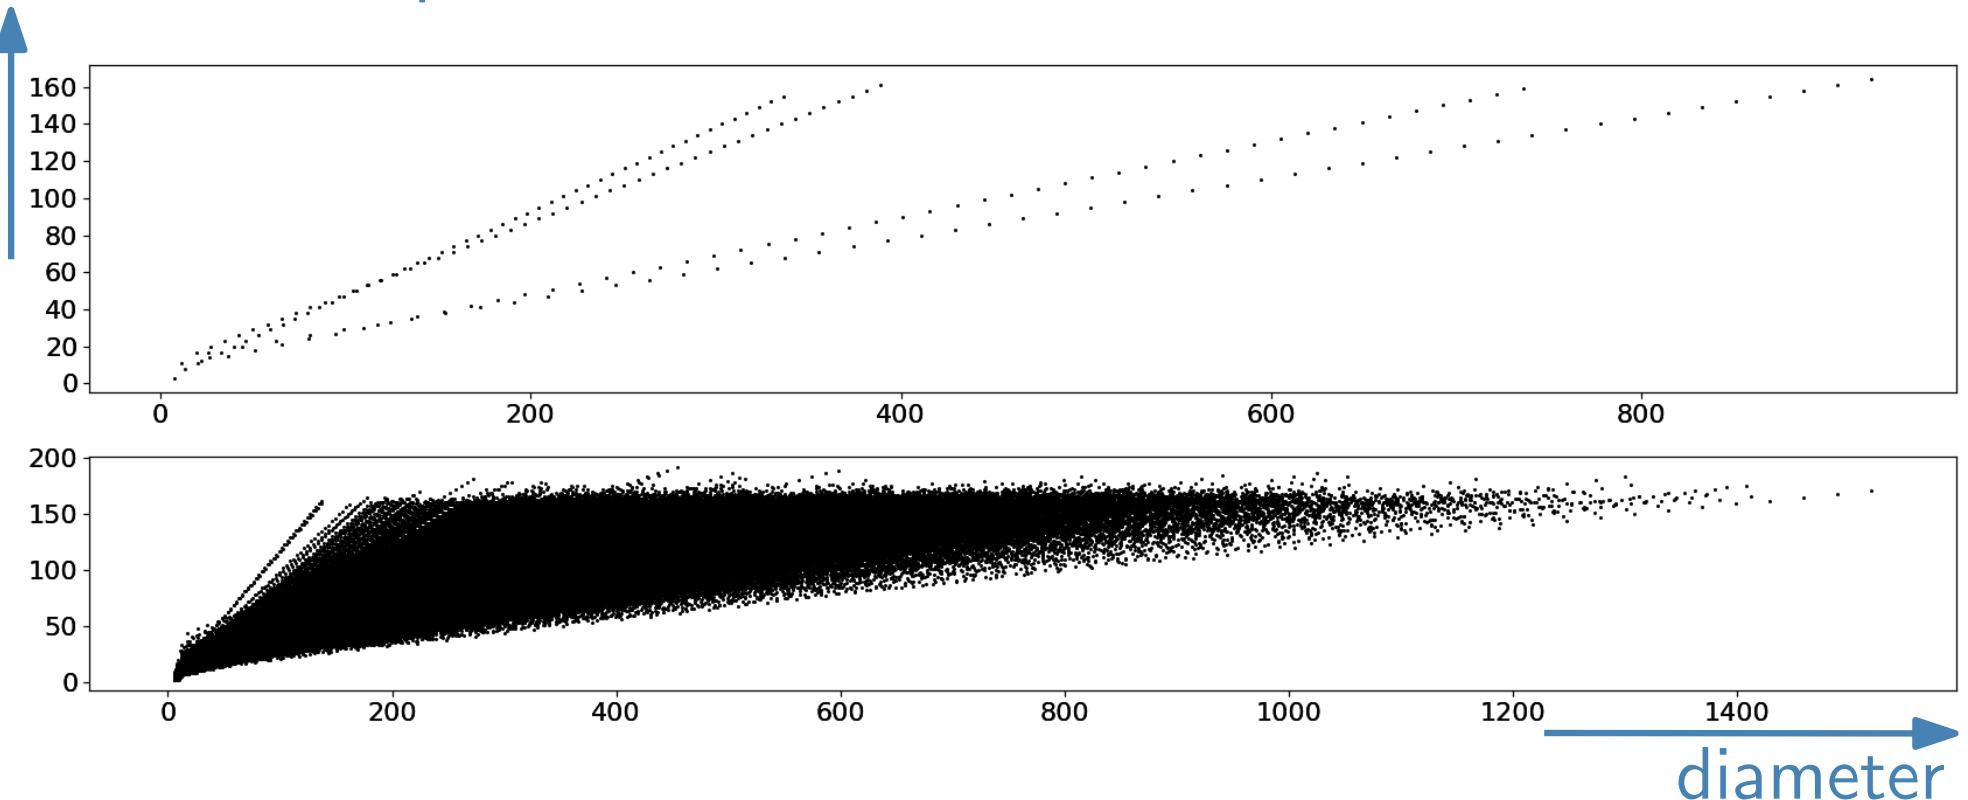

*linear behavior:*

flips untwist the triangulation


by a constant number of flips per iteration of the twist

# Experiments

*random*

number of flips

[ Despré Dubois Kolbe T. HAL'21 ]

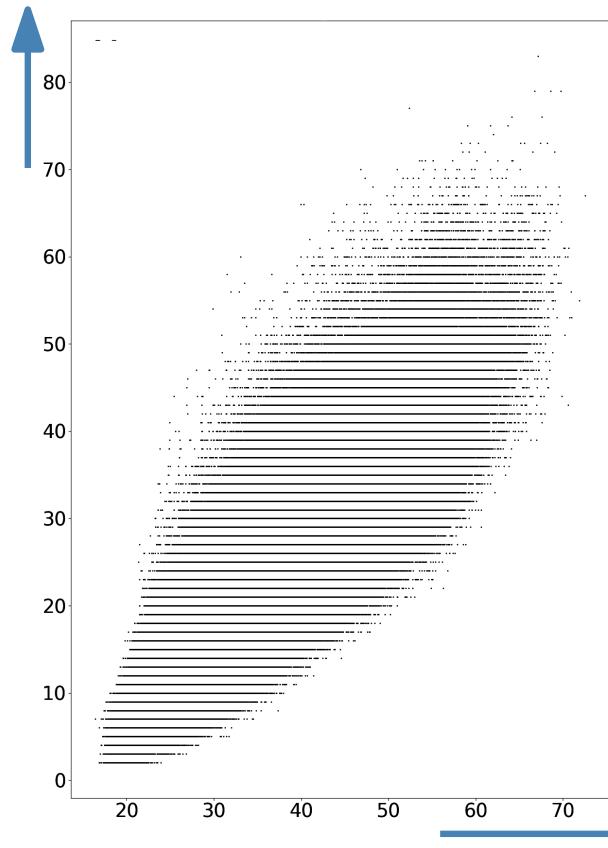

logarithmic behavior

$$10 \ln(D)$$


maximum diameter  $\simeq 1500$

# Experiments

*random*

number of flips

[ Despré Dubois Kolbe T. HAL'21 ]

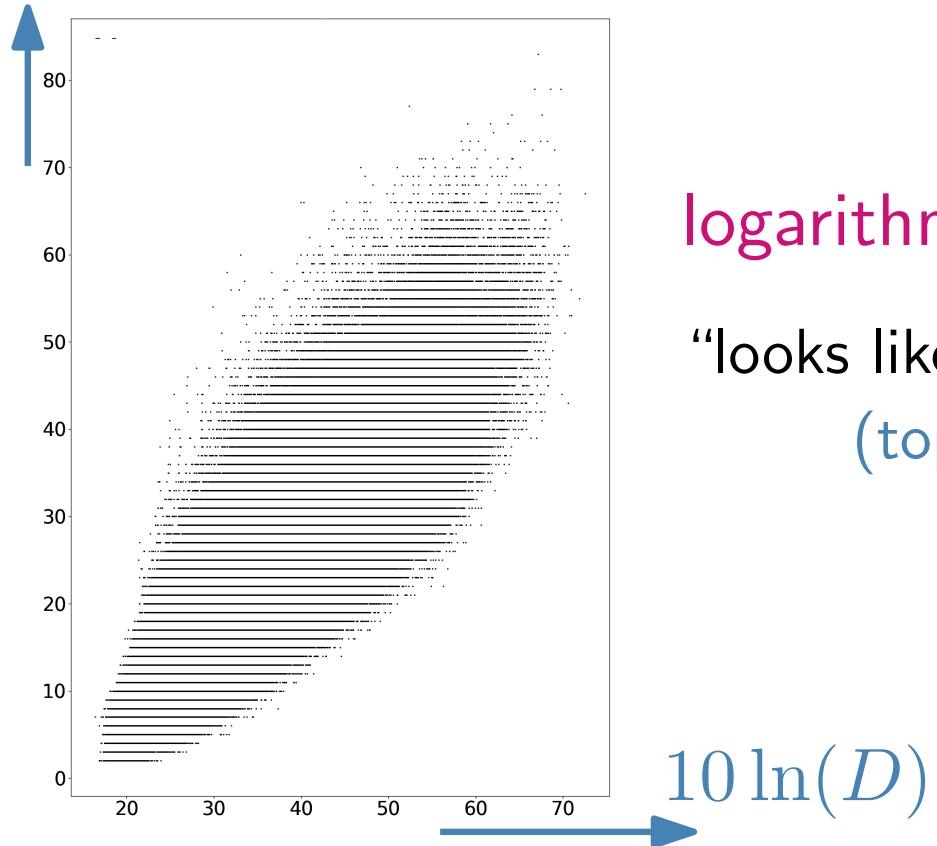

logarithmic behavior

"looks like" M. Bell's results  
(topological triangulations)

maximum diameter  $\simeq 1500$

# Questions

$S_g$  topological surface

$Mod(S_g)$  = mapping class group  
= set of homeomorphisms (up to isotopy) of  $S_g$

# Questions

$S_g$  topological surface

$Mod(S_g)$  = mapping class group  
= set of homeomorphisms (up to isotopy) of  $S_g$

[ Disarlo Parlier T.AMS'19 ]

Flip graph quasi isometric to  $Mod(S_g)$

# Questions

$S_g$  topological surface

$Mod(S_g)$  = mapping class group  
= set of homeomorphisms (up to isotopy) of  $S_g$

[ Thurston ]

reducible: fix at least one curve

pseudo-Anosov (hyperbolic)

periodic (finite order)

# Questions


$S_g$  topological surface

$Mod(S_g)$  = mapping class group  
= set of homeomorphisms (up to isotopy) of  $S_g$


[ Thurston ]

reducible: fix at least one curve

Dehn twists

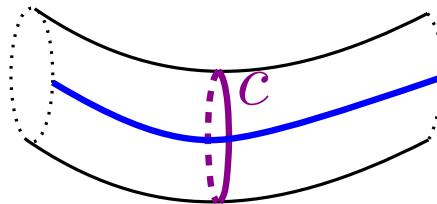

asymptotically  
add a constant to the length

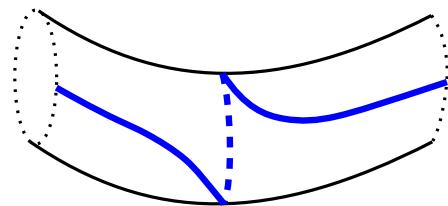

pseudo-Anosov (hyperbolic)

multiply the length by a constant

periodic (finite order)

# Questions


$S_g$  topological surface

$Mod(S_g)$  = mapping class group  
= set of homeomorphisms (up to isotopy) of  $S_g$

$Mod(S_g)$  generated by a finite set of

Dehn twists

[ Farb Margalit '12 ]

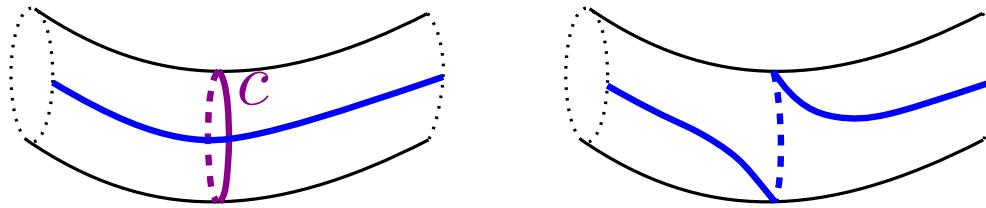

random composition  random walk in  $Mod(S_g)$

pseudo-Anosov with asymptotic probability 1

[ Maher Duke '11 ]

# Questions

$S_g$  topological surface

$Mod(S_g)$  = mapping class group  
= set of homeomorphisms (up to isotopy) of  $S_g$

[ Bell DCG'21]

effect on the flip graph of topological triangulations  
a pseudo-Anosov or a power of a Dehn twist  
reduces the **number of crossings** with a **fixed** curve

different problem here

**unknown goal (Delaunay)**

how far from the goal?

homotopy class of goal edges?

# Questions

*Complexity*

surface  $S$ ,  $n$  points, triangulation  $T$

[ Despré Dubois Kolbe T. HAL'21 ]

# flips to the Delaunay triangulation?

On our experiments ( $g = 2$ )

$$\leq C_{metric} \cdot D(T) \cdot n^2$$

average (?)   $\log(D(T))$

# Questions

*Complexity*

surface  $S$ ,  $n$  points, triangulation  $T$

[ Despré Dubois Kolbe T. HAL'21 ]

# flips to the Delaunay triangulation?

On our experiments ( $g = 2$ )

$$\leq C_{metric} \cdot D(T) \cdot n^2$$

average (?)   $\log(D(T))$

so... ?

# Questions

*Complexity*

surface  $S$ ,  $n$  points, triangulation  $T$

[ Despré Dubois Kolbe T. HAL'21 ]

# flips to the Delaunay triangulation?

On our experiments ( $g = 2$ )

$$\leq C_{metric} \cdot D(T) \cdot n^2$$

average (?)   $\log(D(T))$

so... ?

other input surfaces ?

Thank you !

(Slides just in case)

# History of the CGAL project

## Before CGAL, in Europe

PlaGeo, SpaGeo (Utrecht)

XYZ GeoBench (ETH Zürich)

LEDA (MPII Saarbrücken)

C++GAL  
(INRIA Sophia Antipolis)

...



Jodelet/Lépinay - CC Attribution-Share Alike 2.0 France

# History of the CGAL project

1995 - Start: Gather efforts

Academic consortium



# History of the CGAL project

1995 - Start: Gather efforts

Academic consortium

2003

Open Source project

Double-license: GPLv3+ and commercial  
new contributors

Creation of



*initially as an INRIA startup*

sells commercial licenses and pays royalties to owners  
responsible for the infrastructure  
and long-term evolutive maintenance

# Goals

## Promote research in CG

*“ make the large body of geometric algorithms developed in the field of computational geometry available for industrial applications ”*

⇒ high quality  
review process, ...

⇒ robust code

# Goals

Promote research in CG

Reward structure for implementations in academia

⇒ high quality  
review process, ...

⇒ robust code

# Becoming a CGAL user

<http://www.cgal.org>

Many platforms

Linux, MacOS, Windows  
g++, VC++, clang, . . .

# Becoming a CGAL user

<http://www.cgal.org>

Many platforms

Linux, MacOS, Windows  
g++, VC++, clang, . . .

Download from github

or use

Linux distribution (Debian, . . .)  
Mac distribution (macports, brew, . . .)

Euclidean 2D and 3D triangulations

- in Matlab
- in Python through CGAL bindings

# Becoming a CGAL user

<http://www.cgal.org>

Follow “Getting started”

**easier than ever!**

- “ Since CGAL version 5.0, CGAL is header-only by default, which means that there is no need to build CGAL before it can be used. ”
- Simple viewer

# Becoming a CGAL user

<http://www.cgal.org>

Follow “Getting started”

Read the **User manual** of your favorite package

Read, compile and run **examples**

# Becoming a CGAL user

<http://www.cgal.org>

Follow “Getting started”

Read the **User manual** of your favorite package

Read, compile and run **examples**

**Write your own code!**

looking at the **Reference manual**

Obey license GPLv3+ (or buy a commercial license)

# Becoming a CGAL user

<http://www.cgal.org>

Molecular Modeling

Particle Physics, Fluid Dynamics, Microstructures

Medical Modeling and Biophysics

Geographic Information Systems

Games

Motion Planning

Sensor Networks

Architecture, Buildings Modeling, Urban Modeling

Astronomy

2D and 3D Modelers

Mesh Generation and Surface Reconstruction

Geometry Processing

Computer Vision, Image Processing, Photogrammetry

Computational Topology and Shape Matching

Computational Geometry and Geometric Computing

# Becoming a CGAL user

some commercial users (2012)



# Becoming a CGAL user



Ipelets!

[ipe.otfried.org/](http://ipe.otfried.org/)

# Becoming a CGAL user




Ipelets!

[ipe.otfried.org/](http://ipe.otfried.org/)

Generators

e.g. 200 points in a disk

$\mathbb{R}^2$

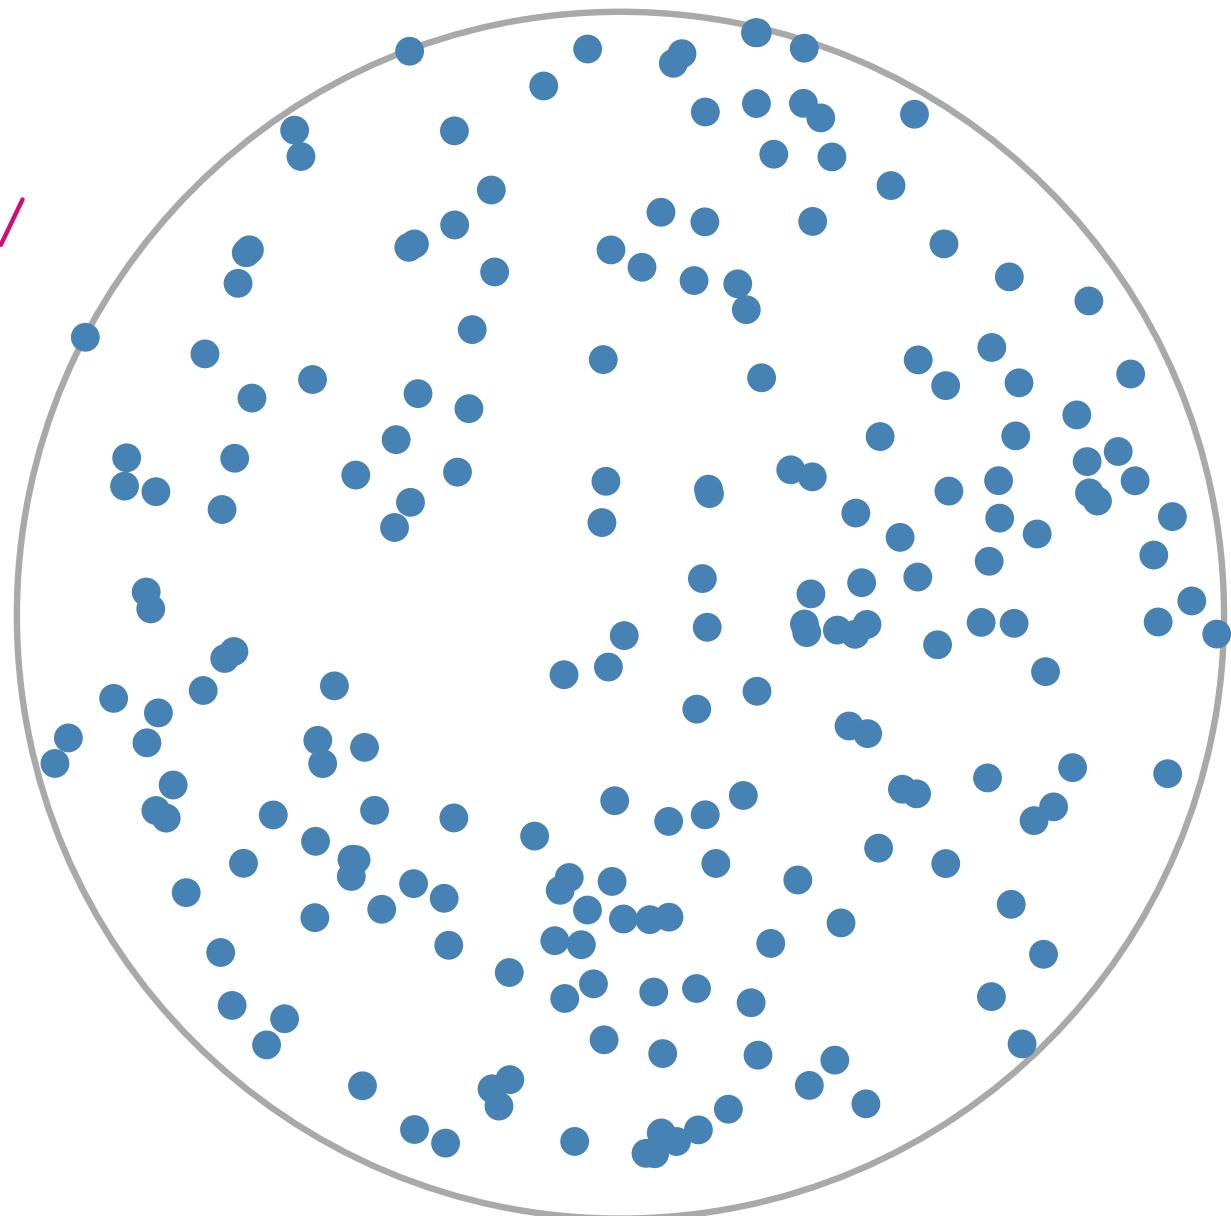

# Becoming a CGAL user



Ipelets!

[ipe.otfried.org/](http://ipe.otfried.org/)


Generators

e.g. 200 points in a disk

$\mathbb{R}^2$

“Diagrams”

→ Voronoi

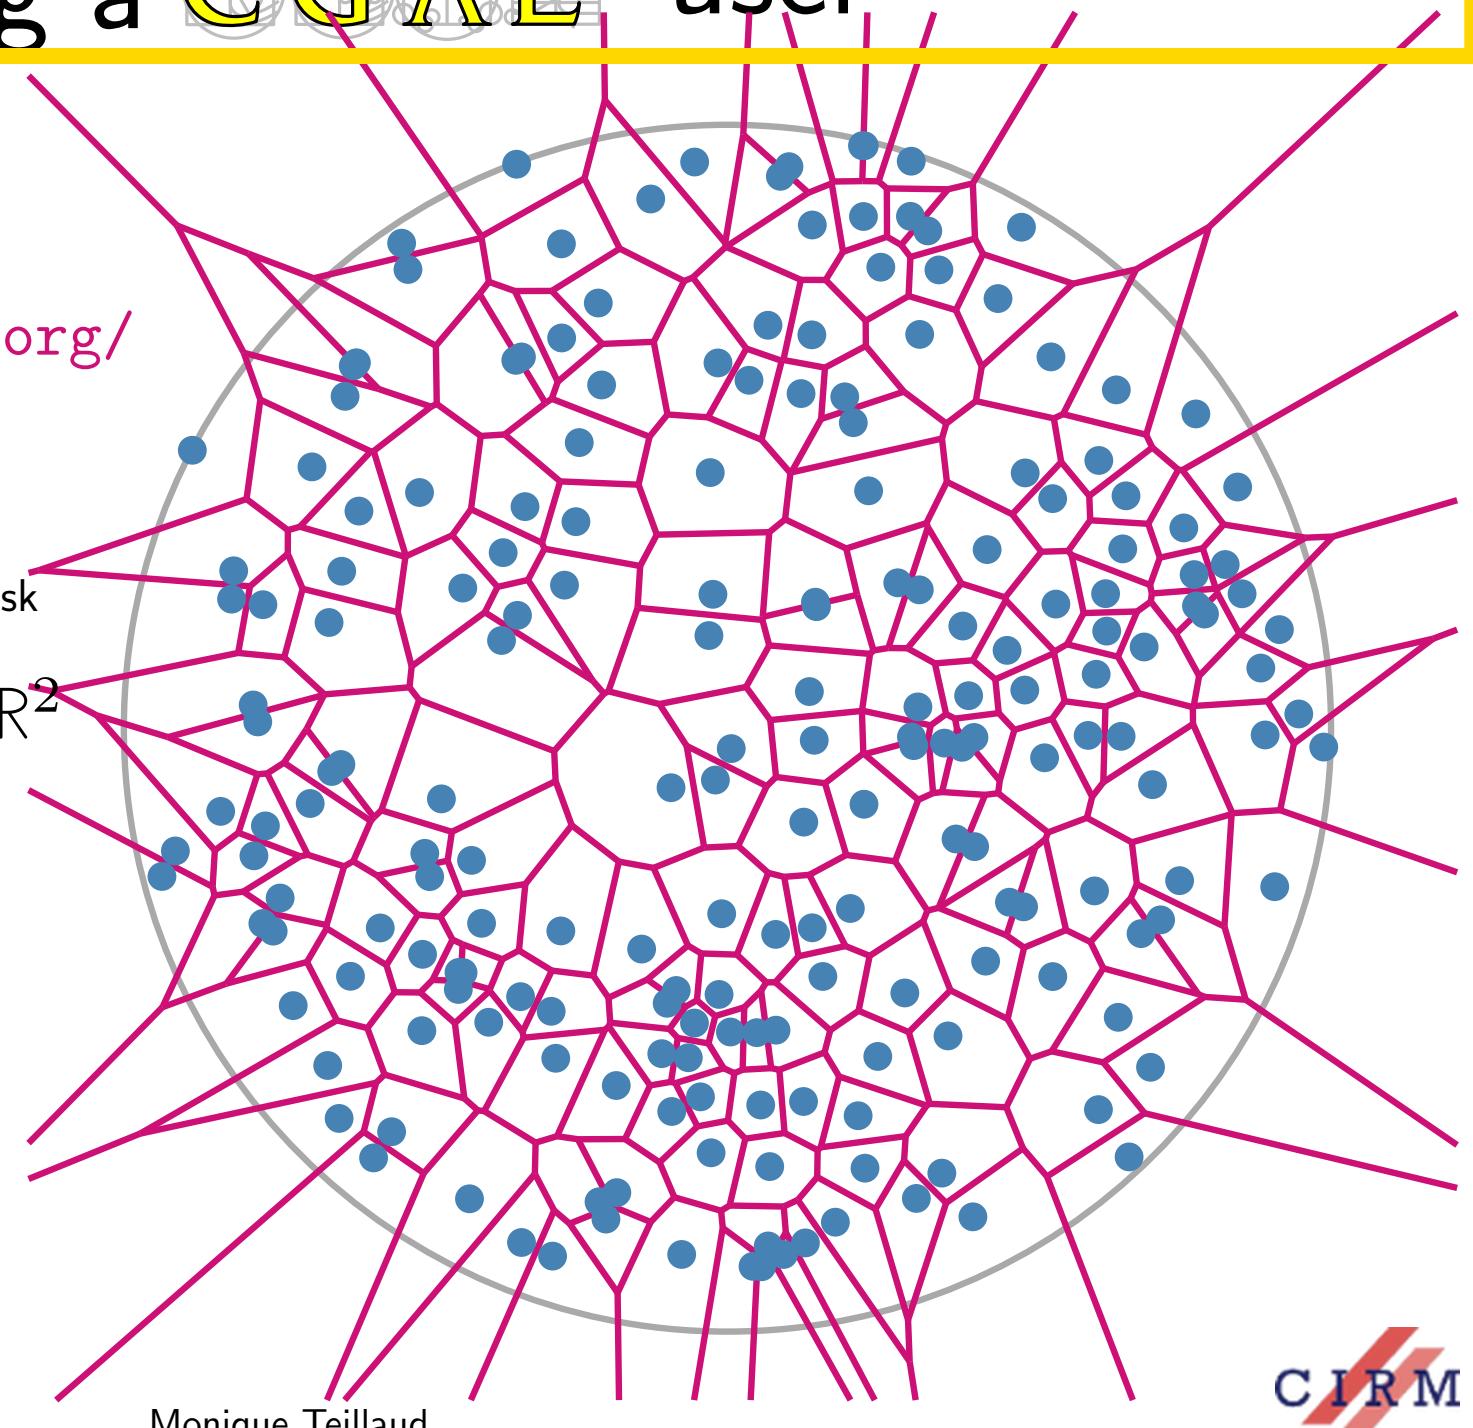

Monique Teillaud

# Becoming a CGAL user



Ipelets!

[ipe.otfried.org/](http://ipe.otfried.org/)

Generators

e.g. 200 points in a disk

$\mathbb{R}^2$

“Triangulations”  
→ Delaunay

