



**HAL**  
open science

## Voltage-stepping schemes for the simulation of spiking neural networks

Gang Zheng, Arnaud Tonnelier, Dominique Martinez

► **To cite this version:**

Gang Zheng, Arnaud Tonnelier, Dominique Martinez. Voltage-stepping schemes for the simulation of spiking neural networks. 2007. inria-00189386v1

**HAL Id: inria-00189386**

**<https://inria.hal.science/inria-00189386v1>**

Preprint submitted on 20 Nov 2007 (v1), last revised 11 Jun 2009 (v4)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Voltage-stepping schemes for the simulation of spiking neural networks

**G. Zheng<sup>\*1</sup>, A. Tonnelier\*, D. Martinez\*\***

*\*INRIA, Inovalée 655 Avenue de l'Europe Montbonnot 38334 Saint Ismier France, {Gang.Zheng, Arnaud.Tonnelier}@inrialpes.fr*

*\*\*LORIA, Campus Scientifique, B.P. 239, 54 506 Vandoeuvre-lès-Nancy, France, Dominique.Martinez@loria.fr*

## Abstract

The numerical simulation of spiking neural networks requires particular attention. On the one hand, time-stepping methods are generic but they hardly reproduce accurately the short-time scale fluctuations of spiking neurons and need specific treatments to avoid the errors associated with the discontinuities of integrate-and-fire models. On the other hand, event-driven methods are exact but restricted to a limited class of models. We present here a voltage-stepping scheme that combines the advantages of these two approaches and consists of a discretization of the voltage state-space. The numerical simulation is reduced to a *local* event-driven method that induces an implicit activity-dependent time-stepping scheme: long time-steps are used when the neuron is slowly varying whereas small time-steps are used in periods of intense activity. Our method accurately approximates the neuronal dynamics and we show analytically that such a scheme leads to a high-order algorithm. We illustrate the voltage-stepping method on nonlinear integrate-and-fire models. In this situation, our method consists of an approximation of the original model by a voltage-dependent integrate-and-fire. We compare our method with time-stepping schemes of Runge-Kutta type.

**Keywords:** *Voltage-stepping; Time-stepping; Spiking neural networks*

---

<sup>1</sup>Corresponding Author, Tel: 0033 4 76 61 53 50, Fax: 0033 4 76 61 55 63

# 1 Introduction

Neuronal information processing involves action potentials, or spikes. Recent findings in neuroscience emphasize the importance of the precise timing of spikes. In biological systems where the processing-speed is required to be high, the timings of spikes are very precise and reliable (Mainen and Sejnowski, 1995; VanRullen *et al.*, 2005). In many specialized systems the precision of spikes has a fundamental role such as odor recognition (Latham *et al.*, 2000) or source detection (Carr and Konishi, 1990; AgmonSnir *et al.*, 1998). Submillisecond precision of spike timing have been recorded (Bair and Koch, 1996; Ariav *et al.*, 2003) and small differences in the precision of synaptic events have severe impact on the plasticity of synapses.

Numerical simulations of neural networks are commonly used to explore the spike coding paradigm. It is thus crucial to have accurate and efficient schemes to simulate spiking neural networks. Different strategies have been developed for the simulation of spiking neural networks: event-driven schemes where the timings of spikes are calculated exactly and time-stepping methods that approximate the membrane voltage of neurons on a discretized time (see (Brette *et al.*, 2007) for a review of simulation environments). In pure event-driven strategies the spike timings are analytically given and are calculated with an arbitrary precision (up to the machine precision). This scheme allows an exact simulation where no spike is missed. This method has become increasingly popular (Mattia and Giudice, 2000; Makino, 2003; Rochel and Martinez, 2003; Brette, 2006; Brette, 2007; Rudolph and Destexhe, 2006; Tonnelier *et al.*, 2007). However only a limited class of simplified neuron models of integrate-and-fire type is amenable to exact stimulations. Time-stepping schemes are generic since they can be applied to any models. Classical integration schemes of Runge-Kutta type have to be modified to properly handle the discontinuities of integrate-and-fire neuron dynamics generated by the resetting and the synaptic events (Hansel *et al.*, 1998; Shelley and Tao, 2001). However when the membrane potential crosses threshold twice during one time step, the spike event may be missed. Due to the discontinuous nature of integrate-and-fire network, a failure to detect a spike may cause dramatic changes on the behavior of the system and artificial dynamical states may be created if the time step is badly chosen (Hansel *et al.*, 1998). Moreover a fundamental limitation on the accuracy of these methods is imposed by the smoothness of the postsynaptic potentials (Shelley and Tao, 2001).

In this paper we define a generic scheme for the simulation of neural networks based on a voltage-space discretization that we call voltage-stepping

scheme. This scheme retains the advantage of the activity-dependent computational cost of event-driven strategies while allowing generic simulation of any neural models. The greatest asset is to define an implicit and adaptive time-discretization for each neuron that depends on its own activity. A neuron that evolves slowly allows long time step and has a low computational cost whereas small time steps are required for fast varying neuron. Here we show that this implicit and variable time-stepping scheme allows high-order integration methods. Since recent efforts have been made on the numerical simulations of integrate-and-fire networks (Brette, 2006; Brette, 2007; Brette *et al.*, 2007; Ros *et al.*, 2006; Morrison *et al.*, 2007; Rangan and Cai, 2007; Rudolph and Destexhe, 2006) we illustrate in the next section our method using the nonlinear integrate-and-fire models. Generalization to different classes of spiking neuron models are proposed. In section 3 we present numerical results and compare the performance of the voltage-stepping scheme with standard time-stepping integration methods.

## 2 Method

### 2.1 Voltage-stepping scheme

Consider the  $k$ th integrate-and-fire neuron in a network described by its membrane potential,  $v^k$ , that evolves according to the equation

$$C \frac{dv^k}{dt} = f(v^k) + I_0 + I_{syn}^k(t), \quad (1)$$

where  $C$  is the membrane capacitance,  $f(v)$  the nonlinear current-voltage characteristic of the membrane,  $I_0$  an external constant input current and  $I_{syn}^k$  the total synaptic input received by neuron  $k$ . A spike is triggered when  $v^k$  reaches a threshold  $v_{th}$  upon which it is instantaneously reset to  $v_r$ . Specific instances of the non-linear integrate-and-fire (NLIF) model (1) are the quadratic model (Ermentrout and Kopell, 1986), (Hansel and Mato, 2001) and the exponential model (Fourcaud-Trocmé *et al.*, 2003).

Let us consider a discretization of the voltage state-space  $V_i = [v_i, v_{i+1}]$  where  $v_i = i\Delta v$  and  $\Delta v$  is a fixed voltage-step. The basic idea of our method is to approximate (1) by the voltage-dependent integrate-and-fire neuron

$$C \frac{dv}{dt} = -g_i(v - E_i) + I_0 + I_{syn}(t) \quad (2)$$

for  $v \in V_i$ . For clarity, the subscript  $k$  has been dropped.  $g_i$  is a voltage-dependent conductance and  $E_i$  is a voltage-dependent resting potential. Pa-

rameters  $g_i$  and  $E_i$  are such that the linear function  $f_{\Delta v}(v) = -g_i(v - E_i)$  approximates the non-linear characteristic  $f(v)$  on  $V_i$ . For instance, using the approximation of  $f$  by the linear interpolation function at the boundaries of  $V_i$  gives

$$g_i = -\frac{f(v_{i+1}) - f(v_i)}{\Delta v}$$

$$E_i = v_i + \frac{f(v_i)}{g_i}$$

In this case the voltage-dependence of the approximated IF parameters is piecewise linear.

Note that we keep the same notation for the membrane potential and its approximation (if ambiguity we will note  $v_{\Delta v}$  the approximation of  $v$ ). We note  $V_{reset} = [v_r, v_r + \Delta v[$  and  $V_{th} = [v_{th}, v_{th} + \Delta v[$  the resetting and threshold intervals. Let  $t_0$  the time at which the membrane potential of the neuron reaches  $V_i$  ( $v(t_0) = i\Delta v$ ) and assume that the neuron stays in  $V_i$  during a non-empty time interval. Integrating (2) between  $t_0$  and  $t$  yields

$$v(t) = i\Delta v e^{-(t-t_0)/\tau_i} + (E_i + I_0/g_i)(1 - e^{-(t-t_0)/\tau_i})$$

$$+ \int_{t_0}^t e^{-(t-y)/\tau_i} \frac{I_{syn}(y)}{C} dy \quad (3)$$

where  $\tau_i = C/g_i$  is the voltage-dependent membrane time constant. The synaptic current  $I_{syn}$  is given by

$$I_{syn}(t) = w \sum_{t_{pre}^f} \alpha(t - t_{pre}^f) \quad (4)$$

where the  $t_{pre}^f$  are the firing times of the presynaptic neurons,  $w$  represents the weight of the synapse,  $\alpha(t) = 1/\tau_s e^{-t/\tau_s} H(t)$  or  $\alpha(t) = 1/(\tau_1 - \tau_2)(e^{-t/\tau_1} - e^{-t/\tau_2})H(t)$  where  $H$  is the Heaviside step function with  $H(t) = 1$  if  $t > 0$  and  $H(t) = 0$  else. Since  $I_{syn}$  is a combination of exponential functions the integral in (3) can be computed analytically and an event-driven method can be used to calculate the next *exit* time,  $t_1$ . Three possibilities occur: (i) the membrane potential goes back to its value at time  $t_0$ , i.e.  $v(t_1) = v_i$  (ii) the membrane potential reaches the interval  $V_{i+1}$ , i.e.  $v(t_1) = v_{i+1}$  and (iii) the neuron is at rest, i.e.  $t_1 = +\infty$ . If the spiking interval  $V_{th}$  is reached, then a firing event occurs,  $t^f = t_1$  and the neuron is reset. The event-driven method is applied on a voltage-step and therefore

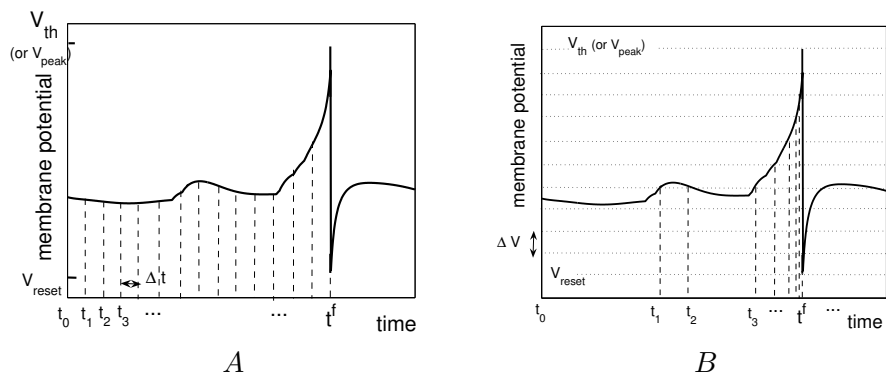


Figure 1: Schematic view of the numerical integration of an integrate-and-fire neuron using (A) a time-stepping scheme and (B) a voltage-stepping scheme. The time stepping method with a fixed time step  $\Delta t$  requires calculations at each step independently of the membrane potential fluctuations. The voltage-stepping approach induces an adaptive time-step leading to a precise approximation of the firing time.

our method may be seen as a *local* event-driven method.

Let  $(t_k)_{k \in N}$  be the sequence of times at which the successive intervals  $(V_i)_{i \in I}$  are reached. This sequence defines the integration points of an implicit variable time-step method. The numerical integration is reduced to the detection of the occurrence of discrete events that is achieved using symbolic computation (when it is possible) or a Newton-Raphson algorithm (that is very efficient and only few iterations are needed). On a time-step, a symbolic expression of the membrane potential is given by (3). The result is schematically illustrated Fig. 1B and compared with a fixed-step method (Fig. 1A). Advantages are clearly seen. At the neuron level, when the membrane potential is slowly varying the corresponding time-steps are large whereas small time-steps are used when the membrane potential strongly fluctuates. Near the threshold, due to the nonlinear voltage-dependent current, the membrane voltage changes quickly leading to short time steps to accurately follow the trajectory. Note that the approximated solution has a symbolic expression given by (3). At the network level, voltage stepping method presents interesting properties. Firstly, the computational cost of the simulation is significantly reduced when the activity of the network is sparse. Serial activation of areas, like propagating wave or synfire activ-

ity, frequently occur in neuronal tissue, notably the cortex, the thalamus and hippocampus. Neurons that participate to the wave activity are excited while the others are at rest or poorly activated. Time steps are used to update excited neurons whereas no computation is done for the others. Secondly, the spike-spike interactions <sup>2</sup> which is usually ignored in modified Runge-Kutta scheme (Rangan and Cai, 2007) is naturally handled in our local event-driven strategy. Moreover unlike standard time-stepping scheme, the implicit time-discretization defined by our technique is different for each neuron in the network and only depends on its activity.

The basic idea of the voltage-stepping approach is to define a local variable-step integrator using an approximation of the nonlinear characteristic  $f$  by a function that is amenable to an event-driven scheme. The piecewise linear interpolation of the nonlinear current  $f(v)$  leads to an approximation of the original model by a voltage-dependent linear integrate-and-fire (LIF) neuron (2). As  $v$  evolves, parameters of the LIF change. This approach is reminiscent to the piecewise linear caricature of neuron models (McKean, 1970; Tonneier and Gerstner, 2003). In general, as we show in the Appendix, the voltage-dependent LIF, defined using an interpolation of the nonlinear currents at the boundaries of  $V_i$ , leads to a numerical integration with an accuracy of  $O(\Delta v^2)$ . A clever choice of the interpolation points within a voltage-step leads to an error of order  $O(\Delta v^4)$ . However it should be noted (see Appendix) that the fourth order accuracy is only reached for the simulation of one-dimensional neuron models. A lower order scheme ( $O(\Delta v)$ ) is obtained using a voltage-dependent non-leaky IF model ( $f_{\Delta v}$  is piecewise constant). Similarly, a more accurate scheme is obtained using a piecewise quadratic approximation and the corresponding approximated model is a voltage-dependent QIF model.

## 2.2 Generalization

The voltage-stepping strategy is not limited to the simulation of one dimensional integrate-and-fire neurons. Below we sketch how to apply this technique for different widely used neural models.

### A. Integrate-and-fire neurons with adaptation.

An improvement of the NLIF model is achieved by adding a second variable

---

<sup>2</sup>interactions between spikes that are in the same time interval

(Izhikevich, 2003; Brette and Gerstner, 2005)

$$C \frac{dv}{dt} = f(v) - u + I_0 + I_{syn}(t) \quad (5)$$

$$\frac{du}{dt} = a(bv - u) \quad (6)$$

where  $u$  represents an adaptation current. At each firing time, the variable  $u$  is increased by an amount  $c$  ( $u \leftarrow u + c$ ). As previously, we derive a voltage-dependent LIF using a linear interpolation of  $f$  on  $V_i$ . The system is now two-dimensional but since the equations are linear on a voltage-step the approximated model can be solved analytically in this interval, then the local event-driven scheme is similarly applied in this case. Note that (i) nonlinear currents can be added in the adaptation equation provided that a piecewise linear approximation is used. (ii) Without resetting on  $v$  and without spike-triggered-adaptation (5)-(6) has the FitzHugh-Nagumo model as a special instance.

### B. Conductance based synaptic currents.

More realistic descriptions of synaptic current incorporate conductance changes

$$I_{syn}(t) = g_{syn}(v_e - v) \sum_{t_{pre}^f} \alpha(t - t_{pre}^f) \quad (7)$$

where  $v_e$  is a reversal potential. Recently the event-driven simulation of LIF models has been extended to synaptic conductances (Brette, 2006). Thus we can adapt the voltage-stepping method to neural models with synaptic conductances. The computational cost of the simulation can be reduced using the following approximation  $v_e - v = v_e - v_i$  on the voltage-step  $V_i = [v_i, v_i + \Delta v]$  but we introduce an error of order  $\Delta V$ . To restore the accuracy of the scheme, we rewrite equation as

$$\begin{aligned} C \frac{dv}{dt} &= f(v) + I_0 + g(v_e - v) \\ \frac{dg}{dt} &= -g/\tau_s \end{aligned}$$

where an incoming spike triggers an instantaneous additive change  $g \rightarrow g + w$ . Nonlinearities appear both in the characteristic,  $f$ , and in the conductance,  $gv$ . To achieve a local event-driven scheme, it is necessary to discretize the state-space  $(v, g)$ . The method is similar to conductance-based models and is detailed below.

### C. Hodgkin-Huxley type neurons.



Our approach is not limited to integrate-and-fire neuron models and can be used to simulate detailed neuron models including spike-description such as Hodgkin-Huxley type models. For clarity we consider the Morris-Lecar model

$$\begin{aligned} C \frac{dv}{dt} &= \bar{g}_{Ca} m_\infty(v)(v_{Ca} - v) + \bar{g}_K u(v_K - v) + \bar{g}_l(v_l - v) + I \\ \frac{du}{dt} &= \frac{u_\infty(v) - u}{\tau(v)} \end{aligned}$$

that describes an instantaneously responding voltage-sensitive Ca<sup>2+</sup> conductance for excitation and a delayed voltage-dependent K<sup>+</sup> conductance for recovery (see (Rinzel and Ermentrout, 1998) for a complete definition). Since the nonlinearity involves both  $v$  and  $u$ , it is necessary to discretize the entire state space  $(v, u)$  (the term state-stepping is more appropriate in this case). The state space is partitioned in subdomains where the function is approximated by a linear system  $F_i(X) = A_i X + b_i$  where  $X = (v, u)$ . The shape of subdomains is triangular and a simplicial partition (i.e. triangulation based on a rectangular partition) can be used (Girard, 2002). In each triangle the approximated neuron model has a symbolic expression from which we calculate the switching time, i.e. the time at which a new triangle is reached. In Fig. 2 we show the result of the numerical integration. The method performs like an adaptive time-stepping scheme. The neuron is updated frequently when one state variable has large variation, specially near the threshold and at the peak of the spike where the membrane voltage present abrupt polarization. Note that the integration points are not only determined by the membrane potential but also by the recovery variable. The fastest changing variable imposes the time-steps of the neuron. The algorithm can be extended to general n-dimensional conductance-based neuron using a simplicial subdivision of the neuron state-space and interpolating the vector field at the vertices of the simplex.

### 2.3 Algorithm

Each neuron maintains a mode (i.e. its location in the discretized voltage space) and an exit time. The exit time is a spike timing if the neuron reaches the threshold interval.

- Initialization: We compute the events, i.e. the exit-times of each neuron (including spike timings) and insert the events in a priority queue.

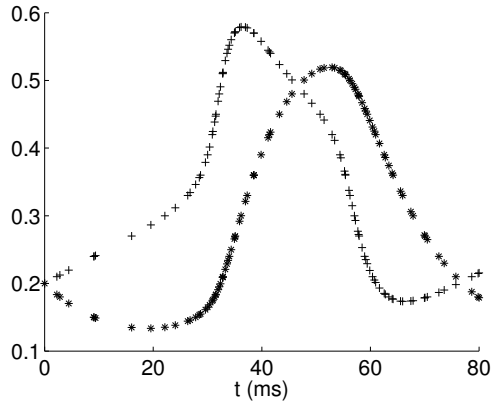


Figure 2: Numerical simulation of the Morris-Lecar model with a state-stepping algorithm. We simulate the model over one period of its oscillatory regime. Crosses are the membrane potential and stars are for the potassium channel. We use a voltage-step of  $6mV$  and a step of  $0.03$  for the recovery variable. For convenience the membrane potential has been rescaled.

- Process events. Extract the event with the lowest timing. Note that local events do not have repercussions on the overall dynamics of the network and only require a local updating of the corresponding neuron state and a computation of the new exit time. For a spike timing, the neuron is reset and the event is propagated, i.e. the exit-time of the target neurons are updated.

Optimization of the code can be obtained using precalculated tables of the exit-time in each voltage-step without input. If spikes are received, these timings can be used as an initial guess for the iterative search algorithm.

## 2.4 Link with previous works

Traditional event-driven methods are in fact spike-driven schemes; the neuron state variables are updated when a spike is received or emitted. The voltage-stepping technique produces new events: the events are not only firing times or spike reception but also the times of mode switching, i.e. when the neuron reaches a new voltage interval. The number of events is increased and thus the computational cost is increased. Local events do not have a repercussion on the overall activity of the network and are only used

to update the corresponding neuron parameters. When the cost of managing events become prohibitive, it is possible to combine the event-driven simulation with a time window that processes several spikes over one step (Morrison *et al.*, 2007). However like every time-step methods some spikes may be missed and the order of the method is reduced.

The voltage-stepping scheme combines event-driven and discretization techniques. A method based on a combination of event-driven and time-driven schemes has been recently developed but is limited to the linear IF neuron and does not take the advantage of the sparseness of neural activity (Morrison *et al.*, 2007). To simulate more realistic neural models an alternative approach has been proposed by (Ros *et al.*, 2006) where an event-driven scheme that uses lookup tables is developed. The simulation is reduced to a consultation of a precalculated table of function values. This scheme combines the advantages of the use of realistic neural models and high-speed simulations but becomes cumbersome to manage when a good accuracy is required for the numerical simulation.

Adaptive time-stepping schemes provide short time-step integration for active neurons and long-time step when the neuron is at rest or slightly activated. These methods have a clear advantage when the entire shape of the spike is calculated. When simulating neural networks, classical variable-step integrators fails to be efficient since the time-steps have to be independent from one neuron to another to avoid that the fastest changing neuron imposes the time-discretization for the entire network. In a recent study, (Lytton and Hines, 2005) used for each neuron an independent variable time-step integrator. A critical problem is to coordinate the local integrators and to properly handle the events. Indeed when an event arrives at a neuron at time  $t_e$  it is necessary to have all the states of the receiving neuron at time  $t_e$ . In our approach events are simply handled in an event-driven scheme. The variable time-steps induced by the voltage-stepping scheme present interesting properties: (i) by construction the threshold event lies on an integration time-step boundary. (ii) Integration points are independent, i.e. in network simulation, the time steps are different from one neuron to another. (iii) Time-steps are imposed by the voltage-trajectory and when the neuron is at rest, no step is computed. Note that the error is controlled through  $\Delta v$ .

Approximation by piecewise linear systems has become a classical tool for the global qualitative analysis of dynamical systems and has been proposed as a technique for numerical simulations (Girard, 2002). The voltage-stepping method is a variant of the hybrid computation method where the simulation is done using an approximation of the vector field (Dora *et*

*al.*, 2001). The hybrid computation requires a full discretization of the state space that appears to be prohibitive for large dynamical systems. Taking the advantage of point-like interactions between neurons this scheme could be efficiently implemented for the simulation of spiking networks. Following the hybrid-system framework (differential equations with discrete events), we interpret spiking neural networks as an hybrid system where global events are spikes and local events are mode switches. During simulation the neuron switches between modes of operation based on the value of the voltage, i.e. parameters of the model change when a mode transition is detected.

### 3 Numerical Results

To illustrate our numerical scheme we consider the quadratic integrate-and-fire (QIF) model. The QIF model includes nonlinear spike generating current and represents the normal form of any type I neuron model near the bifurcation (Ermentrout, 1996; Ermentrout and Kopell, 1986). It is widely used as a realistic neural model (Brunel and Latham, 2003; Fourcaud-Trocme *et al.*, 2003; Hansel and Mato, 2001). The dynamics of the QIF model is described by

$$\tau \frac{dv}{dt} = v^2 + I_0 + I_{syn}(t) \quad (8)$$

where  $v$ ,  $I_0$  and  $I_{syn}$  are dimensionless membrane potential, input current and synaptic current, respectively. Parameter  $\tau$  is the membrane time constant. We treat synaptic current of the form

$$\begin{aligned} I_{syn}(t) &= w \exp(-(t - t^f)/\tau_s), \quad t \geq t^f \\ &= 0, \quad t < t^f \end{aligned} \quad (9)$$

where  $\tau_s$  is the synaptic time constant and  $w$  the synaptic weight. Numerical values of QIF neurons are taken from (Martinez, 2005), the membrane time constant is  $\tau = 0.25ms$ ,  $v_r = -0.0749$  and  $v_{th} = 0.7288$ . The synaptic time constant is  $\tau_s = 6ms$  and the synaptic strength is  $w = 5 \times 10^{-4}$ . Note that the membrane potential, in voltage unit, is obtained using the variable change  $V \leftarrow C/qv + V_0$  where  $C = 0.2nF$ ,  $q = 0.00643mS.V^{-1}$  and  $V_0 = -60.68mV$ . Therefore a factor of  $C/q = 31.1mV$  has to be applied to the voltage step  $\Delta v$  to retrieve the physical unit.

One of the goals of our numerical scheme is to simulate accurately the dynamics of spiking neurons and to investigate temporal coding properties.

Therefore we are interested in reproducing the exact timing of spikes and we use the following measure of error

$$Error = \frac{1}{N} \sum_f |t_{\text{exact}}^f - t_{\text{appro}}^f| \quad (10)$$

where  $N$  is the number of spikes,  $t_{\text{exact}}^f$  are the exact firing times (i.e. with an arbitrary precision) and  $t_{\text{appro}}^f$  are the corresponding approximated firing times that depends on  $\Delta V$  for voltage-stepping methods or  $\Delta t$  for time-stepping methods. Using (10) we implicitly assume, as a minimal requirement, that the number of spikes between the exact and the approximated spike trains does not differ. This is achieved using a sufficiently accurate numerical scheme, i.e. the steps are small enough to capture all the spikes. Therefore, the error only concerns the accuracy of individual spike timings. We have shown that the QIF model is amenable to an exact simulation (Tonnelier *et al.*, 2007) that we will use for  $t_{\text{exact}}^f$  in the error analysis. We focus on the voltage-stepping scheme with a piecewise linear approximation. Parameters of the approximated voltage-dependent LIF, using an interpolation at the boundaries of  $V_i$  (we will call VS2 scheme), are  $g_i = -\Delta v(2i + 1)$  and  $E_i = \Delta v i(i + 1)/(2i + 1)$  where  $\Delta v$  is a fixed voltage-step. We also consider the voltage-stepping scheme using a linear interpolation at gaussian abscissas (hereafter VS4 scheme). Since fixed time-step methods remain the simulation standard, we compare fixed time-step performance with our method. We examine the error of our second order scheme (VS2) and compare with the 'corresponding' second order time-stepping algorithm, the modified RK2 (the second order Runge-Kutta scheme with a linear interpolation) that is known as a second order scheme (Shelley and Tao, 2001). Since the accuracy is activity-dependent we use different networks and different input scenarios. A single test neuron is used under a constant current in both excitable and oscillatory regimes. In addition, the quality of the numerical schemes is assessed using a more realistic paradigm: *random input current*. Finally, we demonstrate the accuracy of voltage-stepping schemes by applying it to a spiking neural network.

### 3.1 Constant current input

We ignore the synaptic current,  $I_{syn} = 0$ , and consider a QIF neuron with a constant external driving current  $I_0$ . For  $I_0 < 0$  there is a pair of equilibrium points. One is stable and the other is an unstable fixed point above which a spike is emitted. The neuron is said to be excitable. For  $I_0 > 0$  the neuron

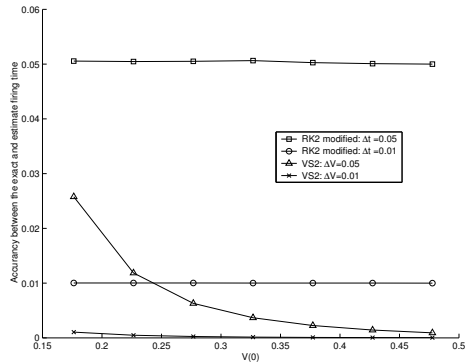


Figure 3: Firing time  $t^f$  of the QIF neuron as a function of  $v(0)$  for different algorithms. Solid line is the exact value of the firing time, x's are the modified RK2 with  $\Delta t = 0.05$ , circles, squares and triangles are VS2 with  $\Delta v = 0.05$ ,  $\Delta v = 0.01$ ,  $\Delta v = 0.005$ , respectively. The enlarged figures show the firing time for small and large superthreshold initial conditions.

oscillates. We examine the error in both regime by calculating the error on the first spike time and the error on the frequency in the periodic firing regimes.

Let  $I_0 < 0$  and consider an initial condition  $v(0)$  slightly above the unstable fixed point  $\sqrt{-I_0}$ . Without further input, the membrane potential is given by

$$v(t) = -\sqrt{-I_0} \coth(\sqrt{-I_0}t/\tau - \operatorname{atanh}(\sqrt{-I_0}/v(0))).$$

and the spike timing is given by

$$t^f = \tau/\sqrt{-I_0} \left( \operatorname{atanh}(\sqrt{-I_0}/v(0)) - \operatorname{atanh}(\sqrt{-I_0}/v_{peak}) \right) \quad (11)$$

We compare the exact value of firing time to the value numerically obtained with the voltage stepping method VS2 and the modified RK2 scheme (Fig. 3). Both algorithms perform similarly for  $\Delta v = 0.05, 0.01, 0.005 mV$  and  $\Delta t = 0.05 ms$  that is for a nearly equal number of integration points. A precise comparison is given further.

We also examine the errors of VS2 and VS4 schemes as a function of the voltage-step (Fig. 4). As expected, the errors of our VS2 scheme decreases quadratically with  $\Delta v$  while the error of the VS4 scheme diminishes as the fourth power of  $\Delta v$ .

	$\Delta t = 0.05$	$\Delta t = 0.01$	$\Delta v = 0.05$	$\Delta v = 0.01$
Accuracy ( $\times 10^{-3}$ )	50.362	10.016	7.465	0.304
Computing time (ms)	8.458	15.403	6.389	20.750

Table 1: Error on spike timings in the regular firing regime for different voltage-steps. We simulate one test neuron over 1 *second* with different voltage-steps.  $N_{\Delta v}$  gives the number of voltage steps used to discretize the voltage space between  $v_r$  (resetting potential) and  $v_{th}$  (peak of a spike).  $\text{Log}(\text{Error})$  is calculated according to (10) and  $N_{IP_s}$  represents the corresponding number of integration points for different voltage-steps.

To have an idea of how the time-step and the voltage-step are related, we determine the time-step versus the voltage-step required to reach a given pre-determined precision (Fig. 3.1A). Note that since this graph is activity-dependent it cannot be used as a generic  $\Delta v/\Delta t$  relationship. In Fig. 3.1B we compare the computational cost of each method, i.e. the number of integration points that is used to calculate the firing time (with a given precision). Note that the computational cost of the zero-search algorithm used in voltage-stepping method is not considered. We use Newton’s method and practically only four or five iterations are sufficient to reach a very high precision. Note also that in general the modified Runge-Kutta methods need a zero-search algorithm to estimate the spike time (not for RK2 since the spike time is obtained by solving a linear equation). Results show that for moderate value of error (two-digits accuracy) both methods use similar discretized time steps. When higher accuracy is required, the number of time steps of the modified RK2 method dramatically increased. A major reason is that the uniform distribution of the discretized time in time-stepping methods implies the use of unnecessary time steps at the initiation of the spike in order to have short time steps at the peak of the spike.

For  $I_0 > 0$  the neuron fires regularly and the firing rate is given by

$$\nu = \frac{\sqrt{I_0}}{\tau \left( \arctan \frac{\vartheta}{\sqrt{I_0}} - \arctan \frac{v_r}{\sqrt{I_0}} \right)} \quad (12)$$

In Fig. 3.1, we compare the exact value of the firing rate given by (12) with the approximated value given by our voltage-stepping method (VS2) and the modified RK2 method for different values of voltage-step and time-step. The order of the voltage-stepping methods VS2 and VS4 is numerically

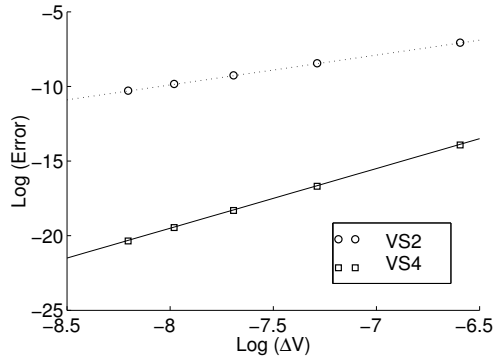


Figure 4: Log-log plot of the error on the first spike timing as a function of the voltage-step. Circles and squares are voltage-stepping methods with a piecewise linear interpolation at the boundaries of the voltage-interval (VS2) and at the gaussian abscissas (VS4), respectively. The lines (not fits) indicate the order of the methods. Dotted-line is second order and solid-line is fourth order.

evaluated in Fig. 3.1. Results support those obtained for the computation of the first spike time.

	$\Delta t = 0.005$	$\Delta t = 0.001$	$\Delta v = 0.005$	$\Delta v = 0.001$
Accuracy ( $\times 10^{-2}$ )	20.031	4.135	0.874	0.208
Computing time (ms)	16.339	6.948	14.895	6.004

Table 2: Error on spike timings in the regular firing regime for different voltage-steps. We simulate one test neuron over 1 *second* with different voltage-steps.  $N_{\Delta v}$  gives the number of voltage steps used to discretize the voltage space between  $v_r$  (resetting potential) and  $v_{th}$  (peak of a spike).  $Log(Error)$  is calculated according to (10) and  $N_{IP_s}$  represents the corresponding number of integration points for different voltage-steps.

### 3.2 Random current injection

We consider a simple test neuron receiving a synaptic activity modeled by a fluctuating spike train. Note that we use a current injection and a more



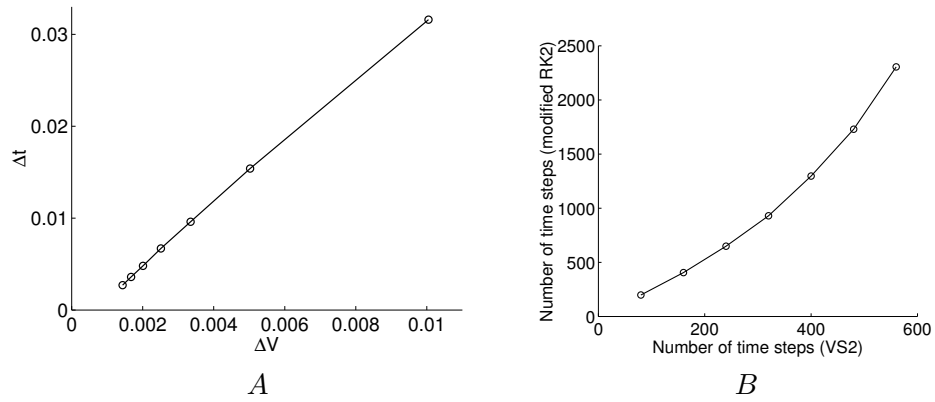


Figure 5: (A) Time-step of the modified RK2 required to reach a given precision on the calculation of the firing time as a function of the voltage-step of the VS2 method. Seven error tolerances are used that are approximately:  $Error = 2 \times 10^{-2}, 3 \times 10^{-2}, 6 \times 10^{-3}, 5 \times 10^{-3}, 4 \times 10^{-3}, 3 \times 10^{-3}$  (from right to left). (B) Number of time steps of the modified RK2 scheme as a function of the respective number of time steps of the voltage-stepping method that are associated to the seven error values given in (A), from left to right.

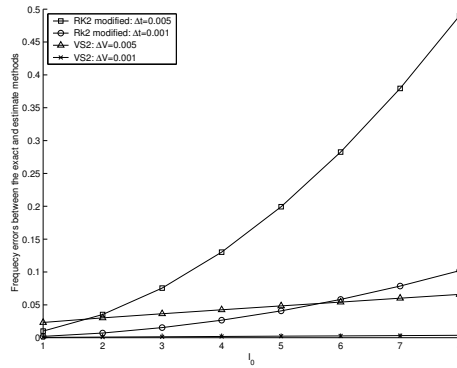


Figure 6: Firing rate of the QIF neuron as a function of the input current. The solid line is the exact value. The + and \* correspond to the firing rate given by the modified Runge-Kutta method of order 2 with a time-step  $\Delta t = 0.005 \text{ ms}$  and  $\Delta t = 0.001 \text{ ms}$ , respectively. Circles and squares represent VS2 with  $\Delta v = 0.005$  and  $\Delta v = 0.001$ . The enlarged figures show the frequency for different values of the input current.

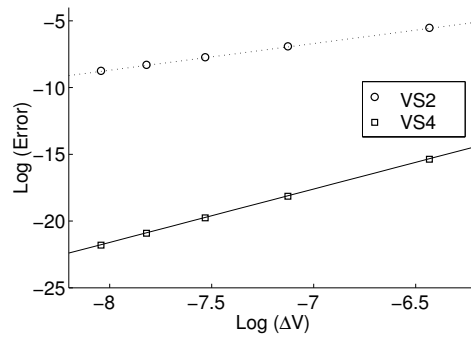


Figure 7: Errors on the firing rate as a function of the voltage-step for the voltage-stepping methods VS2 (circle) and VS4 (square). The lines (not fits) indicate the order of the methods. Dotted-line is second order and solid-line is fourth order.

realistic input scenario would be stochastic conductance changes. However a random conductance scenario can be replaced, to a high degree of accuracy, by a random current injection (Richardson, 2004). For clarity, we keep the current injection paradigm. We investigate two scenarios that reproduce two different regimes of neural activity.

In the first scenario, we use a fixed excitatory spike train generated by a Poisson process with rate  $\nu_E = 10^4 \text{spikes/s}$  that models the interaction with 1000 excitatory presynaptic neurons firing at 10 Hz. In this scenario, the neuron operates in a high activity regime with a firing rate  $\sim 400 \text{spikes/s}$ . The second scenario is described by two fluctuating synaptic currents, one excitatory Poisson process ( $\nu_E = 10^4 \text{spikes/s}$ ) and one inhibitory Poisson process ( $\nu_I = 10^4 \text{spikes/s}$ ). The neuron operates in a fluctuation-driven regime with a moderate firing rate ( $\sim 30 \text{spikes/s}$ ). We compute the error on the spike timings of the QIF model using the voltage-stepping method (VS2) for different voltage-steps. To evaluate the performance we determine, in each scenario and for a given voltage-step, the corresponding number of time-steps of the modified RK2 method that is necessary to reach the same accuracy.

In the first scenario the neuron fires regularly with monotonic subthreshold membrane voltage trajectories. Results are given in Table 1.

$N_{\Delta v}$	$\text{Log}(\text{Error})$	$N_{IPs}$
50	-3.69	18950
100	-5.18	37900
150	-5.99	59550
200	-6.39	75800

Table 3: Error on spike timings in the regular firing regime for different voltage-steps. We simulate one test neuron over 1 *second* with different voltage-steps.  $N_{\Delta v}$  gives the number of voltage steps used to discretize the voltage space between  $v_r$  (resetting potential) and  $v_{th}$  (peak of a spike).  $\text{Log}(\text{Error})$  is calculated according to (10) and  $N_{IPs}$  represents the corresponding number of integration points for different voltage-steps.

For different values of the voltage-steps we compute the error and the number of integration points use by the simulation. To preserve the accuracy of spike times up to 1s of simulation time, we had to use numerous integration points. In this scenario, we found that time-stepping schemes gave comparable results. For instance, using a fixed time steps  $\Delta t = 0.02 \text{ms}$ ,

the modified RK2 scheme integrates 50000 times during 1s, and it gives  $\log(Error) = -6.06$  (i.e. a six-digit accuracy). Such accuracy is reached using voltage-stepping scheme VS2 with a bit more integration points (see Table 1). The disadvantage is due to the fact that trajectory of the membrane potential are abrupt and the spike time is well approximated by the linear interpolation used by the modified RK2 scheme whereas, in voltage-stepping scheme, several voltage-steps are used without enhancing the accuracy. In the second scenario, the membrane potential is driven by the balanced of excitation and inhibition. In this regime, the spike-times are irregular. For a fixed voltage-step, the accuracy of the voltage-stepping is affected (see Table 2 but on the other hand the number of integration point significantly decreases. The accuracy of Runge-Kutta type schemes dramatically

$N_{\Delta v}$	$\text{Log}(Error)$	$N_{IPs}$
50	-1.64	1718
100	-3.01	3417
150	-3.63	5151
200	-3.87	6843

Table 4: Error on spike timings in the irregular firing regime for different voltage-steps. The notations of  $N_{\Delta v}$ ,  $\text{Log}(Error)$  and  $N_{IPs}$  represent the same meaning as those in Table (3.2).

decrease and small time-steps are necessary to compute accurately the spike times. For instance, with  $N_{\Delta v} = 150$  the VS2 method uses 5151 integration points. The modified RK2 method requires approximately 25000 time steps ( $\Delta t = 0.04ms$ ) to reach the same accuracy. In this regime, the advantage of the voltage-stepping scheme is clear.

### 3.3 Network activity

We demonstrate the accuracy of our integration scheme by applying it to a small network of  $N = 100$  inhibitory neurons. Such network shows rapid synchronization through mutual inhibitions and variations of this model have been widely studied (Wang and Buzsaki, 1996; Martinez, 2005; Ambard and Martinez, 2006). We consider all-to-all coupling between inhibitory neurons with a synaptic strength  $g_i = 0.005$ . Each inhibitory neuron is driven by a pre-synaptic excitatory spike train (Poisson process,  $\nu_E = 10^4 \text{spikes/s}$ ) with a synaptic weight  $g_e = 0.005$ . We integrate until  $t = 40ms$  and use the VS2 method with a subdivision of the voltage-space into  $N_{\Delta v} = 250$

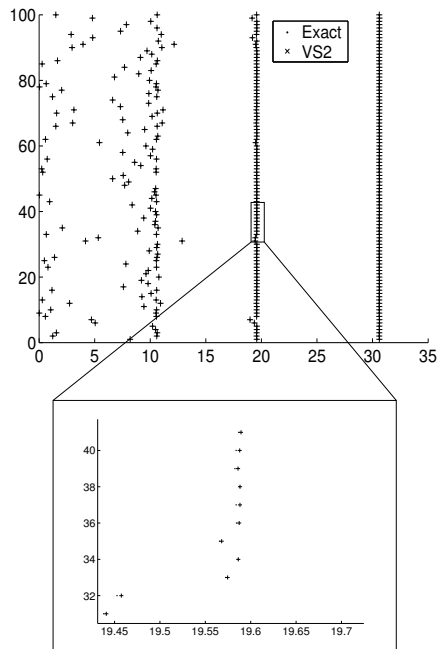


Figure 8: Simulation of a network of 100 inhibitory neurons. Spike times are computed exactly (dots) and with the VS2 method using  $N_{\Delta v} = 250$  voltage-intervals ('+'). A high degree of accuracy is obtained and spikes are superimposed most of time.

voltage-intervals. The exact and approximated spike times are shown in Figure 3.3.

## 4 Conclusions

Recent efforts have been made to simulate integrate-and-fire neuronal networks. Specific methods like event-driven schemes (Makino, 2003; Brette, 2006; Brette, 2007), fast methods (Rangan and Cai, 2007) or exact time-stepping schemes (Morrison *et al.*, 2007) are limited to linear integrate-and-fire models. Voltage-stepping methods are generic numerical schemes that realize an efficient and accurate numerical integration of spiking neural networks. Important elements in our approach are (i) the variable time-steps that are different for each neuron in the network depending on their activity

(ii) the treatment of the possible discontinuities of the dynamics (iii) the event-driven nature of the simulation. This event-driven treatment presents significant advantage when delays have to be considered.

Our voltage-stepping method is not necessarily restricted to uniform voltage step  $\Delta v$ . There exists efficient algorithms (Breiman, 1993) that can be used to optimize both the non-uniform intervals  $V_i$  and their associated linear approximations. A possible extension of our approach is to use a voltage-discretization adapted to the non-linear voltage-dependent current of the model.

## Acknowledgments

Research supported by the INRIA cooperative research initiative RDNR.

## References

- AgmonSnir, H., C. Carr and J. Rinzel (1998). The role of dendrites in auditory coincidence detection. *Nature* **393**, 268–272.
- Ambard, M. and D. Martinez (2006). Inhibitory control of spike timing precision. *NeuroComputing* **70**, 200–205.
- Ariav, G., A. Polsky and J. J. Schiller (2003). Submillisecond precision of the input-output transformation function mediated by fast sodium dendritic spikes in basal dendrites of cal pyramidal neurons. *J. Neurosci.* **23**, 7750–7758.
- Bair, W. and C. Koch (1996). Temporal precision of spike trains in extrastriate cortex of the behaving macaque monkey. *Neural Comp.* **8**, 1185–1202.
- Breiman, L. (1993). Hinging hyperplanes for regression, classification, and function approximation. *IEEE Trans. Inf. Theory* **39**, 999–1013.
- Brette, R. (2006). Exact simulation of integrate-and-fire models with synaptic conductances. *Neural Comp.* **18**, 2004–2027.
- Brette, R. (2007). Exact simulation of integrate-and-fire models with exponential currents. *Neural Comp.*

- Brette, R. and G. Gerstner (2005). Adaptive exponential integrate-and-fire model as an effective description of neuronal activity. *J. Neurophysiol.* **94**, 3637–3642.
- Brette, R., M. Rudolph, T. Carnevale, M. Hines, D. Beeman, J.M. Bower, M. Diesmann, A. Morrison, P.H. Goodman, F.C. Harris, M. Zirpe, T. Natschlag, D. Pecevski, B. Ermentrout, M. Djurfeldt, A. Lansner, O. Rochel, T. Vieville, E. Muller, A.P. Davison, S. El Boustani and A. Destexhe (2007). Simulation of networks of spiking neurons: a review of tools and strategies. *J. Comput. Neurosci.*
- Brunel, N. and P. Latham (2003). Firing rate of the noisy quadratic integrate-and-fire neuron. *Neural Comp.* **15**, 2281–2306.
- Carr, C. and M. Konishi (1990). A circuit detection of interaural time differences in the brain stem of barn owl. *J. Neurosci.* **10**, 3227–3246.
- Dora, J. Della, A. Maignan, M. Mirica-Ruse and S. Yovine (2001). Hybrid computation. *ISSAC'01*.
- Ermentrout, G.B. (1996). Type I membranes, phase resetting curves, and synchrony. *Neural Comp.* **6**, 979–1001.
- Ermentrout, G.B. and N. Kopell (1986). Parabolic bursting in an excitable system coupled with a slow oscillation. *SIAM J. Appl. Math.* **46**, 233–253.
- Fourcaud-Trocmé, N., D. Hansel, C. van Vreeswijk and N. Brunel (2003). How spike generation mechanisms determine the neuronal response to fluctuating inputs. *J. Neurosci.* **23**, 11628–11640.
- Girard, A. (2002). Approximate solutions of odes using piecewise linear vector fields. *5th International Workshop on Computer Algebra in Scientific Computing*.
- Hansel, D. and G. Mato (2001). Existence and stability of persistent states in large neuronal networks. *Phys. Rev. Lett.* **10**, 4175–4178.
- Hansel, D., G. Mato, C. Meunier and L. Neltner (1998). On the numerical simulations of integrate-and-fire networks. *Neural Comp.* **10**, 467.
- Hubbard, J. and B. West (1991). Differential equations: A dynamical systems approach. *Texts in Applied Mathematics, Vol. 5, Springer-Verlag, New York*.

- Izhikevich, E. (2003). Simple model of spiking neurons. *IEEE Transactions on Neural Networks* **14**, 1569–1572.
- Latham, P. E., B. E. Richmond, P. G. Nelson and S. Nirenberg (2000). Intrinsic dynamics in neuronal networks, i. theory. *J. Neurophysiol.* **83**, 808–827.
- Lytton, W. W. and L. M. Hines (2005). Independent variable time-step integration of individual neurons for network simulations. *Neural Comput* **17**, 903–921.
- Mainen, Z. and T. Sejnowski (1995). Reliability of spike timing in neocortical neurons. *Science* **1503**, 268.
- Makino, T. (2003). A discrete-event neural network simulator for general neuron models. *Neural. Comput. and Applic.* **11**, 210–223.
- Martinez, D. (2005). Oscillatory synchronization requires precise and balanced feedback inhibition in a model of the insect antennal lobe. *Neural Comp.* **17**, 2548–2570.
- Mattia, M. and P. Del Giudice (2000). Efficient event-driven simulation of large networks of spiking neurons and dynamical synapses. *Neural Comp.* **12**, 2305.
- McKean, H. P. (1970). Nagumo’s equation. *Advances in Mathematics* **4**, 209–223.
- Morrison, A., S. Straube, H. E. Plesser and M. Diesmann (2007). Exact subthreshold integration with continuous spike times in discrete time neural network simulations. *Neural Comp.* **19**, 44–79.
- Rangan, V. A. and D. Cai (2007). Fast numerical methods for simulating large-scale integrate-and-fire neuronal networks. *J. Comput. Neurosci.* **22**, 81–100.
- Ridchardson, M.J.E. (2004). The effects of synaptic conductance on the voltage distribution and firing rate of spiking neurons. *Phys. Rev. E*.
- Rinzel, J. and B. Ermentrout (1998). Analysis of sneural excitability. *In: C Koch and I Segev, Eds. Methods in Neuronal Modeling: From ions to networks. MIT Press* pp. 251–291.



- Rochel, O. and D. Martinez (2003). An event-driven framework for the simulation of networks of spiking neurons. *Proc. 11th European Symposium on Artificial Neural Networks*.
- Ros, E., R. Carrillo, E. M. Ortigosa, B. Barbour and R. Agis (2006). Event-driven simulation scheme of spiking neural networks using lookup tables to characterize neuronal dynamics. *Neural Comp.* **18**, 2959–2993.
- Rudolph, M. and A. Destexhe (2006). Analytical integrate-and-fire neuron models with conductance-based dynamics for event-driven simulation strategies. *Neural Comp.* **18**, 2305.
- Shelley, M. J. and L. Tao (2001). Efficient and accurate time-stepping schemes for integrate-and-fire neuronal networks. *J. Comp. Neurosci.* **11**, 111–119.
- Tonnelier, A. and W. Gerstner (2003). Piecewise linear differential equations and integrate-and-fire neurons: insights from two-dimensional membrane models. *Phys. Rev. E*.
- Tonnelier, A., H. Belmabrouk and D. Martinez (2007). Event driven simulation of nonlinear integrate-and-fire neurons. *Neural Comp.*
- VanRullen, R., R. Guyonneau and S. J. Thorpe (2005). Spike times make sense. *Trends in Neurosciences* **28**, 1–4.
- Wang, X. and G. Buzsaki (1996). Gamma oscillation by synaptic inhibition in a hippocampal interneuronal network model. *J. Neurosci.* **16**, 6402–6413.

### **Appendix:Order of voltage-stepping schemes**

For simplicity, we consider a general neuron model described as follows

$$\frac{dv(t)}{dt} = f(v(t)) \quad (13)$$

For consistency, we keep the same notations used in Sections 2 and 3. Over  $V_i$ , one possible linear interpolation for function  $f(v)$  can be achieved by interpolating it at the boundaries  $v_i$  and  $v_{i+1}$ . It should be noted that other possible linear interpolations for  $f(v)$  are also existed, and we will discuss it in the second part of this appendix.

#### **Linear interpolation at boundaries (VS2 method)**

Let us consider  $v_{\Delta v}$  the solution of the following dynamical system:

$$\frac{dv}{dt} = f_{\Delta v}(v) \quad (14)$$

where  $f_{\Delta v}$  is the piecewise linear function as follows:

$$f_{\Delta v}(v) = \frac{v_{i+1} - v}{\Delta v} f(v_i) + \frac{v - v_i}{\Delta v} f(v_{i+1})$$

Then it can be proved that the error of approximation is bounded by

$$|f(v) - f_{\Delta v}(v)| = O(\Delta v^2) \quad (15)$$

Considering the following theorem:

**Theorem 1** (*Fundamental Inequality (Hubbard and West, 1991)*) For a differential equation  $\dot{X} = F(x)$  satisfying the Lipschitz condition with  $K \neq 0$  and if  $u_1(t)$  and  $u_2(t)$  are two continuous, piecewise differentiable functions satisfying  $|\dot{u}_i(t) - F(u_i(t))| \leq \varepsilon_i$  for all  $t$  at which  $u_1(t)$  and  $u_2(t)$  are differentiable and if  $|u_1(0) - u_2(0)| \leq \delta$ , then

$$|u_1(t) - u_2(t)| \leq \delta e^{K|t|} + \frac{\varepsilon_1 + \varepsilon_2}{K} (e^{K|t|} - 1).$$

Applying Theorem 1 into (13) and (14), with (15), it has been proved that  $v - v_{\Delta v} = O(\Delta v^2)$ , which follows  $\Delta t = |t_{exact}^f - t_{approx}^f| = O(\Delta v^2)$ . It means that if using boundaries of each  $V_i$  to linearly interpolate  $f(v)$  over  $V$ , the estimate error of exact spike time is with an accuracy of  $O(\Delta v^2)$ .

Moreover, the following two special remarks should be noted:

- At the neural network level, the incoming spikes generated by presynaptic neurons introduced a second order error (since  $|t_{exact}^f - t_{approx}^f| = O(\Delta v^2)$ ). However, noting the fact that  $f_{\Delta v}$  linearly approximates  $f$ , and do not change the order of the approximation given by (15). Consequently, the proposed voltage-stepping scheme (VS2) guarantees still the same accuracy of network level with as that of neuron level, even after considering the effect of propagation of estimate error of spike time.
- For the  $p$ -dimensional case, the only difference is to approximate  $f(v)$  over  $V_i \subseteq R^p$  by a linear system:  $f_{\Delta v}(v) = A_i v + b_i$ , which is uniquely determined as the linear interpolation vector field of  $f(v)$ . The same result can be achieved by using  $\|\cdot\|$  to replace  $|\cdot|$  (refer to (Girard, 2002) for more details).

### Linear interpolation at gaussian abscissas (VS4 method)

Over  $V_i$ , let us reconsider (13) and (14), which follows

$$\Delta t_i = t_{exact}^i - t_{appro}^i = \int_{v_i}^{v_{i+1}} \left( \frac{1}{f(v)} - \frac{1}{f_{\Delta v}(v)} \right) dv \quad (16)$$

where  $t_{exact}^i$  represents the exact exit time of (13) over  $V_i$ , and  $t_{appro}^i$  represents its approximation. The objective is to minimize (16). Note that  $\frac{1}{f_{\Delta v}(v)} \in C^\infty$ , if  $\frac{1}{f(v)}$  is  $C^k$ ,  $k \geq 4$ , then according to Gaussian quadrature rule, if we use linear interpolation at gaussian abscissas:  $f_{\Delta v}$  to approximate  $f$ , then we have

$$\int_{v_i}^{v_{i+1}} \left( \frac{1}{f(v)} - \frac{1}{f_{\Delta v}(v)} \right) dv = O(\Delta v^5) \quad (17)$$

The only point is to calculate the gaussian abscissas over  $V_i$ . According to Gaussian quadrature rule, for linear interpolation case (i.e., the number of evaluation points is 2), the Legendre polynomials to obtain these two evaluation points on the interval  $[-1, 1]$  are  $\pm \frac{1}{\sqrt{3}}$ . Hence, over  $V_i = [v_i, v_{i+1}[$ , the gaussian abscissas are as follows:

$$\begin{aligned} v_{i,1} &= \frac{\sqrt{3}-1}{2\sqrt{3}}v_{i+1} + \frac{\sqrt{3}+1}{2\sqrt{3}}v_i \\ v_{i,2} &= \frac{\sqrt{3}+1}{2\sqrt{3}}v_{i+1} + \frac{\sqrt{3}-1}{2\sqrt{3}}v_i \end{aligned}$$

based on which, the linear interpolation of  $f(v)$  can be described as follows:

$$f_{\Delta v}(v) = \frac{v_{i,2} - v}{v_{i,2} - v_{i,1}} f(v_{i,1}) + \frac{v - v_{i,1}}{v_{i,2} - v_{i,1}} f(v_{i,2})$$

Consequently, over each  $V_i$ , by using linear interpolation at gaussian abscissas, the accuracy of approximation of exact spike time is of an order  $O(\Delta v^5)$ , thus over all  $V$ , the estimate error of exact spike time is with an accuracy of  $O(\Delta v^4)$ .

It should be noted that this method cannot be generalized into high dimensional system. The major reason is that (17) cannot be always fulfilled in high dimensional case. Moreover, at neural network simulation, since the incoming spikes generated by presynaptic neurons introduced a fourth order error, which makes also equation (17) failed, thus the proposed voltage-stepping scheme (VS4) cannot be generalized into neural network simulation. For this moment, this method works only for single neuron simulation, and how to preserve high approximation accuracy when applying it into neural network simulation is still an open problem.