



OpenMEEG for M/EEG forward modeling: a comparison study

Alexandre Gramfort, Théodore Papadopulo, Emmanuel Olivi, Maureen Clerc

► To cite this version:

Alexandre Gramfort, Théodore Papadopulo, Emmanuel Olivi, Maureen Clerc. OpenMEEG for M/EEG forward modeling: a comparison study. Human Brain Mapping, Jun 2010, Barcelone, Spain. inria-00502745

HAL Id: inria-00502745

<https://inria.hal.science/inria-00502745>

Submitted on 15 Jul 2010

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

OpenMEEG for M/EEG forward modeling: a comparison study

A. GRAMFORT^{‡†}, T. PAPADOPOULOU[‡], E. OLIVI[‡], M. CLERC[‡]

alexandre.gramfort@inria.fr

‡ Athena Project Team, INRIA Sophia-Antipolis, France

† Parietal Project Team, INRIA Saclay-Ile de France, Saclay, France



Objective

- Evaluate the accuracy of available BEM solvers for M/EEG forward modeling with realistic head models.

The M/EEG forward problem


Objective

Predict what is measured by M/EEG sensors due to a configuration of current generators within the head.

Challenge

Analytical solutions exists for simple models such as sphere models. With realistic head models, numerical solvers are required. BEM solvers are adapted to models with piecewise constant conductivities.

Sphere models vs. realistic models

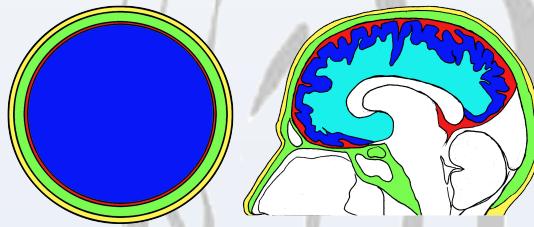

Why compare BEM solvers?


- BEM solvers are based on different mathematical formulations.
- For a given formulation, implementation details vary:
 - Galerkin methods vs collocation methods
 - Precision in numerical integrations
 - Adaptive vs. non adaptive integration procedures

Experimental setting

Software packages tested

- OpenMEEG with and without adaptive integration (OM and OMNA) [1,2,3]: Symmetric BEM with P1-P0 elements.
- BEMCP (CP) [Phillips 00]: standard BEM with linear collocation (LC)
- Simbio (SB) [Zanow et al. 95]: std. BEM with LC + ISA
- Dipoli (DP) [Oostendorp et al. 89]: std. BEM with LC + ISA
- Helsinki BEM [Stenroos et al. 07]: LC (HB) and LC + ISA (HBI)

Model considered

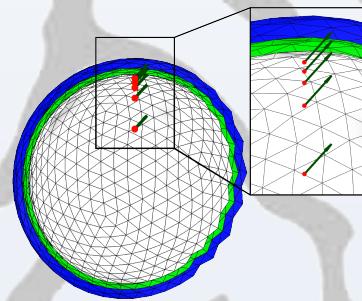

- 3 nested shells: inner skull, outer skull and skin surfaces (radii 88, 92, 100).
- 5 dipoles at different distances from the inner skull: direction (1, 0, 1)
- regular and random meshes
- a random mesh with N vertices is obtained by meshing the convex hull of 10N points randomly sampled on the unit sphere followed by decimation.

Simulation study: Comparison results for EEG

Precision measures

- Numerical solution g_n
- Analytical solution g_a
- Relative Difference Measure (RDM):

$$RDM(g_n, g_a) = \left\| \frac{g_n}{\|g_n\|} - \frac{g_a}{\|g_a\|} \right\|$$

Should be close to 0

- Magnitude (MAG):


$$MAG(g_n, g_a) = \|g_n\|/\|g_a\|$$

Should be close to 1


- With random meshes RDMs and MAGs are computed with 100 repetitions of the experiment.

- Note: MEG accuracy relies on EEG solutions via the Biot et Savart law

With standard meshes

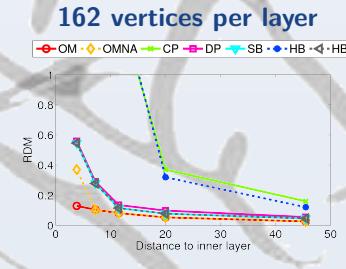


With random meshes

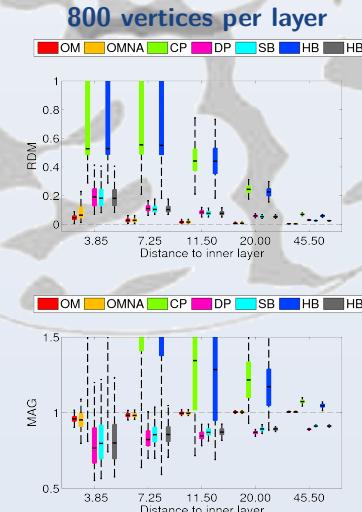

- OpenMEEG is the most accurate solver with regular meshes.

- OpenMEEG with adaptive integration is the most robust to imperfect meshing.

Computation times

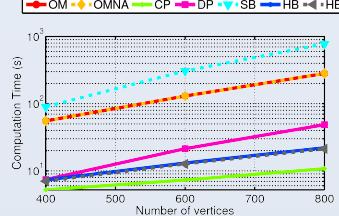

Technical details

- OpenMEEG is open source (Linux, Windows, Mac OS X)
- OpenMEEG is written in C++ and can be used from Python and Matlab using the Fieldtrip toolbox
- Experiments have been performed with Fieldtrip
- <http://openmeeg.gforge.inria.fr>
- openmeeg-info@lists.gforge.inria.fr

References

- [1] Gramfort A., Papadopoulou T., Olivi E., Clerc M. **OpenMEEG: open source software for quasistatic bioelectromagnetics**, submitted.
- [2] Gramfort A. **Mapping, timing and tracking cortical activations with MEG and EEG: Methods and application to human vision**, PhD thesis 2009.
- [3] Kybic J., Clerc M., Abboud T., Faugeras O., Keriven R., Papadopoulou T. **A Common Formalism for the Integral Formulations of the Forward EEG Problem**, IEEE Transactions on Medical Imaging, 2005