

Mechanized support for the formal specification, verification and deployment of component-based applications

Nuno Gaspar

▶ To cite this version:

Nuno Gaspar. Mechanized support for the formal specification, verification and deployment of component-based applications. Other [cs.OH]. Université Nice Sophia Antipolis, 2014. English. NNT: 2014NICE4127. tel-01114217v1

HAL Id: tel-01114217 https://inria.hal.science/tel-01114217v1

Submitted on 8 Feb 2015 (v1), last revised 10 Apr 2015 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

UNIVERSITÉ DE NICE-SOPHIA ANTIPOLIS

ÉCOLE DOCTORALE STIC

SCIENCES ET TECHNOLOGIES DE L'INFORMATION ET DE LA COMMUNICATION

THÈSE

pour l'obtention du titre de

Docteur en Sciences

Mention Informatique

présentée et soutenue par

Nuno Gaspar

Mechanized support for the formal specification, verification and deployment of component-based applications

Thèse dirigée par Eric Madelaine et co-encadrée par Ludovic Henrio

Soutenue le 16 Décembre 2014

Jury

Rapporteurs Frédéric Loulergue LIFO, Université d'Orléans

Alan SCHMITT INRIA Bretagne Atlantique

Examinateurs Luis Barbosa Universidade do Minho

Yves Bertot INRIA Sophia Antipolis

Directeur de thèse Eric Madelaine INRIA Sophia Antipolis

Co-encadrant de thèse Ludovic Henrio CNRS

E assim foi.

Résumé

Cette thèse appartient au domaine des méthodes formelles. Que ce soit par le biais d'approches automatiques ou interactives, l'objectif des méthodes formelles est d'accroître la confiance que l'on peut accorder aux propriétés d'un système. Dans cette thèse, nous concentrons leur application sur une méthodologie spécifique pour le développement de logiciels: l'ingénierie à base de composants.

Parmi tous les paradigmes de programmation, l'ingénierie à base de composants se présente comme une des approches les plus utilisées pour le développement de logiciels dans le monde réel. Elle met l'accent sur une séparation nette des préoccupations, ce qui le rend attrayant pour des buts industriels ou de recherche. En outre, elle permet des reconfigurations structurelles de l'architecture des applications. L'avantage de la modification de l'architecture du logiciel vient de la nécessité de faire face à la multitude de situations qui peuvent survenir dans un système potentiellement massivement distribué et hétérogène. À cette fin, le *Grid Component Model* (GCM) suit cette approche en fournissant tous les moyens pour définir, composer, et dynamiquement reconfigurer les applications distribuées à base de composants.

Dans cette thèse, nous abordons la spécification formelle, la vérification et le déploiement d'applications GCM reconfigurables et distribués. Notre première contribution est un cas d'étude industriel sur la spécification comportementale et la vérification d'une application distribuée et reconfigurable: The Hypermanager. Cela favorise l'utilisation des méthodes formelles dans un contexte industriel, mais met également en évidence la nécessité d'approches alternatives et/ou

complémentaires afin de mieux répondre aux besoin de ces entreprises.

Notre deuxième contribution est une plate-forme, élaboré avec l'assistant de preuve Coq, pour le raisonnement sur les architectures logicielles: MEFRESA. Cela comprend la mécanisation de la spécification du GCM, et les moyens pour raisonner sur les architectures reconfigurables GCM. En outre, nous abordons les aspects comportementaux en formalisant une sémantique basée sur les traces d'exécution de systèmes de transitions synchronisés. Dans l'ensemble, elle fournit les premiers pas vers une plate-forme complète pour la spécification et la vérification des caractéristiques structurelles et comportementales des applications GCM.

Enfin, notre troisième contribution est un nouveau langage de description d'architecture (ADL): Painless. En outre, nous discutons son intégration avec ProActive — un intergiciel Java pour la programmation concurrente et distribuée, et l'implantation de référence du GCM. Painless permet de spécifier des architectures de GCM paramétrées, avec leurs reconfigurations structurelle, dans un langage déclaratif. La conformité avec la spécification de GCM est évaluée par le code fonctionnel certifié extrait de MEFRESA. Ceci permet le déploiement et la reconfiguration sûre des applications du GCM.

Abstract

This thesis belongs to the domain of formal methods. Either by means of automatic or interactive approaches, the goal of formal methods is to increase the confidence one can place on a system's properties. In this thesis, we focus on their application regarding a specific methodology for the development of software: component-based engineering.

Among all programming paradigms, component-based engineering stands as one of the most followed approaches for real world software development. Its emphasis on a clean separation of concerns makes it appealing for both industrial and research purposes. Further, it enables on-the-fly structural reconfigurations of the architecture of the application. The advantage of modifying the software architecture at runtime comes from the need to cope with the plethora of situations that may arise in a potentially massively distributed and heterogeneous system. To this end, the Grid Component Model (GCM) endorses this approach by providing all the means to define, compose and dynamically reconfigure component-based distributed applications.

In this thesis we address the formal specification, verification and deployment of distributed and reconfigurable GCM applications. Our first contribution is an industrial case study on the behavioural specification and verification of a reconfigurable distributed application: The Hypermanager. This promotes the use of formal methods in an industrial context, but also puts in evidence the necessity for alternative and/or complementary approaches in order to better address such undertakings.

Our second contribution is a framework, developed with the Coq proof assistant, for reasoning on software architectures: MEFRESA. This encompasses the mechanization of the GCM specification, and the means to reason about reconfigurable GCM architectures. Further, we address behavioural concerns by formalizing a semantics based on execution traces of synchronized transition systems. Overall, it provides the first steps towards a complete specification and verification platform addressing both architectural and behavioural properties.

Finally, our third contribution is a new Architecture Description Language (ADL), denominated Painless. Further, we discuss its proof-of-concept integration with ProActive — a Java middleware for concurrent and distributed programming, and the *de facto* reference implementation of the GCM. Painless allows to specify parametrized GCM architectures, along with their structural reconfigurations, in a declarative-like language. Compliance with the GCM specification is evaluated by certified functional code extracted from Mefresa. This permits the safe deployment and reconfiguration of GCM applications.

Resumo

Esta tese pertence à disciplina de métodos formais. Quer seja por meio de abordagens automáticas ou interativas, o objectivo dos métodos formais é aumentar a confiança se pode colocar sobre as propriedades de um sistema. Nesta tese, focamos a sua aplicação numa metodologia específica para o desenvolvimento de software: engenharia baseada em componentes.

De entre todos os paradigmas de programação, a engenharia baseada em componentes destaca-se como uma das abordagens mais usada para o desenvolvimento de software do mundo real. A sua ênfase numa clara separação de functionalidades e controlo, torna-a atraente para fins industriais e de investigação. Além disso, permite reconfigurações estruturais da arquitetura da aplicação. A vantagem de alterar a topologia da aplicação em tempo de execução vem da necessidade de lidar com a multiplicidade de situações que podem surgir em sistemas distribuídos. O *Grid Component Model* (GCM) segue esta abordagem, fornecendo todos os meios para definir, compor e reconfigurar dinamicamente aplicações distribuídas baseadas em componentes.

Nesta tese abordamos a especificação formal, verificação e implementação de aplicações GCM distribuídas e reconfiguráveis. A nossa primeira contribuição é um caso de estudo industrial sobre a especificação comportamental e verificação de uma aplicação distribuída e reconfigurável: The HyperManager. Isto promove o uso de métodos formais num contexto industrial, mas também põe em evidência a necessidade de abordagens alternativas e/ou complementares para este tipo de tarefas.

A nossa segunda contribuição é um modelo desenvolvido com o assistente de prova Coq, para o raciocínio em arquiteturas de software: MEFRESA. Este, engloba a mecanização da especificação GCM, e os meios para raciocinar sobre arquiteturas reconfiguráveis GCM. Além disso, abordamos aspectos comportamentais através da formalização de uma semântica com base em traços de execução de sistemas de transição sincronizados. Em suma, fornecemos os primeiros passos para uma plataforma de especificação e verificação abordando propriedades de arquitetura e comportamentais.

Por fim, a nossa terceira contribuição é uma nova Architecture Description Language (ADL), denominada Painless. Além disso, discute-se a sua integração com ProActive — um middleware Java para programação concorrente e distribuída, e a implementação referência do GCM. Painless permite especificar arquiteturas GCM parametrizadas, juntamente com suas reconfigurações estruturais, em uma linguagem declarativa. Conformidade com a especificação GCM é avaliada pelo código certificado extraído de MEFRESA. Isto, permite o lançamento e reconfiguração segura das aplicações GCM.

Acknowledgments

I thought about doing a thesis several years before starting it. It was fascinating to see PhD students arguing their ideas with rather, let's say, opinionated, researchers. I could see myself doing that. Not the easiest — or even the safest — choice, but it seemed personally rewarding. In the end, I'm happy its done, knowing for sure that this is not the finish line for me. A lot more is coming. It is exciting to wonder about what's next. Time will tell. Oh, yeah, this is my thesis, so I took the liberty to write this paragraph. It will make me nostalgic one day. That said, let's start thanking people.

I should first thank Françoise, for replying to my email regarding a thesis offer. I couldn't have even started my PhD without this simple gesture. To Eric and Ludovic, for advising me throughout these three years. I appreciate the time they conceded me. I wish them the best of luck.

I am also grateful to the remaining members of the OASIS team — that later became the Scale team. My office mate, Vincent, was kind enough to proof-read to my French texts. Justine also contributed. In case there are remaining grammatical mistakes, it is fair to say that they share a quota of the responsibility.

Further, to the Italian *clan*, Lorenzo, Federico... it was a pleasure arguing with them about football. On that note: to my chagrin, I had to write my thesis during the World Cup 2014. Luckily, Portugal exhibited such a poor performance that it permitted me to ignore the rest of the competition, and focus on my writing.

I must also mention several other INRIA colleagues. Amjad, Lokman, Yanwen, Michael, Cristian ... and all the remaining that couldn't fit here.

I know that time is precious in research. I sincerely thank the reviewers and examiners composing the jury of my thesis. I am impressed and pleased with the effort that Alan Schmitt and Frédéric Loulergue put into reading my thesis and their subsequent notes and recommendations.

For last, to my Mom, for supporting and encouraging me all these years. I wouldn't have done it without her kindness and patience.

Table of Contents

\mathbf{R}	ésum		V
\mathbf{A}	bstra	et v	ii
\mathbf{R}	esum	i	X
Li	st of	Figures xv.	ii
Li	st of	Listings	x
Li	ist of	Tables xx	\mathbf{v}
1	Intr	oduction	1
	1.1	Component-based software engineering	2
	1.2	Context — The Spinnaker project	3
	1.3	Contributions	3
	1.4	Organisation of this thesis	5
2	Pre	iminaries	7
	2.1	The GCM Component Model	8
		2.1.1 Overview of the GCM specification	9
		2.1.2 The GCM ADL	3
	2.2	ProActive — A middleware for distributed programming 1	4
		2.2.1 GCM/ProActive — a reference implementation for GCM 1	5

		2.2.2	Specifying architectures with the ADL $\ \ldots \ \ldots \ \ldots$	17
	2.3	pNets:	A formalism for defining behavioural semantics	20
		2.3.1	Behavioural semantics for $\operatorname{GCM}/\operatorname{ProActive}$ applications	22
		2.3.2	Coping with structural reconfigurations	24
	2.4	The Fi	acre specification language	26
	2.5	A brief	f overview of the Coq Proof Assistant	29
		2.5.1	Data types	30
		2.5.2	Functional programming in Coq \dots	31
		2.5.3	Proving properties	34
		2.5.4	Extracting certified programs	37
3	The	Hypei	rManager	39
	3.1	The H	yperManager architecture	41
	3.2	Formal	I specification and verification methodology \dots	44
	3.3	The Hy	yperManager as a formal methods case study	48
		3.3.1	On HyperManager Gateway	49
		3.3.2	On HyperManager Server	57
		3.3.3	On System Product	60
	3.4	The ca	se study reloaded: on structural reconfigurations	62
		3.4.1	On HyperManager Reconfigurable Gateway $\ \ldots \ \ldots \ \ldots$	63
		3.4.2	On HyperManager Reconfigurable Server	64
		3.4.3	On Reconfigurable System Product $\dots \dots \dots \dots$.	64
	3.5	Discuss	sion	66
4	A m	nechani	zed framework for reasoning on software architectures	69
	4.1	Mechai	nizing GCM with the Coq proof assistant	70
		4.1.1	Core elements \dots	71
		4.1.2	Well-formed component architectures $\ \ldots \ \ldots \ \ldots \ \ldots$	78
		4.1.3	Well-typed component architectures	85
		4.1.4	Well-formedness and well-typedness decidability	88
	4.2	An op	ERATION language for composing architectures	101
		4.2.1	Syntax and semantics	101
		422	Building well-formed architectures	108

TA	\mathbf{R}	LE	OF	CO	N'	ΓE^{Γ}	VTS

7.2

7.3

T_{Δ}	ABLE	OF C	ONTENTS	XV
	4.3	Provin	ng Properties	110
		4.3.1	Meeting the Specification: Absence of Cross-Bindings	110
		4.3.2	Supporting Parametrized ADLs	112
		4.3.3	Structural Reconfigurations	114
	4.4	Discus	ssion	117
5	Pair	ıless in	ntegration with ProActive	123
	5.1	Integr	ration approach	124
		5.1.1	Computing states from operations	125
		5.1.2	Certified code, PAINLESS interpreter, and the ProActive mi	d-
			dleware	127
	5.2	The F	PAINLESS architecture description language	131
		5.2.1	Painless Semantics	132
		5.2.2	Painless hello world and beyond	134
	5.3	Discus	ssion	136
6	Med	chaniz	ed behavioural semantics	139
	6.1	Groun	ndwork: Infinite data structures	140
	6.2	Labell	led transition systems, and traces	141
		6.2.1	Encoding labelled transitions systems	141
		6.2.2	LTS traces	142
	6.3	Synch	aronization of LTS, and traces	144
		6.3.1	Encoding synchronizations between LTSs	145
		6.3.2	Net traces	146
		6.3.3	Synchronized Master & Slave example	151
	6.4	Towar	rds GCM behavioural models	158
	6.5	Discus	ssion	163
7	Rela	ated w	vork	167
	7.1	On th	ne HyperManager use case	168

8	Fina	al rema	arks	173	
	8.1	Perspe	ectives	174	
\mathbf{A}	Rés	umé d	e la thèse	177	
	A.1	Introd	uction	177	
		A.1.1	Génie logiciel à base de composants	177	
		A.1.2	Contexte — Le projet Spinnaker	178	
		A.1.3	Contributions	179	
		A.1.4	Organisation de cette thèse	180	
	A.2	Conclu	asion	181	
Bi	bliog	graphy		183	
Lis	ist of Acronyms 193				

List of Figures

2.1	A simple GCM architecture	9
2.2	Normal Binding	11
2.3	Import Binding	11
2.4	Export Binding	11
2.5	Components ${\bf A}$ and ${\bf B}$	16
2.6	${\bf A}$ invokes ${\bf f}_1$ from ${\bf B}$	16
2.7	A blocks! wait-by-necessity	16
2.8	${f B}$ replies, and ${f A}$ is happy	16
2.9	Simple GCM application example	17
2.10	GCM composite application example	18
2.11	pNet representing a primitive component	23
2.12	Behaviour of proxy	24
2.13	Behaviour of the proxy manager	24
2.14	Binding controller	25
2.15	pNet example for reconfigurable multicast interface	25
3.1	Hierarchical representation of our case study	41
3.2	HyperManager server component	42
3.3	HyperManager gateway component	43
3.4	Formal specification and verification workflow	47
3.5	Behaviour of the JMXIndicatorsMethod method	51
3.6	Behaviour of the HMGatewayMethod method	53

xviii LIST OF FIGURES

3.7	Behaviour of the HMStartMonitoringMethod method 54	1
3.8	Behaviour of the HMStopMonitoringMethod method 54	4
3.9	Behaviour of the HMLoopMethod method for the HyperManager	
	Gateway	5
3.10	Behaviour of the HMServerMethod method 5	7
3.11	Behaviour of the HMLoopMethod method for the HyperManager	
	Server	3
4.1	binding examples	ō
4.2	Use-Case Architecture	4
4.3	Mefresa overview from a GCM perspective	3
5.1	Overall integration of Painless with ProActive	Э
5.2	starter application	4
5.3	composite application	4
6.1	LTS of a queue, bounded by two requests	9
6.2	LTS of a body process handling one method)

List of Listings

2.1	GCM/ProActive slave component ADL	17
2.2	$\operatorname{GCM/ProActive}\ Composite\ component\ ADL\ \dots\dots\dots$	18
2.3	GCM/ProActive $Master$ component ADL	19
2.4	The Order type	26
2.5	The Slave process (part $1/2$)	27
2.6	The Slave process (part $2/2$)	27
2.7	The Master process	28
2.8	Process synchronization	29
2.9	nat datatype	30
2.10	list datatype	31
2.11	plus function definition	31
2.12	length function definition	32
2.13	option datatype	33
2.14	head function definition	33
2.15	vector datatype	33
2.16	$\textbf{vhead} \ \mathrm{function} \ \mathrm{definition} \ \ldots \ldots \ldots \ldots \ldots \ldots \ldots$	34
2.17	is_even predicate definition	34
2.18	Proof that 4 is even	34
2.19	permut predicate definition	35
2.20	Permutation proof example	36
2.21	original vhead function	37
2.22	Extracted vhead function	37

xx LIST OF LISTINGS

3.1	Queue specification of the JMX Indicators component in Fiacre (bounded	l
	at two requests)	44
3.2	Body specification of the JMX Indicators component in Fiacre	45
3.3	Specification for the JMXIndicatorsMethod argument and return types	49
3.4	JMXIndicatorsMethod specification	50
3.5	HMGatewayMethod specification	52
4.1	interface datatype	71
4.2	ident, signature and path datatypes	71
4.3		72
4.4	contingency datatype	72
4.5		72
4.6	component datatype	73
4.7	Projection for the component identifier element	73
4.8	Function to find a component by its identifier	74
4.9	binding datatype	74
4.10	binding examples in Mefresa	75
4.11	Model for component "Component N" (part 1 of 3)	76
4.12	Model for component "Component N" (part 2 of 3)	76
4.13	Model for component "Component N" (part 3 of 3)	77
4.14	well-formed component definition	78
4.15	unique_ids predicate definition	78
4.16	$well_formed_interfaces \ \mathrm{predicate} \ \mathrm{definition} \ . \ . \ . \ . \ . \ . \ . \ . \ . \ $	79
4.17	Function to find an ${\sf interface}$ by its identifier and ${\sf visibility}$ values	80
4.18	well_formed_bindings predicate definition	81
4.19	normal_binding predicate definition	81
4.20	export_binding predicate definition	82
4.21	Proof script for the $C_{is_well_formed}$ Lemma	83
4.22	$well_typed \ \mathrm{predicate} \ \mathrm{definition} \ \ldots \ldots \ldots \ldots \ldots \ldots$	85
4.23	sound_contingency predicate definition	86
4.24	${\sf client_internal_mandatory_itfs_are_bound} \ \operatorname{predicate} \ \operatorname{definition} \ \ldots \ .$	86
4.25	${\sf subc_client_external_mandatory_itfs_are_bound\ predicate\ definition}$	86
4.26	decidable predicate definition	89

TIOT OF LICTINGS	
LIST OF LISTINGS	XXI

4.27	well_typed_bool function definition
4.28	sound_contingency_bool function definition
4.29	${\tt client_internal_mandatory_itfs_are_bound_bool} \ \ {\tt function} \ \ {\tt definition} \ \ . \ \ 96$
4.30	${\sf client_internal_mandatory_itfs_are_bound_bool_one \ function \ defi-}$
	nition
4.31	${\tt check_if_recipients_are_mandatory_aux} \ \ {\tt function} \ \ {\tt definition} \ \ . \ . \ . \ \ . \ $
4.32	state datatype
4.33	operation datatype
4.34	Notation for sequence of operations
4.35	Reflexive transitive closure definition of step
4.36	operation for the component "Component N" $\dots \dots \dots$
4.37	operation for the component $"C"$
4.38	operation for the component $"S"$
4.39	operation for binding the components
4.40	Overall operation for component "Component N" $\dots \dots \dots$
4.41	Logical statement regarding the reduction of build_running_example 107
4.42	well_formed predicate definition
	well_formed predicate definition
4.43	validity statement
4.435.1	validity statement
4.435.15.2	validity statement
4.435.15.25.3	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128
4.435.15.25.35.4	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128
4.43 5.1 5.2 5.3 5.4 5.5	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129
4.43 5.1 5.2 5.3 5.4 5.5 5.6	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132
4.43 5.1 5.2 5.3 5.4 5.5 5.6 5.7	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132Role symmetry132
4.43 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132Role symmetry132Interface symmetry132
4.43 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132Role symmetry132Interface symmetry132A first PAINLESS specification134
4.43 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132Role symmetry132Interface symmetry132A first PAINLESS specification134PAINLESS specification for the composite tutorial135
4.43 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132Role symmetry132Interface symmetry132A first PAINLESS specification134PAINLESS reconfigurations135PAINLESS reconfigurations136
4.43 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 6.1	validity statement109Excerpt of the build_state function definition125validity statement126wf_error_msg type definition128custom_build_state function definition128custom_build_state_correct lemma129Shorthand for interfaces132Role symmetry132Interface symmetry132A first PAINLESS specification134PAINLESS reconfigurations135LList datatype140


xxii LIST OF LISTINGS

6.4	action datatype
6.5	message datatype
6.6	LTS datatype
6.7	Trace definition for a LTS
6.8	$\label{ts_target_state} \mbox{ ts_target_state function definition } \dots $
6.9	${\sf SynchronizationVector}\ datatype \dots \dots$
6.10	A convenient notation for Synchronization Vector $\dots \dots \dots$
6.11	Net datatype
6.12	$\verb net_state datatype \dots \dots$
6.13	$\verb net_target_states function definition$
6.14	$\verb init_net_state function $
6.15	attainable predicate definition $\dots \dots \dots$
6.16	Trace definition for Net
6.17	Definition of the satisfies predicate $\dots \dots \dots$
6.18	Definition of the Always predicate
6.19	Definition of the slave process lts_states
6.20	Definition of the slave process actions
6.21	Definition of the slave process transitions
6.22	Definition of the slave process LTS
6.23	Definition of the master process lts_states
6.24	Definition of the master process actions $\dots \dots \dots$
6.25	Definition of the master process transitions
6.26	Definition of the master process LTS
6.27	Definition of the master process LTS
6.28	Definition of the overall Net $\dots \dots \dots$
6.29	Definition of the interleaving predicate
6.30	Definition of the Rma relation
6.31	Definition of the Rma relation
6.32	Encoding of the lts_states for the queue process
6.33	Encoding of the transitions for the queue process
6.34	Encoding of the initial lts_state for the queue process
6.35	Encoding of the queue process
6.36	Encoding of the body transitions

LIST OF LISTINGS	xxiii
6.37 Remaining definitions encoding body process	161
6.38 Encoding of JMX Indicators method	161
6.39 Encoding of the component system	162
6.40 Definition of the recursive Net datatype	163

List of Tables

2.1	Rules for the permut predicate
3.1	State-space information for the HyperManager Gateway component . 55
3.2	State-space information for the $HyperManager$ Server component 59
3.3	State-space information for the overall system product 60
3.4	State-space information for HyperManager Gateway with reconfig-
	urable interface
3.5	State-space information for HyperManager Server with reconfigurable
	interface
3.6	State-space information for the reconfigurables HyperManager Server
	and HyperManager Gateway
3.7	State-space information for the reconfigurables HyperManager Server
	and HyperManager Gateway (second approach) 66
4.1	Semantics of our operation language
4.2	Details regarding the number of lines composing Mefresa 120
5.1	Painless syntax (excerpt)
5.2	Painless semantic rules (excerpt)



Introduction

"Never permit a dichotomy to rule your life, a dichotomy in which you hate what you do so you can have pleasure in your spare time.

Look for a situation in which your work will give you as much happiness as your spare time."

Pablo Picasso

Contents

1.1	Component-based software engineering	2
1.2	Context — The Spinnaker project	3
1.3	Contributions	3
1.4	Organisation of this thesis	5

This thesis belongs to the domain of formal methods. In particular, we focus on their application to a specific methodology for the development of software: component-based engineering.

Either by means of automatic or interactive approaches, the goal of formal methods is to increase the confidence one can place on a software system. Throughout this thesis, we discuss the application of formal methods techniques in the context of component-based engineering.

1.1 Component-based software engineering

Among all programming paradigms, component-based engineering stands as one of the most followed approaches for real world software development. Its emphasis on a clean separation of concerns makes it appealing for both industrial and research purposes. Furthermore, component-based systems are notorious for their capacity to address the inherent challenges of today's software development. They promote modular designs, and therefore ease the burden of development and maintenance of applications. Moreover, portability and re-usability of components are further benefits of this paradigm.

There are several component models proposed in the literature [1, 2, 3], each with their own particularities (hierarchical/flat, static/reconfigurable, ...). Yet, their foundation is generally made of three main ingredients: components, interfaces, and bindings. A component can be seen as a building block, usually a piece of software code. An interface is an access point to/from components. Finally, a binding is a connection established between components, through their interfaces.

Indeed, component-based programming shares some resemblances with objectoriented programming. Their fundamental distinction lies in the fact that in the former paradigm, communications are always explicitly made through the component's interfaces, therefore making all existing dependencies evident.

Another facet of component-based systems concerns software evolution. This methodology of developing software enables on-the-fly structural reconfigurations of the architecture of the application. The advantage of modifying the software architecture at runtime comes from the need to cope with the plethora of situations that may arise in a potentially massively distributed and heterogeneous system. Indeed, the ability to restructure is also a key aspect in the field of autonomic computing where software is expected to adapt itself. However, this capacity comes with a price: we no longer need only to care about functional concerns, but also about structural ones.

The widespread use of component models together with the interesting challenges posed by reconfigurable component-based applications make it an exciting research topic for the formal methods community. Within our research group, we focus on the Grid Component Model (GCM) [2] to address the intricacies of grid and cloud computing. Details regarding its specification are discussed in Section 2.1.

1.2 Context — The Spinnaker project

This thesis occurs in the context of the Spinnaker project¹, a collaborative project between INRIA and several industrial partners, where we intend to contribute for the widespread adoption of Radio-Frequency Identification (RFID)-based technology. To this end, our contribution comes with the design and implementation of a non-intrusive, flexible and reliable solution that can integrate itself with other already deployed systems. Specifically, we developed The Hypermanager, a general purpose monitoring application with autonomic features. This was built using GCM/ProActive² — a Java middleware for parallel and distributed programming that follows the principles of the GCM. For the purposes of this project, it had the goal to monitor the E-Connectware³ (ECW) framework in a loosely coupled manner.

1.3 Contributions

In this thesis, we contribute to the state of the art in the domain of formal methods and (distributed) component-based systems.

Our first contribution is an industrial case study on the behavioural specification and verification of a reconfigurable distributed application. This promotes the use of formal methods in an industrial context, but also puts in evidence the necessity for alternative and/or complementary approaches in order to better address such undertakings.

Our second contribution is a framework, developed with the Coq proof assistant, for reasoning on software architectures: Mefresa. This encompasses

¹Project OSEO ISIS. http://www.spinnaker-rfid.com/

²http://proactive.activeeon.com/index.php

 $^{^3}$ http://www.tagsysrfid.com/Products-Services/RFID-Middleware

the mechanization of the GCM specification, and the means to reason about reconfigurable GCM architectures. Further, we address behavioural concerns by formalizing a semantics based on execution traces of synchronized transition systems. Overall, it provides the first steps towards a complete specification and verification platform addressing both architectural and behavioural properties.

Finally, our third contribution is a new Architecture Description Language (ADL), denominated Painless, and its proof-of-concept integration with the ProActive middleware. Painless allows to specify parametrized GCM architectures, along with their structural reconfigurations, in a declarative-like language. Compliance with the GCM specification is evaluated by certified functional code extracted from Mefresa. This permits the safe deployment and reconfiguration of GCM applications.

The following publications resulted from this thesis.


- Nuno Gaspar and Eric Madelaine. Fractal à la Coq. Conférence en Ingénierie du Logiciel, Rennes, France, June 2012.
- Nuno Gaspar, Ludovic Henrio and Eric Madelaine. Bringing Coq into the World of GCM Distributed Applications. International Journal of Parallel Programming, August 2014. Volume 42, Issue 4, pp 643-662.
- Nuno Gaspar, Ludovic Henrio and Eric Madelaine. Formally Reasoning on a
 Reconfigurable Component-Based System A Case Study for the Industrial
 World. International Symposium on Formal Aspects of Component Software
 (FACS'2013). Lecture Notes in Computer Science 2014, pp 137-156.
- Nuno Gaspar, Ludovic Henrio and Eric Madelaine. Painless support for the static and runtime verification of component-based applications. 6th IPM International Conference on Fundamentals of Software Engineering (FSEN'2015). (to appear)

Moreover, a talk entitled Formal Reasoning on Component-Based Reconfigurable Applications, was given at the student session of the 40th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (POPL'2013).

1.4 Organisation of this thesis

The remaining of this thesis is organized as follows.

- Chapter 2 gives an overview of the **technical background** required for the understanding of this thesis. Pointers for relevant literature are indicated for the reader desiring further details.
- Chapter 3 discusses an **industrial case study** on the formal specification and verification of a reconfigurable GCM/ProActive application. This is achieved by formally defining its behavioural semantics and check it against the desired properties by means of model-checking techniques.
- Chapter 4 presents Mefresa, a framework for the reasoning on software architectures. It is tailored for the GCM, and developed using the Coq proof assistant.
- Chapter 5 shows how we leverage the MEFRESA framework and Coq's certified extraction mechanism to provide an extension to the GCM/ProActive middleware. Further, we propose PAINLESS, a novel language for the specification of reconfigurable GCM architectures.
- Chapter 6 addresses the mechanization of a **behavioural semantics using the Coq proof assistant**. We show how we can interactively reason about transition systems. Further, we illustrate its use in the context of the GCM.
- Chapter 7 discusses relevant **related work** w.r.t. to the main contributions of this thesis.
- For last, chapter 8 discusses the **final conclusions** about this thesis, and indicates perspectives for future work and improvements.



Preliminaries

"We live in a society exquisitely dependent on science and technology, in which hardly anyone knows anything about science and technology."

Carl Sagan

Contents

2.1	1 The	GCM Component Model	8
	2.1.1	Overview of the GCM specification	9
	2.1.2	The GCM ADL	13
2.2	Pro.	Active — A middleware for distributed program-	
	min	g	14
	2.2.1	$\operatorname{GCM}/\operatorname{ProActive}$ — a reference implementation for GCM	15
	2.2.2	Specifying architectures with the ADL	17
2.3	3 pNe	ts: A formalism for defining behavioural semantics	20
	2.3.1	Behavioural semantics for GCM/ProActive applications	22
	2.3.2	Coping with structural reconfigurations	24
2.4	4 The	Fiacre specification language	26

2.5	5 A brief overview of the Coq Proof Assistant		
	2.5.1	Data types	30
	2.5.2	Functional programming in Coq	31
	2.5.3	Proving properties	34
	2.5.4	Extracting certified programs	37

This chapter discusses the required background for the reading of this thesis. Each of its constituents Sections are self-contained presentations to relevant material for its understanding. The reader already familiar with some of the Sections may opt to skip them.

Section 2.1 introduces the GCM component model. Its reference implementation is discussed in Section 2.2. Then, Section 2.3 presents a formalism for specifying behavioural semantics. Section 2.4 discusses the Fiacre specification language. For last, Section 2.5 provides an overview of the Coq proof assistant.

2.1 The GCM Component Model

Proposed by the CoreGrid European network of Excellence, the GCM [2] is based on the Fractal Component Model [1], with extensions addressing the issues of grid computing: deployment, scalability and asynchronous communication. Essentially, it benefits from Fractal's hierarchical structure, introspection capabilities, extensibility, and the separation between interfaces and implementation. In the following, we do not discriminate what is inherited from the Fractal component model and what is an extension. We discuss the whole features defining the GCM.

The main objectives of the GCM are the implementation, deployment, and management of complex and distributed systems. Indeed, there are several proposals for component models in the literature, yet, most suffer from limited support for extension, adaptation, and distribution. To this end, the GCM offers customizable communication patterns, transparent remote component access, component composition, introspection (i.e. monitoring of the running system), and (autonomic) (re)configuration capabilities. Moreover, the GCM intends to be suited for a wide range of application scenarios.

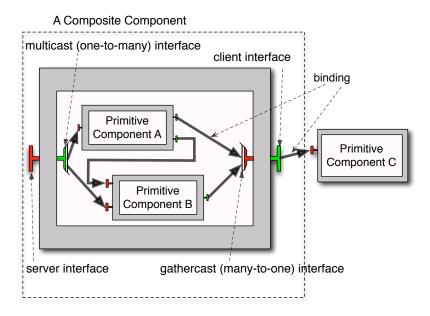


Figure 2.1 – A simple GCM architecture

An example of a GCM architecture is depicted by Figure 2.1. Basically, the core elements of a GCM application are (1) components, which can be composite or primitive — depending on whether they have inner components or not —, (2) interfaces, and (3) bindings. As expected, interfaces act as access points, and bindings establish communications between components.

Both synchronous and asynchronous communications are supported. These, can be *one-to-one*, but also of collective nature: *one-to-many* (multicast), many-to-one (gathercast), and even many-to-many. Moreover, support for autonomic aspects are provided by means of non-functional interfaces.

In the remainder of this section we delve into the GCM intricacies and further discuss its characteristics that are relevant for the understanding of this thesis. For more details the interested reader is pointed to the GCM's technical specification [4].

2.1.1 Overview of the GCM specification

Component introspection In the GCM, components are endowed with introspection capabilities of its external features. One of the advantages of being a

hierarchical component model is the possibility to adjust the granularity of abstraction, i.e. components can be seen as white or black boxes. As a black box, one cannot see its internal structure, solely its external interfaces.

Each interface has a name. All external interfaces of one component must have distinct names, but no such restriction is imposed on interfaces belonging to different components. Moreover, an interface is also characterized by its *role*: it can be a *client* or *server* interface. The former emits operation invocations, while the latter receives them. Intuitively, one should see the client interfaces as the means for service methods to interact with other service methods.

A component's interface can be introspected through two different Application Programming Interface (API)s: the Component interface, and the Interface interface. The former specifies the methods getFcInterfaces() and getFcInterface(String iftName), that return an array of references to the component's interfaces, and a reference to the interface whose name matches the value itfName passed as argument, respectively. The latter, focuses on the introspection from an interface perspective. In particular, it specifies a getFcItfName() method, that returns a string with the name of the interface, and getFcItfOwner(), that returns the Component reference of the component to which it belongs.

Component configuration A GCM component, primitive or composite, is arranged by two parts: a membrane and a content. The former — see the grey parts of each component of Figure 2.1 — contains a set of controllers that expose non-functional interfaces. These allow to dynamically reconfigure the structure of a GCM application. The latter, is either an object — for primitive components — or a finite set of subcomponents — for composite components —, which are under control of the enclosing component's controllers.

A membrane can have interfaces of external and internal visibility. External interfaces are available from outside the component, while internal interfaces are accessible to the component's direct subcomponents. A component's interfaces can share the same name provided they have a different visibility. Moreover, interfaces are also classified regarding their functionality: they can be functional or control. The former corresponds to an interface providing or requiring a functionality to the component. Intuitively, it means it is part of the application logic. The

latter provides "non-functional" aspects, such as reconfiguration capabilities. This capacity to reconfigure the application's architecture at runtime is of paramount importance, and plays a key role in the realm of autonomic computing.

A binding is a communication path from a client interface to a server interface. There are three types of bindings. A normal binding (1) is established between two external interfaces from components at the same hierarchical level, i.e. possessing the same enclosing component. An import binding (2) is made from a (sub)component to its enclosing component. Last, an export binding (3) binds a component to one of its subcomponents. For the sake of clarity, these are depicted by Figure 2.2, Figure 2.3, and Figure 2.4, respectively.

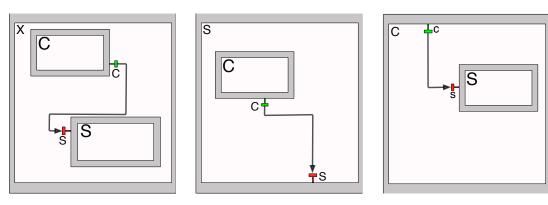


Figure 2.2 – Normal Binding

Figure 2.3 – Import Binding

Figure 2.4 – Export Binding

This can be seen as a structural constraint ensuring that no binding can "cross" a component boundary except through its interfaces. Further, a client interface can be bound to at most one server interface, while several client interfaces can be bound to the same server interface. This constraint is relaxed if the client interface is of multicast cardinality. Other cardinality values include singleton, for simple one-to-one communications, and gathercast that act as a rendez-vous for gathering data.

Component runtime instantiation In the GCM, component creation is achieved through *factories*. Basically, components are created by other special type of components called component factories.

The GCM offers a generic component factory and a standard component factory. The former allows the creation of several kinds of components, while the latter is more specific, it can only create components of the same type. For both factories, one can wonder: if components are created from component factories, how are component factories created? From other component factories? Indeed, this would lead to an infinite recursion. This is solved by the inclusion of a bootstrap component factory that needs not to be created explicitly. Naturally, it is able to create several kinds of components, namely component factories.

Component typing A simple type system is defined for composing components. It mainly reflects the characteristics of the component's interfaces. In particular it focuses on the *cardinality* and *contingency* attributes of an interface.

There are four possible values for an interface cardinality. Considering an interface of type \mathbf{T} , it can be singleton (1), entailing that the component owning it must have exactly one interface of type \mathbf{T} . Collection (2), indicating that an arbitrary number of interfaces of type \mathbf{T} can coexist on a given component. However, their name must begin with the same name specified in \mathbf{T} . Since there is an infinite number of such interfaces, they cannot be created at the same time, they must be created lazily, i.e., at invocation time. An interface may also be multicast (3): it is like a singleton, but transforms each invocation into a set of invocations. At last, an interface of gathercast (4) cardinality also behaves as a singleton, but transforms a list of invocations into a single invocation.

Regarding the interface's contingency attribute, an interface can be *optional* or *mandatory*. The operations of an optional interface have no guarantee to be available at runtime, while a mandatory interface provides such a guarantee. Basically, mandatory interfaces are made for components absolutely requiring other components to work, whereas optional interfaces are useful for components that may use others, if present. For instance, a parser component absolutely needs a lexer component, but can work with or without a logger component.

2.1.2 The GCM ADL

One may need to define arbitrarily complex architectures. With the increase of complexity in the system to be described, it is important to have a precise way to describe such architectures. In the realm of component-based engineering, this is usually achieved by means of an ADL. The GCM follows this approach by supporting its own GCM ADL [5].

The GCM ADL is a XML-based language. As a root element it contains the definition element. Basically, it describes the structure of the application via component, interface and binding elements. The component element possesses a name and definition attribute. These identify the component, and its owner, respectively. Moreover, it may contain the following child elements:

- comment: a free form of text documenting the component. (0-unlimited);
- interface: description of the interface provided by the component. (0-unlimited);
- component: reference to a subcomponent. (0-unlimited);
- binding: description of the binding hold by the component. (0-unlimited);
- content: class which represents the components. (0-1);
- attributes: list of attributes of the component. (0-1);
- controller: controller of the component. (0-1);
- *virtualNodes*: list of virtual nodes the component should be deployed on. (0-1);
- export Virtual Nodes: list of export virtual nodes. (0-1).

A comment element is a simple text element, adding some contextual information. An interface element possesses the following attributes:

- name: identifier of the interface. (required);
- role: 'client' or 'server'. (required);

- *signature*: signature of the interface. (required);
- contingency: 'mandatory' or 'optional'. (optional);
- cardinality: 'singleton', 'collection', 'gathercast' or 'multicast'. (optional);
- comment: a free form of text documenting the interface. (0-unlimited).

Its constituting attributes should pose no doubt. However, the careful reader may notice that there is no attribute specifying whether an interface is of internal or external visibility. This must be handled in an automated manner. For instance, a multicast server interface of a composite component is in fact the composition between a server interface and a multicast internal client interface.

Next, the component child element of the component element portrays GCM's hierarchical nature. The binding element is solely composed by two attributes, *client* and *server*, which hold the name of the client and server interfaces involved in the binding, respectively. The content element features solely the *class* attribute that specifies the class implementing the component.

The attributes element are key/value pairs that can be used to parametrize the component. The controller element indicates the component controller that manages the component w.r.t. non-functional aspects. Finally, the remaining elements virtualNodes and exportVirtualNodes serve the purpose of facilitating the deployment task, i.e., one may want to distribute its application to a set of predefined nodes.

This Subsection discussed the main ingredients of the GCM ADL. For a more detailed description of its intricacies, namely its XML schema, the interested reader is pointed to its technical specification [5].

2.2 ProActive — A middleware for distributed programming

ProActive¹ is an open source Java middleware for the programming of multithreaded, parallel, and distributed applications. An application adopting ProAc-

¹Available online: http://proactive.activeeon.com/index.php

tive is composed by entities denominated *active objects* [6]. Each active object contains a distinguished element, the *root*, that is its only entry point. Moreover, it possesses its own thread of control, every incoming method call is automatically placed in a queue of pending requests, and is able to decide by which order it serves them.

Further, incoming method calls are asynchronous with transparent future objects. Basically, a short rendezvous occurs at the beginning of each asynchronous remote call, which blocks the caller until the call has reached the callee. Then, if the invoked method returns a result, a future object is created on the callee side and returned back as a result to the caller. Thus, a future can be seen as a placeholder for the return value of an active object method invocation. The object that issued the invocation can therefore proceed its execution. At a later stage, if it needs to read the actual returned value, it blocks until the value is available — i.e. until the request is processed and returned back from the callee — or continues transparently if meanwhile the value has already been obtained. This mechanism is called wait-by-necessity.

Another common nomenclature found in the literature for the future concept is *promise* [6]. Both terms are often used interchangeably.

2.2.1 GCM/ProActive — a reference implementation for GCM

As mentioned earlier, ProActive is the *de facto* reference implementation for GCM. For this reason, whenever focusing on its component model part, it is often referred to by GCM/ProActive.

In GCM/ProActive a primitive component is implemented through an active object, and thus includes its standard features. Components communicate asynchronously through the established bindings between their interfaces.

For instance, let us consider two components of some architecture as depicted by Figure 2.5. Components **A** and **B** both possess a server interface (in red), and the former is also equipped with a client interface (in green). A binding between **A**'s client interface and **B**'s server interface connects them together. Moreover, they both include a request queue.

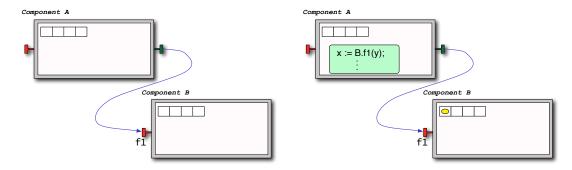


Figure 2.5 – Components **A** and **B**

Figure 2.6 – $\bf A$ invokes $\bf f_1$ from $\bf B$

Whenever **A** invokes the method \mathbf{f}_1 from **B**'s server interface, a request is inserted into **B**'s queue. At this point, the variable **x** holds a future for the reply of \mathbf{f}_1 , and **A** proceeds its execution (Figure 2.6).

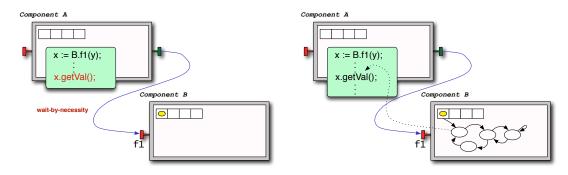


Figure 2.7 – A blocks! wait-by-necessity Figure 2.8 – B replies, and A is happy

If **A** needs to access the value of \mathbf{x} , then it may be the case that **B** has not yet treated the request, and thus **A** blocks until it gets the reply from \mathbf{f}_1 's invocation (Figure 2.7). Alternatively, it may be the case that **B** already replied, and therefore **A** can proceed its execution transparently (Figure 2.8).

As expected, GCM components are mono-threaded, i.e. only one request is treated at a time. It may seem restrictive, but it has the benefit of ensuring thread-safety. Nevertheless, we may refer that recent work aims at improving performance by allowing multi-threading for active objects [7].

2.2.2 Specifying architectures with the ADL

As discussed in Subsection 2.1.2, the GCM defines its ADL as a means to specify component architectures. GCM/ProActive includes support for such feature. For instance, let us consider the simple GCM application depicted by Figure 2.9.



Figure 2.9 – Simple GCM application example

It is composed solely by one primitive component, named Slave, possessing one server interface named i_1 . Listing 2.1 illustrates the specification of this architecture.

```
1 <!DOCTYPE definition PUBLIC "-//objectweb.org//DTD Fractal ADL 2.0//
        EN" "classpath://org/objectweb/proactive/ core/component/adl/xml/
        proactive.dtd">
2 <definition name="org.objectweb.proactive.examples.userguide.
        components.adl.starter.adl.Slave">
3 <interface signature="org.objectweb.proactive.examples.userguide.
        components.adl.starter.Itf1" role="server" name="i1">
4 <content class="org.objectweb.proactive.examples.userguide.components
        .adl.starter.SlaveImpl"/>
5 <controller desc="primitive"/>
6 </definition>
```

Listing 2.1 – GCM/ProActive slave component ADL

The contents of the ADL should pose no doubt. Line 1 concerns XML validation aspects, basically it allows standard validators to check if the XML file is well formed. The component architecture aspects $per\ se$ begin at line 2. Its definition possesses the name attribute indicating its classpath, and contains three child elements: interface, content and controller. The interface's signature points to the java interface file holding signature for the supported service methods. Next, it is specified as having a server role and with name i_1 (line 3). The content holds the class attribute that indicates the actual java implementation for this component.

- i.e. it implements the service methods specified in the interface's signature (line
- 4). At last, the *controller* specifies the default primitive component controller (line
- 5). Moreover, no information is provided regarding *virtual nodes*. This is usually the case when deploying the application locally.

Let us now look at a more elaborated example. Figure 2.10 depicts a slightly more complex architecture featuring three components: *Composite*, *Master* and the previously discussed *Slave*.

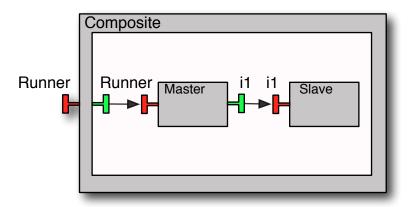


Figure 2.10 – GCM *composite* application example

The Composite encapsulates the two remaining components and exposes one external server named Runner. Its symmetric counterpart, i.e. internal and client, is bound to the server interface of the Master component, also named Runner. Further, the Master component is also equipped with a client interface named i_1 that is bound to the Slave's server interface. Listing 2.2 shows its ADL.

Listing 2.2 – GCM/ProActive Composite component ADL

Line 3 starts the *definition* of this *Composite* by indicating its classpath, and including the child elements relevant for this specification. As mentioned above, the GCM ADL does not include an attribute for specifying whether an interface is of external or internal visibility. Indeed, there is only one *interface* element included in the *composite* ADL (line 4). Its symmetric counterpart is not specified and automatically handled by GCM/ProActive. Next, the *component* elements at lines 6 and 7 are references to their actual ADLs. Lines 9 and 10 specify the two bindings of this architecture using the familiar **this** and **.** notations. For last, line 12 specifies the *controller* as the default composite component controller.

The remaining pieces for the specification of the *Composite* architecture concerns the ADLs of its two subcomponents: *Master* and *Slave*. The *Slave* architecture has already been discussed (see Listing 2.1), its only modification concerns the classpath of its *name* definition. Regarding the *Master* component, its ADL is depicted by Listing 2.3.

Listing 2.3 – GCM/ProActive *Master* component ADL

As expected, it follows the same structure as the *Slave* ADL. Indeed, it mainly differs on the inclusion of a client interface (line 5).

In this Section we only covered the fundamentals of the ProActive middleware. The interested reader is pointed to ProActive's programming manual for more discussion on its intricacies [8].

2.3 pNets: A formalism for defining behavioural semantics

pNets stands for parametrized Network of synchronized automata. It provides an intermediate and general formalism aimed at the specification and synchronisation of the behaviour of a set of automata. Further, it is mainly aimed towards two goals: provide a formal foundation to the model generation principles for distributed component frameworks — such as GCM —, and to propose an expressive, yet concise, machine-oriented model that can be used as an internal format for software tools.

The first definition of pNets was published in [9]. Here, we restrict ourselves to a more succinct discussion, focusing on the material relevant for the understanding of this thesis.

A pNet is a hierarchical structure whose leaves are pLTSs or queues. A pLTS is a labelled transition system with variables. It can possess guards and assignments on its transitions. It is formally defined as follows.

Definition 2.3.1 (pLTS). A pLTS is a parametrized LTS defined by a tuple $pLTS \triangleq (P, S, s_0, L, \rightarrow)$ where:

• P is a finite set of parameters, from which we construct the term algebra \mathcal{T}_P , with parametrized actions \mathcal{A}_P , the parametrized expression \mathcal{E}_P , and the boolean expressions \mathcal{B}_P .

2.3. PNETS: A FORMALISM FOR DEFINING BEHAVIOURAL SEMANTICS21

- S is a set of states. For each state $s \in S$, variables of s are global to the pLTS.
- $s_0 \in S$ is the initial state.
- L is the set of labels of the form $(\alpha, e_b, (x_j := e_j)^{j \in J})$, where $\alpha \in \mathcal{A}_P$ is a parametrized action, $e_b \in \mathcal{B}_P$ is a guard, and the variables $x_j \in P$ are assigned the expressions $e_j \in \mathcal{E}_P$.
- $\rightarrow \subseteq S \times L \times S$ is the transition relation.

Before proceeding to the remaining definition of a pNet structure, let us define the *sort* of a pNet. Basically, it is its signature: the set of actions it can perform, that is, the set of labels of its transitions. We define it by the following function $Sort: pNet \rightarrow \mathcal{A}_P$.

$$Sort(p) = \begin{cases} L & \text{for } p = (P, S, s_0, L, \rightarrow) \\ \{?Q_m_i \mid m_i \in \mathcal{M}\} \cup \{!Serve_m_i \mid m_i \in \mathcal{M}\} & \text{for } p = Queue(\mathcal{M}) \\ L & \text{for } p = (P, L, pNet_i^{k \in K}, SV_k^{k \in K}) \end{cases}$$

Its definition should pose no doubt. For the cases of being a leaf, if it is either a pLTS or a queue. For the former it simply returns its set of labels L. For the latter it returns a set of actions depending on $\mathcal{M} \subseteq \mathcal{T}_P$. Basically, a $Queue(\mathcal{M})$ can be seen as an infinite pLTS modelling the behaviour of a First In, First Out (FIFO) queue. Its semantics is simply the en-queueing and de-queueing of $m_i \in \mathcal{M}$. The last case concerns the recursive constructor of the pNet structure, where we also simply return its set of labels L.

Let us now see a formal definition for pNet.

Definition 2.3.2 (pNet). A pNet is a hierarchical structure defined by pNet $\triangleq pLTS \mid Queue(\mathcal{M}) \mid (P, L, pNet_i^{i\in\mathcal{I}}, SV_k^{k\in K})$ where

- P is a finite set of parameters, from which we construct the term algebra \mathcal{T}_P , with parametrized actions \mathcal{A}_P .
- $L \subseteq \mathcal{A}_P$ is the set of labels actions of the pNet.
- $\mathcal{I} \in \mathcal{I}_P$ is the set of over which sub-pNets are indexed, $\mathcal{I} \neq \emptyset$.

- $pNet_i^{i\in\mathcal{I}}$ is the family of sub-pNets.
- $SV_k^{k \in K}$ is a set of synchronization vectors $(K \in \mathcal{I}_P)$. $\forall k \in K, SV_k = \alpha_j^{j \in J_k} \rightarrow \alpha_k'$. Each synchronization vector verifies: $\alpha_k' \in L, J_k \in \mathcal{I}_P, \varnothing \subset J_k \subseteq I$, and $\forall j \in J_k.\alpha_j \in Sort(pNet_j)$.

Being a hierarchical structure, a pNet composes sub-pNets and expresses by its synchronization vectors how the sub-entities are synchronized. For instance, $SV_k = \alpha_j^{j \in J} \to \alpha_k'$ means that each sub-pNet can perform the action α_j , resulting in a global action labelled α_k' .

$\begin{array}{ccc} \textbf{2.3.1} & \textbf{Behavioural semantics for GCM/ProActive applications} \\ & \textbf{tions} \end{array}$

Section 2.1 presented the GCM, and its reference implementation was discussed in Section 2.2. Here, we show how to use pNets to give a formal semantics to GCM/ProActive applications.

As an illustrative example, the internals of a GCM primitive component featuring three service methods — m_1 , m_2 and m_3 — and two client methods — m_4 and m_5 — are depicted by Figure 2.11. It illustrates both the global structure of the pNets represented by boxes, and the synchronization vectors represented by arrows — an ellipse is used when it involves more than one process.

Invocation on service methods — $Q_m_{i, i \in \{1,2,3\}}$ — go through a Queue, that dispatches the request — Serve_m* — to the Body. Serving the request consists in performing a Call_m* to the adequate service method, represented by the \mathcal{M}_i boxes in the figure. Once a result is computed, a synchronized R_m* action is emitted. This synchronization occurring between the service method and the Body stems from the fact that GCM primitive components are mono-threaded. Moreover, the careful reader will notice the $fid_{i, i \in \{1,2,3\}}$ in the figure. These are the previously discussed futures (see Section 2.2), and act as promises for replies, leveraging asynchrony between components.

Service methods interact with external components by means of client interfaces. This requires obtaining a proxy — GetProxy_m*, New_m_{i, ie{4,5}} — in order to be able to invoke client methods — Q_m_{i, ie{4,5}}. The reply — R_m_{i, ie{4,5}}

2.3. PNETS: A FORMALISM FOR DEFINING BEHAVIOURAL SEMANTICS23

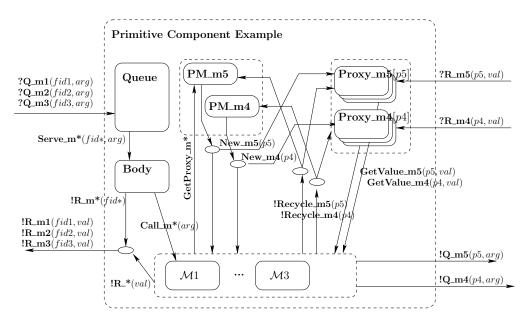



Figure 2.11 – pNet representing a primitive component

— goes to the proxy used to call the external component. Then, a GetValue_- $m_{i, i \in \{4,5\}}$ is performed in order to access the result in the method being served. Finally, Recycle_ $m_{i, i \in \{4,5\}}$ actions can be performed in order to release the proxies.

The behaviour of the Queue and the Body elements should pose no doubt. The former acts as a queue with a FIFO policy, raising an exception if its capacity is exceeded. The latter dispatches the requests to the appropriate method and awaits its *return*, thus preventing the service of other requests in parallel.

The handling of proxies however, is not as straightforward and deserves a closer look. Figures 2.12 and 2.13 illustrate the behaviour of the Proxies and Proxy Managers, respectively. Upon reception of a New_m_i action, a Proxy waits for the reply of the method invoked with it — R_m —, making thereafter its result available — GetValue_m . As soon as the reply is received, the Proxy can potentially be recycled through a Recycle_m action.

The behaviour of the Proxy Manager is slightly more elaborated. It maintains a *pool* of proxies, keeping track of those available and those already allocated. On the reception of a GetProxy_m action, it activates a new proxy — New_m — if there is one available. Should that not be the case, an Error(NoMoreProxy) action is emitted. As expected, a Recycle_m action frees a previously allocated proxy.






Figure 2.12 – Behaviour of proxy

Figure 2.13 – Behaviour of the proxy manager

2.3.2 Coping with structural reconfigurations

As mentioned in Section 2.1, the GCM also contemplates non-functional aspects such as structural reconfigurations. This means that the architecture of the application can evolve at runtime (e.g. by establishing new bindings, removing existing ones, ...).

For GCM applications bind and unbind operations are handled by the component owning the client interface that is supposed to be reconfigurable. This should come as no surprise, indeed, it follows the same spirit as in object-oriented languages: an object holds the reference to a target object; it is this object that must change the reference it holds. Moreover, we recall that client interfaces can be of singleton or multicast cardinality. The former is bound to at most one server interface, while the latter needs to potentially handle several recipients. Therefore, their reconfiguration is dealt in different manners.

Let us first illustrate how a reconfigurable client singleton interface is modelled in pNets. A component is equipped with a *binding controller* interface to bind and unbind its client singleton interfaces. As depicted by Figure 2.14, the binding controller pLTS attached to each of them controls their bindings.

Indeed, we allow for reconfigurations by defining two new request messages for the *binding* and *unbinding* of interfaces. These are delegated to a binding controller

2.3. PNETS: A FORMALISM FOR DEFINING BEHAVIOURAL SEMANTICS25

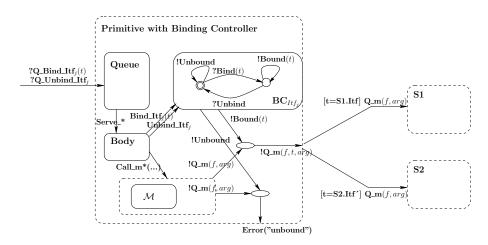


Figure 2.14 – Binding controller

that upon method invocation over these reconfigurable interfaces will check if they are indeed bound, emitting an error if it is not the case. Moreover, the target of the invocation is decided by checking its passed reference. For this reason one must know statically what are the possible target interfaces that a reconfigurable interface can be bound too.

Reconfigurations involving multicast interfaces require keeping track of a set of recipients. Figure 2.15 depicts the pNet specificities concerning the handling of such interfaces.

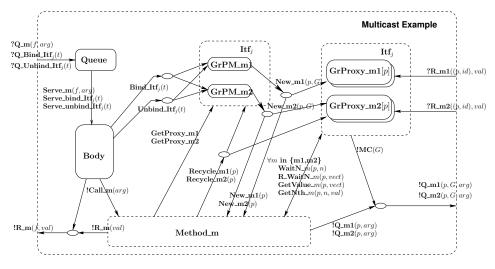


Figure 2.15 – pNet example for reconfigurable multicast interface

In short, the machinery involved for dealing with this kind of interfaces mainly differs from reconfigurable singleton interfaces in that we must keep track of the target's connectedness status. Indeed, the emission of a new proxy — New_- $\mathsf{m}_{i,i\in\{1,2\}}$ — is synchronized in a similar manner, however we also transmit the current status of the multicast interface (i.e. the G variable in the figure). This status will be taken into account when invoking one of the client methods — Q_- $\mathsf{m}_{i,i\in\{1,2\}}$. In practice, G is a boolean vector whose element's valuation determine the interface's connectedness.

In this section we succinctly presented pNets mainly focusing on its application to the formal specification of GCM applications. It should be noted however, that pNets is also suited for the specification of other types of systems. For a more detailed account on its intricacies the interested reader is pointed to its authoritative reference [10].

2.4 The Fiacre specification language

Fiacre [11] stands for Format Intermédiaire pour les Architectures de Composants Répartis Embarqués. It is a formal language that allows to model systems, in particular, embedded and distributed systems, for formal verification and simulation purposes.

It is built around two notions: processes and components. The former describes the behaviour of sequential components. It is defined by a set of states, each associated with a program made of standard programming language constructs (loops, if-then-else, ...), non-deterministic constructs, communication events, and jumps to subsequent states. The latter describes the composition of processes. It is defined as a parallel composition of components and/or processes communicating through ports and shared variables.

For the sake of clarity, let us see a simple example². First, we define an *union* type as depicted by Listing 2.4.

```
type Order is unionmakeSandwich
```

²The described example is a slight adaptation from the online Fiacre tutorial: http://projects.laas.fr/fiacre/doc/fiacre-tutorial.html

```
3 | makeCoffee of 0..2
4 end
```

Listing 2.4 – The Order type

Basically, the above Order type encodes two types of orders: make a sandwich (line 2), that takes no parameter as we assume there is only one kind of sandwich, and to make coffee (line 3), that takes a value ranging over [0..2] symbolizing that there are three kinds of coffee.

Let us now see a first Fiacre process. Listing 2.5 encodes the beginning of the Slave process.

```
5 process Slave [ready : none, order : in Order] is
6 states startSlavery, waitOrder,
7 makingLatte, makingEspresso, makingCapuccino,
8 makingSandwich
9 var tmp : Order

Listing 2.5 – The Slave process (part 1/2)
```

The Slave process takes two parameters, often called *labels*. As we shall see later, these are used to make processes communicate together, or more precisely, *synchronize*.

At line 5, we can see that the first parameter, ready, is declared with type none. It is a predefined type meaning that no value can be attached to it. The second parameter, order, is of Order type. Moreover, the in keyword stands for the fact that it can only receive orders, and not emit them.

From line 6 to line 8 we define all the states of the Slave process. Further, a local variable, tmp, of type Order, is defined at line 9. We can now proceed to the the process behaviour. Listing 2.6 depicts its definition.

```
10 from startSlavery
11    ready;
12    to waitOrder
13
14 from waitOrder
15    order?tmp;
16    case tmp of
17    makeCoffee(0) -> to makingLatte
18    | makeCoffee(1) -> to makingEspresso
```

```
makeCoffee(2) -> to makingCapuccino
     makeSandwich -> to makingSandwich
  end
21
22
23 from makingLatte
    to startSlavery
24
25
26 from makingEspresso
    to startSlavery
27
28
  from makingCapuccino
29
    to startSlavery
30
32 from makingSandwich
    to startSlavery
33
```

Listing 2.6 – The Slave process (part 2/2)

Its understanding should be straightforward as the Fiacre specification language is rather intuitive and concise.

From its initial state, startSlavery, upon reception of a ready message (lines 10-11), the process proceeds to the waitOrder state (line 12). From there, it awaits for an order message, and stores its value on the tmp variable (lines 14-15). Then, depending on the value of tmp, it proceeds to the corresponding state (lines 16-21). Indeed, the remaining definition of the Slave process is rather trivial: from any attained state, it simply returns to the initial state startSlavery.

Let us now see the Master process. It is depicted by Listing 2.7.

```
34 process Master [ready : none, order : out Order] is
      states start, ordering
35
36
      from start
           ready;
38
           to ordering
39
40
      from ordering select
41
            order!makeCoffee(0)
42
           order!makeCoffee(1)
43
            order!makeCoffee(2)
            order!makeSandwich
45
```

```
    46 end;
    47 to start
```

Listing 2.7 – The Master process

Its definition is straightforward. From its initial state, start, it synchronizes with the Slave process through the label ready, and proceeds to the state ordering (lines 37-39). Then, it non-deterministically selects one order to emit (lines 41-46), and finally, returns to the initial state (line 47).

The last step is to specify how these two processes synchronize. This is depicted by Listing 2.8.

```
48 component CruelWorld is
49 port ready : none,
50 order : Order
51
52 par * in
53 Slave [ready, order]
54 || Master [ready, order]
55 end
56 CruelWorld
```

Listing 2.8 – Process synchronization

Labels are declared in components with the port keyword (lines 49-50). Then, we simply indicate the process synchronization (lines 52-55). The * symbol is used as a shorthand for the labels to be synchronized.

This simple example should be sufficient to provide an insight on the Fiacre specification language. For more details on its semantics the interested reader is pointed to [11].

2.5 A brief overview of the Coq Proof Assistant

The Coq Proof Assistant [12] is a system that implements the Calculus of Inductive Constructions [13] that itself combines both a *higher-order logic* and a functional programming language. In short, it goes beyond the capabilities of standard programming languages/environments by allowing the programmer to write logical

definitions, write functions, and develop proofs involving these definitions and functions.

Indeed, this is also the case for other interactive theorem provers such as Isabelle/HOL [14] and PVS [15]. However, Coq distinguishes itself from these systems in one fundamental aspect: it is based on a *intuitionistic* logic³. This means that the *law of excluded middle* — for any proposition \mathcal{P} , $\mathcal{P} \vee \neg \mathcal{P}$ holds — is not assumed as an axiom. In practice, this entails that whenever trying to prove a formula $\mathcal{P} \vee \neg \mathcal{P}$ we need to show which one from \mathcal{P} or $\neg \mathcal{P}$ actually holds.

In the remaining of this section we delve into Coq's realm and discuss its relevant features for the understanding of this thesis.

2.5.1 Data types

Coq comes with very little features built-in. For instance, the customary data types boolean, integer, string, etc, are not intrinsic to the system, but defined in the standard library. The point here is that even these canonical data types can be seen as ordinary user code.

For instance, in Coq natural numbers are inductively defined as depicted by Listing 2.9:

```
1 Inductive nat : Set :=
2     O : nat
3     | S : nat -> nat
```

Listing 2.9 – nat datatype

An inductive type is defined by a number of constructors, each with its own arity. For nat, these are O, with arity equal to zero, and S, with arity equal to one. Intuitively, it means that a natural number is either zero or the successor of some natural number. The above simple definition is therefore enough to model infiniteness of natural numbers.

A value of an inductive type is a composition of its constructors. Thus, the expression S (S (S O)) is indeed a valid expression representing the natural number 3. In fact, the syntactical objects 0, 1, 2, ... are seen as mere notations by Coq. Their sole purpose is to improve readability.

³Also referred also *constructive logic* in the literature.

In a similar fashion, the standard library also provides a definition for the list data type as show by Listing 2.10.

A list is also defined by two constructors: nil and cons. These, possess arity zero and two, respectively. The former represents an empty list — and thus needs no argument —, while the latter a non-empty list. More precisely, cons h tl should be read as a list with head element h, and tl as its tail list.

The careful reader may wonder about the parameter A of the list data type. This stems from the fact that this definition is *polymorphic*. Indeed, it defines a list without explicitly stating the type of its elements. The sole implicit constraint is that they all possess the same type.

As an example, the expression cons 2 (cons 1 (cons 0 nil)) stands for a list of naturals, whose elements are 2, 1 and 0. For the sake of readability, there are also notations for easing the definitions of lists. For instance, the expression (2 :: 1 :: 0 :: nil) is equivalent to the one above.

2.5.2 Functional programming in Coq

Having understood the basics of Coq's data types, we can now proceed to writing functions over these data types.

Adding natural numbers can be seen as rather *intriguing*. This is directly related to how natural numbers are defined in Coq. The implementation of the plus function is given by Listing 2.11.

```
1 Fixpoint plus (n m : nat) {struct n} : nat := 2 match n with 3 | 0 \Rightarrow m 4 | S p \Rightarrow S (plus p m) 5 end
```

Listing 2.11 – plus function definition

The first thing to note is the use of the keyword Fixpoint. This means that we are defining a recursive function. Looking at its signature we see that the function plus takes parameters n and m, both explicitly specified as being of type nat. Then, we find a rather suspicious {struct n}. In Coq, one can only write terminating functions. However, in general, determining whether a function terminates is undecidable. The struct construct specifies the argument that structurally decreases at each recursion step. For the plus function, every recursive call is applied on p, which is a strict sub-term of S p. Thus, this reduction is monotone and will inevitably reach the O constructor, at which point the function terminates. Moreover, pattern-matching is exhaustive — all nat constructors are contemplated —, and therefore all cases are always covered. Indeed, the actual algorithm of addition is a bit surprising. If n is equal to zero we can simply return m. Otherwise, it must be the case that n is the successor of some number p, and we can simply return the successor of the addition between p and m.

For last, the signature contains the return type. As expected, the plus function returns a nat. It should be noted that Coq's type system is powerful enough to automatically infer all this typing information. The (unnecessary) extra verbosity in this example is included for the sake of explanation. In the following we shall omit typing information whenever it is obvious from the context.

Defining functions over lists follow the same principle. For instance, the rather common function computing the length of a list is defined as depicted by Listing 2.12.

Listing 2.12 – length function definition

Basically, at each recursion step we define the length of the list as being the successor of the length of its tail. The recursion is performed on the tail, and thus a strict sub-term. Eventually, we reach an empty list, at which point we simply return zero, and the function terminates.

Another peculiar aspect of Coq is that every defined function must be total,

i.e. a function that is defined for all inputs. This seems a strong restriction as there are several functions that are *partial* by nature. For instance, a function returning the head of a list: what can be returned in the input list is empty? In standard programming languages, one usually handles such situations by raising an exception, but this is not possible in Coq.

One way to deal with these cases is through the option type as demonstrated by Listing 2.13.

```
1 Inductive option (A : Type) : Type :=
2    Some : A -> option A
3    | None : option A.
```

Listing 2.13 – option datatype

The best way to understand its use is to see it in action. In Listing 2.14, we exemplify it with the head function. Notice that we use the Definition keyword, and not Fixpoint. This is due to the fact that this function is not recursive.

Listing 2.14 – head function definition

Two other approaches to cope with partial functions are the use default values, and dependent types. The former consists simply in associating a predefined return value for the "undesired" inputs. Clearly, this solution is not ideal, and sometimes even infeasible. The latter represents a more powerful feature of Coq. Basically, a dependent type is a type that depends on a value. For instance, we can define the vector type, that characterizes lists of a specific length as shown by Listing 2.15.

Such type definition ensures that a list of type (vector n) has always length n. This facilitates the definition of partial functions such as the one returning the head of a vector as depicted by Listing 2.16.

```
Definition vhead (A:Type) (n:nat) (v: vector A (S n)) := 2 match v with  
Vcons el n v' \Rightarrow el  
end.
```

Listing 2.16 – vhead function definition

Note that we need not to cope with the case of a empty vector, as this is directly discarded by typing! Indeed, dependent types are an extremely powerful feature. In the context of this thesis however, we do not make an extensive use of it. The interested reader is pointed to Chlipala's book [16] for a more in-depth account on the subject.

2.5.3 Proving properties

Another main ingredient of Coq is about proving properties. First, we need to know how to define predicates: basically, they can be inductively defined in the same manner as data types, except that their *sort*, i.e. type of their type, is Prop. As an example, consider a definition regarding the *parity* of a natural number as illustrated by Listing 2.17.

Listing 2.17 – is_even predicate definition

It is composed by two constructors, Base and Step, that can be read as follows. A natural number \mathbf{n} is *even* if it is equal to zero, or if $(\mathbf{n-2})$ is even.

Using this predicate constructors one can perform proofs. For instance, Listing 2.18 depicts how one could prove that 4 is even.

```
Lemma four_is_even:
   is_even 4.
Proof.
apply Step.
apply Step.
apply Base.
```

```
reflexivity.Qed.
```

Listing 2.18 – Proof that 4 is even

Proving properties in a interactive system like Coq requires convincing it by applying a sequence of *tactics*. For this proof, we start by applying the Step constructor (line 4), at which point Coq will demand the proof of is_even (4-2). We therefore apply once again the same constructor (line 5), and get confronted with the establishment of is_even (4-2-2). Thus, we apply the Base constructor (line 6) and end up with goal of demonstrating 4 - 2 - 2 = 0, that can be trivially proved by reflexivity (line 7).

The above predicate and proof were rather simple. Let us now see a more interesting predicate attesting that two lists are a permutation of each other as shown by Listing 2.19.

```
1 Inductive permut (A : Type) : list A -> list A -> Prop :=
    | p_nil : permut nil nil
    | p_skip : forall (x : A) (11 12 : list A),
3
               permut 11 12 ->
4
               permut (x :: 11) (x :: 12)
5
    | p_swap : forall (x y : A) (11 : list A),
6
               permut (y :: x :: 11) (x :: y :: 11)
7
    p_trans: forall 11 12 13 : list A,
8
               permut 11 12 ->
9
               permut 12 13 ->
10
               permut 11 13.
11
```

Listing 2.19 – permut predicate definition

This predicate is slightly more elaborated and requires a closer look. Indeed, in the realm of formal methods it is common that syntax verbosity get in the way of the understanding of concepts. It should be noted that such inductive predicates can be seen by a set of rules. For instance, the **permut** predicate is defined by the more readable and familiar rules depicted by Table 2.1.

```
\frac{\text{permut I1 I2}}{\text{permut nil nil}} \; p\_nil \qquad \frac{\text{permut I1 I2}}{\text{permut (x :: I1) (x :: I2)}} \; p\_skip \frac{\text{permut I1 I2}}{\text{permut I2 I3}} \; p\_swap \qquad \frac{\text{permut I1 I2}}{\text{permut I2 I3}} \; p\_trans
```

Table 2.1 – Rules for the permut predicate

Using this set of rules, proving that two lists are a permutation of each other boils down to building a proof tree establishing that fact. Below, we exemplify with the proof that (1::2::3::nil) is a permutation of (3::1::2::nil).

```
\frac{\overline{\text{permut } (2 :: 3 :: nil) (3 :: 2 :: nil)} \text{ (p\_swap)}}{\overline{\text{permut } (1 :: 2 :: 3 :: nil) (1 :: 3 :: 2 :: nil)}} \underbrace{\frac{\text{permut } (1 :: 3 :: 2 :: nil) (3 :: 1 :: 2 :: nil)}{\text{permut } (1 :: 2 :: 3 :: nil) (3 :: 1 :: 2 :: nil)}}_{\text{permut } (1 :: 2 :: 3 :: nil)} (p\_swap)}
```

The proof starts by applying a p_trans, that naturally yields two subgoals. It should be noted that the application of this constructor requires the instantiation of I2. In this case, it is instantiated by (1::3::2::nil). The first subgoal (on the left) is handled by applying a p_skip, which produces the goal of proving the permutation of the lists' tails. This is proved by applying p_swap and this subgoal is therefore discharged. The second subgoal (on the right) is directly solved by applying a p_swap. And the proof terminates.

Indeed, the graphical intuition provided by a proof tree can be of great value. However, with more complex goals it rapidly becomes an exercise of style. The equivalent proof in Coq is shown by Listing 2.20.

```
1 Lemma permut_example:
2    permut (1::2::3::nil) (3::1::2::nil).
3 Proof.
4    apply p_trans with (12:=1::3::2::nil).
5    + apply p_skip.
6    apply p_swap.
7    + apply p_swap.
8 Qed.
```

Listing 2.20 – Permutation proof example

As expected, the proof follows the same approach — the + symbols on the proof script serve the purpose of highlighting the subgoals. Moreover, it should be noted that it has the advantage of being machine checked. i.e. Coq makes sure no mistake was made during the proof.

2.5.4 Extracting certified programs

As seen above, Coq is equipped with a functional programming language containing most standard programming facilities, and even some rather sophisticated features (i.e. dependent types). Indeed, despite some "restrictions" — i.e. total functions, termination, ... —, it allows the user to write rather complex programs. The flagship example of this is CompCert [17], a formally verified compiler.

However, Coq is not suitable to execute programs, at least not with the expectation of meeting real world demands, as it does not provide an efficient environment. The reason why one would write programs in Coq is that it offers the possibility to prove properties about them. Then, one can use Coq's extraction mechanism to obtain semantically equivalent code for efficient programming languages like OCaml and Haskell. Indeed, Coq ensures that the program's behaviour is preserved during the extraction, and therefore we say that such programs are certified.

The extraction mechanism opens the door for the building of highly reliable code. Yet, one should be aware of some particularities of this process to fully benefit from it. For instance, dependent types are not supported in a programming language like OCaml. Below, we recall the vhead function (on the left) and show its extraction in OCaml (on the right).

Listing 2.21 – original vhead function

Listing 2.22 – Extracted vhead function

⁴Depending on the reader, these "restrictions" may actually be seen as features! We include the quotes in order to avoid any disgust.

(Un)Surprisingly, the extracted vhead contains the pattern matching for both constructors of the vector type. This is the case as there is no support for dependent types in OCaml, and as such the non-existence of a vhead call with Vnil as argument cannot be guaranteed by typing.


In short, it is the responsibility of the user to make sure all requirements are met before calling an extracted function. Thus, a good practice to follow when extracting code is not to use dependent types in the functions that will act as the program's interfaces. In the same spirit, the proved properties should avoid to make assumptions on their input domain, as only the computational part is extracted, all logical objects are discarded.

Naturally, only a small account of Coq's capabilities were covered in this section. For an authoritative report on its foundations and features the interested reader is pointed to [13]. There is also *Software Foundations* [18], a book that is literally a Coq script, focusing on the principles of programming and on the development of reliable software. For a shorter introduction written in a tutorial style we recommend Bertot's *Coq in a Hurry* [19].

HHH

In this chapter we discussed the relevant technical background for the understanding of this thesis.

In the following chapter we present an industrial case study on the formal specification and verification of a GCM/ProActive application: The HyperManager.



The HyperManager

"Design is a funny word. Some people think design means how it looks. But of course, if you dig deeper, it's really how it works."

Steve Jobs

Contents

Comemic)		
3.1	The	HyperManager architecture	41
3.2	Forn	nal specification and verification methodology	44
3.3	The	${\bf Hyper Manager} \ {\bf as} \ {\bf a} \ {\bf formal} \ {\bf methods} \ {\bf case} \ {\bf study} \ .$	48
	3.3.1	On HyperManager Gateway	49
	3.3.2	On HyperManager Server	57
	3.3.3	On System Product	60
3.4	The	case study reloaded: on structural reconfigurations	62
	3.4.1	On HyperManager Reconfigurable Gateway	63
	3.4.2	On HyperManager Reconfigurable Server	64
	3.4.3	On Reconfigurable System Product	64
3.5 Discussion			66

This chapter discusses the formal specification and verification by model-checking of a reconfigurable monitoring application — The Hypermanager. The *pNets* formalism is employed as a means to describe its behaviour and dynamic topology.

Section 3.1 presents The Hypermanager application. The overall methodology employed for this case study is discussed in Section 3.2. Section 3.3 and Section 3.4 detail the formalization aspects and proven properties. Final remarks are discussed in Section 3.5

The results discussed in this chapter were partially presented as an industrial case study at the Jiangxi Normal University, China, for the 10th International Symposium on Formal Aspects of Component Software [20].

As discussed in Section 1.2, Spinnaker is a French collaborative project between INRIA and several academic and industrial partners whose overall goal aims at promoting the widespread adoption of RFID-based technology. In this context, our contribution came with the design and implementation of a non-intrusive, flexible and reliable solution that can integrate itself with other already deployed systems.

Specifically, we developed the The Hypermanager, a general purpose monitoring application with autonomic features. This was built using GCM/ProActive. For the purposes of this project, it had the goal to monitor the E-Connectware (ECW)¹ framework in a loosely coupled manner.

For the sake of clarity let us describe one of the real life scenarios faced in a industrial context. An hotel needs to keep track of their bed sheets life-cycle. Every bed sheet contains an embedded RFID sensor chip that uniquely identifies it. At every shift, the hotel maids go through all the rooms recovering them to a laundry cart. By reaching the end of the rooms' corridor, a device running the ECW Gateway software captures the bed sheets' identifiers. For each corridor there might be several laundry carts and one device running the ECW Gateway. After receiving the bed sheets' identifiers the ECW Gateways emit this information along with their own identifier to yet another physical device running the ECW Server. Once the information reaches the top of this hierarchy it can be used to whatever purpose, namely bed sheets traceability.

Abstracting away this particular scenario, one can see it in a hierarchical man-

¹http://www.tagsysrfid.com/Products-Services/RFID-Middleware

ner as depicted by Figure 3.1.

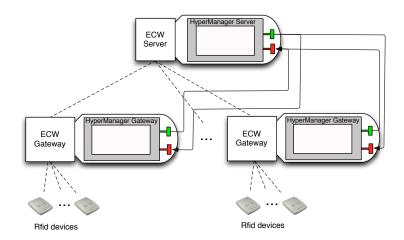


Figure 3.1 – Hierarchical representation of our case study

Regarding the previously described scenario, this hierarchical view should pose no doubt. For each of the N floors of the hotel there are M laundry carts that interact in a *one-to-one* style with a gateway. On the other hand, the gateways communicate with the server on a *n-to-one* style. Moreover, there is also the need to cope for possible maintenance issues. For instance, in the case of malfunction of some device running the ECW Gateway, it may be required to replace it or add a new one in order to avoid any overloading.

The architecture depicted by Figure 3.1 also includes The HyperManager application. Indeed, it is deployed alongside the pre-existent distributed system, performing its monitoring on all ECW components. Moreover, the careful reader may notice that the flow of requests go both from the HyperManager Server to the HyperManager Gateway, and vice-versa. Indeed, these follow the *pull* and *push* styles of communication, respectively. More details regarding these mechanisms will be discussed at a later stage.

3.1 The HyperManager architecture

THE HYPERMANAGER is a general purpose monitoring application that was developed in the context of the Spinnaker project. The goal was to deliver a modular

solution that would be capable of monitoring a distributed application and react to certain events. As such, The Hypermanager is itself a distributed application, deployed alongside the target application to monitor.

Generally, when performing a monitoring task in an application one may consider two types of events: *pull* and *push*. The former stands for the usual communication scenario where the server regularly *pulls* information from the client. The latter however, is when the client *pushes* data to the server. Both styles of communication are employed in The HyperManager application.

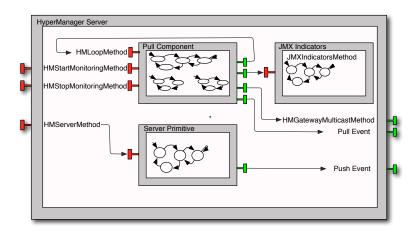


Figure 3.2 – HyperManager server component

As illustrated by Figure 3.2, the HyperManager Server component features three primitive components that are responsible for the application logic. Each possesses one or several service methods.

The JMX Indicators component features only one service method: it accepts requests about a particular Java Management Extensions (JMX)² indicator and replies with its status. This encapsulates business code and interacts directly with the ECW.

The Pull Component includes three service methods and four client interfaces. As the component's name indicates, it is responsible for *pulling* information and emitting it as *pull events*. The service methods HMStartMonitoringMethod and HMStopMonitoringMethod are responsible for starting and stopping the *pulling* activity, respectively. Typically, these are the methods called by an administrator.

²JMX is the standard protocol used for monitoring Java applications.

The remaining service method, HMLoopMethod, may pose some doubt. Indeed, it is called from one of its own client's interface. Being a GCM/ProActive application, it follows the active object paradigm where explicit thread creation is discouraged. As such, making a method *loop* is achieved by making this method send itself a request before concluding its execution.

While in the monitoring loop, the HMLoopMethod method *pulls* information regarding its own local JMX indicators and those of its gateways via a multicast client interface. The last remaining client interface serves the purpose of reporting the *pulled* information as *pull* events.

Last, the Server Primitive component receives *push* information from the HyperManager Gateways — typically to alert the occurrence of some anomaly — and emits it as *push* events.

The description of the HyperManager Gateway component follow the same spirit. Figure 3.3 depicts its constitution.

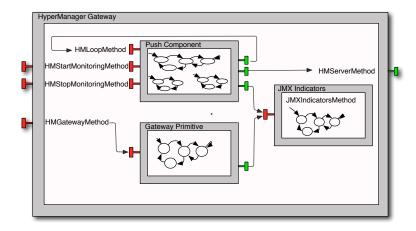


Figure 3.3 – HyperManager gateway component

It is also composed of three primitive components. As expected, the JMX Indicators component has the same semantics as described above.

The Push Component features the same service methods as the Pull Component. Its semantics however, are slightly different. While *looping* it will check for the status of its JMX indicators, and communicate with The HyperManager server if some anomaly is encountered — which will then trigger a *push* event.

As for the Gateway Primitive component, its sole purpose is to reply to the *pulling* requests from the HyperManager Server component.

3.2 Formal specification and verification methodology

Regarding our modelling and verification *workflow*, the first step is to build the behavioural models by encoding the involved processes in the Fiacre specification language. Naturally, this step can be partially automated as processes such as the Queue, Body, etc, are computable, i.e., there is an algorithm that generates their behaviour. For instance, Listing 3.1 depicts the specification of the Queue process for the JMX Indicators component in Fiacre. It should be noted that we need a finite representation of such process: we illustrate this by a Queue bounded at two requests. Further, we use the # notation for denoting tuples.

```
process Queue [ Q JMXIndicatorsMethod: in
     future_id#JMXIndicatorsMethod_args_type ,
   Serve_JMXIndicatorsMethod: out
      future_id#JMXIndicatorsMethod_args_type,
           errorMsgT ]
   Error:
4 is
    states SEmpty, S1, S11, SOutOfBounds, SError
    var a0:future_id , a00:JMXIndicatorsMethod_args_type ,
6
          a1: future_id, a11: JMXIndicatorsMethod_args_type,
          a2: future id, a22: JMXIndicators Method args type,
          errmsg:errorMsgT:={parti=0,partst=UnknownErr}
10
11 from SEmpty
      Q_JMXIndicatorsMethod?a0, a00; to S1
13
14 from S1 select
       Serve_JMXIndicatorsMethod!a0,a00; to SEmpty
    [] Q_JMXIndicatorsMethod?a1,a11
17 end
18
  from S11 select
       Serve JMXIndicatorsMethod!a0,a00; a0:=a1; a00:=a11; to S1
20
```

```
[] Q_JMXIndicatorsMethod?a2,a22; errmsg.partst:=PS11; to SOutOfBounds
22 end
23
24 from SOutOfBounds
25 Error!errmsg; to SError
```

Listing 3.1 – Queue specification of the JMX Indicators component in Fiacre (bounded at two requests)

The JMX Indicators component possesses one service method, named JMXIndicatorsMethod, taking one argument of JMXIndicatorsMethod_args_type type. The three labels (lines 1-3) Q_JMXIndicatorsMethod, Serve_JMXIndicatorsMethod and Error represent enqueuing of a request to its service method, serving it, and throwing an exception due to exceeding of its capacity, respectively. From SEmpty, upon reception of a request the process goes to state S1 (lines 11-12), where it can serve the current request or receive another one (lines 14-17). The former case leads back to SEmpty. The latter takes the execution to S11 where it faces the same cases. On the one hand, another request will lead to SOutOfBounds (line 21), at which point the action Error!errmsg is emitted since the request queue's maximum capacity is reached — where errmsg is a variable holding information about the antecedent state — and the execution is transferred to the sink state SError (lines 24-25). On the other hand, since it exhibits a FIFO policy, serving a request (line 20) is performed on the initial call by emitting Serve_JMXIndicatorsMethod!a0,a00, and performing two assignments: a0:=a1 and a00:=a11. The variables a00, a11, a22 hold the request arguments by order of arrival. Thus, this simple mechanism ensure they are served in an adequate order, i.e., meeting the FIFO policy. Moreover, the variables a0, a1 and a2 contain future proxies, and are handled analogously. Naturally, these are implicit — transparent to the programmer —, but included into the formal model.

Let us now see how the body process is modelled. As an example, listing 3.2 depicts its specification for the JMX Indicators component.

```
process Body [ Serve_JMXIndicatorsMethod : in future_id#
    JMXIndicatorsMethod_args_type ,
    Call_JMXIndicatorsMethod : out future_id#
    JMXIndicatorsMethod_args_type ,
```

```
R JMXIndicatorsMethod
                               : in future id#
       JMXIndicatorsMethod_return_type
    states s0, s1, s11
4
5
    var args : JMXIndicatorsMethod_args_type ,
6
      reply: JMXIndicatorsMethod return type,
            : future_id
9
    from s0
10
       Serve_JMXIndicatorsMethod ? fid , args ; to s1
11
12
    from s1
13
       Call_JMXIndicatorsMethod! fid, args; to s11
14
15
    from s11
16
       R_JMXIndicatorsMethod ? fid , reply; to s0
17
```

Listing 3.2 – Body specification of the JMX Indicators component in Fiacre

Its understanding should pose no doubt. Basically, it idles in state s0 until Serve_-JMXIndicatorsMethod?fid,args is activated, at which point the execution goes to s1 (lines 10-11). From s1 it emits Call_JMXIndicatorsMethod!fid,args, therefore starting the actual method execution, and moves to s11 (lines 13-14). Then, it just waits for the JMXIndicatorsMethod method finish its execution and return, at which point R_JMXIndicatorsMethod?fid,reply is received, and it goes back to s0 (lines 16-17).

Proxy and ProxyManager processes' behaviour can also be obtained in a systematic manner. Together with the Queue and Body processes they model all the internal intricacies of a GCM primitive component. The specification of the featured service methods however, is of specific nature, and thus a manual task.

Having the Fiacre sources files for all involved processes, we use the FLAC compiler³ to produce Lotos [21]. Then, we take advantage of the panoply of tools offered by the CADP suite [22] for model generation and formal verification by model-checking techniques. Figure 3.4 depicts the overall approach.

³Available online http://gforge.enseeiht.fr/projects/fiacre-compil

3.2. FORMAL SPECIFICATION AND VERIFICATION METHODOLOGY 47

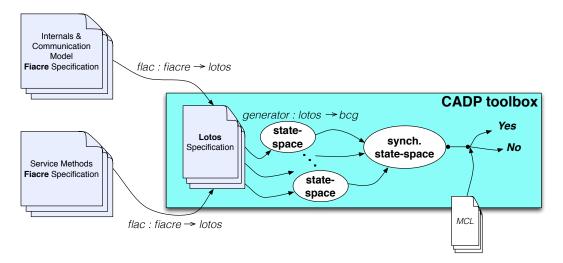


Figure 3.4 – Formal specification and verification workflow

From CADP, we use generator for state-space generation. This process takes a plaintext .lotos file and yields a binary .bcg file encoding a Labelled Transition System (LTS) that models the process behaviour. This file is usually referred to as the state-space. Moreover, it should be noted that state-space generation can be performed in a distributed manner. CADP's distributor tool implements a distributed algorithm that can be executed on several machines. This can be of great value as each of them is used to generate and store a part of the LTS.

For the purposes of this thesis, we used distributed state-space generation by exploiting ProActive PACA Grid — a computing cloud operated by INRIA, University of Nice, and CNRS-I3S laboratory, and accessible through the ProActive Scheduler⁴. Nevertheless, it should be noted that parallel composition through synchronization vectors is a sequential process, and thus may be a bottleneck for large systems. Indeed, as we shall see later, dealing with large state-spaces was one of the main challenges of this case study.

For last, we use evaluator4 for model-checking state-spaces against Model Checking Language (MCL) [23] formulas — an extension of the alternation-free regular μ -calculus [24] with facilities for manipulating data.

In the following, to optimize the size of the model, composite components have no request queue and requests are directly forwarded to the targeted primitive

 $^{^4}$ http://proactive.activeeon.com/index.php?page=proactive_5_min

component. This has no influence in the system's semantics as the request queues of the primitive components are sufficient for dealing with asynchrony and requests from the subcomponents are directly dispatched too. We set the primitive components with re-entrant calls — Pull Component and Push Component — with a queue of size 2, and the remaining from the HyperManager Server and HyperManager Gateway composites with size 1 and 2, respectively. Furthermore, we set the future proxy domain to range over $\{0..1\}$, and consider the existence of two RFID devices per gateway.

Alas, at this stage, model generation remains a rather manual task. Auxiliary tools provide some automation, but a more complete toolchain is lacking. To this end, recent work [25] aims at providing complete model generation of GCM applications.

3.3 The HyperManager as a formal methods case study

As mentioned above, The Hypermanager is a GCM/ProActive application. A natural choice for its behavioural specification is therefore pNets. Further, we use Fiacre to give it a concrete representation. This task requires the specification of all service methods composing the application. These transparently interact with the component's internal intricacies — component queue, proxy manager, ... —, that are also included in the model.

In the following we dedicate Subsection 3.3.1, Subsection 3.3.2, and Subsection 3.3.3 to the discussion on the specification and verification by model-checking of the HyperManager Gateway component, HyperManager Server component, and overall system product, respectively. Next, Section 3.4 deals with the inclusion of structural reconfigurations in our model. Section 3.5 gives some final remarks regarding this case study.

Moreover, for more material on this case study — namely the specification's source files —, the reader is invited to check its companion website⁵.

⁵http://www-sop.inria.fr/members/Nuno.Gaspar/HyperManager.php. At the time of this writing, INRIA Sophia Antipolis network is under maintenance. Thus, we provide a mirror website: http://hypermanager.gaspar.link.

3.3.1 On HyperManager Gateway

JMX Indicators component

As seen above, the JMX Indicators primitive component only features one service method, JMXIndicatorsMethod, with JMXIndicatorsMethod_args_type and JMXIndicatorsMethod_return_type as argument and return types, respectively. These are specified as shown by Listing 3.3.

```
1 type stability_type is union
    Stable
з | Unstable
4 end
6 type device_id_type is union
    IdOne
  | IdTwo
9 end
11 type availability_type is union
     Available
   Unavailable
14 end
16 type device_availability_type is record
    id:device_id_type ,
    availability:availability_type
18
19 end
20
21 type JMXIndicatorsMethod_return_type is union
      memory_usage of stability_type
    device_status of device_availability_type
24 end
25
26 type JMXIndicatorsMethod_args_type is union
      MemoryUsage
    DeviceStatus of device_id_type
29 end
```

Listing 3.3 – Specification for the JMXIndicatorsMethod argument and return types

For the sake of simplicity, we only model two types of JMX indicators: MemoryUsage and DeviceStatus. The latter takes into account an identifier, returning its availability status. This relates to the status of a RFID reader transmitting to the ECW Gateway. While the former accounts for the stability status of the memory.

Listing 3.4 illustrates the specification of the JMXIndicatorsMethod method behaviour.

```
1 process JMXIndicatorsMethod
   [Call JMXIndicatorsMethod: future id#JMXIndicatorsMethod args type,
   R_JMXIndicatorsMethod: future_id#JMXIndicatorsMethod_return_type] is
   states s_init, s_mem, s_dev
5
6
   var fid
                      : future_id,
         device_id_var : device_id_type,
                       : device_availability_type
       x
9
10
   from s init select
11
       Call_JMXIndicatorsMethod ? fid , MemoryUsage
                                                              ; to s_mem
12
    [] Call_JMXIndicatorsMethod ? fid , DeviceStatus(device_id_var) ; to
13
         s dev
   end
14
15
   from s_mem select
16
       R_JMXIndicatorsMethod ! fid , memory_usage(Stable); to s_init
17
    [] R_JMXIndicatorsMethod ! fid , memory_usage(Unstable); to s_init
18
   end
19
20
   from s dev
21
       R_JMXIndicatorsMethod ? fid , device_status(x); to s_init
22
```

Listing 3.4 – JMXIndicatorsMethod specification

Basically, it waits at the s_init state until it receives a request call regarding one of the JMX indicators (lines 11-13). Then, it goes to state s_mem or s_dev, depending on which JMX indicator is queried: a request to the memory usage takes the execution to the former, while a request to the device statuses takes the execution to the latter. From s_mem it randomly replies one of the possible values for the memory usage and goes back to s_init (lines 16-19). As expected, the

same behaviour w.r.t. device statuses occurs from s_dev (lines 21-22). The careful reader may wonder about the rather different specification approaches between the reply of the two JMX indicators. Indeed, for the memory usage it exhaustively lists all possible reply values, and emits a non-deterministic choice among them. For the devices statuses however, it simply replies with a non-instantiated variable x, that does the work of ranging over all possible reply values. Naturally, both approaches have the same semantics, it is merely a matter of style.

The Fiacre specification language allows for fairly simple and intuitive descriptions of automata-based models. Nevertheless, a more convenient representation for illustrating automata is in its graphical form. For instance, Figure 3.5 depicts the behaviour of the JMXIndicatorsMethod method.

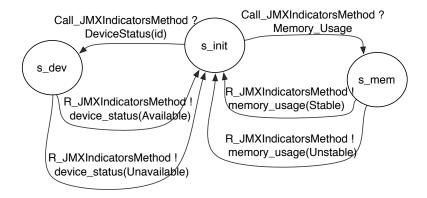


Figure 3.5 – Behaviour of the JMXIndicatorsMethod method

Its understanding is straightforward, as it closely follows Fiacre's specification from Listing 3.4. There is, however, one small nuance: it does not include the future proxies. Indeed, these are related to the internal machinery of GCM components, and one would rather avoid such intricacies when specifying service methods. As such, they are omitted in the graphical representations: we consider these representations as an user-version LTS, i.e., typically what a user would specify without paying attention to the future proxies mechanism.

Gateway Primitive component

Let us now look at the behaviour of the HMGatewayMethod method. Listing 3.5 details its specification in Fiacre.

```
1 process GatewayMethod [Call_GatewayMethod: in
      future_id#gatewayMethod_args_type,
  GetProxy JMXIndicatorsMethod : in none,
  New_JMXIndicatorsMethod
                                  : in proxy,
_{4} Q_JMXIndicatorsMethod
                                   : proxy#JMXIndicatorsMethod_args_type
   GetValue\_JMXIndicatorsMethod : in proxy\#
       JMXIndicatorsMethod_return_type ,
  Recycle_JMXIndicatorsMethod
                                  : out proxy,
   R_GatewayMethod
                                   : out future_id#
       GatewayMethod_return_type] is
8
9
    states s_init, s1, s2, s3, s4, s5, s6
10
                   : future_id,
    var fid
11
                   : gatewayMethod_args_type,
12
        args
                 : proxy,
13
      jmx_reply : JMXIndicatorsMethod_return_type
14
15
    from s_init
      Call_GatewayMethod ? fid , args;
17
      to s1
18
19
20
    from s1
      GetProxy JMXIndicatorsMethod;
21
      to s2
22
23
    from s2
24
      New_JMXIndicatorsMethod ? p;
25
      to s3
26
27
    from s3
28
      Q_JMXIndicatorsMethod ? p, args;
29
      to s4
30
31
    from s4
32
      GetValue_JMXIndicatorsMethod ? p, jmx_reply;
33
      to s5
34
35
```

```
from s5
36
       Recycle_JMXIndicatorsMethod ! p;
37
       to s6
38
39
    from s6
40
       R_GatewayMethod! fid, jmx_reply;
41
       to s_init
42
```

Listing 3.5 – HMGatewayMethod specification

Despite its apparatus, this service method offered by the Gateway Primitive component has also a fairly simple semantics. It acts merely as a request forwarder for the JMX Indicators component. A far more convenient specification is given by Figure 3.6.

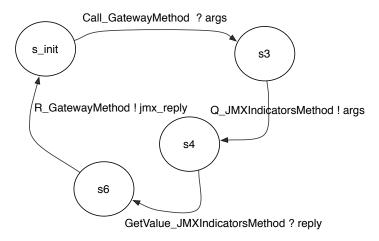



Figure 3.6 – Behaviour of the HMGatewayMethod method

For this example the extra verbosity introduced by the handling of future proxies is even more evident. Indeed, all this machinery ends up obfuscating the method's actual behaviour. In the following, we constrain ourselves to the user-version LTS representation for the description of service method behaviour. Hopefully, this shall facilitate the understanding of the remaining specifications.

Push Component component

Regarding the Push Component, it is composed by three service methods: HM-StartMonitoringMethod, HMStopMonitoringMethod and HMLoopMethod. Further,






Figure 3.7 – Behaviour of the HM-StartMonitoringMethod method

Figure 3.8 – Behaviour of the HM-StopMonitoringMethod method

the global variable **started** is shared among them. For the sake of clarity communication actions are written in black, while *local* computations (e.g. guard evaluations, assignments) are written in blue. Their intended meaning should pose no doubt.

Figure 3.7 and Figure 3.8 depict the behaviours of the HMStartMonitoring-Method and HMStopMonitoringMethod methods, respectively. Basically, they are responsible for enabling/disabling the *looping* process of the HMLoopMethod. This is achieved by the shared variable **started**. On the one hand, invoking HMStart-MonitoringMethod sets **started** to *true* and performs an invocation to HMLoop-Method. On the other hand, HMStopMonitoringMethod sets **started** to *false*.

It should be noted that these local computations involving the global variable started are merely syntactic sugar for the emission and reception of messages to another process. In practice, the involved labels are GuardQuery, GuardReply?b:bool, SetFalse and SetTrue. Their meaning should be obvious from their labels.

The last remaining service method to describe is the most interesting one — the HMLoopMethod method. Its behaviour is depicted by Figure 3.9.

The reception of Call_HMLoopMethod action starts the method execution, moving from state s_init to state s1. Then, the global variable started is checked. If it evaluates to false the method returns by emitting a R_HMLoopMethod message. Otherwise, the execution proceeds by querying the gateway's local JMX indicators — from s2 to s3 through Q_JMXIndicatorsMethod?jmx_args. The reply is received by GetValue_JMXIndicatorsMethod?jmx_reply and evaluated at state s4. If an anomaly is detected (e.g. unstable memory), it is reported to the Hyper-Manager Server component through the message Q_ServerMethod!jmx_reply, thus moving from state s5 to state s6. If no anomaly is found, the execution proceeds

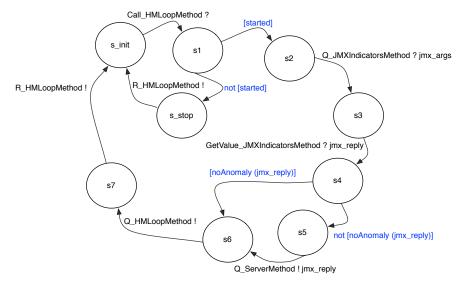


Figure 3.9 – Behaviour of the HMLoopMethod method for the HyperManager Gateway

directly to state s6, where a call to the method itself is performed: Q_HMLoop-Method. This places a request on the Push Component component queue — thus making the method loop — and transfers the execution to state s7. It should be noted that this request is scheduled as any other one: the FIFO policy dictates that requests are served by order of arrival, and therefore a potential Q_HM-StopMonitoringMethod enqueued in the meantime would be served before this new Q_HMLoopMethod request. Finally, from state s7, the message R_HMLoopMethod is emitted, and the method execution concludes by going back to state s_init.

Model Generation and Proven Properties

Model generation is performed by synchronizing all the involved processes — GCM internals and service methods — of the HyperManager Gateway component. Table 3.1 illustrates its state-space information.

	States	Transitions	File Size				
hmgateway.bcg	14.931.628	147.485.103	$\sim 295~\mathrm{mb}$				

Table 3.1 – State-space information for the HyperManager Gateway component

Having the state-space generated we can now prove some properties regarding the expected behaviour of the model. Specifying properties of interest in MCL is a rather intuitive task due to its expressiveness and conciseness. Its main ingredients include patterns extracting data values from LTS actions, modalities on transition sequences described using extended regular expressions, and programming language constructs.

For instance, one could wonder about this rather unusual *looping* mechanism. Once setting the global variable started to *true* — accomplished by Q_HMStart-MonitoringMethod —, the *looping* continues until a request to stop monitoring is received. That is, there is no execution path in which the global variable started evaluates to *false* without the occurrence of a Q_HMStopMonitoringMethod. Property 3.3.1 encodes this statement in MCL.

```
Property 3.3.1 (loops while variable started is true).
```

```
[ "Q HMStartMonitoringMethod" .
```

```
(not "Q_HMStopMonitoringMethod")* . "GuardReply !FALSE" ] false
```

More precisely, Property 3.3.1 reads: all paths starting with the label Q_HM-StartMonitoringMethod, followed by any other sequence of labels not including Q_HMStopMonitoringMethod, and ending by GuardReply !FALSE, cannot occur. Model-checking hmgateway.bcg against this formula demonstrates that it is indeed true.

Another property of interest concerns the overloading of the HyperManager Server component with unnecessary messages. We want to ensure that we cannot push data if not in the presence of an anomaly. This is modelled by Property 3.3.2.

```
Property 3.3.2 (no server overload).
```

The above MCL formula states that all paths starting with any sequence of labels not including the reply of an anomalous JMX indicator — R_JMXIndicatorsMethod !memory_usage (Unstable), R_JMXIndicatorsMethod !device_status ((Unavailable, IdTwo)) and R_JMXIndicatorsMethod !device_status ((Unavailable, IdOne) —, followed by a Q_ServerMethod.* — where * is a wildcard matching all possible arguments —, cannot occur. With no surprise, Property 3.3.2 is also proved to be satisfied by the model.

3.3.2 On HyperManager Server

JMX Indicators component

As seen for the HyperManager Gateway component, the HyperManager Server component also features a JMX Indicators component. This one however, is not endowed with JMX indicators for the RFID devices statuses.

Technically, we attach to the LTS modelling the behaviour of the JMX Indicators component (see Figure 3.5) a context that constraints its requests. This is achieved by synchronization with another LTS that solely emits requests regarding the memory status. This approach for contextual state-space generation is compositional and thus promotes reusability.

Server Primitive component

As seen above, upon detection of an anomaly, the HyperManager Gateway components push the relevant information to the HyperManager Server. Then, it is emitted as a *push* event. This behaviour is depicted by Figure 3.10.

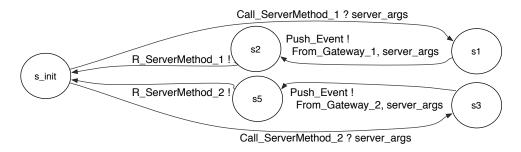


Figure 3.10 – Behaviour of the HMServerMethod method

The careful reader will notice that the emitted event also contains the information regarding the HyperManager Gateway component from which the anomaly originated. This should come as no surprise as there can be several of them, and properly identifying the source of an abnormal situation is of paramount importance. In our model, we consider the existence of two ECW/HyperManager gateways, and therefore we include specific labels — Call_ServerMethod_ $i_{i \in \{1,2\}}$ and R_ServerMethod_ $i_{i \in \{1,2\}}$ — for communicating with them.

Pull Component component

The Pull Component component is composed by three service methods: HMStart-MonitoringMethod, HMStopMonitoringMethod, and HMLoopMethod. Indeed, these have the same names as the service methods for the Push Component component. In fact, their HMStartMonitoringMethod and HMStopMonitoringMethod methods possess the same semantics (depicted by Figure 3.7 and Figure 3.8). Their HM-LoopMethod method however, behave differently. Figure 3.11 depicts its behaviour for the Pull Component.

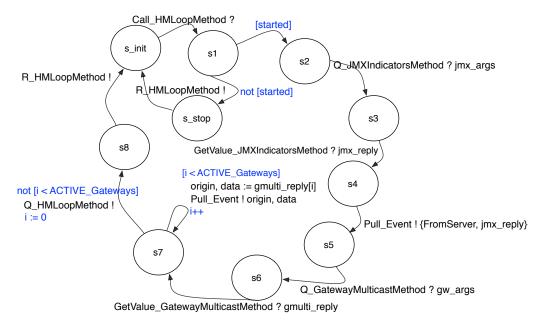


Figure 3.11 – Behaviour of the HMLoopMethod method for the HyperManager Server

Its looping mechanism is also handled through a shared variable named started. While looping, the local JMX indicators are queried, and its reply emitted as pull events. Moreover, through the multicast interface the monitoring information is pulled from the bound gateways. This, emits as many pull events as the number of bound gateways. Last, a request to itself is performed in order to continue looping.

Model Generation and Proven Properties

Table 3.2 illustrates the relevant information concerning HyperManager Server's state-space.

	States	Transitions	File Size
hmserver.bcg	12.787.376	187.589.422	~ 363 mb

Table 3.2 – State-space information for the HyperManager Server component

It should be noted that we can also prove properties regarding the GCM internals. For instance, a rather trivial property we can expect to hold is that we can reach a state which exceeds the maximum capacity of the request queue. For the Server Primitive component, this can be modelled in MCL as demonstrated by Property 3.3.3

```
Property 3.3.3 (reachable exception).
< true* . 'QueueException ServerPrimitive !.*'> true
```

Formally, this property reads: from any state, there exists an execution path that can encompass the label QueueException_ServerPrimitive !.*. As expected, this property is proved to be satisfied by the model.

Another property regarding the GCM internals concerns the use of proxies. For instance, the HMLoopMethod needs to request a proxy in order to be able to invoke the service method from the JMX Indicators component. This is encoded as demonstrated by Property 3.3.4.

```
Property 3.3.4 (need for proxy).
[ (not "GetProxy JMXIndicatorsMethod.*")* .
             "Q JMXIndicatorsMethod.*"] false
```

Formally, the above property reads: all execution paths starting with any sequence of labels not including GetProxy_JMXIndicatorsMethod.*, and followed by Q_JMXIndicatorsMethod.*, cannot occur. With no surprise, model-checking this property confirms that it is satisfied by the model.

3.3.3 On System Product

We attempted to generate a system product constituted by two HyperManager Gateways and one HyperManager Server components. However, even on a machine with 90 GB of RAM, we experienced the so common state-space explosion phenomena. Indeed, as discussed in Section 3.2, while we can use distributed state-space generation, and thus spread the workload among several machines, synchronizations products remain a sequential task.

This arises often in the analysis of complex systems. To this end, *communication hiding* comes as an efficient and pragmatic approach for tackling this issue. Indeed, it allows the specification of actions that need not to be observed for verification purposes, thus yielding more tractable state-spaces.

Table 3.3 illustrates the effects of applying this technique to the model. The sole *communication actions* being hidden are the ones involved in (1) the request transmission from the Queue to the adequate method — Serve_ and Call_ —, (2) the proxy machinery —GetProxy_, New_ and Recycle_ —, and (3) finally in the guard of the looping methods — GuardQuery, GuardReply, SetFalse and SetTrue.

	States	Transitions	File Size
hmgateway-hidden.bcg	14.931.628	147.485.103	$\sim 287~\mathrm{mb}$
hmgateway-hidden-min.bcg	409.374	4.007.232	~ 8.5 mb
hmserver-hidden.bcg	12.787.376	187.589.422	$\sim 375~\mathrm{mb}$
hmserver-hidden-min.bcg	5.761.504	85.157.420	$\sim 179~\mathrm{mb}$
SystemProduct.bcg	342.047.684	3.026.114.393	$\sim 5.27~\mathrm{gb}$
SystemProduct-min.bcg	259.340.044	2.396.896.830	$\sim 4.83~\mathrm{gb}$

Table 3.3 – State-space information for the overall system product

The lines suffixed by -hidden indicate the results obtained by *hiding* the mentioned *communication actions* in the HyperManager Gateway and HyperManager

server state-spaces. For both, no effect is noticed on the size of the LTS. However, there is a decrease in the file size. This is due to the fact that the hiding process yields several τ -transitions, which facilitates file compression. More importantly, this has the consequence of leveraging the subsequent minimization process: the entries suffixed by -min mean that we applied minimization by branching bisimulation — a behavioural equivalence that ignores τ -transitions while preserving the branching structure of the model. Indeed, we even obtain a reduction by two orders of magnitude (!) for the HyperManager Gateway state-space.

THE HYPERMANAGER comes as a monitoring application that should be able to properly trace the origin of an anomaly. As such, one behavioural property that we expect to hold is that whenever an abnormal situation is detected by a HyperManager Gateway, it is fairly inevitable to be reported as a push event that correctly identifies its origin.

First, we shall use MCL's macro capabilities to help us build the formula:

```
macro GETVALUE 1 MEMORY () =
  "GetValue JMXIndicatorsMethod Push 1 !memory usage (Unstable)"
end_macro
macro PUSH 1 MEMORY ()
  ("Push Event (FirstGateway, UnstableMemoryUsage)")
end_macro
```

The above macros should be self-explanatory. The former represents the detection of an anomaly coming from the first HyperManager Gateway — the model is instantiated with two HyperManager Gateways, thus we differentiate their actions by suffixing them adequately. The latter stands for the emission of the push event corresponding to that anomaly. The macros for the remaining relevant actions are defined analogously.

Moreover, we define the following macro generically encoding the fair inevitabil ity^6 that after an anomaly the system emits a push.

⁶We consider the definition by Queille and Sifakis [26]: a sequence is fair iff it does not infinitely often enable the reachability of a certain state without infinitely often reaching it.

Property 3.3.5 (push fairly inevitable).

Having the macros defined, we can now write the formula of interest:

```
(FAIRLY_INEVITABLY_A_PUSH(GETVALUE_1_MEMORY, PUSH_1_MEMORY) and FAIRLY_INEVITABLY_A_PUSH(GETVALUE_2_MEMORY, PUSH_2_MEMORY) and FAIRLY_INEVITABLY_A_PUSH(GETVALUE_1_DEVICE_1, PUSH_1_DEVICE_1) and
```

FAIRLY_INEVITABLY_A_PUSH(GETVALUE_1_DEVICE_2, PUSH_1_DEVICE_2) and FAIRLY_INEVITABLY_A_PUSH(GETVALUE_2_DEVICE_1, PUSH_2_DEVICE_1) and FAIRLY_INEVITABLY_A_PUSH(GETVALUE_2_DEVICE_2, PUSH_2_DEVICE_2)

FAIRLY_INEVITABLY_A_PUSH(GETVALUE_2_DEVICE_2, PUSH_2_DEVICE_2)

Basically, property 3.3.5 states that it is fairly inevitable that the appropriate push event is triggered after the detection of an anomaly. As expected, it is satisfied by the model.

3.4 The case study reloaded: on structural reconfigurations

As seen so far, The Hypermanager acts as a monitoring application with two styles of communication: *pull* and *push*. However, it also needs to cope with structural reconfigurations. This means that at runtime the architecture of the application can evolve by, say, establishing new bindings and/or removing existing ones.

For GCM applications bind and unbind operations are handled by the component owning the *client* interface that is supposed to be reconfigurable. This should come as no surprise, indeed, it follows the same spirit as in object-oriented languages: an object holds the reference to a target object; it is this object that must change the reference it holds.

In our case study, these reconfigurations can occur both from the HyperManager Server — when *pulling* data from the bound gateways —, and from a HyperManager Gateway — when *pushing* data to the server. The difference lies in the fact that the HyperManager Server communicates via a *multicast* interface, unlike the HyperManager Gateways that establish standard 1-to-1 communications.

3.4.1 On HyperManager Reconfigurable Gateway

In Subsection 2.3.2, we showed how a reconfigurable client interface is modelled in pNets. In particular, Figure 2.14 detailed all the internal machinery for singleton interfaces. For this case study, in practice, to the HyperManager Gateway model discussed in Subsection 3.3.1 we add the *non-functional* request messages Q_Bind_ServerMethod and Q_Unbind_ServerMethod.

Since we only have one reconfigurable interface we can avoid adding an explicit parameter — unlike shown in Figure 2.14, where we demonstrate a more general case. Moreover, since the HyperManager Gateways can only be bound to one target — the HyperManager Server —, the binding controller only needs to keep a state variable regarding whether it is bound or not.

As expected, these changes have a considerable impact on the size of the model. This is illustrated by Table 3.4.

	States	Transitions	File Size
hmgateway-reconfig.bcg	354.252.868	4.178.400.886	$\sim 8.45~\mathrm{gb}$
hmgateway-reconfig-min.bcg	354.104.012	4.176.956.686	$\sim 8.54~\mathrm{gb}$

Table 3.4 – State-space information for <code>HyperManager</code> <code>Gateway</code> with reconfigurable interface

All the properties proven in Subsection 3.3.1 still hold for this new Hyper-Manager Gateway model. However, for this new model we are more interested in addressing the reconfiguration capabilities. For instance, provided that the interface is bound, it will not yield an Unbound action upon method invocation.

```
Property 3.4.1 (Bound interface impossibility).
< true* . "Q Bind ServerMethod" . (not "Q Unbind ServerMethod")*</pre>
```

"Q_ServerMethod" . (not "Q_Unbind_ServerMethod")* . "Unbound" > true

Property 3.4.1 is proved *false*. This indicates that provided that the interface is bound, a path yielding an Unbound action without the occurrence of a Q_Unbind_-ServerMethod cannot occur.

3.4.2 On HyperManager Reconfigurable Server

Table 3.5 demonstrates the impact of adding reconfiguration capabilities to the HyperManager Server model.

	States	Transitions	File Size
hmserver-reconfig.bcg	931.640.080	16.435.355.306	$\sim 32.93~\mathrm{gb}$

Table 3.5 – State-space information for HyperManager Server with reconfigurable interface

The generated state-space for the HyperManager Server model nearly attained 1 billion states.⁷ Our attempts to *minimize* it revealed to be unsuccessful due to the lack of memory. These were carried out on a workstation with 90 GB of RAM.

It is worth noticing that while we were not able to *minimize* the produced state-space, we were still able to model-check it against Property 3.3.3.

3.4.3 On Reconfigurable System Product

As seen in Subsection 3.3.3, building the product of the system already proved to be a delicate task. Abstraction techniques such as *communication hiding* were already required to build the system. Thus, it should come as no surprise that we face the same situation here.

However, it should be noted that the *hiding* process itself, produced little effect on the file size, and no effect on the state-spaces. It mainly acted as a means to

⁷As mentioned in Subsection 3.3.2, for the HyperManager Server model, the JMX Indicators component is generated with a context not including the request of device statuses. Previous experiments not considering this context produced a HyperManager Server model with the following characteristics: 4.148.563.680 states, with 74.268.977.628 transitions, on a 154.2 GB file. It is interesting to note the huge impact that (the lack of) a contextual state-space generation on one of its components can provoke.

3.4. THE CASE STUDY RELOADED: ON STRUCTURAL RECONFIGURATIONS65

leverage the subsequent *minimization* process, allowing for a very significant statespace reduction. Table 3.6 illustrates the results obtained by following the same approach as above.

	States	Transitions	File Size
hmgateway-reconfig-hidden.bcg	354.104.012	4.176.956.686	$\sim 8.15~\mathrm{gb}$
hmgateway-reconfig-hidden-min.bcg	11.090.974	127.799.874	\sim 283.5 mb
hmserver-reconfig-hidden.bcg	931.640.080	16.435.355.306	~ 31.28 gb

Table 3.6 – State-space information for the reconfigurables HyperManager Server and HyperManager Gateway

We obtained a significant state-space reduction for the HyperManager Gateway model, but we were unable to *minimize* the HyperManager Server. Indeed, *communication hiding* may leverage state-space reduction, but still requires that the *minimization* process is able to run, therefore not solving the lack of memory issue. This is a rather embarrassing situation as we would expect a significant state-space reduction as well for the HyperManager Server.

While communication hiding revealed to be a valuable tool, minimization is still a bottleneck if the input state-space is already too big. Thus, we need to shift this burden to the lower levels of the hierarchy. Indeed, both HyperManager Server and HyperManager Gateway components are the result of a product between their primitive components. Moreover, these are themselves the result of a product between their internal processes — request queue, body, proxies — and service methods.

Table 3.7 illustrates the results obtained by hiding the same communication actions as in the above approaches, but before starting to build any product.

	States	Transitions	File Size
hidden-hmgateway-reconfig.bcg	3.483.000	43.193.346	~ 85.46 mb
hidden-hmgateway-reconfig-min.bcg	3.073.108	39.373.968	$\sim 83.95~\mathrm{mb}$
hidden-hmserver-reconfig.bcg	210.121.904	3.890.791.694	~ 7.52 gb
hidden-hmserver-reconfig-min.bcg	177.604.848	3.288.937.718	$\sim 6.61~\mathrm{gb}$
SystemProduct-reconfig.bcg	3.054.464.649	38.680.270.695	~ 74.16 gb

Table 3.7 – State-space information for the reconfigurables HyperManager Server and HyperManager Gateway (second approach)

Indeed, following this approach proved to be effective as we were able to generate considerably smaller state-spaces for both the HyperManager Server and HyperManager Gateway, and also build the system product. Alas, system product's *minimization* still remained out of reach. Moreover, model-checking attempts at this approximately 3 billion states state-space also remained out of reach due to lack of computing resources.

Nevertheless, we are still in a position to model-check properties regarding structural reconfiguration for the HyperManager Server component state-space: hidden-hmserver-reconfig-min.bcg. For instance, *pulling* information via a *multi-cast* emission is now predicated with a boolean array whose element's valuation determines whether the HyperManager Gateway is bound or not. As an example, Property 3.4.2 depicts a rather simple *liveness* property.

Property 3.4.2 (can unbind gateways).

<true* . "Q GatewayMulticastMethod !.* !ARRAY(FALSE FALSE) !.*"> true

Formally, Property 3.4.2 states that from any state we can attain a Q_Gateway-MulticastMethod !.* !ARRAY(FALSE FALSE) !*, i.e., we can indeed unbind the two HyperManager Gateways.

3.5 Discussion

In the realm of component-based systems, behavioural specification is among the most employed approaches for the rigorous design of applications. It leverages the use of model-checking techniques, by far the most widespread formal method in the 3.5. DISCUSSION 67

industry. Yet, verification in the presence of structural reconfigurations remains still a rather unaddressed topic. This can be justified by the inherent complexity that such systems impose. However, reconfiguration plays a significant role for the increase in systems availability, and is a key ingredient in the autonomic computing arena, thus tackling its demands should be seen of paramount importance.

In this chapter we discussed the specification and formal verification of a reconfigurable monitoring application as an industrial case study. Several lessons can be drawn from this work.

The Spinnaker project gave us the opportunity to promote the use of formal methods within the industry. As expected, the interaction with our industrial partners revealed to be a demanding task. Common budgetary issues (time allocation, hirings, ...) of such projects and their lack of prior formal methods' exposure were some of the barriers to overcome. This was further aggravated by the fact that software development was playing a little part in the overall project budget, and therefore was not a main priority.

Nevertheless our experience revealed to be fruitful. We were able to witness the general curiosity on the use of formal methods by the industry, and increase our understanding on the needs and obstacles for its broader adoption. Indeed, collaborative projects of this nature allow the industry to test the waters and expose researchers to real-world scenarios. However, bridging the gap between the industry's expectation and the current state of the art still remains as a challenge for the research community. To this end, recent work on Vercors [25] aims at bringing intuitive specification languages and graphical tools for the non-specialists.

Concerning our task at hand, modelling THE HYPERMANAGER application including the intricacies of the middleware led us to a combinatorial explosion in the number of states. This, is further aggravated by the inclusion of reconfigurable interfaces. Even the use of compositional and contextual state-space generation techniques revealed to be insufficient. While this could be solved by further increasing the available memory in our workstation, it is worth noticing that this approach is not always feasible in practice. This bottleneck could be alleviated by performing the overall synchronization product in a distributed manner. Alas, this is not supported by the CADP toolbox. In addition, model-checking itself is also a sequential task... Indeed, in this case study we were often confronted with


the physical limits of our computing resources. Further, we go beyond previous works [27] on the specification and verification of GCM applications by including reconfiguration capabilities. Investigating the feasibility of such undertaking was also within the scope of this work.

At last, as usual in the realm of formal verification, we conclude that abstraction is key. Taking advantage of CADP's facilities for *communication hiding*, one can specify actions that need not to be observed for the verification purposes, which further enhances the effects of a subsequent *minimization* by branching *bisimulation*. This illustrates the pragmatic rationale of formal verification by model-checking — the most likely reason behind its acceptance in the industry.

XXX

In this chapter we presented an industrial case study concerning the formal specification and verification of a GCM/ProActive application: The Hyperman-ager. The employed methodology along with its challenges and issues were discussed.

In the following chapter we introduce MEFRESA, a mechanized framework for reasoning on software architectures.



A mechanized framework for reasoning on software architectures

"If I had asked people what they wanted, they would have said faster horses."

Henry Ford

Contents

4.1	Mec	hanizing GCM with the Coq proof assistant 70
	4.1.1	Core elements
	4.1.2	Well-formed component architectures
	4.1.3	Well-typed component architectures 85
	4.1.4	Well-formedness and well-typedness decidability 88
4.2	An o	operation language for composing architectures . 101
	4.2.1	Syntax and semantics
	4.2.2	Building well-formed architectures
4.3	Prov	ving Properties
	4.3.1	Meeting the Specification: Absence of ${\it Cross-Bindings}~.~110$
	4.3.2	Supporting Parametrized ADLs

4.4

4.3.3	Structural Reconfigurations								114
\mathbf{Disc}	ussion		 						117

This chapter presents MEFRESA (*Mechanized Framework for Reasoning on Software Architectures*), a Coq framework for reasoning on software architectures. It focuses on the GCM, detailing how its specificities were mechanized in a proof assistant like Coq. Moreover, a simple operation language is proposed for the safe composition of GCM architectures. Concrete examples complete its presentation.

The results discussed in this chapter were partially published as a short paper at the proceedings of the Conférence en IngénieriE du Logiciel (CIEL'2012) [28] held at the Université de Rennes, and at the International Journal of Parallel Programming as a special issue of the International Symposium on High-level Parallel Programming and Applications (HLPP'2013) [29], held at the Institut Henri Poincaré, Paris.

Section 4.1 discusses the mechanization of the GCM with the Coq proof assistant. In particular, we show how we use inductive definitions to model the GCM core elements, and predicates to formally specify their structure and *typing* requisites. Further, we demonstrate the decidability of the involved predicates. A language for conveniently manipulating GCM architectures is presented in Section 4.2. Examples on mechanically proven properties are illustrated in Section 4.3. For last, Section 4.4 gives some final remarks about this development.

For more details and release announcements of Mefresa the interested reader is pointed to the website¹ of its development, where a Proviola-enabled [30] exposition is maintained for the sake of elegance.

4.1 Mechanizing GCM with the Coq proof assistant

As discussed in Section 2.1, the GCM is an extension to Fractal. Both component models have their specification written in natural language, thus inherently am-

¹MEFRESA is available online at: http://www-sop.inria.fr/members/Nuno.Gaspar/Mefresa.php. At the time of this writing, INRIA Sophia Antipolis network is under maintenance. Thus, we provide a mirror website: http://mefresa.gaspar.link.

biguous and open to interpretation. In fact, in [31], this liability has already been acknowledged by the people behind Fractal: "However, there are aspects of the [Fractal] specification that remain decidedly insufficiently detailed or ambiguous". To this end, they attempt to "correct these deficiencies by developing a formal specification" in Alloy [32].

The same reasoning applies to our case, except that we rely on the Coq proof assistant [12]. We take advantage of its high expressiveness and effective rationale to give a precise semantics to the structure of GCM applications, and provide the means to reason about its composition. Further, we are not limited to finite domains, we can define and prove general properties about parametrized structures.

In the following we devote the remaining of this Section to detailing the mechanization of the GCM with the Coq proof assistant.

4.1.1 Core elements

The GCM has three core elements: components, interfaces and bindings. Their structure and the way they interact are naturally encoded by means of inductive definitions.

Interface datatype

The interface datatype is depicted by Listing 4.1.

```
Inductive interface : Type :=

Interface : ident -> signature -> path

visibility -> role -> functionality ->

contingency -> cardinality -> interface.
```

Listing 4.1 – interface datatype

It is characterized by an *id* denoting its name, a *signature* corresponding to its java interface *classpath*, and a *path* identifying its location in the component's hierarchy (i.e. the component it belongs to). More precisely, these fields are specified as shown by Listing 4.2.

```
1 Inductive ident : Type := Ident : string -> ident.
2
3 Definition signature := string.
```

```
Definition path: Type = list ident.

Listing 4.2 - ident, signature and path datatypes
```

The only subtlety concerns the path field. It should be noted that GCM is a hierarchical component model, and since by introspection an interface is able to identify the component it belongs to, a path identifying this component is necessary. Its definition (Line 5) is a list of identifiers, where these identifiers indicate the components that need to be traversed in the hierarchy to reach the component holding the interface.

The intended meaning of the remaining fields should pose no doubt. An interface is of internal or external *visibility*, possess a client or server *role*, is of functional or non-functional *functionality*, contains an optional or mandatory *contingency*, and its *cardinality* is of singleton, multicast or gathercast nature.

Listing 4.3 and Listing 4.4 illustrate the role and contingency datatypes, respectively.

```
Inductive role: Type:=

Client: role

Server: role.

Inductive contingency: Type:=
Optional: contingency
| Mandatory: contingency.
```

Listing 4.3 – role datatype

Listing 4.4 – contingency datatype

The remaining encodings are performed analogously. Moreover, comparing these values of these datatypes requires the explicit definition of such a function. For instance, Listing 4.5 depicts a boolean equality function for the role datatype values.

Listing 4.5 – Boolean equality function for the role datatype values

Basically, it is a rather simple function returning true if the two role values are equal, and false otherwise. The only doubt that may arise concerns the contents of line 8: it defines the infix operator == that can be conveniently used in place of beq_role. As expected, other boolean equality functions and their respective convenient notation are defined analogously for other datatypes.

Component datatype

Let us now look at the two remaining core elements, component and binding. Listing 4.6 depicts the component datatype.

```
Inductive component: Type :=

Component: ident -> path -> implementationClass ->

controlLevel -> list component -> list interface ->

list binding -> component

Listing 4.6 - component datatype
```

A component also possesses an identifier and a path indicating its level in the hierarchy. As expected, its implementationClass field is a string holding the java class of its implementation. Its controlLevel field determines its level of control: this feature however, is currently a mere placeholder with default value Configuration, it is only kept for the sake of possible future enhancements. A list of subcomponents, a list of interfaces and a list of bindings conclude its composition. The reader familiar with the Coq proof assistant may wonder about the choice of defining the component datatype using the Inductive keyword instead of Record. Indeed, a Record definition has the advantage of already possessing field accessors facilities. However, it should be noted that it does not support recursive definitions, and thus we are obliged to define it through the Inductive keyword.

Before proceeding to the definition of bindings, let us discuss two auxiliary functions. A component is composed by several elements. It is therefore rather useful to make them easily accessible through *projections*. For instance, Listing 4.7 depicts such a projection for the component's identifier element.

```
Definition projectionComponentId (c:component) : ident :=
match c with
Component id p cl _ lc li lb => id
end.
```

```
 \begin{tabular}{ll} \hline & Notation & $"c$ & $'->id$ & $"$ & := & (projectionComponentId & $c$). \\ \hline \end{tabular}
```

Listing 4.7 – Projection for the component identifier element

Indeed, a simple pattern matching exposes the component's internal structure and allows to easily return the intended identifier value. Moreover, line 6 defines a convenient notation for its use: the expression c->id stands for projectionComponentId c. Naturally, analogous projections are defined for the remaining elements (subcomponents, interfaces, etc).

Another useful function regards the indexation of components. Searching through a list for a component with a specific identifier is achieved by the function depicted by Listing 4.8.

Listing 4.8 – Function to find a component by its identifier

At each recursion step the *head* element e of parameter I is checked for its identifier value. If it is equal to parameter id, then e is returned, otherwise it simply recurs on its *tail* list r (line 4). No component is returned in case I is empty (line 3). Further, line 7 defines a convenient notation for its use: the expression I[id] stands for get_comp id I.

Binding datatype

For last, bindings are connecting components together through their interfaces. Listing 4.9 depicts the binding datatype.

Listing 4.9 – binding datatype

```
Inductive binding: Type:=

Normal: path -> ident -> ident -> ident -> binding

Export: path -> ident -> ident -> binding

Import: path -> ident -> ident -> binding

Import: path -> ident -> ident -> binding.
```

As mentioned in Section 2.1, there are three types of bindings: normal, export and import (Figure 2.2, Figure 2.4, and Figure 2.3, respectively). Their path indicates the component they belong to, and their remaining ident constituents identify the involved components and interfaces. For the sake of clarity, Figure 4.1 depicts a component hierarchy including an example of each type of binding.

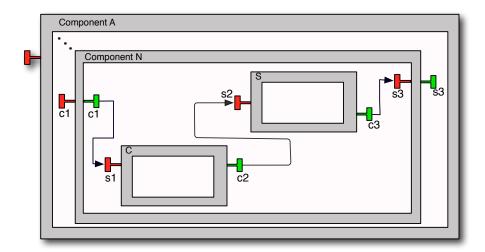


Figure 4.1 – binding examples

From left to right, the three bindings illustrated by Figure 4.1 are depicted by Listing 4.10.

```
1 Export pb (Ident "c1") (Ident "C") (Ident "s1").
2 Normal pb (Ident "C") (Ident "c2") (Ident "S") (Ident "s2").
3 Import pb (Ident "s3") (Ident "S") (Ident "c3").
```

Listing 4.10 – binding examples in Mefresa

where \mathbf{pb} is (Ident "Component A" :: ... :: Ident "Component N" :: nil), i.e., the adequate \mathbf{path} for the bindings hold by the component named "Component N".

A complete example

Having discussed the three core elements of the GCM, it still remains to see them all together at once. For the sake of clarity, in the following we show how the aforementioned component "Component N" is represented in MEFRESA. First, let us mechanize its subcomponent "C". Listing 4.11 depicts such a task.

```
<sup>1</sup> Parameter p : path.
2 Parameter iclC: implementationClass.
3 Parameter sigS1 : signature.
4 Parameter sigC2 : signature.
_{6} Definition cpath : path := (app p (Ident "Component N" :: nil)).
8 Definition C: component :=
   Component (Ident "C") cpath iclC Configuration
        (*subcomponents*)
10
        nil
11
        (*interfaces*)
12
        (\,Interface\,\,(\,Ident\,\,"s1")\,\,sigS1\,\,(app\,\,cpath\,\,(\,Ident\,\,"C"::\,nil\,))
13
                   External Server Functional Mandatory Singleton ::
14
         Interface (Ident "c2") sigC2 (app cpath (Ident "C"::nil))
15
                   External Client Functional Mandatory Singleton :: nil)
16
         (*bindings*)
17
         nil.
18
```

Listing 4.11 – Model for component "Component N" (part 1 of 3)

Lines 1-4 define some parameters for this example. Parameter \mathbf{p} stands for the path of component "Component N". Then, iclC, sigS1 and sigC2 stand for the implementation class of component "C", signature of interface S1 and signature of interface C2, respectively. Line 6 defines the path for component "C" by appending the appropriate identifier. The definition of component "C" per se starts at line 8. Its understanding should pose no doubt. It is set with the default control level value Configuration, has no subcomponents — thus represented by an empty list (line 11) — features two interfaces adequately defined in lines 13-16, and has no bindings (line 18).

```
Parameter iclS : implementationClass.
Parameter sigS2 : signature.
Parameter sigC3 : signature.

Definition spath : path := cpath.

Definition S : component :=
Component (Ident "S") spath iclS Configuration
(*subcomponents*)
```

```
nil
(*interfaces*)
(Interface (Ident "s2") sigS2 (app spath (Ident "S"::nil))
External Server Functional Mandatory Singleton ::

Interface (Ident "c3") sigC3 (app spath (Ident "S"::nil))
External Client Functional Optional Singleton :: nil)
(*bindings*)
nil.
```

Listing 4.12 – Model for component "Component N" (part 2 of 3)

Subcomponent "S" has the same structure and is naturally defined analogously. Its mechanization is depicted by Listing 4.12. Note that both components "S" and "C" possess the same path (line 23), we assign a new variable for the sake of clarity.

```
36 Parameter sigC1 : signature.
37 Parameter sigS3 : signature.
38
  Definition pN: path := cpath.
41 Definition N : component :=
    Component (Ident "Component N") p "_blank" Configuration
42
     (*subcomponent*)
43
     (C :: S :: nil)
44
     (*interfaces*)
45
     (Interface (Ident "c1") sigC1 pN
46
                  External Server Functional Mandatory Singleton ::
47
      Interface (Ident "c1") sigC1 pN
48
                  Internal Client Functional Mandatory Singleton ::
49
      Interface (Ident "s3") sigS3 pN
50
                  Internal Server Functional Optional Singleton
51
      Interface (Ident "s3") sigS3 pN
52
                 External Client Functional Optional Singleton
                                                                    :: nil)
      (*bindings*)
54
      (Export pN (Ident "c1") (Ident "C") (Ident "s1") ::
55
       Normal pN (Ident "C") (Ident "c2") (Ident "S") (Ident "s2") ::
56
       Import pN (Ident "s3") (Ident "S") (Ident "c3") :: nil).
         Listing 4.13 – Model for component "Component N" (part 3 of 3)
```

For last, composite component "Component N" is illustrated by Listing 4.13. The careful reader may notice the definition of the variable pN (line 39). This, is

subsequently used as path for component "Component N"'s interfaces and bindings. Indeed, all of its constituents (subcomponents, interfaces and bindings) possess the same path.

The remaining of its mechanization should pose no doubt. It mainly differs from the two precedent mechanizations (Listing 4.11 and Listing 4.12) in that it also possesses subcomponents, interfaces of internal visibility, and bindings.

4.1.2 Well-formed component architectures

The above definition of the GCM core elements allowed us to see how to compose components. Indeed, by exploiting their hierarchical structure one can build arbitrary complex architectures. Yet, randomly constructing these by solely respecting the inherent typing rules for the component, interface and binding structures, is naturally insufficient w.r.t. the GCM specification compliance. In order to be certain that we are building valid GCM architectures we need to formalize its requirements.

Let us define a predicate concerning the *well-formedness* of a component. Listing 4.14 depicts such predicate.

Listing 4.14 – well-formed component definition

Basically, a **component** is *well-formed* if all its subcomponents are individually well-formed (line 3), and do not possess common identifiers (line 4). Further, its interfaces and bindings must also be well-formed (lines 5-6).

The intended meaning of the unique_ids predicate should be clear from its name. Listing 4.15 depicts its definition.

```
NotInStep: forall (c:component) (r:list component),
                     l \, = \, c \, \, :: \, \, r
5
                      (((c->id) = i) = false) ->
6
                     not_in_l i r
                                                   ->
7
                     not_in_l i l.
8
9
  Inductive unique ids (1:list component) : Prop :=
10
      Unique_Base: l = nil -> unique_ids l
11
     | Unique_Step: forall c r,
12
                       1 = c :: r
13
                       not in l (c\rightarrow id) r \rightarrow
14
                       unique_ids r
                                             ->
15
                       unique_ids 1.
16
```

Listing 4.15 – unique_ids predicate definition

It is composed by two constructors: Unique_Base and Unique_Step. The former simply states that an empty list has indeed unique identifiers. The latter covers the case when the parameter I is composed by a head element c and a tail list r (line 13). The subsequent two premisses ensure that c's identifier is not equal to the components' identifier in the tail r (line 14), and for last, the predicate itself is applied to the tail r (line 15). Concerning the not_in_I predicate, it is essentially defined in the same manner. The NotInNil constructor deals with the case when the parameter I is empty (lines 2-3). The NotInStep constructor deals with the more interesting case, when I is composed by a head element c and a tail r (line 5). c's identifier is checked against parameter i (line 6), and the predicate itself is recursively applied to the tail r (line 7).

Regarding component's interfaces, the sole requirement is that they are uniquely identifiable by their id and visibility values. Listing 4.16 formalizes this constraint.

```
UniquePairsNil : li = nil -> unique_pairs li

UniquePairsStep: forall int r,

li = int :: r ->
not_in_l_pairs (int->id) (int->visibility) r ->
unique_pairs r ->
unique_pairs li.

Definition well_formed_interfaces li : Prop := unique_pairs li.
```

Listing 4.16 – well_formed_interfaces predicate definition

Indeed, the not_in_l_pairs predicate does the main work. The expression not_in_l_pairs i v I should be read as: there is no interface in l that possesses both the same identifier and visibility values as i and v, respectively. The constructor NotInPairsNil covers the case where l is empty — it is simply true by definition (line 2). The constructor NotInPairStep accounts for the case where l contains at least one element: a head element int followed by a tail r (line 4). The arguments i and v are checked against the identifier and visibility values of int (line 5), and finally the same process is applied to the tail r, making the predicate recur (line 6).

The understanding of the unique_pairs predicate should pose no doubt, it essentially follows the same rationale, and relies on not_in_l_pairs to achieve its intended significance.

Before further proceeding into well-formedness concerns, let us define an auxiliary function concerning the indexation of interfaces. Listing 4.17 defines a function retrieving one interface from a list of interfaces by its identifier and visibility values.

```
Function get_interface (id:ident) (v:visibility)
(1:list interface): option interface :=
match l with

| nil => None
| i :: r => if ((i->id) == id) && ((i->visibility) == v then
Some i
else
get_interface id v r
end.
```

```
11 Notation "l '[' id ',' v ']' := (get_interface id v l).
```

Listing 4.17 – Function to find an interface by its identifier and visibility values

Its comprehension is straightforward. The *head* element i of parameter I is checked for its identifier and visibility values (line 5). Should they be equal to parameters id and v, respectively, interface i is returned (line 6). Otherwise, the function recurs in the *tail* r (line 8). Naturally, no interface is returned if I is empty (line 4). Moreover, a convenient notation is defined (line 11): I[id, v] stands for get_interface id v I.

The last remaining piece concerns the well-formedness of bindings. Listing 4.18 illustrates its definition.

```
Definition valid_binding b lc li : Prop :=
match b with
le Normal p i j k l => normal_binding i j k l lc
le Export p i j k => export_binding i j k lc li
le Import p i j k => import_binding i j k lc li
le end.

Definition well_formed_bindings lb lc li : Prop :=
le forall b, In b lb -> valid_bindings predicate definition
Listing 4.18 - well_formed_bindings predicate definition
```

The careful reader may notice one particularity regarding the definition of the well_formed_bindings predicate: unlike well_formed_component and well_formed_-interfaces, it takes more than one parameter into account. A binding is hold by a component and serves as a means for components to communicate with each other, and thus cannot exist by itself. As such, it should come as no surprise that its well-formedness depends on its surroundings, i.e. the components and interfaces involved in its definition.

Regarding the mechanization depicted by Listing 4.18, its understanding should pose no doubt. Basically, the predicate valid_binding is applied to all bindings $b \in lb$ (line 9). This, performs a case analysis on b and its validity is checked depending on whether it is a normal, export or import binding (lines 2-5). For instance, Listing 4.19 depicts the normal_binding predicate.

```
<sup>1</sup> Function normal_binding (idC1 idI1 idC2 idI2:ident)
```

```
component | C
```

Listing 4.19 – normal_binding predicate definition

A normal binding establishes a binding between two subcomponents, and is composed by four identifiers denoting (1) the name of the component holding the client interface, (2) the name of this client interface, (3) the name of the component holding the server interface, and finally (4) the name of this server interface. Therefore, checking its validity boils down to ensuring that these identifiers refer to existing client and server interfaces. The parameters idC1 and idC2 contain the name of the components involved in the binding. These are both supposed to be indexed in lc (line 3), if that is not the case it means that the binding is not valid and False is returned (line 9). If both components c1 and c2 are found, then idl1 and idl2 are supposed to be indexed in their list of interfaces, respectively. Further, since it is a normal binding, it implies that it is established between two external interfaces (line 5). Failure to find the referred interfaces means that the binding is not valid and False is returned (line 7). Otherwise, its validity depends on whether the interfaces i and i' are indeed of client and server roles, respectively (line 6).

As expected, the predicates export_binding and import_binding are defined analogously. The main difference lies in the fact that these bindings are not between two subcomponents, but between a parent component and one subcomponent (or vice-versa). For the sake of clarity, Listing 4.20 depicts the export_binding predicate.

```
Function export_binding idI idC idI' lc (li:list interface) : Prop :=
match lc[idC] with
None => False
Some c' =>
match li[idI, Internal], (c'->itfs)[idI', External] with
```

```
6 | Some i, Some i' => (i->role) = Client /\ (i'->role) = Server
7 | _, _ => False
8 end
9 end.
```

Listing 4.20 – export_binding predicate definition

Basically, it is defined in a similar manner as seen for the normal_binding predicate. For this definition however, we also need to use the component's interfaces (parameter li).

A first well-formedness proof

Having defined our well-formedness predicates it is time to see them in action. Let us retake our running example concerning component "Component N" discussed in Subsection 4.1.1 (see Listing 4.11, Listing 4.12 and Listing 4.13).

First, let us reason about its subcomponents well-formedness. Lemma 4.1.1 addresses the well-formedness of component ${}^{"}C"$.

```
Lemma 4.1.1. C_is\_well\_formed: well\_formed\_component \ C. Proof.
```

We start by applying the WellFormedComponent constructor, which yields four subgoals to discharge. The first and second subgoals concern its subcomponents: their individual well-formedness and the uniqueness of their identifiers. Since it has no subcomponents both premisses are trivially established.

The third subgoal regards the well-formedness of its interfaces. These need to be uniquely identifiable by the tuple composed by their identifier and visibility values. It is clearly the case as it only possesses two external interfaces named s1 and c2.

Finally, the fourth subgoal requires the well-formedness of its bindings. This is also trivially proved as it is a primitive component and thus has no bindings. And therefore the proof concludes. \Box

For the sake of further illustration on how such proofs are performed, Listing 4.21 depicts its proof script.

```
1 Lemma C is well formed:
```

```
well formed component C.
з Proof.
    apply WellFormedComponent.
    Case "1/4 : C's subcomponents are well-formed".
      intros. simpl in H. fromfalse.
    Case "2/4 : C's subcomponents possess unique id's".
      simpl. apply Unique Base. reflexivity.
    Case "3/4 : C's interfaces are well-formed".
9
      simpl.
10
      eapply WellFormedInterfaces_Step; auto.
11
      eapply UniquePairs Step; auto.
12
      eapply NotInPairStep; auto;
13
      eapply NotInPair_Nil; auto.
      eapply UniquePairs_Step; auto.
15
      eapply NotInPair_Nil; auto.
16
      apply UniquePairs_Base; auto.
17
      eapply WellFormedInterfaces Step; auto.
18
      eapply UniquePairs_Step; auto.
19
      eapply NotInPair_Nil; auto.
20
      apply UniquePairs_Base; auto.
21
    Case "4/4 : C's bindings are well-formed".
22
      intuition.
23
24 Qed.
```

Listing 4.21 – Proof script for the C_is_well_formed Lemma

As expected, proving the well-formedness of component "S" follows the same rationale. Indeed, both possess the same structure. Regarding component "Component N", its well-formedness is tackled by Lemma 4.1.2.

```
Lemma 4.1.2. N_is_well_formed:

well_formed_component N.

Proof.
```

Applying WellFormedComponent yields four subgoals to prove.

It possesses two subcomponents (component "C" and component "S"), both are well-formed as previously discussed. Further, their identifiers are different, and therefore the first two subgoals are easily discharged.

It features four interfaces. Two of external visibility, and two of internal visibility. Indeed, some share the same identifier, yet, these are of different visibility

value, and thus still uniquely identifiable.

For last, its three bindings are established from and to existent components/interfaces, and from client to server. Thus, also well-formed, and the proof concludes.

4.1.3 Well-typed component architectures

A component may be well-formed but still unable to start execution. Indeed, its well-formedness guarantees involve important aspects regarding its composition, yet, further insurances are needed for the overall good functioning of the system in terms of its application dependencies. These are dictated by simple typing rules (see [5, p. 22]).

An interface possesses cardinality and contingency attributes. These determine its supported communication model and the guarantee of its functionality availability, respectively. For instance, as dictated by the GCM specification, for proper system execution we must ensure that singleton client interfaces are bound at most once. Indeed, for client interfaces only those with multicast cardinality are allowed to be bound more than once.

Analogously, similar constrains apply to the interfaces' contingency attribute. An interface of mandatory contingency is guaranteed to be available at runtime. This is rather obvious for server interfaces as they implement one or more service methods, i.e., they do have a functionality of their own. Client interfaces however, are used by service methods that require other service methods to perform their task. It therefore follows that a client and mandatory interface must be bound to another mandatory interface of server role. As expected, interfaces of optional contingency are not guaranteed to be available.

MEFRESA captures these requirements by defining a well-typed predicate as depicted by Listing 4.22.

```
Definition well_typed (c:component) : Prop :=
sound_cardinality c /\ sound_contingency c.
Listing 4.22 - well_typed predicate definition
```

Its definition is straightforward, it is a simple conjunction between two more interesting predicates: sound_cardinality and sound_contingency. Listing 4.23 depicts

the latter.

```
Definition sound_contingency (c:component) : Prop := subc_client_external_mandatory_itfs_are_bound c /\ client_internal_mandatory_itfs_are_bound c.
```

Listing 4.23 – sound_contingency predicate definition

As shown by the sound_contigency predicate we split its definition into subc_-client_external_mandatory_itfs_are_bound and client_internal_mandatory_itfs_are_bound. Indeed, the former checks the external interfaces, while the latter the internal ones.

```
Inductive client_internal_mandatory_itfs_are_bound c : Prop :=

2  | CIMI_Bound:

3  (forall itf , In itf (c->itfs) -> (itf->role) = Client ->

4  (itf->visibility) = Internal -> (itf->contingency) = Mandatory ->

5  forall li ,

6  li = export_recipients (itf->id) (c->bnds) (c->subcomps) ->

7  (li <> nil) /\

8   (forall i , In i li -> (i->contingency) = Mandatory)) ->

9  (forall c' , In c' (c->subcomps) ->

10   client_internal_mandatory_itfs_are_bound c') ->

11  client_internal_mandatory_itfs_are_bound c.
```

Listing 4.24 – client_internal_mandatory_itfs_are_bound predicate definition

Listing 4.24 depicts the client_internal_mandatory_itfs_are_bound predicate. Basically, we need to check that for all client, internal, and mandatory interfaces of some component c (lines 3-4), their interface recipients list originating from export bindings are non-empty — i.e. at least bound once — (lines 5-7) and of mandatory contingency (line 8). These recipients are computed by the export_recipients function. Naturally, the same applies recursively to the remaining of the component hierarchy (lines 9-10).

As expected, the subc_client_external_mandatory_itfs_are_bound predicate is defined analogously w.r.t. the subcomponents external interfaces. For the sake of completeness, Listing 4.25 depicts its definition.

```
(forall int, In int (c'->itfs) -> (int->role) = Client ->
    (int->visibility) = External -> (int->contingency) = Mandatory ->
5
    (*these type of itfs can only be in a Normal or Import binding*)
6
    forall 11',
8
     l=normal_recipients (c'->id) (int->id) (c->bnds) (c->subcomps) ->
9
     l' = import\_recipients (c'->id) (int->id) (c->bnds) (c->itfs) ->
10
     (app l l' \Leftrightarrow nil) / 
11
     forall i, In i (app 1 1') -> (i->contingency) = Mandatory))
                                                                          ->
12
    (*recursive call*)
13
    (forall c', In c' (c->subcomps) ->
14
              subc_client_external_mandatory_itfs_are_bound c')
                                                                          ->
15
    subc\_client\_external\_mandatory\_itfs\_are\_bound \ c \,.
16
```

 $Listing \ 4.25-{\tt subc_client_external_mandatory_itfs_are_bound} \ predicate \ definition$

It should be noted that the recipients list is now computed through the normal_-recipients and import_recipients functions.

The **sound_cardinality** predicate is defined analogously w.r.t. cardinality-related concerns.

A first well-typedness proof

Retuning to our running example from Subsection 4.1.1, let us discuss component "Component N"'s well-typedness.

First, we need to establish that component "Component N" has indeed a sound contingency. Lemma 4.1.3 addresses this concern.

```
Lemma 4.1.3. N_has_sound_contingency:
sound_contingency N.
Proof.
```

By unfolding the statement to prove, we can see that it is actually a conjunction of two predicates: subc_client_external_mandatory_itfs_are_bound and client_-internal_mandatory_itfs_are_bound.

For the former we start by applying its constructor CEMI_Bound and get two subgoals to discharge. The first one requires that all subcomponents' client, external and mandatory interfaces are indeed bound, while the second one recursively

requires the same for the component hierarchy inner levels. Component "Component N" contains two subcomponents: "C" and "S". Both possess one client interface, "c2" and "c3", respectively. Yet, only "c2" is of mandatory contingency, and it is indeed adequately bound through a normal binding to "s2" (which is also of mandatory contingency). Proving the second subgoal is straightforward: both subcomponents "C" and "S" are primitive, thus possess no subcomponents. And therefore subc_client_external_mandatory_itfs_are_bound is discharged.

Proving client_internal_mandatory_itfs_are_bound follows the same rationale. Only the interface "c1" from component "Component N" is concerned and it is indeed adequately bound to "s1". \Box

The demonstration that component "Component N" has a sound cardinality follows the same spirit. Basically, we need to exhaustively check that all concerned interfaces are meeting the cardinality-related requirements. For such simple component architecture, it is easy to see that it is indeed the case as all the present interfaces are of singleton cardinality and are all bound at most once.

Finally, we can show that **component** "Component N" is indeed well-typed. This is illustrated by Lemma 4.1.4.

```
Lemma 4.1.4. first_well_typedness_proof:
  well_typed N.
Proof.
```

Establishing the well-typedness of component "Component N" boils down to proving that it has a sound contingency and a sound cardinality. This is clearly the case as previously discussed. \Box

4.1.4 Well-formedness and well-typedness decidability

A component that is both well-formed and well-typed is said to be ready to start execution. The definition of these predicates gives us the ability to interactively prove inside Coq that a component system can, or not, start its execution. The burden of such a demonstration for one component c will therefore inherently depend on the complexity of c. In fact, one may wonder about the feasibility of undertaking such proof, i.e., whether it is indeed possible to actually prove or

disprove that \mathbf{c} is well formed and well typed². In other words, it is worth knowing that both predicates are decidable.

First, we need a predicate expressing decidability. Listing 4.26 depicts one such predicate that we borrow from Coq's standard library.

```
<sup>1</sup> Definition decidable (P:Prop) := P \setminus / \sim P.
```

Listing 4.26 – decidable predicate definition

Its definition is rather simple: it takes one proposition and returns the disjunction of this proposition itself with its negation. For our purposes, we shall use it for our well-formedness and well-typedness predicates. Indeed, proving them decidable is of paramount importance, it ensures the existence of an algorithm capable of automatically determining their valuation.

Generally, there are two approaches for proving a predicate's decidability.³ On the one hand, one can attempt to prove it by exploiting the structure of the involved parameters, showing that for all of its constructors it is indeed possible to infer a *True* or *False* valuation. On the other hand, one can write a function that acts as its computational counterpart, i.e., it returns a boolean value, *true* or *false*, in accordance with the predicate's valuation. Then, one needs to show that this function is *sound* — whenever it returns *true* the predicate's valuation is *True* —, and *complete* — whenever the predicate's valuation is *True*, the function returns *true*. Such functions are often called *decision procedures*. Finally, proving the predicate's decidability has now become trivial since it is intrinsically related with this boolean function.

In the following, we use the first approach for demonstrating the decidability of the well_formed_component predicate, and the second approach for tackling the decidability of the well_typed predicate.

²It should be noted that we are in the context of Coq's constructive logic, theorems that are true in classical logic (i.e. the excluded middle) may not be provable in Coq.

³One can argue about a third approach: defining a custom induction principle that accommodates the predicate's subtleties — for instance, nested recursion. However, this follows the same spirit as the first approach that we describe here.

Well-formedness decidability

As shown by Listing 4.14, the well_formed_component predicate is composed by other predicates: unique_ids, well_formed_interfaces, and well_formed_bindings. Naturally, proving their decidability is required in order to demonstrate that well_formed_component is decidable.

For instance, let us consider the unique_ids predicate. As shown by Listing 4.15, its definition includes the not_in_l predicate (see Listing 4.15). As such, the first step is to prove its decidability. This is demonstrated by Lemma 4.1.5.

```
Lemma 4.1.5. not\_in\_dec: for all id\ l, decidable\ (not\_in\_l\ id\ l). Proof.
```

We start by applying induction on the structure of I, and thus obtain two subgoals. Both require the original goal but applied to an empty list, and to a list composed by a head element c and a tail I.

The first subgoal is trivial. We recall that the decidable predicate actually stands for a disjunction. In particular, for this case: $not_in_l id nil \lor \neg not_in_l id nil$. Its left-hand side proposition its evidently true. Proving $not_in_l id nil$ can easily be achieved by applying the NotInNil constructor, at which point we only need to show that nil = nil, which is discharged by reflexivity.

The second subgoal requires the demonstration of decidable (not_in_I id (c::I)) by assuming decidable (not_in_I id I) as induction hypothesis. At this point we can safely assume that $(c \rightarrow id) = id$ is either true or false.

For the first case, we can show that the right-hand side of our goal is true. Indeed, since (c->id) is equal to id, then it is easy to see that not_in_l id (c::l) is false. Thus, we need to prove the negation of false, which is a tautology.

For the second case, we need to use the induction hypothesis. We know that $(not_in_I id I)$ is either true or false. If it this true, then we can show that not_in_I id (c::I) is also true. Indeed, since (c -> id) = id is false we have all the ingredients to discharge this subgoal by applying the NotInStep constructor. If it is false, then it follows that not_in_I id (c::I) is also false, as we have in context the negation of one of its premises. And thus the proof concludes.

Having demonstrated not_in_l's decidability, we are now in a position to address the unique_ids predicate. Its decidability is discussed by Lemma 4.1.6.

```
Lemma 4.1.6. unique_ids_dec:
    forall (lc:list component), decidable (unique_ids lc).
Proof.
```

We start by applying induction on the structure of Ic. This, naturally yields two subgoals: we now need to demonstrate the original goal for an empty list, and then for a list composed by a head element c and a tail list I.

The first subgoal is trivial, we can easily demonstrate unique_ids nil by applying its Unique_Base constructor.

The second subgoal is more elaborated. From the induction hypothesis we know that unique_ids lc is either true or false. Further, from Lemma 4.1.5 we know that this is also the case for not_in_l (c->id) lc. We need to consider all their pairwise combinations, and thus we have four cases to deal with.

For the first case, we have both assumptions with a valuation of true. It this therefore easy to show that unique_ids (c :: lc) holds by applying the Unique_Step constructor.

The remaining three cases possess at least one assumption with a valuation of false. Thus, it is always possible to show that \neg unique_ids (c :: lc) holds, as we always have the negation of one of its premises in context. And thus we can conclude the proof.

Proving the decidability of the well_formed_interfaces and well_formed_bindings predicates follow the same rationale. We account for all possible cases by recurring to structural induction, and reasoning symbolically on the parameters. However, it should be noted that well_formed_component c also possesses a premise involving a nested recursive call: $\forall c', c' \in (c.subcomps) \rightarrow well_formed_component c'$. Alas, coping with such definitions in Coq is somewhat cumbersome, and requires delving into its intricacies. In the following, we demonstrate an approach that can be seen as a general recipe for dealing with such cases.

First, let us prove an auxiliary lemma that is somewhat peculiar: it is possible to decide that all components in an empty list are well-formed. Lemma 4.1.7 demonstrates this.

```
Lemma 4.1.7. well_formed_component_nil_dec :
    decidable (forall c, In c nil -> well_formed_component c).

Proof.
```

We can easily show the left-hand side of our goal: $\forall c, c \in nil \rightarrow well_formed_-$ component c. This means that we have $c \in nil$ as an assumption, which is always false. Since from false anything follows, we can conclude the proof.

Having dealt with the case where the list of components is empty, let us now cope with the case where it is composed by a head element and a tail. For this case however, as demonstrated by Lemma 4.1.8, we shall use some parameters to establish the proof. Basically, the parameters include the decidability of the well-formedness of a component \mathbf{c} , and the decidability of the well-formedness of all components in a list \mathbf{lc} . Then, we want to show that all components in (cons \mathbf{e} \mathbf{lc}) are also well-formed.

```
Lemma 4.1.8. well_formed_component_cons_dec
   (c : component)
   (Hc : decidable (well_formed_component c))
   (lc : list component)
   (Hlc: decidable (forall e, In e lc -> well_formed_component e)):
   decidable (forall e, In e (cons c lc) -> well_formed_component e).

Proof.
```

From the Hc hypothesis we know that well_formed_component \mathbf{c} is either true or false. If it is false, then it evidently follows that $\neg(\forall e, e \in (cons\ c\ lc) \rightarrow well_-formed_component\ e)$. We only need to instantiate \mathbf{e} with \mathbf{c} to see that it is the case. If it is true however, we need to account for two other possibilities: from Hlc we know that $(\forall\ e, e \in lc \rightarrow well_formed_component\ e)$ is either true or false. If it is true, then we have all the necessary assumptions to prove that the left-hand side of our goal holds: if \mathbf{e} is instantiated with \mathbf{c} , then we can show it with Hc, otherwise if $\mathbf{e} \in lc$, then we can show it with Hlc. If it is false however, then we can show the right-hand side of our goal by analogous reasoning.

The last remaining ingredient before proceeding to the main proof is depicted by Lemma 4.1.9. Basically, we prove the decidability of the well-formedness of all components member of a list, while having as parameter the decidability of the well-formedness of all components. Indeed, it seems a rather strange lemma to prove. However, it is of paramount importance for the applicability of this approach. We exhibit its proof with the associated Coq script in order to further emphasize the peculiarity of the approach.

Lemma 4.1.9. well_formed_component_lc_dec:

The first thing to note is the use of the fix construct (line 5). This allows to define anonymous recursive functions. Basically, the proof is achieved by defining a recursive function that pattern matches on its parameter lc and uses Lemma 4.1.7 and Lemma 4.1.8 to adequately cover all the cases (lines 8-10). For last, the careful reader may wonder about the use of *Defined* instead of *Qed* (line 12). This makes Coq keep the proof of Lemma 4.1.9 — it exposes its recursive nature to a caller — while with *Qed* it would become *opaque*.

Finally, we are in a position to prove the decidability of the well_formed_-component predicate for all components **c** as demonstrated by Theorem 4.1.1. We also exhibit its proof as a Coq script to illustrate how the approach described so far is put into practice.

Theorem 4.1.1. well formed component dec:

```
forall c, decidable (well_formed_component c).
Proof.
fix 1; intros [i p ic cl lc li lb].
sassert (IHp_dec :=
well_formed_component_lc_dec well_formed_component_dec lc);
clear well_formed_component_dec.
```

```
Surrded.

Guarded.

destruct IHp_dec; destruct (well_formed_bindings_dec lb lc li);

destruct (well_formed_interfaces_dec li);

destruct (unique_ids_dec lc);

(*The first subgoal is when all properties are Well-formed. The others have at least one that isn't and are proved by congruence*)

[ left; apply WellFormedComponent; simpl; intros; auto | ..];

(right; intro Hwf; inversion Hwf; simpl in *; congruence).

Qed.
```

We start the proof by performing structural induction on the first argument through the fix tactic⁴ and introduce in the context component c's constituents (identifier, path, implementation class, ...) (line 4). The fix tactic also introduces a new hypothesis in the context, named as the current theorem, and with the same type as the goal. Indeed, this is an odd behaviour, and one may be tempted to use this new hypothesis to discharge the goal, but that would make Coq reject the proof. In short, proofs done with fix are required to satisfy a syntactic guardedness criterion, and attempting to directly discharge a goal with the hypothesis it introduces violates this criterion.

We introduce the proof that all subcomponents of **c** are well-formed into our context and name it IHp_dec (lines 5-6). Further, we remove the hypothesis introduced by fix since we will not use it anymore (line 7). Then, we use the Guarded command to check that Coq's guardedness condition is satisfied (line 8). It is not a tactic, it does not affect the state of the proof. Its sole purpose is to inform about the compliance of this guardedness condition at the current state of the proof, rather than having to wait until its conclusion.

At this point, the main work for this proof is done. The remaining simply accounts for all possible cases regarding the well-formedness decidability of the involved predicates (lines 10-12), and discharges them adequately (lines 16-17).

Finally the decidability of our well_formed_component is proved. Undeniably, the burden of this approach is considerable. This is mainly due to the way Coq is able to cope with nested definitions such as the component datatype. Yet, it

⁴Not to be confused with the previously mentioned fix construct for recursive functions.

should still be considered as a valid approach as it provides a rather interesting tutorial on how to build proof terms through functions, and as we shall see below, the burden of the second approach is comparable.

Moreover, the behaviour of the fix tactic is rather undocumented, and is generally not recommended. In fact, even in *Cocorico*⁵ it is stated that "it is not advisable to use it (unless you know what you do)". Alas, there are situations where it is indeed required. Nevertheless, for more details on its intricacies the reader is pointed to Giménez's tutorial on recursive types [65] for a very brief discussion on its use.

Well-typedness decidability

Having demonstrated the well_formed_component predicate decidable, it is time to cope with the well_typed predicate. As mentioned earlier, we shall use a different approach to tackle this task: we define some functional code that act as the computational counterpart of the well_typed predicate.

Basically, we need a function that returns the boolean value *true* whenever a component is well-typed, and the boolean value *false* otherwise. Further, it must be able to do it for all components given as input. Listing 4.27 depicts such function.

```
Definition well_typed_bool (c:component) : bool :=

sound_cardinality_bool c && sound_contingency_bool c.

Listing 4.27 - well_typed_bool function definition
```

Basically, it follows the same spirit as the well_typed predicate (see Listing 4.22), except that it is composed by boolean functions rather than predicates. With no surprise, the definition of the sound_contingency_bool function also follows the same spirit as the sound_contingency predicate (see Listing 4.23). Listing 4.28 depicts its definition.

```
Definition sound_contingency_bool (c:component): bool :=
client_internal_mandatory_itfs_are_bound_bool c &&
subcomponents_client_external_mandatory_itfs_are_bound_bool c.

Listing 4.28 - sound_contingency_bool function definition
```

 $^{^5\}mathrm{Cocorico}$ is the official Coq wiki, also known as The nonterminating Coq wiki: http://coq.inria.fr/cocorico/Home

Indeed, the actual work is carried by the two boolean functions client_internal_mandatory_itfs_are_bound_bool and subcomponents_client_external_mandatory_itfs_are_bound_bool — the computational counterparts of the predicates depicted in Listing 4.24 and Listing 4.25, respectively. Listing 4.29 depicts the former.

```
Fixpoint client_internal_mandatory_itfs_are_bound_bool c : bool :=

match c with

Component i p ic cl lc li lb =>

(client_internal_mandatory_itfs_are_bound_bool_one li lc lb) &&

(fix f_sub lc {struct lc} :=

match lc with

nil => true

| sc :: r =>

client_internal_mandatory_itfs_are_bound_bool sc && f_sub r

end) lc

end.
```

Listing 4.29 – client_internal_mandatory_itfs_are_bound_bool function definition

Its understanding should pose no doubt. Basically, it uses an auxiliary function client_internal_mandatory_itfs_are_bound_bool_one to check the interfaces at the current hierarchical level (line 4) and then recurs on the inner levels, i.e., on the subcomponents (lines 5-10).

The function responsible for checking each hierarchical level individually is also fairly simple. Listing 4.30 illustrates its definition.

```
Function client_internal_mandatory_itfs_are_bound_bool_one
(li:list interface) (lc:list component) (lb:list binding): bool :=
match li[Client, Internal, Mandatory] with
nil => true
| i :: r => check_if_recipients_are_mandatory_aux (i :: r) lb lc
end.
```

Listing 4.30 – client_internal_mandatory_itfs_are_bound_bool_one function definition

The parameter li holds a list of interfaces. From these, it recovers those that are client, internal, and mandatory (line 3). If there are none meeting this criteria, it simply returns *true* (line 4): it means that there are no interfaces that need to be checked. Otherwise, there is the need to check if the recipients of the bindings of

these interfaces are indeed of mandatory contingency (line 5). This is achieved by yet another auxiliary function depicted by Listing 4.31.

```
1 Function check_if_recipients_are_mandatory_aux (li:list interface)
                          (lb:list binding) (lc:list component) : bool :=
2
    match li with
3
      nil
             => true
    | i :: r \Rightarrow let lir := export recipients (i->id) lb lc in
5
                 if not_nil lir && check_if_mandatory lir then
6
                   check_if_recipients_are_mandatory_aux r lb lc
7
                 else
                   false
9
    end.
10
```

Listing 4.31 – check_if_recipients_are_mandatory_aux function definition

In short, it recurs through all interfaces in parameter li, recovering their list of recipient interfaces involved in export bindings (line 5). These, must be non-empty and of mandatory contingency (lines 6-7) — this is the purpose of the not_nil and check_if_mandatory functions, respectively. Should that not be the case, the function returns false (lines 8-9). Reaching an empty list makes the function return true (line 4).

Defining a function that checks if the client, internal, and mandatory interfaces are adequately bound is not enough. We need to prove it correct, i.e., that it is indeed a reliable computational counterpart of the client_internal_mandatory_-itfs_are_bound predicate. This is the purpose of Lemma 4.1.10. In order to deal with its nested recursive nature we employ the same approach as seen for the decidability of the well_formed_component predicate. We omit the related auxiliary lemmas and go straight to the main proof.

```
Lemma 4.1.10. cim_itfs_bound_correctness:

forall c,

client_internal_mandatory_itfs_are_bound_bool c = true <->

client_internal_mandatory_itfs_are_bound c.

Proof.
```

We start by applying the fix tactic and proceed by asserting the equivalence that we are trying to prove on the subcomponents. We do this in an analogous manner as discussed for the well formed component dec theorem (see Listing 4.1.1).

We want to prove a logical equivalence and therefore the proof is divided in two parts. The first part argues the soundness of the client_internal_mandatory_interfaces_are_bound_bool function, i.e., whenever it returns the boolean value true, the predicate client_internal_mandatory_interfaces_are_bound has indeed a valuation of True. The second part concerns its completeness: it is always able to return the boolean value true, provided that the predicate has a valuation of True.

For the first part, we start by applying the CIMI_Bound constructor, thus obtaining two subgoals. For the first one, we need to establish that the concerned interfaces are indeed bound to recipients of mandatory contingency. Since we have as hypothesis client internal mandatory interfaces are bound bool li lc lb = true, it follows that client_internal_mandatory_interfaces_are_bound_bool_one li lc lb = true holds. By induction on li, and since we pattern match on the expression li[Client, Internal, Mandatory], we can generalize and consider two cases: either it yields an empty list, or not. If it is an empty list, then we have a contradiction, since the CIMI_Bound constructor introduced a client, internal and mandatory interface variable int \in li in our context. Thus we can discharge this subgoal. if it is not an empty list, then we know that either int is the head of the list, or it is in the tail. It it is the head of the list, then we know that not_nil lir && check_if_mandatory *lir is true* — where *lir is the list of recipients from int:* export_recipients (int->id) Ib Ic. Thus, we have in context all the necessary assumptions to prove our subgoal. If it is in the tail of the list however, then we use the induction hypothesis, and can conclude this subgoal by unfolding and reducing the adequate definitions.

For the second subgoal, we need to cope with the nested recursion on the subcomponents. That is, we need to show that client_internal_mandatory_interfaces_are_bound c' holds, for $c' \in c.$ subcomps. From the beginning of this proof, we already asserted the equivalence for the subcomponents. Thus, we can apply this hypothesis and now need to show that client_internal_mandatory_interfaces_are_bound_bool c' = true, while having as an assumption that client_internal_mandatory_interfaces_-are_bound_bool c = true. Since we know it holds for the parent component c, then it must also hold for the subcomponent c' since the function definition recurs on all the component hierarchy. And thus we can conclude this subgoal.

The second part of this proof regards the other implication: we now assume client internal mandatory interfaces are bound c and try to prove client inter-

 $nal_mandatory_interfaces_are_bound_bool\ c = true.\ It\ should\ be\ noted\ that\ the$ function in our goal is defined by a boolean conjunction between client_internal_mandatory_interfaces_are_bound_bool_one li lc lb and the recursive call on the subcomponents. Thus, we need to prove that both functions return the boolean value true. For the first one, we start by applying induction on li, yielding two subgoals. The first subgoal is trivial: if Ii is empty, so is Ii[Client, Internal, Mandatory]. Thus, the function returns the boolean value true, and we are left to show that true = true, which is trivially proved by reflexivity. For the second subgoal we need to show that client_internal_mandatory_itfs_are_bound_bool_one (a :: li) lc lb = true holds. From the induction hypothesis we can conclude that client_internal_mandatory_itfs_are_bound_bool_one li lc lb = true holds, we now need to take care of the interface a. We need to consider three cases. If a is not of client, internal and mandatory nature then it is irrelevant for the sake of this proof, and we can proceed to the subsequent case. If it is indeed of such nature, then it may or may not possess bounded recipients of mandatory contingency. If it is the case, then we can show our goal by computation, i.e., we can reduce the term and eventually we get a true = true goal that is proved by reflexivity. If it is not the case, then we have a contradiction in our context w.r.t. client_internal_mandatory_interfaces_are_bound c premisses.

For the last part of this proof we need to show that the recursive call made on the subcomponents indeed returns the boolean value true. We start by applying induction on Ic, which yields two subgoals. The first subgoal is where there is no subcomponent: in this case the function simply returns true and we can prove our goal by reflexivity. For the second subgoal we know there is at least one subcomponent and we can use the equivalence on the subcomponents and the induction hypothesis to establish our goal. And thus the proof finally concludes. \Box

With no doubt, the above proof is long and laborious. Yet, it only tackles one of the involved functions. Indeed, analogous proofs are carried for the functions subcomponents_client_external_mandatory_itfs_are_bound_bool and sound_cardinality_bool. We omit these proofs as they follow the same rationale.

Having established the equivalences between the relevant predicates and functions, we can demonstrate Theorem 4.1.2. We illustrate this proof with a Coq script in order to emphasize how the approach is put into practice.

```
Theorem 4.1.2. well_typed_correctness:

forall c, well_typed c <-> well_typed_bool c = true.

Proof.

intro c. unfold well_typed; unfold well_typed_bool.

rewrite sound_cardinality_correctness.

rewrite sound_contigency_correctness.

destruct (sound_cardinality_bool c);

destruct (sound_contingency_bool c); intuition.

Qed.
```

Indeed, proving Theorem 4.1.2 is mostly achieved by using previous lemmas. And finally, Theorem 4.1.3 shows the decidability of the well_typed predicate. We also demonstrate this proof as a Coq script as it further emphasizes how this general approach differs from the one employed for Theorem 4.1.1.

```
Theorem 4.1.3. well_typed_dec:

2  forall c, decidable (well_typed c).

3  Proof.

4  intro c. unfold decidable.

5  rewrite well_typed_correctness.

6  destruct (well_typed_bool c); auto.

7  Qed.
```

Finally the decidability of the well_typed predicate is demonstrated. Further, we also defined a sound and complete decision procedure for the well-typedness valuation. Defining the computational counterparts of the well-typedness specification was indeed an elaborated task. To this end, recent work [33] aims at making such transformations automatic by extracting functional code from induction specifications and producing its proof of soundness. Yet, at the current stage of development it only works for a certain class of inductive specifications, and a completeness proof seems out of reach.

In this Section we discussed the mechanization of the GCM. In particular, we discussed how we used inductive definitions to model its core elements, and predicates to formally specify structure and typing requirements. Further, decidability of these predicates was also covered, ensuring that we can always determine

4.2. AN OPERATION LANGUAGE FOR COMPOSING ARCHITECTURES 101

whether a given component is compliant w.r.t. the GCM specification. The remaining of this Chapter builds on top of these definitions to develop a convenient language for manipulating GCM architectures, and to show pertinent examples.

4.2 An operation language for composing architectures

In the previous section, we saw how to use the component datatype to model a component hierarchy. Yet, for more complex architectures, directly manipulating the component datatype is not very convenient. This is even more evident if we consider reconfigurations: the software architecture evolves and one needs a simple and elegant solution for coping with such structural changes. Moreover, as mentioned in [34] composing an architecture in a arbitrary manner can lead to an "uncontrolled" architectural modification. Ensuring the consistency of the application's structure, both at deployment time and after performing a reconfiguration is thus of paramount importance.

To this end, we define an OPERATION language for manipulating GCM architectures. In the following, we dedicate the remaining of this section delving intro its intricacies.

4.2.1 Syntax and semantics

Before proceeding to the definition of our OPERATION language per se, let us introduce the notion of state. In most programming language definitions, a state is a structure that holds all the relevant information for a given program point, namely the mapping between the variables and their values. In our case, a state has the same shape as a component. Listing 4.32 depicts the state datatype.

```
Definition state := component.
Definition root := nil : list ident.
Definition empty_state : state :=
Component (Ident "Root") root "null" Configuration nil nil nil.
Listing 4.32 - state datatype
```

The choice of the **component** structure to represent a **state** should come as no surprise. It holds all the relevant information w.r.t. the structure of a GCM application, and has the advantage of being "well-known".

As further demonstrated by Listing 4.32, and with no surprise, an empty state is a component that is located at the *root* of the hierarchy — and thus with a nil path —, and without any subcomponents, interfaces and bindings (lines 2-4).

Manipulating the state structure is achieved with our aforementioned OPERA-TION language. Its syntactic categories for building GCM architectures are defined by Listing 4.33.

```
1 Inductive operation : Type :=
     Mk_component : ident -> path -> implementationClass ->
                        {\tt controlLevel} \,\, \hbox{->} \,\, {\tt list} \,\, {\tt component} \,\, \hbox{->} \,\, {\tt list} \,\, {\tt interface} \,\, \hbox{->} \,\,
3
                         list binding -> operation
4
      Rm component: path -> ident -> operation
      Mk_interface : ident -> signature -> path -> visibility ->
                        role -> functionality -> contingency ->
                         cardinality -> operation
                      : binding -> operation
     Mk_binding
      Rm binding
                      : binding -> operation
10
                      : operation -> operation -> operation
      Seq
11
     Done
                      : operation.
12
```

Listing 4.33 – operation datatype

The intended meaning of each constructor should raise no doubt. Basically, our OPERATION language allows us to make and remove components, make interfaces, and make and remove bindings. Further, we can naturally compose operations as a sequence. For this, we define a convenient notation as depicted by Listing 4.34.

```
1 \text{ Notation "op1} ; op2" := (Seq op1 op2).
```

Listing 4.34 – Notation for sequence of operations

Last, **Done** stands for the completed *operation* — it has the equivalent role of **skip** in standard programming language definitions.

The design of software architectures can be seen from a transition system point of view. One makes some operation op, in some state σ , and ends up with a reduced operation op' in some state σ '. This can be represented by the following manner.

$$\langle op, \sigma \rangle \longrightarrow \langle op', \sigma' \rangle$$
.

Building GCM architectures will therefore require to define these transition rules for each constructor of this operation language. In other words, to define a semantics. Table 4.1 illustrates the semantics of our OPERATION language. The notation is used for projections, and the involved definitions should have self-explanatory names. We use proof rules in order to ease readability. Basically, they represent the predicate step: (operation * state) \rightarrow (operation * state) \rightarrow Prop in MEFRESA, where each proof rule corresponds to a step constructor. We omit the constructor's names and number each rule for the sake of space.

```
i = Interface id s p v r f co ca
              c = Component id p ic cl lc li lb
                                                                                                                                                           valid\_interface\_path p \sigma
              well\_formed\_component\ c
                                                                                                                                                           c = get\_component\_with\_path p \sigma
                                                                                                                                                           \forall i', i' \in (c.interfaces) \rightarrow
              valid\_component\_path\ p\ \sigma
                                                                                                                                                                 i.id = id \rightarrow i.visibility \neq v
              \forall \ c', \ c' \in \left( get\_scope \ p \ \overset{\frown}{\sigma} \right) \rightarrow \left( c'.id \neq id \right)
\overline{\langle Mk\_component \ c, \ \sigma \rangle \longrightarrow \langle Done, \ add\_comp \ \sigma \ c \rangle} \ (1)
                                                                                                                                              \overline{\langle Mk\_interface \ i, \ \sigma \rangle \longrightarrow \langle Done, \ add\_itf \ \sigma \ i\rangle} \ \ (2)
                      binding is not a duplicate b \sigma
                                                                                                                                                          valid component path p \sigma
                     valid component binding b \sigma
                                                                                                                                                         component\_is\_not\_connected\ p\ id\ \sigma
 \overline{\langle Mk\_binding\ b,\ \sigma\rangle \longrightarrow \langle Done,\ add\_binding\ \sigma\ b\rangle} \ (3)

\frac{\cdot}{\langle \mathbf{Rm\_component} \ p \ id, \ \sigma \rangle \longrightarrow \langle \mathbf{Done}, \ rm\_comp \ \sigma \ p \ id \rangle} (4)

                        valid\_component\_binding\ b\ \sigma
  \overline{\langle \mathbf{Rm\_binding}\ b,\ \sigma \rangle \longrightarrow \langle \mathbf{Done},\ rm\_binding\ \sigma\ b \rangle} \ \ (5)
                                                                                                                                                                  \overline{\langle Done; op_2, \sigma \rangle \longrightarrow \langle op_2, \sigma \rangle} (6)
                                                                                                                                  \frac{\langle op_1, \sigma \rangle \longrightarrow \langle \mathbf{Done}, \sigma' \rangle}{\langle op_1; op_2, \sigma \rangle \longrightarrow \langle op_2, \sigma' \rangle} (8) \quad \overline{\langle \mathbf{Done}, \sigma \rangle \longrightarrow \langle \mathbf{Done}, \sigma \rangle} (9)
                        \frac{\langle op_1, \sigma \rangle \longrightarrow \langle op'_1, \sigma' \rangle}{\langle op_1; op_2, \sigma \rangle \longrightarrow \langle op'_1; op_2, \sigma' \rangle} (7)
```

Table 4.1 – Semantics of our *operation* language

The rules from Table 4.1 dictate the premisses that need to hold in order to perform a step. Rule (1), whose constructor name is SMakeComponent, concerns making components. Naturally, it requires the component itself to be well-formed. Further, its path needs to be valid, i.e. to point to a pre-existent component in the hierarchy — this is the purpose of the valid_component_path: path \rightarrow state \rightarrow Prop. For last, its identifier must be different than the ones from the components at the same hierarchical level — as expected, the purpose of the get_scope: path \rightarrow state \rightarrow component function is to return the component indicated by the path given as parameter. Performing this step yields a state where the component c is adequately added in state σ . This is the purpose of the add_comp: state \rightarrow component \rightarrow state function.

Rule (2), named SMakeInterface, follows the same spirit, the main difference is that an interface can share the same identifier with another one, provided that they have a different visibility value. The add_itf: state \rightarrow interface \rightarrow state function produces a state with the interface inserted in the hierarchy.

Rules (3) and (5), SMakeBinding and SRemoveBinding respectively, have the same requirement: the binding to be made/removed must be valid, i.e. can exist/exists in the hierarchy and will be/is of normal, import or export type. Further, for the creation of bindings, in order to prevent useless duplication we require that it does not already exists. As expected, the effects of the performed operation are accomplished by the functions add_binding: state \rightarrow binding \rightarrow state and rm_binding: state \rightarrow binding \rightarrow state, respectively.

Rule (4), named SRemoveComponent, concerns the removal of a component. For this, we need to provide a valid path and it must not be *connected*, that is, not bound to any other component. This removal occurs by the use of the rm_comp: state \rightarrow path \rightarrow ident \rightarrow state function.

The remaining rules concern operation composition. Rule (6), named SSeqFinish, formalizes the intuitive idea that we can skip the idempotent Done operation. Next, rule (7), named SSeq1, precises that op_1 can itself be a composed operation. Orthogonally, rule (8), named SSeq2, is meant for the cases where op_1 is an operation that can be fully reduced in one step. Finally, rule (9) is named SDoneRefl and simply attests that Done produces no effects.

The rules from Table 4.1 only define a one step transition. However, there are cases where we may want to reason about multiple steps transitions. This is naturally achieved by the reflexive transitive closure of our step predicate. Listing 4.35 depicts its definition in Mefresa.

```
10 Notation " op '/' s '~~~>*' op' '/' s' " :=

(rt_closure step (op,s) (op',s')).
```

Listing 4.35 – Reflexive transitive closure definition of step

First, we define the notion of relation (line 1). Basically, it is a predicate expecting two arguments of the same type. Its valuation dictates whether the arguments are related or not. Then, we proceed by defining a general notion of reflexive transitive closure (lines 3-8). It includes two constructors $\mathsf{rt_base}$ and $\mathsf{rt_step}$. The former defines the reflexive case, i.e., when the two parameters are the same. The latter can be read as follows: if \mathbf{x} and \mathbf{y} are related (line 6), and there is a path from \mathbf{y} to \mathbf{z} (line 7), then there is a path from \mathbf{x} to \mathbf{z} (line 8). Finally, for convenience we define a notation for the reflexive transitive closure of the step predicate (lines 10-11).

A first architecture through an operation

Having seen the syntax and semantics of our OPERATION language, it is time to see it at work. We shall demonstrate its use on our running example. For this however, we shall assume that component "Component N" is located at the root of the hierarchy. We make this slight modification since we will be building a concrete component architecture and thus we cannot work with an uninstantiated path parameter — note that component "Component N"'s path was left as an undefined parameter in the previous examples.

First, let us demonstrate the operation to build the enclosing component, that is, "Component N". Listing 4.36 depicts its definition.

```
Mk_interface (Ident "s3") sigS3 [id] Internal
Server Functional Optional Singleton;
Mk_interface (Ident "s3") sigS3 [id] External
Client Functional Optional Singleton.
```

Listing 4.36 – operation for the component "Component N"

Its understanding should pose no doubt. For the sake of clarity, we start by defining root as a nil path (line 1) — it emphasizes the idea that we are building this component at the top of the hierarchy. The build_N operation is parametrized by id in order to improve readability (line 6), and the implementationClass parameters sigC1 and sigS3 are left uninstantiated. Moreover, it should be noted that at this point we cannot establish the bindings as the subcomponents are yet to be made.

Listing 4.37 depicts the operation to make subcomponent "C".

```
Parameter iclC : implementationClass.

Parameter sigS1 : signature.

Parameter sigC2 : signature.

Definition build_C (id: ident) (pN: path) : operation :=

Mk_component id pN iclC Configuration [] [] [];

Mk_interface (Ident "s1") sigS1 (app pN [id])

External Server Functional Mandatory Singleton;

Mk_interface (Ident "c2") sigC2 (app pN [id])

External Client Functional Mandatory Singleton.

Listing 4.37 - operation for the component "C"
```

Its definition is rather straightforward. The only subtlety concerns the interfaces' path: the path of an interface should indicate the component it belongs to, thus we append pN to the identifier id.

The operation for creating subcomponent "S" follows the same spirit and is depicted by Listing 4.38.

```
Parameter iclS : implementationClass.
Parameter sigS2 : signature.
Parameter sigC3 : signature.

Definition build_S (id: ident) (pN: path) : operation :=
Mk_component id pN iclS Configuration [] [] [];
Mk_interface (Ident "s2") sigS2 (app pN [id])
```

4.2. AN OPERATION LANGUAGE FOR COMPOSING ARCHITECTURES 107

```
External Server Functional Mandatory Singleton;

Mk_interface (Ident "c3") sigC3 (app pN [id])

External Client Functional Optional Singleton.

Listing 4.38 – operation for the component "S"
```

Finally, Listing 4.39 depicts the operation for establishing the bindings.

Listing 4.39 – operation for binding the components

We put everything together in Listing 4.40. Basically, we simply use the sequence constructor to compose the overall operation.

```
Definition build_running_example : operation :=
let iN := Ident "Component N" in
let iC := Ident "C" in
let iS := Ident "S" in
build_N iN; build_C iC [iN]; build_S iS [iN]; bind_system [iN].
```

So far, we only have an operation, we do not possess an actual representation of

Listing 4.40 – Overall operation for component "Component N"

the component architecture. For this, we must *reduce* the build_running_example operation. This is achieved demonstrating the statement depicted by Listing 4.41.

```
exists s, build_running_example / empty_state --->* Done / s.
```

Listing 4.41 – Logical statement regarding the reduction of build_running_example

Proving the above statement amounts to applying the appropriate rule for each step and establishing their premisses. Mixing deduction with computation solves this goal in rather a straightforward manner. To some extend, it is like using an interpreter where each step demands requirements that need to be satisfied in order to be allowed.

We omit the details of this proof as it mostly boils down to adequately apply the semantic rules shown in Table 4.1, and refer the reader to the online development for its details.

4.2.2 Building well-formed architectures

In the previous section, we saw how to build component architectures through an operation language. Further, we introduced the general notion of state — which is basically a component —, and in particular we defined an empty state (see Listing 4.32). Yet, while the definition of state possess the same structure of a component, we need a tailored well-formedness predicate for it. Indeed, this ensures the well-formedness of the complete component hierarchy starting from the root element. Listing 4.42 depicts its definition.

```
Definition well_formed (s:state) : Prop :=
match s with

Component id p ic cl lc li lb =>
id = Ident "Root" /\ p = root /\ ic = "null" /\
cl = Configuration /\ li = nil /\
well_formed_component s
end.
```

Listing 4.42 – well_formed predicate definition

In practice, manipulating a component architecture consists in interacting with the state's subcomponents — constituent lc —, and bindings — constituent lb. Thus, the remaining constituents are left untouched, that is, they should remain as they are in the empty state.

A first fact to establish concerns the well-formedness of the empty state. Lemma 4.2.1 addresses this point.

```
Lemma 4.2.1. empty_state_is_well_formed:
well_formed empty_state.
Proof.
```

We can split this proof into six subgoals. Naturally, the first five subgoals are trivially discharged by reflexivity. The remaining subgoal concerns the well-formedness of a component without subcomponents, interfaces and bindings. Applying the WellFormedComponent constructor yields four subgoals. The first and second subgoals concern the well-formedness and the identifier unicity of the subcomponents. Since there are none to consider, both subgoals are trivially discharged. The third and fourth subgoals require the well-formedness of the interfaces and bindings, re-

4.2. AN OPERATION LANGUAGE FOR COMPOSING ARCHITECTURES 109

spectively. The same argument applies: there are none to check, and thus the proof concludes. \Box

Another aspect discussed in the previous section was the possibility to reason on the overall execution of (sequence of) operations. This was achieved through the definition of the reflexive and transitive closure (see Listing 4.35) of the step relation defined by Table 4.1. To this end, an important theorem to prove is that reducing an operation in a well-formed state, ends up in a state that is also well-formed. Listing 4.43 depicts this theorem.

Listing 4.43 – validity statement

Proving the above theorem is achieved by case analysis on the *operation* language constructors. For the constructors that actually cause an effect on the state — Mk_component, Mk_interface, ... — we need to show that performing one step yields a well-formed state. Thus, the proof delves into the effects caused by functions such as add_comp, add_itf, etc. The Done constructor is idempotent, and thus evidently maintains the state well-formed. For last, for the Seq constructor we need to explicitly deal with multiple-steps reductions. By induction on the reflexive transitive closure of step we get the base case that is trivially true by reflexivity. Further, for the induction step we use the induction hypothesis that requires to show the well-formedness of the attained intermediary state. Yet, we know this state was reached by a one step reduction. Thus, it is necessarily well-formed as we already showed that the remaining constructors always yield a well-formed state.

The details of this proof are rather elaborated as they mostly deal with the intricacies of the involved functions. The interested reader is referred to the online development for an exhaustive and documented account of this proof. A direct link is provided for the sake of convenience: http://mefresa.gaspar.link/CoqLive/Mefresa/Mefresa.Operation.Compliance.html#validity.

Essentially, the above theorem gives the certitude that any composition of operations that meet the premisses will yield a well-formed component architecture.

Moreover, it should be noted that we do not require the starting **state** to be empty. This is particularly relevant for structural reconfigurations, as these occur on an already deployed **component** architecture.

The reader may wonder about a similar theorem concerning the well-typedness. Clearly, it would not be possible to establish such a theorem. Indeed, it is easy to see that expecting the well-typedness to be maintained at every step of an operation would not be feasible. For instance, a component architecture is not well-typed right after adding an interface of mandatory contingency and client role.

The well_formed predicate concerns the structure and modular composition of a component architecture. Therefore, it is legitimate to expect that this property always holds. For instance, it is never reasonable to let a binding cross the component boundaries occur. The well_typed predicate however, is more related with a component architecture readiness for starting its execution. For instance, specifying an interface with a mandatory contingency and client role intuitively means that the application needs this interface to be bound for a correct behaviour. Further, deployment and structural reconfigurations occur while the application is stopped. Thus, we only need to ensure that a GCM application is well-typed right before it (re)starts its execution.

4.3 Proving Properties

In this section we illustrate some more concrete examples on the use of MEFRESA for proving properties. To this end, Subsection 4.3.1 focuses on aspects of the mechanized GCM specification, Subsection 4.3.2 deals with general properties regarding the operation language, and Subsection 4.3.3 discusses a previous case-study on autonomic computing through structural reconfigurations of a GCM application.

4.3.1 Meeting the Specification: Absence of Cross-Bindings

As mentioned in Subsection 4.1.1, there are three types of bindings allowed: normal, export, and import. Regarding this, it is said that establishing one of these types of bindings "ensure that primitive bindings cannot cross component boundaries except through interfaces" [1].

The first step in proving this property is to encode the notion of *cross-binding*. In Mefresa, bindings are locally stored by the direct enclosing component. The involved components and interfaces are specified through their identifiers. Thus, in order to be crossing, a binding must specify a recipient that is not at the same hierarchical level. For instance, a *one-level* cross-binding of *export* type is defined as follows:

```
Definition cross_export idI1 idC2 idI2 lc li : Prop := 
(exists i, Some i = li[idI1, Internal] /\ (i->com) = Client) /\

(cexists c, Some c = lc[idC2] /\ (exists i, Some i = (c->interfaces)[idI2, External])) /\

(forall c, In c lc -> 
exists c', Some c' = (c->subComponents)[idC2] /\ 
exists i, Some i = (c'->interfaces)[idI2, External] /\ 
(i ->com) = Server).
```

A binding of export type is made from an internal client interface — this is what the first part of the above definition stands for. Next, since the binding is supposed to be crossing we must state that there exists no component and interface that match the identifiers idC2 and idI2, respectively. This is due to the fact that we do not impose strict restrictions on the identification of our core elements (e.g. components can have the same identifier as long as they are in a different level of the hierarchy). Finally, the last part of the definition establishes the target of the binding: there exists a component, whose identifier is idC2, that is a subcomponent of the one being crossed, with an external server interface whose identifier matches IdI2.

The same reasoning is applied for the definition of cross-bindings of *normal* and *import* types.

Having defined the notion of cross-binding we shall rely on the following auxiliary lemma to complete the proof.

```
1 Lemma binding_cannot_be_crossing_if_valid:
2 forall b s, valid_component_binding b s ->
3 cross_binding b s -> False.
```

Essentially, the above lemma states that we cannot have a binding $\bf b$ in a state $\bf s$

that is both a valid binding and crossing at the same time — otherwise we could prove *false*.

Proving this lemma amounts to perform case analysis on the type of bindings. We know that bindings can be *normal*, *import* or *export*. Therefore, we need to show that each of these three types of bindings are always established within the bounds of components and being that the case, they cannot be crossing.

The property we want to prove here however is slightly different. We want to prove that meeting the specification, indeed we cannot have cross-bindings. In Mefresa, this boils down to the following theorem.

```
Definition system_binding (b:binding) (s:state) : Prop :=
match get_component_with_path (b->path) s with
None => False
Some c => In b (c->bindings)
end.

Theorem cross_binding_cannot_happen:
forall b s, well_formed s -> system_binding b s ->
cross_binding b s -> False.
```

We include the definition of system_binding to put emphasis that binding b belongs to the system. By definition, in the presence of a well-formed state s we can only have valid bindings. As such, any bindings b belonging to s must be valid. Since we know from our previously proved lemma bindings_cannot_be_crossing_if_valid that a binding cannot be valid and crossing at the same time, we can conclude the proof.

4.3.2 Supporting Parametrized ADLs

It is often the case that we want to build a distributed application that has several instances of the same component. For instance, in [27] we showed how to specify a GCM distributed application with fault-tolerance of Byzantine failures [35] that had several instances of the same primitive component.

For this kind of systems, it would be more convenient to specify it in a parametrized manner. To this end, coping with this parametrization amounts to defining a function that takes a **component** as a *template* and produces **n** instances of that

component. For primitive components this is achieved as follows:

At each recursion step we construct a new **component** whose identifier is the one from the template suffixed with the current value of **n**. Moreover, we also update the interfaces' path accordingly.

Naturally, provided that the given component is well-formed, we want to ensure that the list of generated components are also well-formed. Lemma 4.3.1 addresses this aspect. The well_formed_components: list component \rightarrow Prop predicate simply requires that the list of components possess unique identifiers and each component is well-formed.

```
Lemma 4.3.1. well_formed_template_generation:

forall c, well_formed_component c ->

forall n, well_formed_components (generate_from_template c n).

Proof.
```

Proving the well-formedness of the generated components is obtained by induction on n. If it is zero, then we get an empty list, which is evidently well-formed. If it is the successor of some natural n then we need to prove that the generation is well-formed for $(S \ n)$ — the successor of n — given the well-formedness for n as the induction hypothesis. First, we need to establish that the components identifiers are unique, which can be derived by the fact that the suffix that is appended at each iteration is always strictly lower than the precedent, and thus different. Then, we need to prove that each generated component is individually well-formed. Unfolding one time the definition of the generation of $(S \ n)$ components yields the first produced component whose identifier is (SUFFIX_IDENT I $(S \ N)$), appended with the recursive call on the argument n. The first component of this list is well-formed since it has no subcomponents and the interfaces remain well-formed after

a path update. As for the tail of the list, it can be proved well-formed from the induction hypothesis. And thus the proof concludes. \Box

4.3.3 Structural Reconfigurations

In the realm of autonomic computing one must be able to dynamically restructure the architecture of the application. In [34] we showed how structural reconfigurations were used in order to provide a cost-efficient solution for the saving of power consumption. A slightly simplified architecture⁶ of the proposed GCM application is depicted by Fig. 4.2.

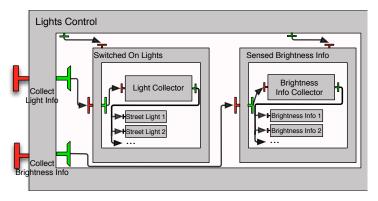


Figure 4.2 – Use-Case Architecture

This use-case consists in an experimental component system in charge of switching on and off street lights, according to the perceived luminosity of the surroundings. Basically, in order to address the goal of saving energy, but at the same time offering an acceptable quality of service (i.e. an acceptable luminosity in the streets), the components *Street Light* and *Brightness Info* are added/removed accordingly. Moreover, as said in [34], the use-case starts with three *Brightness Info* components and zero *Street Light* component.

We model this scenario in Mefresa by defining every component involved in the architecture. For instance, components *Light Collector* and *Street Light* are mechanized as follows:

⁶GCM components possess a *membrane* part that we do not model in MEFRESA. This however, should not be seen as too much of a shortcoming. A component membrane serves mainly the purpose of promoting the separation of concerns between functional and non-functional aspects. It does not contain any added functionality on its own.

```
1 Parameter slclass lcclass: implementationClass.
<sup>2</sup> Parameter s1 s2 : signature.
4 Definition p1 := [Ident "Lights Control"; Ident "Switched On Lights"
 Definition LightComp : component :=
    Component (Ident "Street Light") p1 slclass Configuration nil
        [Interface (Ident "Get") "" (app p1 [Ident "Street Light"])
               External Server Functional Mandatory Singleton | nil.
10
  Definition LCC: component :=
11
   Component (Ident "Light Collector") pl lcclass Configuration nil
       [Interface (Ident "Light Info") s1 (app p [Ident "Light
13
           Collector "])
              External Server Functional Mandatory Singleton;
14
        Interface (Ident "Collect Light Info") s2 (app p [Ident "Light
15
            Collector "])
              External Client Functional Mandatory Singleton]
16
       nil.
17
```

In the above definitions, **p1** holds the path of both **components** in the hierarchy. Furthermore, the remaining **components** are defined in a similar fashion. Considering the variable LightsControlUseCaseArchitecture as the structure holding the complete hierarchy, we can prove its well-formedness.

```
Lemma LightsControlUseCase_is_well_formed:
well_formed LightsControlUseCaseArchitecture.
```

The architecture from this use case indeed meets the specification, and proving this lemma poses no particular challenge as it has an explicit structure. The interesting aspect of this use-case comes from the fact that we need to add and remove components at runtime. Indeed, this scenario is yet another example of the usefulness of being able to cope with parametrized specifications.

Before proceeding to the structural reconfigurations, we shall use our *operation* language constructs to define new, higher-level constructs. For instance, we can easily define an **operation** to build several **components** at a time:

```
1 Fixpoint mk_components lc : operation :=
2 match lc with
```

This new operation mk_components takes a list of components as argument and produces a sequence of mk_component operations by means of our; constructor. Further, we shall also define an operation for the construction of a list of bindings.

```
Fixpoint mk_normal_bindings (p:path) (icc:ident) (iic:ident)

(ics:ident) (n:nat) (iis:ident) :=

match n with

0 => done

| S m =>

(mk_binding (Normal p icc iic (suffix_ident ics n) iis));

mk_normal_bindings p icc iic ics m iis

end.
```

Essentially, it is a set of bindings being made from the same client to several servers. The path **p** is given as pointer to the component in the hierarchy where the binding is going to be kept. Then, we specify the identifiers **icc** and **iic** that determine the component and interface from which the binding is made from. Since each binding is made to a different component, we need to generate different identifiers. This is achieved in the same manner as with the generate_from_template function defined above: at each recursion step we suffix **n** to **ics** so that we target different components for every binding built. Finally, the identifier **iis** gives the interface to which the binding is made to.

Having defined our new operations, we can now proceed to the specification of the reconfiguration to add "Street Light" components. Below, LightComp is a variable representing our "Street Light" component defined above.

```
Definition add_lights_reconfig (n:nat) :=
mk_components (generate_from_template LightComp n);
mk_normal_bindings p1

(Ident "Light Collector") (Ident "Collect Light Info")
(Ident "Street Light") n (Ident "Get").
```

Basically, the above creates **n** components by using the "Street Light" component as template, and then establishes the required bindings. This, could for instance be used as follows:

4.4. DISCUSSION 117

```
1 Lemma adding_lights_red:
2 exists s,
3 add_lights_reconfig 3/LightsControlUseCaseArchitecture ~~~>* Done/s.
4
5 Lemma adding_lights:
6 forall s,
7 add_lights_reconfig 3/LightsControlUseCaseArchitecture ~~~>* Done/s->
8 well_formed s.
```

Proving the above lemmas is achieved by the same reasoning techniques as discussed above. Regarding the first lemma, the key ingredient here to note is that components are created before establishing the bindings — and thus bindings will indeed succeed to be established — and they are well-formed since they are generated from a well-formed template component. As such, reducing this operation to **Done** is possible. It should be noted that while generalizing this lemma for **n** would require a proof by induction, it would still follow the same principle. As for the second lemma, it is a natural consequence of our *validity* theorem (see Listing 4.43).

4.4 Discussion

In this chapter we presented a framework to reason about the structure of GCM applications mechanized in the Coq Proof Assistant. The main novelty of our approach lies in the use of an operation language that allows us to build software architectures that are *correct-by-construction*. While we lose some of the automation offered by the usual approach followed by the use of model-checkers, relying on the expressiveness of the Coq Proof Assistant allows us to reason on issues that cannot be addressed by usual model-checking techniques.

The choice of a *deep-embedding* rather than a *shallow* approach for the definition of our operation language is also worth discussing. By explicitly using a *datatype* for the encoding of our operation language there is a clear identification of its syntax, letting no doubt on how operations can be composed. Further, our goal here is also to formalize the GCM specification, a *deep-embedding* emphasizes the operational semantics for the building and reconfiguration of architectures.

Indeed, the definition of the GCM specification in natural language opens the

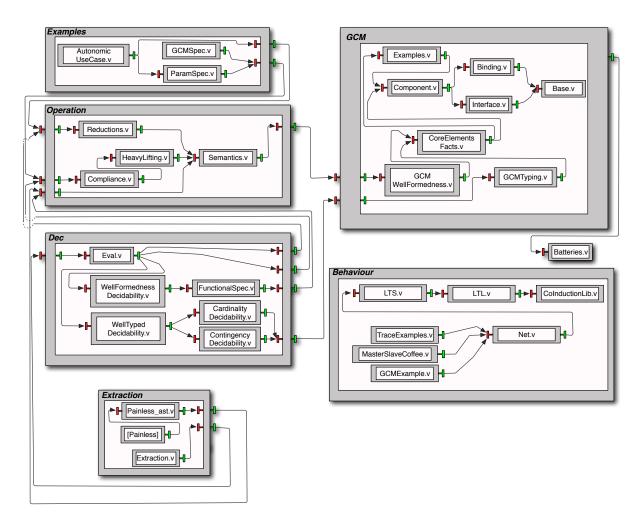


Figure 4.3 – Mefresa overview from a GCM perspective

door for several interpretations. Further, such a specification is supposed to be *flexible* and allow various conceivable implementations. Nevertheless, the MEFRESA framework shows that it is possible and fruitful to formalize such an undertaking in a proof assistant like Coq. Further, is also provides a case-study on the mechanization of **component** models in the context of interactive theorem proving. In fact, the need for such an approach was already discussed in [31].

To wrap up, Figure 4.3 provides an overview of MEFRESA from a GCM perspective: unless where explicitly stated otherwise, composite components represent folders, and primitives represent Coq modules.

At the top right corner, the **GCM** composite component contains the core modules

4.4. DISCUSSION 119

of this framework. At the left, the **Examples** composite holds the examples discussed in Section 4.3. Below, the **Operation** composite contains all the machinery concerning **operations**: its operational semantics, related proofs, and custom-made tactics to ease proof automation.

The **Dec** composite deals with the *decidability* of our main predicates and functional code computing well-formedness and well-typedness valuations. **Batteries.v** is a general purpose Coq library aiming at improving proof scripts' readability and maintainability.

The two last remaining pieces, the **Extraction** and **Behaviour** composites, represent Mefresa's extensions that will be discussed in detail in Chapter 5 and Chapter 6, respectively. The former concerns Painless, a new ADL for specifying GCM architectures. The latter deals with the mechanization of a behavioural semantics.

The **Extraction** composite, deals with all the intricacies of generating OCaml code that can be run independently or in the shape of a library. The module **Extraction.v** specifies some extraction details such as the conversion from Coq datatypes to OCaml primitives types — for instance, rather than extracting the encoding of Coq's natural datatype, naturals are adequately translated to positive integers. The module **Painless_ast.v** holds the definition of the abstract syntax tree for the PAINLESS ADL. At last, [**Painless**] implements a lexer, parser and interpreter for PAINLESS specifications. These are directly programmed in OCaml.

The **Behaviour** composite defines a behavioural semantics based on synchronized transition systems. The modules **CoInductionLib.v** and **LTL.v** are borrowed contributions from [13]. LTS.v and **Net.v** hold the mechanization of the relevant datatypes and predicates of this semantics. Finally, **TraceExamples.v**, **MasterSlaveCoffee.v** and **GCMExample.v** contain examples on how this semantics can be put to practice.

Table 4.2 depicts further relevant data concerning the number of lines of the specification, proof development, and comments parts composing MEFRESA. This was obtained through the coqwc tool.

	Specification	Proof	Comments
Batteries.v	268	172	146
Behaviour/CoInductionLib.v	251	303	10
Behaviour/GCMExample.v	138	5	29
Behaviour/LTL.v	67	94	2
Behaviour/LTS.v	146	0	32
Behaviour/MasterSlaveCoffee.v	228	915	122
Behaviour/Net.v	316	0	61
Behaviour/TraceExamples.v	36	143	4
Dec/CardinalityDecidability.v	290	761	8
Dec/ContingencyDecidability.v	328	869	7
Dec/Eval.v	238	718	66
Dec/FunctionalSpec.v	111	181	11
Dec/WellFormednessDecidability.v	88	327	55
Dec/WellTypedDecidability.v	10	15	3
Examples/AutonomicUseCase.v	132	475	59
Examples/GCMSpec.v	60	154	91
Examples/ParamSpec.v	67	138	17
Examples/ThesisRunningExample.v	105	372	17
Extraction/Extraction.v	395	607	42
Extraction/Painless_ast.v	110	0	25
GCM/Base.v	18	30	16
GCM/Binding.v	119	106	15
GCM/Component.v	127	71	42
GCM/CoreElementsFacts.v	119	150	9
GCM/Examples.v	40	0	4
GCM/GCMTyping.v	196	10	52
GCM/GCMWellFormedness.v	154	283	4
GCM/Interface.v	262	197	52
Operation/Compliance.v	71	367	58
Operation/HeavyLifting.v	721	3294	14
Operation/Reductions.v	238	132	13
Operation/Semantics.v	610	417	89
Total	6059	11306	1175

Table 4.2 – Details regarding the number of lines composing Mefresa

XXX

In this chapter we presented Mefresa, a Coq framework for the reasoning on software architectures.

4.4. DISCUSSION 121

In the following Chapter we show its practical facet by demonstrating how we integrated it with the ProActive middleware, and the inherent benefits from this combination.



Painless integration with ProActive

"Many will call me an adventurer
- and that I am, only one of a
different sort: one of those who
risks his skin to prove his
platitudes."

Che Guevara

Contents

5.1	Inte	gration approach
	5.1.1	Computing states from operations $\dots \dots 125$
	5.1.2	Certified code, Painless interpreter, and the ProActive
		middleware
5.2	The	Painless architecture description language 131
	5.2.1	Painless Semantics
	5.2.2	Painless hello world and beyond
5.3	\mathbf{Disc}	ussion

This Chapter proposes a new ADL, named PAINLESS, and discusses its associated tool support. Section 5.1 describes the undertaken approach for providing an extension to the ProActive middleware supporting the interpretation of PAINLESS

specifications. The syntax and semantics of Painless are presented in Section 5.2. Specification examples are also explained. Finally, Section 5.3 concludes this Chapter.

Our GCM/ProActive extension implementation is freely available online, and contains the examples discussed in this Chapter and several others. The interested reader is pointed to the website¹ of its development for more details.

The results discussed in this chapter are partially included in a paper to be presented at the IPM School of Computer Science, for the 6^{th} IPM International Conference on Fundamentals of Software Engineering, to be held in Tehran, Iran [36].

5.1 Integration approach

Typically, one uses an ADL as a means to specify the software architecture. This promotes separation of concerns and compels the software architect to accurately define structural requisites. Nevertheless, this task is seldom trivial as arbitrarily complex architectures may need to be defined. It is thus important to provide the means for expressive and intuitive, yet reliable, specifications. As discussed in Section 2.2, the ProActive middleware supports the specification of GCM architectures by means of its own ADL — for instance, Listing 2.1 exemplified one such architecture specification.

However, the GCM ADL lacks support for architectural reconfigurations and parametrization. Further, it is XML-based: while it may be suitable for tools, it is a rather verbose and static description of the architecture.

To this end, Painless supports both the definition of parametrized architectures and the specification of reconfigurations in a declarative style. This, facilitates deployment tasks and gives a more comprehensive understanding of the application's topology.

In the following we detail our approach for extending the ProActive middle-

¹The PAINLESS extension for the ProActive middleware is available online at: http://www-sop.inria.fr/members/Nuno.Gaspar/Painless.php. At the time of this writing, IN-RIA Sophia Antipolis network is under maintenance. Thus, we provide a mirror website: http://painless.gaspar.link.

ware with the capacity to cope with Painless specifications. In particular, we show how we leverage Mefresa's apparatus to provide an automated means to reduce operations, and how this is subsequently used as a back-end for evaluating Painless specification's compliance w.r.t. the GCM requirements.

5.1.1 Computing states from operations

As seen in Section 4.2, one can check the feasibility of reducing an operation by interactively applying its reduction rules (see Table 4.1) and attempting to prove the required premises. This ability is of great value when attempting to prove arbitrary complex properties about potentially parametrized architectures. Indeed, proof assistants are notoriously known for their strength in performing inductive proofs.

Yet, if the intention is to build a state representing the result of an operation reduction, then we would be better with a function performing such task. This is the purpose of the function depicted by Listing 5.1.

```
1 Function build_state (op:operation) (init:state) : option state :=
   match op with
      Mk_component i p ic cl lc li lb =>
         if beq_bool ( valid_component_path_bool p init &&
                no_id_clash_bool i p init
                dec_component (Component i p ic cl lc li lb)) false then
6
              None
         else
              add_component init p i ic cl lc li lb
10
11
12
     Seq
                      op1 op2
13
          {\tt let} \ s := \ {\tt build\_state} \ {\tt op1} \ {\tt init} \ {\tt in}
14
          match s with
15
                        => None
               None
16
               Some s => build state op2 s
17
          end
18
     Done
                                            => Some init
20
```

 $_{21}$ end.

Listing 5.1 – Excerpt of the build_state function definition

The above excerpt shows how we can use a function to compute the result of an arbitrary operation reduction. Basically, it pattern matches on the parameter op (line 2), and proceeds depending on the matched constructor. For instance, if it is a MK_component, it performs the adequate checks w.r.t. to the SMakeComponent proof rule, and invokes the add_component function (lines 3-9). As expected, valid_component_path_bool is a boolean function checking if path p points to an existing component in the state init. no_id_clash checks that the identifier i is not already used by another component at the same hierarchical level. For last, dec_component computes whether the component to be added is well-formed. All these functions are proved correct w.r.t. their logical counterpart.

Apart from the Seq and Done constructors, the remaining operation constructors are handled analogously. Seq is composed by two operations (line 13), the leftmost operation is fully reduced, and the resulting state is used for reducing the rightmost operation (lines 14-18). Done means that the end of the operation was reached, and it simply returns the current state.

Another important note regards the use of the option type as return type of this function. This is due to the fact that it only returns a state if it was able to reduce the given operation, otherwise it simply returns None. This should come as no surprise, as it is not always the case that an operation can be fully reduced. Further, as discussed in Chapter 4, the validty theorem (see Listing 4.43) enunciates that reducing an operation to Done from a well-formed state yields a well-formed state. Naturally, the analogous behaviour is expected from the build_state function. Further, we also expect it to always be able to compute a resulting state from an operation op, whenever it is possible to reduce op to Done. In short, we want the computational counterpart of the reflexive transitive closure of the step predicate. Listing 5.2 depicts the relevant Theorem.

```
Theorem build_state_correctness:

forall op s s',

well_formed s ->

(op / s ~~~>* Done / s' <-> build_state op s = Some s').

Listing 5.2 - validity statement
```

Proving buid_state_correctness requires a case analysis on the operation constructors, and relating the boolean checks made in build_state with the premises of the step predicate.

By the above Theorem we know that build_state is both *complete* and *sound*. Complete, since starting from a well formed state s, it always computes a state s' holding the effects of op whenever op can be proved to be reduced to Done attaining s'. Sound, as we can always prove that op can be reduced to Done and attain a state s' provided that build_state applied to op and s returns s'.

Considering the context of a component-based application life-cycle, one deploys its application by performing an operation *op* on an empty **state**, and thus well-formed (by Lemma 4.2.1). Then, if *op* can indeed be reduced, we reach a well-formed **state** s (by Theorem 4.43).

Performing an architectural reconfiguration boils down to applying an operation op' to s, leading to yet another well-formed state s' — provided that op' can indeed be reduced —, and this cycle can be repeated indefinitely. Indeed, there is no need to explicitly compute the well-formedness of the attained states, as it is provably guaranteed. There is however such a need regarding their well-typedness.

Basically, we end up with all the necessary tools to compute whether a given operation, of deployment or reconfiguration nature, can be safely applied. The function build_state (see Listing 5.1) constructs the resulting (provably well-formed) state from an operation, and well_typed_bool (see Listing 4.27) checks whether a given state is well-typed.

5.1.2 Certified code, Painless interpreter, and the ProActive middleware

As discussed above, the functions build_state and well_typed_bool compute the resulting state from a given operation, and check for a state's well-typedness, respectively. This is of great value, yet, it falls short w.r.t. informing a user about a cause of failure. For instance, an operation may not be able to be reduced since it attempts to remove a component that is still connected to another. For such cases, it is important to provide some feedback providing insight on the root of the issue.

We define custom versions of the involved functions. For instance, the func-

tion custom_build_state :operation \rightarrow state \rightarrow (option state * option wf_error_msg), behaves as build_state, but carries back a wf_error_msg value in case of an issue. Listing 5.3 depicts the definition of the wf_error_msg datatype.

```
Inductive wf_error : Type :=

| PathError: wf_error | ClashError: wf_error |
| IllFormed: wf_error | NotConnected: wf_error |
| Invalid: wf_error | Duplicate : wf_error.

| Inductive wf_error_msg : Type :=
| ErrorMkComponent: ident -> path -> wf_error -> wf_error_msg |
| ErrorRmComponent: ident -> path -> wf_error -> wf_error_msg |
| ErrorMkInterface: ident -> path -> wf_error -> wf_error_msg |
| ErrorMkBinding : binding -> wf_error -> wf_error_msg |
| ErrorRmBinding : binding -> wf_error -> wf_error_msg |
```

Listing 5.3 – wf_error_msg type definition

Basically, it defines a constructor for each operation constructor whose reduction actually produces an effect to the current state (liens 7-11). Further, their elements hold all the relevant information for adequately identifying the origin of an issue in an operation reduction. For instance, the ErrorMkComponent (line 7) holds the identifier, path, and wf_error value of the involved component.

For the sake of clarity, Listing 5.4 depicts an excerpt of the custom_build_state illustrating how error-reporting is handled.

```
Function custom_build_state (op:operation) (init:state)
                          : (option state * option wf_error_msg) :=
   match op with
     Mk_component i p ic cl lc li lb =>
4
       match valid_component_path_bool p init with
5
         false => (None, Some(ErrorMkComponent i p PathError))
       | true =>
          match no_id_clash_bool i p init with
            false => (None, Some (ErrorMkComponent i p ClashError))
          true
10
             match dec component (Component i p ic cl lc li lb) with
11
               false => (None, Some (ErrorMkComponent i p IllFormed))
12
             | true => (add_component init p i ic cl lc li lb, None)
             end
14
```

```
end
       end
16
17
18
19
   Seq
             op1 op2
      let s := custom_build_state op1 init in
21
      match s with
22
       | (None, Some err)
                               => (None, Some err)
          (Some s', _) => custom_build_state op2 s'
                           => (None, None) (*should not happen*)
25
      end
26
   Done
                                    => (Some init, None)
29 end.
```

Listing 5.4 – custom_build_state function definition

Indeed, it is a rather simple approach: at each boolean check, it returns its associated cause if a *false* value is obtained (lines 6, 9, 12).

While this error-reporting approach is simple enough, it is important to ensure that it causes no conflict with the behaviour of the original build_state function. Moreover, we also expect it to be able to always report back an error message whenever it is not possible to reduce an operation. This addressed by Lemma custom_build_state_correct as depicted by Listing 5.5.

The above lemma is proved by case analysis of the operation datatype. It poses no particular challenge, as indeed both functions have a similar structure.

As expected, an analogous approach is used regarding the well_typed_bool function, that is, we have a function custom_well_typed_bool : state → option

wt_error_msg, reporting back the cause of a well-typedness non-compliance.

As discussed in Subsection 2.5.4, Coq is able to extract functional code into OCaml. We use this feature to extract both custom_build_state and custom_well_typed_bool. Then, through *OCaml-Java* [37], we obtain a Java library implementing these two functions.

Figure 5.1 depicts the overall approach for providing an extension to the ProActive middleware coping with Painless specifications.

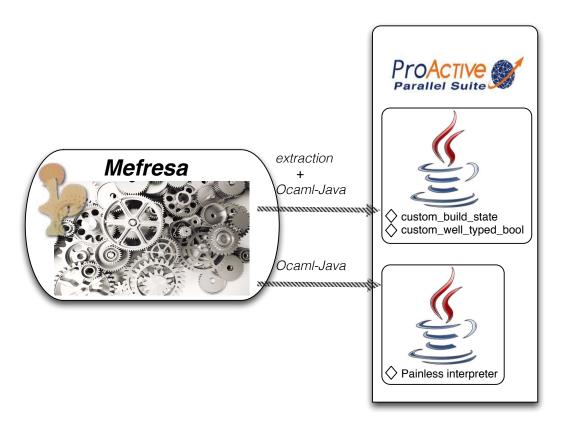


Figure 5.1 – Overall integration of Painless with ProActive

The Painless interpreter is directly written in OCaml, and also compiled to Java bytecode with OCaml-Java. Basically, its only task is to interpret a Painless expression to Mefresa's operation language. This is the case for both deployment and reconfiguration expressions. Then, the resulting operation is reduced with custom_build_state. If no issue is reported back, then the returned state is checked with custom_well_typed_bool. Provided that no well-typedness issue is detected,

the operation is mapped to the adequate methods composing the GCM/ProActive API. Further, the object holding the state's structure is kept for subsequent reconfiguration tasks.

It should also be noted that whenever an error is reported back, from custom_build_state or custom_well_typed_bool, a Java exception holding all the relevant information is thrown. This permits to adequately react without stopping the application. Indeed, a GCM/ProActive application requires a component to stop its execution in order to perform a structural reconfiguration. In our case, we evaluate its compliance with the GCM specification before actually starting the deployment/reconfiguration.

5.2 The Painless architecture description language

PAINLESS is a *parametrized architecture description language for Mefresa*. Basically, it provides the software architect with the ability to write parametrized architectures and its possible structural reconfigurations in a declarative style. An excerpt of its grammar is defined by Table 5.1.

```
exp ::= n | true | false | [] | str | x | mk exp | rm exp | skip | Component exp<sub>1</sub> ... exp<sub>6</sub> | Interface exp<sub>1</sub> ... exp<sub>7</sub> | Binding bexp | exp :: exp | exp = exp | exp + exp | exp - exp | if exp then exp else exp | exp exp | exp; exp | match exp with pat<sub>1</sub> \rightarrow exp<sub>1</sub> ... pat<sub>k</sub> \rightarrow exp<sub>k≥1</sub> end decl ::= let P = exp | let rec P = exp rcfg ::= Reconfiguration str arg<sub>0</sub> ... arg<sub>k</sub>: decl<sub>0</sub> ... decl<sub>k</sub> reconfigure exp arch ::= Architecture str: decl<sub>0</sub> ... decl<sub>k≥0</sub> deploy exp rcfg<sub>0</sub> ... rcfg<sub>h≥0</sub> Table 5.1 - Painless syntax (excerpt)
```

Its elementary — or *normal forms* — expressions include natural numbers, booleans, lists, and strings. Naturally, one can also use variables. Making and removing elements from the component architecture is achieved by the polymorphic mk and rm, respectively. As expected, skip is idempotent. Components, interfaces and bindings are also first-class citizens — where bexp is an expression for the three

types of bindings. Facilities for manipulating lists, comparison, and binary operators such as + and - are also built-in features. The standard if-then-else, function call, sequence; and match constructors conclude the range of allowed expressions. **decl** acts as a declaration layer composed by the usual (potentially recursive) let definitions, indexed by a parameter P: an identifier potentially followed by a sequence of function arguments.

Therefore, an architecture **arch** is composed by a string **str** representing its name, $k \ge 0$ declarations, and an expression describing the application deployment topology. Further, it may contain $h \ge 0$ similarly defined reconfigurations.

For instance, we define in Listing 5.6 an useful shorthand. Indeed, interfaces in primitive components are always of external visibility, and usually of server role.

Another rather common situation regards the creation of interfaces for composite components. Interfaces can be of internal or external visibility, and of client or server role. Typically, every interface of a composite component possesses its symmetric one. This can be defined as shown by Listing 5.7 and Listing 5.8 — with the obvious visibility_symmetry definition omitted.

5.2.1 Painless Semantics

Table 5.2 gives an excerpt of the rules for translating expressions to MEFRESA's operation language. We use $\Gamma \vdash e \Downarrow v$ for denoting the evaluation of e under the environment Γ being reduced to v, and \vdash_t stands for type inference.

```
\frac{normal\_form(v)}{\Gamma \vdash v \parallel v} \ nf_{sem}
                                                                                                       \overline{\Gamma \vdash skip \Downarrow \mathbf{done}} \ skip_{sem}
                       \Gamma \vdash e \Downarrow c
                                                                                                                 \Gamma \vdash e \Downarrow i
c = component id p cl lc li lb
                                                                                         i = \textit{interface} id p sig v f co ca
\Gamma \vdash mk \ e \Downarrow mk\_component \ c mk_{sem}^c
                                                                                            \Gamma \vdash mk \ e \Downarrow mk  interface i
             \Gamma \vdash exp_1 \Downarrow id \quad \Gamma \vdash_t id : string \quad \Gamma \vdash exp_2 \Downarrow p \quad \Gamma \vdash_t p : list \ string
        \Gamma \vdash exp_3 \Downarrow cl \quad \Gamma \vdash_t cl : string \quad \Gamma \vdash exp_4 \Downarrow lc \quad \Gamma \vdash_t lc : list component
    \Gamma \vdash exp_5 \Downarrow li \quad \Gamma \vdash_t li : list interface \quad \Gamma \vdash exp_6 \Downarrow lb \quad \Gamma \vdash_t lb : list binding
                                                                                                                                                              c_{sem}
                      \Gamma \vdash Component \ exp_1 \ ... \ exp_6 \downarrow component \ id \ p \ cl \ lc \ li \ lb
                                  matches(pat_k, val) \land \forall h, h < k \rightarrow \neg matches(pat_h, val)
     \Gamma \vdash exp \Downarrow val
                                                  \Gamma, (pat_k, val) \vdash exp_k \Downarrow v_k
                  \Gamma \vdash match \ exp \ with \ pat_1 \rightarrow exp_1 \ ... \ pat_n \rightarrow exp_n \ end \ \downarrow v_k
                                                                                        \Gamma \vdash exp_1 \downarrow \alpha
                                                                                                                        \Gamma \vdash_t \alpha : operation
                     \frac{\Gamma[x] = \alpha}{\Gamma \vdash x \Downarrow \alpha} \ var_{sem}
                                                                                       \Gamma \vdash exp_2 \Downarrow \beta \Gamma \vdash_t \beta : operation
                                                                                                   \Gamma \vdash exp_1 ; exp_2 \Downarrow \alpha ; \beta
```

Table 5.2 – Painless semantic rules (excerpt)

Rule nf_{sem} dictates that a normal form yields immediately a semantic value. The rule $skip_{sem}$ simply depicts that skip is translated to MEFRESA's done operation. Rules mk_{sem}^c and mk_{sem}^i illustrate the polymorphic constructor mk at work. It can be used to build components, interfaces and bindings — making bindings is defined analogously. These proceed by fully reducing the expression e into a component/interface/binding that can be used into MEFRESA's operations. Rule c_{sem} shows the reduction of a Component: all its elements (identifier, subcomponents, ...) need to be reduced and of adequate type. Analogous rules apply for Interfaces and Bindings. $match_{sem}$ illustrates how pattern matching is performed. First, the expression exp to be matched is reduced to some value val. Then, we reduce the expression exp_k with the corresponding pattern $pat_{k\in\{1,n\}}$ matching with val. As expected, this occurs in an environment Γ enlarged with a mapping between pat_k and val, and patterns are checked by order. var_{sem} shows that a variable is reduced by looking it up in the environment Γ . Finally, the rule seq_{sem} simple attests that a sequence of Painless expressions is translated to Mefresa's operations.

The complete reduction of an expression should yield a (sequence of) MEFRESA's

operations, otherwise it is rejected. For instance, the rule $arch_{sem}$ depicts how an architecture without reconfiguration strategies is evaluated.

$$\forall i, 0 \leq i \leq k. \ decl_i = (P_i, \ exp_i) \qquad \Gamma \vdash exp_i \Downarrow \beta_i$$

$$\frac{\Gamma, (P_0, \beta_0), ..., (P_k, \beta_k) \vdash exp \Downarrow \alpha \qquad \Gamma \vdash_t \alpha : operation}{\Gamma \vdash Architecture \ str: \mathbf{decl}_0 \ ... \ \mathbf{decl}_{k \geq 0} \ deploy \ \mathbf{exp} \Downarrow \alpha} \ arch_{sem}$$

Basically, the deployment expression exp is reduced to α , under an environment including all the declarations $decl_i$. Naturally, α must be of type operation.

From here on MEFRESA's extracted functions are used. Firstly, custom_build_-state is applied to α and on an empty state. If a state σ is returned we know it is well-formed. Then, we apply custom_well_typed_bool to σ , completing the deployment evaluation. In case of an error an exception with its cause is thrown.

Dealing with reconfigurations is performed analogously. The expression to be evaluated is reduced on a context including the deployment declarations, the ones defined locally, and its instantiated parameters. Upon reduction to an operation, its validity is checked on the current state σ of the application.

5.2.2 Painless hello world and beyond

The ProActive manual proposes its *starter* and *composite* tutorials by explaining the deployment of the applications shown by Figure 5.2 and Figure 5.3, respectively.



Figure 5.2 - starter application




Figure 5.3 - composite application

The *starter* application is simply a primitive component named *Slave*, containing an external, server interface named *i1*. Listing 5.9 exemplifies one way to define its architecture in Painless.

1 Architecture "Painless Starter Tutorial":

```
2 let i1_class = "org.painless.examples.sbmf2014.Itf1"
3 let impl_class = "org.painless.examples.sbmf2014.SlaveImpl"
4 
5 let i1 = itf "i1" i1_class ["Slave"]
6 let slave = Component "Slave" impl_class [] [] [i1] []
7 deploy mk slave
```

Listing 5.9 – A first Painless specification

We use the previously defined function itf, which belongs to PAINLESS standard library along with other facilities for coping with common operations.

The *starter* application is rather simple and acts as an appetizer. The subsequent *composite* tutorial is slightly more elaborated. Its specification is depicted by Listing 5.10. All the involved functions are part of the standard library.

```
Require "org.painless.examples.sbmf2014.adl.starter.painless"

Architecture "Painless Composite Tutorial":

let runner =

itf "Runner" "org.painless.examples.sbmf2014.Runner" []

let master_itfs = [runner ; clientof i1]

let master = Component "Master" "org.painless.examples.sbmf2014.

MasterImpl" [] [] master_itfs []

let composite = Component "Composite" [] "null" [] [runner; interface_symmetry runner] []

deploy mk (add_subcomponents composite [master; slave]);

mk normal ["Composite"] "Master" "i1" "Slave" "i1";

mk export ["Composite"] "Runner" "Master" "Runner"
```

Listing 5.10 – Painless specification for the *composite* tutorial

Firstly, we require the *starter* ADL as defined in Listing 5.9 (line 1). This, imports all its declarations, namely i1 and slave. We proceed by declaring the involved elements (lines 4-11), where the only doubt may arise from the *clientof*: *interface* \rightarrow *interface* function (line 7). This function returns a client version of the interface given as argument. Finally, we deploy the application by making the *composite*

component and its two bindings (lines 13-15). The function $add_subcomponents$: $component \rightarrow list\ component \rightarrow component\ adds\ the\ master\ and\ slave\ components$ to the composite one, while taking into account all the intricacies regarding their paths.

The last remaining ingredient concerns architectural reconfigurations. Concerning the *composite* example, one could want to replace the *slave* component by another one with a different implementation. This can be achieved by appending the reconfiguration depicted by Listing 5.11, where $mk_in : path \rightarrow component \rightarrow component$ makes the given component in the specified path, and *change_class*: $string \rightarrow component \rightarrow component$ returns the given component with a modified class field.

```
16 Reconfiguration "change slave" impl:
17    reconfigure
18    rm normal ["Composite"] "Master" "i1" "Slave" "i1";
19    rm ["Composite"] "Slave";
20    mk_in ["Composite"] (change_class impl slave);
21    mk normal ["Composite"] "Master" "i1" "Slave" "i1"
```

Basically, we need to unbind the *slave* component before removing it (lines 18-19), make a new *slave*, inside the *composite*, with a different implementation class (line 20), and finally bind this new *slave* (line 21).

Listing 5.11 – Painless reconfigurations

5.3 Discussion

In this Chapter we presented Painless and its related novel approach for the specification of software architectures. Its declarative trait allows for intuitive and concise specifications, liberating the software architect from highly verbose specifications such as the ones obtained via machine languages like XML. Moreover, its support for parametrized architectures eases deployment — it becomes a matter of instantiation —, and thus boosts productivity. Further, in GCM/ProActive, mapping components to physical resources is achieved through application/deployment descriptors. While this information is not an aspect of the architecture per se, extending Painless with such feature could be envisaged.

5.3. DISCUSSION 137

Another key ingredient is the treatment of structural reconfigurations as first-class citizens. Indeed, by supporting the specification of the topological changes that may occur at runtime, it yields a better understanding of the application. Moreover, it is worth noticing that the specified reconfigurations become easily accessible from a programming perspective: through a simple method call with the name of the desired reconfiguration. Furthermore, reconfiguration specifications are evaluated at runtime. The clear benefit is that one can be highly confident that the reconfiguration will not let the application in a ill-formed or ill-typed state as the evaluation process is carried out by provably correct code extracted from MEFRESA.

Additionally, a further inherent advantage is that it all happens without stopping the application. Indeed, actually performing the reconfiguration requires it to be stopped at the composite level. By making a prior evaluation, the risk of reconfiguration failure is diluted.

Composing architecture specifications through the Require command fosters reuse, and further contributes to the conciseness of PAINLESS specifications. Yet, it is fair to say that additional experimentation remains to be done in order to fully assess the scalability of the approach.

At last, an interesting direction for future work concerns ensuring provably safe reconfigurations, statically. While runtime checks are useful, one may desire stronger guarantees statically. This could be achieved by identifying useful classes of architectures that would feature provably safe reconfiguration operations. This could be achieved by leveraging MEFRESA's apparatus so that all specified reconfigurations provably yield well-formed and well-typed states, for all possible execution traces.

XXX

In this Chapter we presented PAINLESS, a new ADL supporting parametrized specifications, architectural reconfigurations, and with a declarative trait. Further, we discussed its integration with the ProActive middleware.

In the following Chapter we describe the mechanization of a behavioural semantics with the Coq proof assistant.



Mechanized behavioural semantics

"The greater danger for most of us lies not in setting our aim too high and falling short; but in setting our aim too low, and achieving our mark."

Michelangelo

Contents

.100		
3.1	Gro	undwork: Infinite data structures 140
3.2	Labe	elled transition systems, and traces 141
	6.2.1	Encoding labelled transitions systems 141
	6.2.2	LTS traces
3.3	Syno	chronization of LTS, and traces 144
	6.3.1	Encoding synchronizations between LTSs 145
	6.3.2	Net traces
	6.3.3	Synchronized Master & Slave example 151
3.4	Tow	ards GCM behavioural models 158
3.5	Disc	russion
	3.2 3.3 3.4	6.2.1 6.2.2 6.3.3 Sync 6.3.1 6.3.2 6.3.3 6.4 Tow

This chapter discusses the mechanization, in the Coq proof assistant, of a behavioural semantics based on the execution trace of synchronized labelled transition systems. Further, we show how it can be used in the context of GCM applications.

Section 6.1 briefly presents the encoding of infinite data structures in Coq. Then, section 6.2 presents the mechanization of LTSs and their traces. We show how we can synchronize several LTSs in Section 6.3. Then, we exemplify its use in the context of GCM applications in Section 6.4. For last, Section 6.5 discusses the final remarks about this mechanization.

6.1 Groundwork: Infinite data structures

In this section we briefly discuss the concepts involved in the definition of infinite data structures such as lazy lists. For a more detailed coverage of these topics the interested reader is pointed to [13, chap. 13].

As discussed in Section 2.5, values from an inductive type are obtained by repeated application of its constructors. Further, the type's induction principle constrains this sequence of constructor application to be finite. On the other hand, while values from *co-inductive* types are also obtained via repeated application of its constructors, there is no such infinity restriction.

One of the most basic co-inductive types is the one encoding *lazy lists*. Listing 6.1 encodes its datatype.

```
CoInductive LList (A:Type) : Type :=

LNil : LList A

LCons : A -> LList A -> LList A.
```

Listing 6.1 – LList datatype

Indeed, its definition follows the definition of an inductive list. Its only difference lies in the use of the Colnductive keyword. Yet, there is a fundamental distinction in that this datatype allows to build infinite lists.

For instance, one can easily build a list holding the infinity of natural numbers as depicted by Listing 6.2.

Listing 6.2 – Lazy list holding all natural numbers

Any attempt to reproduce the above with an inductive list would be rejected by Coq. Further, the careful reader may notice the use of the CoFixpoint keyword. Indeed, it is used in a similar fashion as the Fixpoint keyword, yet, it does not impose restrictions forbidding the construction of infinite structures, and thus is very handy when dealing with the infinity.

6.2 Labelled transition systems, and traces

6.2.1 Encoding labelled transitions systems

Let us start by the basic constituent of an LTS: a state. Listing 6.3 depicts its mechanization.

```
Definition state_mem : Type := list (string * nat) .

Inductive lts_state :=
LTS_State : nat -> state_mem -> lts_state .
Listing 6.3 - lts_state datatype
```

A lts_state is identified by a natural number, and holds an internal memory that is a simple mapping between strings to naturals. For the sake of simplicity we directly use strings to denote variables, and constrain ourselves to natural number values.

Next, let us now see the action datatype. Listing 6.4 illustrates its definition.

```
\begin{array}{lll} \mbox{1 Inductive} & \mbox{action} & : & \mbox{Type} & := \\ \mbox{2} & \mbox{Action} & : & \mbox{message} & -> & \mbox{assignments} & -> & \mbox{action} & . \\ & & \mbox{Listing } 6.4 - \mbox{action} & \mbox{datatype} \end{array}
```

An action is composed by a message, and a set of assignments. As expected, the latter permits to specify the assignment of specific state variables to a transition. The former holds the label, its type of communication and a set of parameters. Listing 6.5 depicts its definition.

Listing 6.5 – message datatype

A message can either be *reading* or *emitting* (lines 2-3). Typically, these are used to receive and transmit values, respectively. Naturally, the allowed **parameters** are either values — natural numbers — or variables (lines 6-7).

Finally, we can now see the LTS datatype as depicted by Listing 6.6.

```
Definition actions := list action.

Definition transitions := list(lts_state * action * lts_state).

Record LTS : Type := mk_LTS

Record LTS : lts_states ;

Init : lts_state ;

Actions : actions ;

Transitions : transitions

}.
```

Listing 6.6 – LTS datatype

6.2.2 LTS traces

Having defined the LTS datatype, we can now define traces. A trace is a sequence of actions resulting from the sequence of transitions taken by the LTS. It can either be finite or infinite. A finite trace means that a *sink* state was attained, thus the execution *deadlocks*. Listing 6.7 defines a LTS trace.

```
1 CoInductive LTS_Trace (A:LTS) : lts_state -> LList action -> Prop :=
    lts_empty_trace : forall (q:lts_state),
       (forall (m: message) (asgns: assignments),
          In (Action m asgns) (@Actions A) ->
                 (lts_target_state A q m = None)) ->
       LTS Trace A q LNil
6
     lts_lcons_trace : forall (q q':lts_state) (m:message)
8
        (asgns:assignments) (l:LList action),
9
           In (Action m asgns) (@Actions A) ->
10
           Some q' = lts_target_state A q m ->
11
           LTS_Trace A q' l
                                            ->
12
           LTS_Trace A q (LCons (Action m asgns) 1).
```

Listing 6.7 – Trace definition for a LTS

A LTS_Trace is defined by a co-inductive predicate since we potentially deal with infinite sequences. The expression, LTS_Trace A q I, means that I is a trace in the LTS object A, starting from the state q.

The LTS_Trace predicate is composed by two constructors: Its_empty_trace (line 2) and Its_cons_trace (line 8). The former simply expresses that, from any state, all actions of the LTS yield no target state (lines 3-5). Indeed, the function Its_target_state : LTS \rightarrow Its_state \rightarrow message \rightarrow Its_state is responsible for computing the attained state from q with an action holding the message m. Thus, the constructor's conclusion is LTS_Trace A q LNiI, since the trace from q is empty. The latter constructor however, demands the that we reach a state q' (line 11), and a trace from q' (line 12), in order to conclude LTS_Trace A q (LCons (Action m asgns) I) (line 13).

For the sake of clarity, Listing 6.8 depicts the lts_target_state function.

```
Some (q_mem_upd->>qs)
10
           end
11
         else
12
           lts_get_target_state r st m
13
    end.
14
  Definition lts target state (A:LTS) (st:lts state) (m:message)
16
                                                     : option lts_state :=
17
    match m with
18
       Message "-" \_ \_ \Longrightarrow Some st
19
    _ => lts_get_target_state (@Transitions A) st m
20
    end.
21
```

Listing 6.8 – lts_target_state function definition

The function pattern matches the message m and checks whether its label is equal to "-". If it is the case then it simply returns the current state st (line 19), otherwise it proceeds by calling the lts_get_target_state function (line 20). The is due to the fact that we consider a message with a "-" label as a special case. As we shall see in Section 6.3, this exception is related with the way we deal with synchronization between LTSs.

The lts_get_target_state function starts by pattern matching on the LTS list of transitions (line 3), returning no state if its empty (line 4). If it is not the case (line 5), then we check if the transition at the head of the list possesses a source state that matches the parameter state st, and if the message contained in its action is equal to the parameter message m (line 6). Should that be the case, then it simply process the assignments associated with the taken action (line 9), and updates the target state memory accordingly (line 10). As expected, this the the purpose of the process_assignment: state_mem \rightarrow assignments \rightarrow state_mem function, and \rightarrow notation, respectively. Otherwise it recurs on the tail of the list of transitions (line 13).

6.3 Synchronization of LTS, and traces

In the previous Section we saw how to model a single LTS. However, it is often the case that we want to be able to have several LTS communicate with each other.

This is achieved by synchronizing their actions.

6.3.1 Encoding synchronizations between LTSs

First, let us formalize the notion of a synchronization vector. Listing 6.9 depicts its datatype.

```
Inductive SyncronizationElement: Type:=

WildCard: SyncronizationElement

SyncElement: string -> SyncronizationElement.

Inductive SyncronizationOutput: Type:=

GlobalAction: string -> SyncronizationOutput.

Inductive SynchronizationVector: Type:=

SyncVector: list SyncronizationElement * SyncronizationOutput ->

SynchronizationVector.
```

Listing 6.9 – Synchronization Vector datatype

Basically, a synchronization vector is composed by a list of synchronization elements, and an output element (line 9). The former indicate the actions that need to be considered among the list of LTS being synchronized. The latter stands for the resulting global action. Both synchronization and output elements are represented by string values. For the sake of convenience we also permit synchronization elements to be defined through the WildCard constructor (line 2). Further we define a notation as depicted by Listing 6.10.

```
Definition sync_notation (a:string) : SyncronizationElement :=
match a with
   "-" => WildCard
   | _ => SyncElement a
end.

Notation "<< A , ... , B >> -> C" :=
(SyncVector((cons (sync_notation A) .. (cons (sync_notation B) nil) ...), GlobalAction C)).
```

Listing 6.10 – A convenient notation for SynchronizationVector

Basically, it permits Coq to directly understand expressions such as the following one: << "x" , "y" , "-" , "z" >> -> "XYZ" — from left to right, four LTS objects are synchronized on their actions labelled "x", "y", any, and "z", respectively, yielding a global action labelled "XYZ".

Let us now define a type for a communicating network of LTS. We shall call this type Net. Its definition is depicted by Listing 6.11.

It is composed by two constructors: mk_SingletonNet and mk_Net. The former is used for simple models constituted with a single LTS, while the latter permits to specify communicating LTS by means of synchronization vectors.

For this new structure we need a new notion of state. Listing 6.12 depicts the net_state datatype.

Basically, both its constructors follow the same rationale: they keep track of the involved lst_states.

6.3.2 Net traces

Before proceeding to the definition of traces for Nets, we need to consider how their transitions are performed. For this case, we need to consider the current net_state and the activated synchronization vector. Moreover, each synchronization element may permit more than one action to occur. Thus, a function computing the target net_states must also return the resulting global action. Listing 6.13 depicts such a function.

```
Fixpoint net_target_states (net_obj : Net) (q: net_state)
(sv:SynchronizationVector) : list (action * net_state) :=
match_net_obj, q, sv_with
```

```
mk_Net (llts, list_svs), Net_State sts, SyncVector (svs, svo) =>
     let acts := allowed_actions_from_sv_element llts sts svs in
5
     let acts ' := combineN acts in
6
     let acts' := treat_emissions acts' list_lts_states in
     let acts' := exclude_incompatible_parameter_messages acts' in
8
     (fix fix_net_target_states (list_acts: list (list action)) :=
9
      match list acts with
10
        nil
                  \Rightarrow nil
11
      | acts :: r =>
12
       let no_msg_states := get_target_lts_states sts llts acts in
13
       let params to emit := message parameter to emit no msg states in
14
       let llts ' := transmit_message params_to_emit no_msg_states in
15
       let global_action := global_action_output svo acts in
16
       (global_action, Net_State (llts')) :: fix_net_target_states r
17
       end) acts'
18
    | _, _, _ => nil
19
20
    end.
```

Listing 6.13 – net_target_states function definition

The above function may seem complicated at first sight, and requires a closer look. Basically, it starts by pattern matching on its Net parameter net_obj , net_state parameter q, and synchronization vector parameter sv (line 3). The function is supposed to be used with Net objects and net_state modelling systems with LTS synchronization. Should that not be the case, it simply returns an empty list (line 17). The function allowed_actions_from_sv_element : list LTS \rightarrow list lts_state \rightarrow list SyncronizationElement \rightarrow list (list action) computes the actions that may occur at each LTS composing llts, taking into account its current lts_state held at sts and w.r.t the adequate synchronization element in svs (line 5). An implicit constraint is that llts and sts are of the same length, and also equal to the number of synchronization elements in svs.

Then, it is necessary to generate all valid synchronizations of actions that may occur for each LTS (lines 6-8). The function combineN: list (list action) \rightarrow list (list action) generates all combinations of actions (line 6). For instance, let us consider the expression combineN [["Action1"; "Action3"]; ["Action1"; "Action2"]]. We use the type string instead of the type action for the sake of clarity. Basically, this means that at the current lts_state of the first LTS the actions "Action1" and

"Action3" can be emitted, whereas "Action1" and "Action2" are the ones that can be emitted from the current lts_state of the second LTS. The expression reduces to [["Action1"; "Action1"]; ["Action1"; "Action2"]; ["Action3"; "Action1"]; ["Action3"; "Action2"]] — i.e. it simply generates all possible combinations. Clearly, not every combination yields a valid synchronization: actions that do not match cannot be synchronized together. Removing the invalid combinations is the purpose of the functions treat_emissions: list (list action) \rightarrow lts_states \rightarrow list (list action) and exclude_incompatible_parameter_messages: list (list action) \rightarrow list (list action) (lines 7-8).

Next, it goes through all valid synchronizations, and gets for all LTS objects the target states along with the associated action to emit (line 13). This is the purpose of the get_target_lts_states function. Then, the functions message_parameter_to_emit and transmit_message perform the assignments contained in the synchronized actions. The function global_action_output returns the global action resulting from the synchronized action labels with their parameters (line 16). Finally, the computed global action along with the attained net_state is kept, and the function recurs (line 17).

Another useful function concerns the computation of the initial state of a Net. Listing 6.14 depicts its definition.

```
1 Definition init_net_state (net_obj: Net) : net_state :=
    match net_obj with
      mk_SingletonNet lts_obj => NetSingleton_State (@Init lts_obj)
3
    | mk Net (list lts, svs) =>
4
        let lq := (fix fix_init_lts_states list_lts :=
            match list_lts with
6
               nil
                            \Rightarrow nil
            | lts_obj :: r => (@Init lts_obj) :: fix_init_lts_states r
            end
9
        ) list_lts in Net_State lq
10
    end.
11
```

Listing 6.14 – init_net_state function

Basically, the above function proceeds by pattern matching on the Net parameter net_obj (line 2). If it is a Net with a single LTS object, than it simply returns the adequate net_state constructor with the initial state of the LTS (line 3). Otherwise,

it recursively gathers the initial state of each LTS objects composing net_obj into the local variable lq (lines 5-9), and returns the adequate net_state constructor with lq (line 10).

Let us now define a predicate indicating whether a state can attain another state. Listing 6.15 depicts its formalization.

```
1 Inductive attainable (A: Net) :
                list net_state -> net_state -> net_state -> Prop :=
2
    Attain0 : forall q mem, q=q -> attainable A mem q q
     AttainN : forall qi qf mem, ~ seen qi mem ->
4
                forall list_lts svs, A = mk_Net (list_lts, svs) ->
5
                forall qn sv, In sv svs ->
6
                forall ga lq, ga lq = net target states A qi sv ->
                In qn (get_list_snd ga_lq) ->
                attainable A (qi::mem) qn qf ->
9
                attainable A mem qi qf.
10
```

Listing 6.15 – attainable predicate definition

It is composed by two constructors: Attain and Attain N. Intuitively, the former expresses the idea that a net_state can always attain itself (line 3). The latter is slightly more involved. Basically, in order for a net_state qi to attain net_state qf, there needs to be a net_state qn that belongs to qi's target states, and qf to be attainable from qn. The function net_target_states computes qi's target states (line 7) by using one of the specified synchronization vectors (lines 5-6). However, it returns a list of tuples associating a global action with a net_state. Thus, qn needs to belong to the list of elements at the right of each tuple. This is the purpose of the function get_list_snd : forall X Y : Type, list $(X * Y) \rightarrow list Y$ (line 8). Then, qn needs to be able to attain qf (line 9). The careful reader may wonder about the second predicate parameter that stores the list of already seen net_states. There is no point in revisiting already seen net_states in order to check attainability. Thus, it is also required that the source net_state was not already previously seen (line 4). Naturally, this is the purpose of the negated predicate seen: net_state \rightarrow list net_state \rightarrow Prop. The careful reader may wonder about the use of the seen predicate instead of the classifical In: for all A: Type, A \rightarrow list A \rightarrow Prop from the standard library. This is due to the fact that we need a finer grain comparison of net states: we do not take into account the state mem values when checking if a

net_states as already been seen.

As expected, traces for Nets are slightly more involved than traces for LTS. Listing 6.16 formalizes the notion of trace for the Net datatype.

```
1 CoInductive Net_Trace (A: Net) : net_state -> LList action -> Prop :=
    lts trace: forall net q lts q,
       net_q = NetSingleton_State lts_q ->
       forall A', A=mk SingletonNet A' ->
       In lts_q (@States A')
       for all 1, LTS_Trace A' lts_q 1
       Net_Trace A net_q 1
7
     net_empty_trace: forall (q:net_state) list_lts list_sv ,
9
        A = mk\_Net (list\_lts, list\_sv)
10
        forall list_lts_states, q = Net_State list_lts_states
11
        indexed_membership list_lts_states list_lts
12
        attainable A nil (init net state A) q
13
        (forall sv, In sv list_sv -> net_target_states A q sv = nil) ->
14
        Net\_Trace A q LNil
15
16
     net_lcons_trace: forall (q:net_state) sync_vec list_lts list_sv ,
17
         A = mk\_Net (list\_lts, list\_sv)
18
         forall list_lts_states, q = Net_State list_lts_states
                                                                     ->
19
         indexed_membership list_lts_states list_lts
                                                                     ->
20
         attainable A nil (init_net_state A) q
                                                                     ->
21
         In sync_vec list_sv
                                                                     ->
22
         forall ga_lq', ga_lq' = net_target_states A q sync_vec
                                                                     ->
23
         forall ga q', In (ga, q') ga_lq' -> Net_Trace A q' l
                                                                     ->
24
         Net_Trace A q (LCons ga 1).
25
```

Listing 6.16 – Trace definition for Net

It is composed by three constructors: Its_trace, net_empty_trace and net_lcons_trace. The first constructor deals with singleton Nets, and thus relies on the previously discussed LTS_Trace predicate (lines 2-7). The second constructor is meant for empty traces, that is, when there is no synchronization vector that can be activated (line 14), and thus the execution is stuck (line 15). Two further requirements are specified. First, it is required that the current net_state q is attainable from the initial state of the Net object A (line 13). Second, the indexed_membership

: list lts_state \rightarrow list LTS \rightarrow Prop predicate simply states that the i^{th} element of the first parameter belongs to the set of lts_states of the i^{th} element of the second parameter (line 12). The third constructor deals with the most interesting case: there is a successful synchronization between the LTSs composing the Net object A. As in the second constructor, the indexed membership and attainability requirements are also included (lines 20-21). Further, the expression net_target_states A q sync_vec (line 23) yields a list of tuples holding the target states along with the associated global action from net_state q, and by using a synchronization vector sync_vec belonging to list_sv (line 22). Finally, it is necessary to establish a trace from one of the net_states belonging to this list of tuples (line 24), and the associated global action is added to the trace (line 25).

6.3.3 Synchronized Master & Slave example

First, let us define a convenient notation for reasoning over execution traces. Listing 6.17 depicts such definition.

Listing 6.17 – Definition of the satisfies predicate

Basically, it permits to use the convenient and familiar notation $t \models p$, meaning "trace t satisfies property p". As expected, we shall use a temporal logic in order to reason about such traces. In particular, we take advantage of the encoding in Coq of Linear Temporal Logic (LTL) from [13, sec. 13.9]. For the sake of completeness, we demonstrate here a part of this formalization. For instance, Listing 6.18 depicts the Always predicate.

Listing 6.18 – Definition of the Always predicate

Basically, the Always predicate holds if the trace satisfies the predicate P given as parameter (line 3), and the Always predicate itself must hold for the tail of the

trace (line 4). Naturally, it is implicit that this predicate only holds for infinite traces.

In Section 2.4 we discussed the Fiacre specification language by illustrating a Master/Slave example from the online Fiacre tutorial. In the following, we show how to encode and reason about such system.

The slave process

Let us start by encoding the slave process. It possesses two states. Listing 6.19 depicts their mechanization.

```
1 Definition slv0 : lts_state := LTS_State 0 [].
2 Definition slv1 : lts_state := LTS_State 1 [].
```

Listing 6.19 – Definition of the slave process lts_states

Further, it features three kinds of actions: parameterless ready and order:MakeSandwich, and order:MakeCoffee taking one natural number specifying a kind of coffee. These are encoded as depicted by Listing 6.20

```
Definition slave_ready_act := Action (Message "ready" Read nil) nil.

Definition readSandwichOrder : action :=

Action (Message "order:MakeSandwich" Read nil) nil.

Definition readCoffeeOrder (n:nat) : action :=

Action (Message "order:MakeCoffee" Read (Val(n)::nil)) nil.

Function CoffeeOrders n : actions :=

match n with

0 => readCoffeeOrder 0 :: nil

| S m => readCoffeeOrder n :: CoffeeOrders m

end.

Definition slave_order_acts n := readSandwichOrder :: CoffeeOrders n.

Definition slave_acts n := slave_ready_act :: (slave_order_acts n).
```

Listing 6.20 – Definition of the slave process actions

Moreover, we need to specify its transitions. This is achieved by the function depicted by Listing 6.21.

Listing 6.21 – Definition of the slave process transitions

Finally, we can now define the LTS representing the slave process as demonstrated by Listing 6.22.

Listing 6.22 – Definition of the slave process LTS

The master process

The master process follows the same rationale, except that it emits orders whereas the slave receives them. Listing 6.23 depicts its states.

```
1 Definition mst0 : lts_state := LTS_State 0 [].
2 Definition mst1 : lts_state := LTS_State 1 [].
```

Listing 6.23 – Definition of the master process lts_states

Listing 6.24 depicts its actions.

```
Definition makeCoffeeOrder (n:nat): action:=

Action (Message "MakeCoffee" Emit (Val(n)::nil)) nil.

Function nMakeCoffeeOrders n: actions:=

match n with

makeCoffeeOrder 0:: nil

Sm => makeCoffeeOrder n:: nMakeCoffeeOrders m

end.

Definition makeSandwichOrder: action:=

Action (Message "MakeSandwich" Emit nil) nil.

Definition master_order_acts n: actions:=

makeSandwichOrder:: nMakeCoffeeOrders n.
```

```
Definition master_ready_act := Action (Message "ready" Read nil) nil.
Definition master_acts n : actions :=
master_ready_act :: (master_order_acts n).
```

Listing 6.24 – Definition of the master process actions

Its transitions are also encoded via a function as demonstrated by Listing 6.25.

```
Function master_transitions master_order_acts :=
match master_order_acts with
nil => (slv0, slave_ready_act, slv1) :: nil
m_act :: r => (slv1, m_act, slv0) :: (master_transitions r)
end.
```

Listing 6.25 – Definition of the master process transitions

And finally Listing 6.26 depicts the LTS of the master process.

```
Definition masterlts n : LTS :=

mk_LTS [mst0; mst1] mst0 (master_acts n)

(master_transitions (master_order_acts n)).

Listing 6.26 - Definition of the master process LTS
```

Synchronization and a first proof

Having defined the slave and master processes we now need to specify how they synchronize. Listing 6.27 depicts their synchronization.

Listing 6.27 – Definition of the master process LTS

Indeed, by using the previously defined notation we can easily specify the adequate synchronization vectors. Moreover, specifying the Net of the overall system is now a rather simple task. It is depicted by Listing 6.28.

```
\begin{array}{lll} \mbox{$^{1}$ Definition MasterSlaveCoffeeNet $n := $} \\ \mbox{$^{2}$ mk\_Net (([slavelts $n; masterlts $n]), synch\_vectors).} \\ \mbox{$Listing 6.28-Definition of the overall Net} \end{array}
```

Having defined this parametrized master/coffee Net, we can now try to prove properties about it. For instance, we can show that all traces of this system are an infinite interleaving between ready and order actions. For this, we first need to define a predicate expressing this interleaving. Listing 6.29 depicts such predicate.

```
1 Inductive interleaving (X:Type) (Y:Type) (R:Y->X->Prop)
                            (a b : Y) : LList X \rightarrow Prop :=
     Interleaving One: for all l'la'b',
3
                                l = LCons a' (LCons b' l') ->
4
                                R a a' ->
5
                                R b b' ->
6
                                interleaving R a b l
     Interleaving Two: for all l'la'b',
                                l = LCons b' (LCons a' l') \rightarrow
9
                                R a a' ->
10
                                R b b' ->
11
                                interleaving R a b 1.
12
```

Listing 6.29 – Definition of the interleaving predicate

It is defined in a polymorphic manner for the sake of genericity. As we shall see later, the types X and Y will be instantiated to action and string, respectively. Moreover, it features two constructors: InterleavingOne and InterleavingTwo. Both possess a similar structure, their only difference lies in the order by which the actions occur (lines 4 and 9). Further, the reader may wonder about the predicate $R: Y \to X \to Prop$ declared as parameter. This has the purpose of comparing the actual actions occurring in the trace — a' and b' — with labels passed as parameter — a and b. For instance, for the purposes of this example the relation that we use is depicted by Listing 6.30.

Listing 6.30 – Definition of the Rma relation

Its understanding should pose no doubt. Basically, it pattern matches the parameters I and act, and checks if I matches the label of the message composing act.

Finally, we are in a position to establish our first proof about traces. Theorem 6.3.1 expresses that from all states, all traces of MasterSlaveCoffeeNet instantiated with three — 0, 1 and 2 — coffee kinds, satisfy an infinite interleaving between ready actions and order actions.

```
Theorem 6.3.1. Infinite_interleaving:

for all t q,

Net_Trace (MasterSlaveCoffeeNet 2) q t ->

t |= (Always (interleaving Rma "ready" "order")).

Proof.
```

We start by applying the infamous cofix tactic as this is a proof by co-induction. This introduces a hypothesis in our context with the same type as the theorem we are trying to prove. We cannot directly use this hypothesis as it would violate Coq's guardedness condition. Instead, we consider all Net trace constructors: Its_trace, net_empty_trace and net_lcons_trace.

For the first case, Its_trace, the proof is easily discharged as MasterSlaveCoffeeNet is a Net value obtained via the mk_Net constructor, and not with NetSingleton_State. Thus, we have contradiction in our context.

The second case concerns the net_empty_trace constructor. This requires to establish that an empty trace, LNil, satisfies the aforementioned infinite interleaving property. Clearly, this is not the case, since the trace is empty. Thus, establishing this proof requires to demonstrate a contradiction in our context. Since we are universally quantifying over q, we need to consider all possible net_states. This yields four subgoals. For the first subgoal, we consider Net_State [slv0; mst0] as the source net_state. One of net_empty_trace's premisses is that net_target_states yields no target net_state for all synchronization vectors. This is clearly false, as the can show that << "ready", "ready" >> -> "ready" does indeed permit to attain Net_State [slv1; mst1]. And thus this subgoal is discharged. For the second and third subgoals we have Net_State [slv0; mst1] and Net_State [slv1; mst0] as source net_state, respectively. Both are supposed to be attainable from MasterSlaveCoffeeNet's initial net_state. Indeed, this is clearly not the case and we

can demonstrate a contradiction. The fourth and last subgoal possesses Net_State [slv1; mst1] as source net_state, and discharging it follows the rationale of the first subgoal except that we use << "order:MakeSandwich", "MakeSandwich" >> -> "order:Sandwich" or << "order:MakeCoffee", "MakeCoffee" >> -> "order:Coffee" to demonstrate the contradiction.

For last, the third case regards the net_lcons_trace constructor. As seen for previous case, we need to consider all possible net_states, thus four subgoals. the third and fourth subgoal possess Net_State [slv0; mst1] and Net_State [slv1; mst0] as source net_state, respectively. By the same reasoning as discussed above, we can demonstrate a contradiction in our context. The first subgoal has Net_State [slv0; mst0] as the source net_state. From the three specified synchronization vectors, only << "ready", "ready" >> -> "ready" permits the trace to progress: Net_State [slv1; mst1] is reached as target net_state, and the global action (Action (Message "ready" Emit []) []) is emitted. We can now apply the Always_LCons constructor, yielding two subgoals. For the first subgoal we need to demonstrate that the interleaving predicate holds. For this we make the trace further progress by induction on the Net_Trace predicate in our context, yielding the respective three subgoals. The two first subgoals are easily discharged by contradiction in the same manner we discussed above. for the third subgoal we need to consider the two synchronization vectors that can be activated: << "order:MakeSandwich", "MakeSandwich" >> -> "order:Sandwich" and << "order:MakeCoffee", "MakeCoffee">> -> "order:Coffee". Since there are three kinds of coffee, we need to consider four actions. In all cases we apply the InterleavingOne constructor with the adequate actions as parameters, and discharge it by reflexivity. The second subgoal for the Always_LCons constructor requires to prove the same goal for the tail of the trace. For this, we simply use the co-induction hypothesis with q instantiated to Net_State [slv1; mst1]. This concludes the first subgoal of the net_lcons_trace constructor case. The second and third subgoal were already discussed above, and the fourth is discharged analogously. The main difference lies in the fact that Net_State [slv1; mst1] is the source net_state, thus the constructor Interleaving Two is used instead, and a similar reasoning is applied w.r.t. the activated synchronization vectors.

The above theorem gives an example on how we can use a proof assistant like Coq to formally reason about synchronized transitions systems. Indeed, this is usually achieved by means of automatic techniques such as model-checking. Yet, it should be noted that in system like Coq we need not to constrain ourselves with finite instances, and can directly reason about parametrized systems. For instance, Listing 6.31 enunciates the same interleaving property for a parametrized MasterSlaveCoffeepNet.

```
1 Theorem Infinite_interleaving ':
2    forall n t q,
3    Net_Trace (MasterSlaveCoffeeNet n) q t ->
4    t |= (Always (interleaving Rma "ready" "order")).

Listing 6.31 - Definition of the Rma relation
```

Proving the above theorem requires more care as we no longer deal with a closed term. In particular, we cannot explicitly enumerate all the actions as they depend on the parameter n. We perform induction on n and show that the set of target states and message labels from the emitted actions never depend on it. In practice, this proof¹ follows the same structure as seen for Theorem 6.3.1 but uses auxiliary lemmas dealing with the non-interference of n with the interleaving behaviour.

6.4 Towards GCM behavioural models

As seen in Section 2.3, and further discussed by example throughout Chapter 3, GCM components are internally composed by a set of processes — FIFO queue, body, etc. These can be modelled with our LTS datatype.

For the sake of clarity, Figure 6.1 depicts a queue, bounded at two requests, and accepting requests for method m_1 .

¹Unfortunately, due to the complexity of the involved proofs, some auxiliary lemmas are admitted rather than proved. Yet, we feel sufficiently confident on their veracity.




Figure 6.1 – LTS of a queue, bounded by two requests

Its understanding should pose no doubt. Action messages are written in *light oblique* black and assignments in blue. Basically, by assigning v2 to v1 after emitting Server_m1! v1 it is guaranteed that requests are treated following a FIFO policy.

The mechanization of the above queue is easily achieved using our LTS datatype. First, let us see its lts_states as depicted by Listing 6.32.

```
Definition queue_states : lts_states :=

[LTS_State 0 [] ; LTS_State 1 []; LTS_State 2 [] ; LTS_State 3 []].

Listing 6.32 - Encoding of the lts_states for the queue process
```

Next, Listing 6.33 illustrates its transitions.

```
1 Definition queue_transitions : transitions :=
  [ (LTS_State 0 [], Action (Message "Q_m1" Read [Var("v1")]) [],
      LTS_State 1 []);
     (LTS_State 1 [], Action (Message "Q_m1" Read [Var("v2")]) [],
3
        LTS_State 2 []);
     (LTS_State 2 [], Action (Message "Q_m1" Read [Var("v3")]) [],
4
        LTS State 3 []);
5
     (LTS_State 3 [], Action (Message "Error" Emit [Var("v3")]) [],
6
        LTS_State 3 []);
     (LTS_State 2 [], Action (Message "Serve_m1" Emit [Var("v1")]) [
        AssignmentVar "v2" "v1"], LTS_State 1 []);
     (LTS_State 1 [], Action (Message "Serve_m1" Emit [Var("v1")]) [],
        LTS State 0 [])
  ] .
10
```

Listing 6.33 – Encoding of the transitions for the queue process

Since we use local variables we need to specify them in the initial state as shown by Listing 6.34.

```
Definition queue_mem : state_mem :=  ("v1", 0) :: ("v2", 0) :: ("v3", 0) :: nil.  Definition queue_init : lts_state := LTS_State 0 queue_mem.
```

Listing 6.34 – Encoding of the initial lts_state for the queue process

The last remaining piece is a simple list holding the actions. We omit it since they are already represented by the transitions depicted in Listing 6.33. Finally, we can compose the LTS modelling the queue process. Listing 6.35 illustrates its definition.

```
Definition queue : LTS :=

mk_LTS queue_states queue_init queue_actions queue_transitions.

Listing 6.35 - Encoding of the queue process
```

A GCM component is also composed by a *body* process. Basically, this process ensures that GCM components are mono-threaded. For instance, a body process handling requests for a method m_1 is depicted by Figure 6.2.




Figure 6.2 – LTS of a body process handling one method

From the above LTS we can see that no second process can be *served* without the previous one having returned.

The mechanization of the body process follows the same rationale as seen for the queue process. Listing 6.36 depicts its transitions.

```
4 (LTS_State 2 [], Action (Message "R_ml" Read [Var("v1")]) [] ,
LTS_State 0 [])
5 ].
```

Listing 6.36 – Encoding of the body transitions

Further, Listing 6.37 illustrates the remaining definition of the body process.

```
Definition body_states : lts_states :=

[LTS_State 0 [] ; LTS_State 1 [] ; LTS_State 2 []].

Definition body_mem : state_mem := ("v1", 0) :: nil.

Definition body_init : lts_state := LTS_State 0 body_mem.

Definition body_actions : actions :=

[Action (Message "Serve_m1" Read [Var("v1")]) [] ;

Action (Message "Call_m1" Emit [Var("v1")]) [] ;

Action (Message "R_m1" Read [Var("v1")]) []

Action (Message "R_m1" Read [Var("v1")]) []

Definition body : LTS :=

mk_LTS body_states body_init body_actions body_transitions.
```

Listing 6.37 – Remaining definitions encoding body process

For the sake of simplicity, we omit the models of the remaining GCM component internal processes (proxies, etc). Instead, we mechanize the method from the JMX Indicators component discussed in Chapter 3. Basically, it simply accepts a query for one of its JMX indicators, and replies with its current status (see Figure 3.5).

```
(LTS_State 1 [], Action (Message "R_m1" Emit [Val(11)]) [],
         LTS_State 0 []) ;
      (LTS_State 2 [], Action (Message "R_m1" Emit [Val(210)]) [],
         LTS_State 0 []);
      (LTS_State 2 [], Action (Message "R_m1" Emit [Val(211)]) [],
10
         LTS State 0 []);
      (LTS_State 2 [], Action (Message "R_ml" Emit [Val(220)]) [],
11
         LTS_State 0 []);
      (LTS_State 2 [], Action (Message "R_m1" Emit [Val(221)]) [],
12
         LTS State 0 [])
    ].
13
14
  Definition jmx states : lts states :=
15
    [LTS_State 0 []; LTS_State 1 []; LTS_State 2 []].
16
17
  Definition jmx init: lts state := LTS State 0 [].
18
19
20 Definition jmx : LTS :=
    mk_LTS jmx_states jmx_init jmx_actions jmx_transitions.
```

Listing 6.38 – Encoding of JMX Indicators method

In the above definition we omitted definition of jmx_actions as it holds the list of actions that can be seen in jmx_transitions definition.

Building the overall model for this simplified GCM component is achieved by synchronizing the above processes, and instantiating the adequate **Net** constructor. This is achieved as depicted by Listing 6.39.

```
1 Definition synch_vectors : list SynchronizationVector :=
                 , "-"
                              , "-"
   [ << "Q m1"
                                          >> -> "Q m1"
     << "Serve_m1", "Serve_m1", "-"</pre>
                                          >> -> "Serve_m1"
                , "Call_m1" , "Call_m1" >> -> "Call_m1"
     << "-"
                  , "R_m1"
                             , "R_m1"
                                          >> -> "R m1"
     << "Error"
                                          >> -> "Error"
8 Definition gcm_component : Net :=
   mk_Net ([queue; body; jmx], synch_vectors).
```

Listing 6.39 – Encoding of the component system

6.5. DISCUSSION 163

Having synchronized the processes constituting the component as a Net value, one can attempt to establish proofs regarding its traces of execution as we demonstrated in Section 6.3. Other components, including more details about the internal aspects, and with more sophisticated service methods can be modelled in the same manner. Indeed, this example is rather simple and only shows an instantiated component system. Having functions as models for parametrized queue and body processes would have been more interesting. Yet, it should provide enough insight on how to go about more complex mechanizations.

6.5 Discussion

It is common to use automata-based formalisms to specify software systems. In fact, as seen in Chapter 3, we adopted such an approach for the specification of The HyperManager application. Indeed, the hierarchical nature of pNets make it a suitable choice for modelling GCM applications. Here, however, our mechanization does not handle hierarchical specifications. This is unfortunate since composing GCM applications naturally yield multi-layered systems. Adapting our mechanization to cope with hierarchical specifications would require some effort. The first step concerns the Net datatype: it needs to be recursive. Listing 6.40 depicts its mechanization.

Listing 6.40 – Definition of the recursive Net datatype

The sole difference between this definition and the original Net definition (see Listing 6.11) is that the mk_Net constructor contains Net values rather than LTS values. As expected, the same kind of modification is necessary for the net_state datatype. Finally, the function net_target_states : Net \rightarrow net_state \rightarrow SynchronizationVector: list (action * net_state) (see Listing 6.13) needs to be able to handle the recursive structure of these two re-defined datatypes. In particular, a synchronization vector potentially triggers several other synchronizations: for each synchronization element it needs to recursively descend the hierarchy until it

reaches a leaf — a LTS —, and carry back the resulting global action.

Furthermore, providing a completely mechanized specification and verification platform for GCM applications would require another step. We would need to establish a connection with the architectural aspects presented in Chapter 4. One way to achieve this is by enriching the interface datatype (see Listing 4.1) with a field holding a list of LTSs. This symbolizes the modelling of the behaviour of the interface's service methods. Then, a function build_model : component \rightarrow Net would compute a Net synchronizing the component internals and the specified service methods. The main technical obstacle in the definition of such a function concerns the generation of the appropriate "application-dependent" synchronization vectors. For instance, a primitive component is modelled by a Net holding a LTS for each component internal process and service methods. Generating their synchronization vectors poses no special difficulty as it mainly reflects the order by which requests are treated — first into the queue process, then dispatched by the body process, etc. However, generating the synchronizations vectors resulting from the bindings between components is slightly more involved as it requires synchronizing Net objects — rather than LTSs —, and potentially of different hierarchical levels — for import and export bindings. Further, deciding a component's adequate place in the Net hierarchy would be achieved directly through its path field.

It should also be noted that this approach could be further leveraged by exploiting well-formedness and well-typedness aspects. That is, we only need to care about execution traces coming from well-formed and well-typed architectures. Moreover, an integration with PAINLESS could also be envisaged. Extending our ADL to support the behavioural specification of service methods enables formal verification of GCM applications directly through a format understandable by software architects. Further, its translation to MEFRESA's operation language would remain rather unchanged as it solely regards a field added to the interface datatype.

To conclude, we believe that there is sufficient evidence regarding the feasibility of using a proof assistant like Coq to specify and reason about parametrized GCM applications. Yet, it is fair to say that there remains a significant amount of work in order to provide a full-featured specification and verification framework.

6.5. DISCUSSION 165

In this chapter we presented the mechanization of a behavioural semantics based on the execution trace of synchronized labelled transition systems. Further, we exemplified its use in the context of GCM applications.

In the following chapter we discuss the works related with this thesis.



Related work

"If you know the enemy and know yourself you need not fear the results of a hundred battles."

Sun Tzu

Contents

7.1	On the HyperManager use case	168
7.2	On the Mefresa framework	169
7.3	On Painless	170

This Chapter discusses the works related with this thesis. Section 7.1 places the industrial case study discussed in Chapter 3 in the context of existing literature regarding behavioural specification, and architectural reconfigurations. Section 7.2 discusses other undertakings concerning the formalization of component models using proof assistants and other more lightweight specification platforms. Further, we also refer material regarding proof systems for reasoning on distributed systems. For last, Section 7.3 compares Painless and its integration with the ProActive middleware with other ADLs and related tools.

7.1 On the HyperManager use case

The use of automata-based formalisms to model software systems is a rather common approach in the realm of formal methods. This stems from their intuitive usage, and tool support. For instance, the maturity attained by the CADP toolbox [22] made it a reference tool among the formal methods community. Several case studies have been published, namely industrial ones addressing other goals than verification. For instance, in [38] Coste et. al. discuss performance evaluation for systems and networks on chips.

In [27], Ameur-Boulifa et. al. discussed the specification and verification of a fault-tolerant GCM application. Indeed, their approach is akin to the one we used for The Hypermanager application. Yet, structural reconfigurations are not contemplated. In fact, our case study described in Chapter 3 is the first work addressing the specification and verification of a reconfigurable GCM application.

More closely related with the formalization of dynamic architecture topologies aspects, we must refer the experiments presented in [39]. A dynamic reconfiguration protocol is specified and model-checked, however their focus is on the reconfiguration protocol itself rather than reconfigurable applications. Indeed, many works can be found in the literature embracing a behavioural semantics approach for the specification and verification of distributed systems. Yet, literature addressing the aspects of reconfigurable applications remains scarce.

Nevertheless, we must cite the work around BIP (Behaviour, Interaction, Priority) [40] — a framework encompassing rigorous design principles. It allows the description of the coordination between components in a layered way. Moreover, it has the particularity of also permitting the generation of code from its models. Yet, structural reconfigurations are not supported. Further, as demonstrated in [41], their compositional rationale allows to combine interactive proof strategies with model-checking.

Further, let us mention the Kell calculus [42]: "a family of distributed process calculi, parameterized by languages for input patterns, that is intended as a basis for studying component-based distributed programming". The authors also present an extension called Fraktal, and subsequently exemplify how to use it in order to model component-based applications embracing the Fractal component model.

Another rather different approach that we must refer is the one followed by tools specifically tailored for architectural specifications. For instance, in [43] Inverardi et. al. discusses CHARMY, a framework for designing and validating architectural specifications. It offers a full featured graphical interface with the goal of being more *user friendly* in an industrial context. Still, architectural specifications remain of static nature.

Looking at the interactive theorem proving arena we can also find some related material. In [44] Boyer et. al. propose a reconfiguration protocol and prove its correctness in the Coq Proof Assistant [12]. This work however, also focuses on the protocol itself, and not in the behaviour of a reconfigurable application.

7.2 On the Mefresa framework

Many approaches regarding the formalization of component models can be found in the literature. In [45], Henrio et al. formalize a framework for reasoning on the structural aspects of GCM component composition mechanized in Isabelle/HOL [14]. Further, they provide a semantics for component communication, and illustrate an example concerning request delegation. Regarding component composition, our approach is considerably different in that we provide a semantics for an *operation* language for the building and reconfiguration of GCM architectures. Moreover, we define a generic datatype Net, that can be used for both communication and behavioural aspects.

Another work involving the use of a proof assistant is the work by Johnsen et. al. on the Creol framework [46]. Creol focuses on the reasoning of distributed systems by providing a high-level object oriented modelling language. Its operational semantics are defined in the rewriting logic tool Maude [47]. This work however does not contemplate architectural reconfigurations and follows a methodology in the style of a Hoare Logic.

Furthermore, the work around the TLA+ Proof System (TLAPS) [48] is also worth mentioning. TLA+ is a specification language based on set theory and temporal logic, with recently added constructs for writing proofs. One of its main strengths is its integrated environment allowing to reason about TLA+ specifications using both a model-checker (TLC model-checker), and TLAPS. Moreover, it

should be noted that TLAPS provides several back-end provers: the proof assistant Isabelle [14], and automated provers such as Zenon [49]. However, at this stage of development it does not perform temporal reasoning. Perhaps a trace-based approach as the one we illustrated in Chapter 6 would suit their needs?

The approach embraced by BSP-WHY [50] also permits the use of several backend provers. It is tailored for BSP programs [51], and relies on the Why tool [52] to produce the relevant proof obligations w.r.t. to the properties of interest.

Indeed, while the use of deductive methods, let it be by means of proof assistants or automated provers, is gaining notoriety, model-checking is still the de facto formal approach for both industrial and academic undertakings. Usually, some form of state machine model is used for the design of the intended system, and then a carefully chosen model-checker as back-end is employed as a decision procedure. This is for instance the methodology followed in our Vercors platform [53].

A formal specification of the Fractal Component Model has been proposed in the Alloy specification language [31]. This work proves the consistency of a (settheoretic) model of Fractal applications. Their goal was to clarify the inherent ambiguities of the informal specification presented in [1]. Their specification however, is constrained by the first-order relational logic nature of the Alloy Analyzer. In fact, they point to the use of the Coq Proof Assistant in order to overcome this limitation.

For last, let us also mention previous work by Aldrich on the use of a type system at the source code level to enforce architectural constraints [54]. This is a rather different approach than ours as it is a direct extension of the Java programming language with type annotations that are statically checked. Allowing for flexible and dynamic designs is within the goals of the project, but structural reconfigurations are not supported.

7.3 On Painless

Several proposals for ADLs can be found in the literature, each with their own particularities and attempting to address their specific application domain concerns.

7.3. ON PAINLESS 171

The work around the ArchWare ADL [55] is of particular interest. They claim that "software that cannot change is condemned to atrophy" and introduce the concept of an active software architecture in order to address this challenge. Based on the higher-order π -calculus, it provides constructs for specifying control flow, communication and dynamic topology. Unlike Painless, its syntax exhibits an imperative style and type inference is not supported, thus not promoting concise specifications.

Nevertheless, it is sufficiently rich to provide executable specifications of active software architectures. Moreover, user-defined constraints are supported through the ArchWare Architecture Analysis Language. Yet, their focus is more aimed at the specification and analysis of the ADL, rather than actual application execution and deployment. In our work, the user solely defines the architecture of its application, structural constraints are implicit: they are within the mechanized GCM specification. Further, our tool support is tightly coupled with the ProActive middleware.

Also from the realm of process algebras, Archery [56] is a modelling language for software architectural patterns. It is composed by a core language and two extensions: Archery-Core, Archery-Script and Archery-Structural-Constraint. These permit the specification of structural and behavioural dimensions of architectures, the definition of scripts for reconfiguration, and the formulation of structural constraints, respectively. Moreover, a bigraphical semantics is defined for Archery specifications. This grants the reduction of the constraint satisfaction verification to a type-checking problem. However, this process is not guarantee to be automatic, and type-checking decidability remains as future work.


As expected, logic is also a natural formalism of choice. For instance, Gerel [57] is a generic reconfiguration language including powerful query constructs based on first-order logic. Further, its reconfiguration procedures may contain preconditions \dot{a} la Hoare Logic [58]. These are evaluated by brute force. It is unclear how they cope with the inherent undecidability of such task.

Furthermore, the use of a graph-based formalism for the specification of software architectures is also rather popular. For instance, in [59] two graph-based approaches and related tool support are compared. Another interesting aspect of this work regards the use of the Alloy Analyzer [32], and Maude [60] as a means to show the approaches' feasibility.

More recently, Di Cosmo et. al. defined the Aeolus component model [3]. Their focus is on the automation of cloud-based applications deployment scenarios. Nevertheless, their proposal is still loosely inspired by the Fractal component model [1] whose most peculiar characteristics are its hierarchical composition nature and reconfiguration capabilities. However, while both approaches permit architectural reconfigurations at runtime, its specification is not supported by their ADL, it solely contemplates deployment related aspects. Moreover, support for parametrized specifications is also not covered, forcing the software architect to explicitly define the application's structure.

Regarding Fractal, it is also worth noticing that they try to overcome the lack of support for reconfiguration specification through Fscript [61]. Fscript embeds FPath — a DSL for navigation and querying of Fractal architectures — and acts as a scripting language for reconfiguration strategies. These are not evaluated for their validity. Nevertheless, system consistency is ensured by the use of transactions: a violating reconfiguration is rolled back. Furthermore, an interesting feature is the support for application-specific architectural invariants.

To conclude, let us mention a survey regarding the approaches for the specification of dynamic software architectures [62]. These are classified into four categories: graph-based, process algebra-based, logic-based, and other. To this end, we place ourselves in the *other* category. Indeed, while formal logic is at the foundation of our approach, all the machinery involving requirement/constraint checking is implicit and done automatically by our Coq development. The software architect solely needs to use a language with a declarative trait.



Final remarks

"Success is not final, failure is not fatal: it is the courage to continue that counts."

Winston Churchill

This thesis discussed the application of formal methods techniques in the context of component-based engineering. In particular, we focused on the GCM and its reference implementation GCM/ProActive.

Our industrial case study about The Hypermanager application demonstrated the pragmatic rationale of formal verification by means of model-checking techniques. Indeed, the degree of automation offered by this approach makes it appealing for the purposes of increasing the confidence one can put on the properties of a verified software system. However, it is also fair to say that, by itself, remains a rather hopeless approach for verifying parametrized systems dealing with infinite data structures. Indeed, one can try to define finite abstractions of the system to model. However, then one needs to prove that these abstractions are sound w.r.t. the original system semantics, and that is seldom a trivial task.

To this end, we developed MEFRESA, a mechanized framework for reasoning on software architectures. Behavioural concerns are addressed by a formalization of a semantics based on execution traces of synchronized transition systems. This, provides the first steps towards a complete specification and verification platform addressing both architectural and behavioural properties. Moreover, we further leverage Mefresa by using its operation language as a target for the evaluation of Painless specifications. Using Coq's extraction mechanism we get certified code checking well-formedness and well-typedness compliance. In conjunction with a Painless interpreter, it is subsequently integrated with ProActive, yielding a library for the safe deployment and reconfiguration of GCM applications.

To sum up, we use Coq to address the specification, verification and deployment of distributed and reconfigurable GCM applications.

8.1 Perspectives

MEFRESA results from an effort to provide the mechanical means to reason about reconfigurable GCM applications. Further, it also shows that it is possible to effectively use certified code in the context of real world applications. Nevertheless, several improvements can be envisaged.


A component membrane serves the purpose of separating functional and non-functional concerns. The mechanization of the GCM specification does not include the component membrane, nor it is supported by the PAINLESS ADL. Adding this feature requires changing the component datatype so that it includes a membrane part containing itself a component hierarchy. Further, MEFRESA's operation language and PAINLESS need to be able to refer to this new component hierarchy. These changes require some effort, yet, it is worth noticing that they do not entail any fundamental change, and do not break most of the existing infrastructure.

Another interesting direction for future work concerns the Painless ADL and its associated tool support. At the current stage, it is sufficiently expressive to let the user develop its own architecture libraries and specification facilities. However, some good practice methodologies could be automated. For instance, the necessity to indicate the path field of every element composing the architecture can be somewhat overwhelming. The ability to automatically infer this information would be of great value as it would further promote modular designs and ease the task of the software architect.

At last, it is worth mentioning that in the context of formal verification it is common to see graphical tools that generate suitable models for some target back-

175

end system. Mefresa may be used in such a context as well. In fact, the work regarding the integration of Painless with the ProActive middleware already exemplifies such scenario. Setting up Mefresa as a back-end for the Vercors platform could be a worthwhile undertaking. However, at this stage of development, this would also demand a significant effort on the Vercors platform itself. Further, the means to specify reconfigurations is not supported, only static architectures can be displayed from the graphical interface. To this end, Painless could be used as the input format of architectural reconfigurations. This would provide a more complete picture of the software architecture, but also ease the subsequent integration with Mefresa. Moreover, it should be noted that Java code generation would be facilitated as we already built the necessary infrastructure to integrate Painless with ProActive.



Résumé de la thèse

Ce Chapitre résume le contenu de cette thèse en Français. Section A.1 présente sont contexte et ses principales contributions. Finalement, Section A.2 discute les conclusions.

Les détails des travaux réalisés dans le contexte de cette thèse sont décrit en anglais dans les Chapitres précédents.

A.1 Introduction

Cette thèse appartient au domaine des méthodes formelles. En particulier, nous discutons leur application sur une méthodologie spécifique pour le développement de logiciels: l'ingénierie à base de composants.

Que ce soit par le biais d'approches automatiques ou interactives, l'objectif des méthodes formelles est d'accroître la confiance que l'on peut accorder sur les propriété d'un système.

A.1.1 Génie logiciel à base de composants

Parmi tous les paradigmes de programmation, l'ingénierie à base de composants se présente comme une des approches les plus utilisées pour le développement de logiciels dans le monde réel. Elle met l'accent sur une séparation nette des préoccupations, ce qui la rend attrayante pour des buts industrielles ou de recherche. En outre, les systèmes à base de composants sont connus pour leur capacité de

répondre aux défis du développement des logiciels d'aujourd'hui. La conception modulaire permet d'alléger les tâches de développement et de maintenance des applications. De plus, la portabilité et la réutilisation des composants sont d'autres avantages de ce paradigme.

Il existe plusieurs modèles de composants proposés dans la littérature [1, 2, 3], chacun avec leurs propres particularités (hiérarchique / plat, statique / reconfigurable, ...). Cependant, leur fondation est généralement composé de trois ingrédients principaux: composants, interfaces et bindings. Un composant peut être considéré comme un bloc de construction, généralement un morceau de code logiciel. Une interface est un point d'accès depuis / vers composants. Enfin, une binding est une connexion établie entre deux composants, à travers leurs interfaces.

En effet, la programmation à base de composant contient des ressemblances avec la programmation orientée objet. Leur différence fondamentale réside dans le fait que dans le premier paradigme, les communications se font toujours explicitement à travers des interfaces des composants, rendant ainsi toutes les dépendances existantes évidentes.

Une autre facette des systèmes à base de composants concerne l'évolution des logiciels. Cette méthodologie de développement de logiciels permet des reconfigurations structurelle de l'architecture de l'application. L'avantage de la modification de l'architecture du logiciel vient de la nécessité de faire face à la pléthore de situations qui peuvent survenir dans un système potentiellement massivement distribué et hétérogène. En effet, la capacité à restructurer est également un aspect clé dans le domaine du calcul autonomique. Cependant, cette capacité a un prix: nous avons besoin de nous soucier des aspects fonctionnelles, mais aussi des aspects structurelles.

Au sein de notre groupe de recherche, nous nous concentrons sur le *Grid Com*ponent Model (GCM) [2] pour répondre aux défis du calcul en grille.

A.1.2 Contexte — Le projet Spinnaker

Cette thèse se déroule dans le contexte du projet de Spinnaker ¹, un projet entre l'INRIA et plusieurs partenaires industriels, dans lequel nous avons l'intention de

¹Projet OSEO ISIS. http://www.spinnaker-rfid.com/

contribuer pour l'adoption de technologie à base de Radio-Frequency Identification (RFID). À cette fin, notre contribution passe par la conception et la mise en œuvre d'une solution non-intrusive, flexible et fiable capable de s'intégrer avec d'autres systèmes déjà déployés. Plus précisément, nous avons développé THE HYPER-MANAGER, une application de monitoring autonomique. Elle a été développé en utilisant GCM/ProActive ² — un intergiciel Java pour la programmation parallèle et distribué, et l'implantation référence du GCM. Pour les fins de ce projet, THE HYPERMANAGER avait pour but de surveiller E-Connectware ³ (ECW).

A.1.3 Contributions

Dans cette thèse, nous contribuons à l'état de l'art dans les domaines des méthodes formelles et des systèmes (distribués) à base de composants. Nous abordons la spécification formelle, la vérification et le déploiement d'applications GCM reconfigurables et distribuées.

Notre première contribution est un cas d'étude industriel sur la spécification comportementale et la vérification d'une application distribuée et reconfigurable: The Hypermanager. Cela favorise l'utilisation des méthodes formelles dans un contexte industriel, mais met également en évidence la nécessité d'approches alternatives et/ou complémentaires afin de mieux répondre aux besoin de ces entreprises.

Notre deuxième contribution est une plate-forme, élaborée avec l'assistant de preuve Coq, pour le raisonnement sur les architectures logicielles: MEFRESA. Cela comprend la mécanisation de la spécification du GCM, et les moyens pour raisonner sur les architectures reconfigurables GCM. En outre, nous adressons les aspects comportementaux en formalisant une sémantique basée sur les traces d'exécution de systèmes de transitions synchronisés. Dans l'ensemble, elle fournit les premiers pas vers une plate-forme complète pour la spécification et la vérification des caractéristiques structurelles et comportementales des applications GCM.

Enfin, notre troisième contribution est un nouveau langage de description d'architecture (ADL): Painless. En outre, nous discutons son intégration avec

²http://proactive.activeeon.com/index.php

³http://www.tagsysrfid.com/Products-Services/RFID-Middleware

ProActive — un intergiciel Java pour la programmation concurrente et distribuée, et l'implantation de référence du GCM. PAINLESS permet de spécifier des architectures de GCM paramétrées, avec leurs reconfigurations structurelles, dans un langage déclaratif. La conformité avec la spécification de GCM est évaluée par le code fonctionnel certifié extrait de MEFRESA. Ceci permet le déploiement et la reconfiguration sûre des applications du GCM.

Les publications suivantes sont issues de cette thèse.

- Nuno Gaspar and Eric Madelaine. Fractal á la Coq. Conférence en Ingénierie du Logiciel, Rennes, France, June 2012.
- Nuno Gaspar, Ludovic Henrio and Eric Madelaine. Bringing Coq into the World of GCM Distributed Applications. International Journal of Parallel Programming, pp. 1-20, 2013.
- Nuno Gaspar, Ludovic Henrio and Eric Madelaine. Formally Reasoning on a Reconfigurable Component-Based System — A Case Study for the Industrial World. International Symposium on Formal Aspects of Component Software (FACS'2013), October 2013.
- Nuno Gaspar, Ludovic Henrio and Eric Madelaine. Painless support for the static and runtime verification of component-based applications. (soumis)

En outre, un exposé intitulé Formal Reasoning on Component-Based Reconfigurable Applications, a été présenté à la session d'étudiants de 40th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (POPL'2013).

A.1.4 Organisation de cette thèse

La Section suivante conclue ce Chapitre servant de résumé en Français en discutant les principales conclusions de cette thèse. Les Chapitres précédents, écrits en anglais, détaillent sont contenu, et sont organisés comme suit.

• Chapitre 1 introduit cette thèse.

A.2. CONCLUSION 181

• Chapitre 2 donne un aperçu du **background technique** nécessaire pour la compréhension de cette thèse. Quelques pointeurs sont indiqués pour le lecteur désirant plus de détails.

- Chapitre 3 décrit une **étude de cas industriel** sur la spécification et la vérification formelle d'une application GCM/ProActive reconfigurable.
- Chapitre 4 présente MEFRESA, une plate-forme pour le raisonnement sur des architectures logicielles. Elle est adaptée pour le GCM, et développée en utilisant l'assistant de preuve Coq.
- Chapitre 5 montre comment nous tirons parti de MEFRESA et du mécanisme d'extraction certifié de Coq pour fournir une extension a l'intergiciel GCM/ ProActive. Nous proposons une nouvelle approche pour la spécification des architectures GCM reconfigurables.
- Chapitre 6 aborde la mécanisation d'une **sémantique comportementalle** à l'aide de l'assistant de preuve Coq. Nous montrons comment nous pouvons interactivement raisonner sur des systèmes de transitions. En outre, nous illustrons son utilisation dans le contexte du GCM.
- Chapitre 7 discute des **travaux liés** aux principales contributions de cette thèse.
- Chapitre 8 discute les **conclusions** de cette thèse, et indique quelques perspectives pour des améliorations futures.

A.2 Conclusion

Cette thèse a examiné l'application de méthodes formelles dans le cadre de l'ingénierie à base de composants. En particulier, nous nous sommes concentrés sur le GCM et sont implantation référence GCM/ProActive.

Notre étude de cas industriel démontre le pragmatisme de la vérification formelle au moyen de techniques de model-checking. En effet, le degré d'automatisation offert par cette approche la rend très attrayante. Cependant, il est aussi juste de dire que, par elle-même, reste une approche ineffective pour la vérification des systèmes paramétrés. En effet, on peut essayer de définir des abstractions finies du système à modéliser. Cependant, il faut alors prouver que ces abstractions sont correctes vis-a-vis de la sémantique du système d'origine, ce qui est rarement une tâche triviale.

À cette fin, nous avons développé MEFRESA, une plate-forme mécanisée pour le raisonnement sur les architectures logiciels. Les préoccupations comportementales sont traitées par la formalisation d'une sémantique fondées sur les traces d'exécution de systèmes de transitions synchronisés. Cela fournit les premiers pas vers une plate-forme complète pour la spécification et la vérification des propriétés structurelles et comportementales.

En outre, nous tirons parti de MEFRESA en utilisant son langage d'operation comme une cible pour l'évaluation de spécifications PAINLESS. L'utilisation du mécanisme d'extraction de Coq permet d'extraire du code fonctionnel certifié vérifiant la well formedness et well typedness des architectures GCM. En collaboration avec un interpréteur de spécifications PAINLESS, ils sont intégrés à ProActive, ce qui donne de la sûreté pour le déploiement et la reconfiguration d'applications GCM.

Pour conclure, nous utilisons Coq pour aborder la spécification, la vérification et le déploiement d'applications GCM distribuées et reconfigurables.

Bibliography

- [1] E. Bruneton, T. Coupaye, and J.-B. Stefani, "The Fractal Component Model," 2004. [Online]. Available: http://fractal.ow2.org/
- [2] F. Baude, D. Caromel, C. Dalmasso, M. Danelutto, V. Getov, L. Henrio, and C. Pérez, "GCM: a grid extension to Fractal for autonomous distributed components," *Annales des Télécommunications*, vol. 64, no. 1-2, pp. 5–24, 2009.
- [3] R. D. Cosmo, S. Zacchiroli, and G. Zavattaro, "Towards a formal component model for the cloud." in SEFM, ser. Lecture Notes in Computer Science, G. Eleftherakis, M. Hinchey, and M. Holcombe, Eds., vol. 7504. Springer, 2012, pp. 156–171.
- [4] ETSI Technical Committee GRID, "ETSI TS 102 830 V1.1.1 GRID; Grid Component Model (GCM); GCM Fractal Management API," ETSI, Technical Specification, 2010. [Online]. Available: http://www.etsi.org/deliver/etsi_ts/102800_102899/102830/01.01.01_60/ts_102830v010101p.pdf
- [5] —, "ETSI TS 102 829 V1.1.1 GRID; Grid Component Model (GCM); GCM Fractal Architecture Description Language (ADL)," ETSI, Technical Specification, 2009. [Online]. Available: http://www.etsi.org/deliver/etsi_ts/102800_102899/102829/01.01.01_60/ts_102829v010101p.pdf

[6] T. Gurock, "Active Objects and Futures: A Concurrency Abstraction Implemented for C# and .NET," 2007. [Online]. Available: http://blog.gurock.com/wp-content/uploads/2008/01/activeobjects.pdf

- [7] L. Henrio, F. Huet, and Z. István, "Multi-threaded Active Objects," in COORDINATION 2013, C. Julien and R. De Nicola, Eds. Springer, 2013, 15th International Conference on Coordination Models and Languages, Florence, Italy. [Online]. Available: http://hal.inria.fr/hal-00818482
- [8] ActiveEon Company, in collaboration with INRIA, "ProActive Programming: Components. Version 5.4.0," ActiveEon S.A.S, Manual, 2014. [Online]. Available: http://proactive.activeeon.com/index.php?page=manual_proactive
- [9] T. Barros, R. Ameur-Boulifa, A. Cansado, L. Henrio, and E. Madelaine, "Behavioural models for distributed Fractal components," Annales des Télécommunications, vol. 64, no. 1-2, pp. 25–43, 2009.
- [10] R. Ameur-Boulifa, L. Henrio, E. Madelaine, and A. Savu, "Behavioural Semantics for Asynchronous Components," INRIA, Research Report RR-8167, Dec. 2012. [Online]. Available: http://hal.inria.fr/hal-00761073
- [11] B. Berthomieu, J. Bodeveix, M. Filali, H. Garavel, F. Lang, F. Peres, R. Saad, J. Stoecker, and F. Vernadat, "The syntax and semantics of FIACRE," Research Report, 2009.
- [12] The Coq Development Team, "The Coq Proof Assistant Reference Manual," 2012. [Online]. Available: https://coq.inria.fr/
- [13] Y. Bertot and P. Castéran, Interactive theorem proving and program development: Coq'Art: the calculus of inductive constructions, ser. Texts in theoretical computer science. Berlin, New York: Springer, 2004.
- [14] T. Nipkow, L. C. Paulson, and M. Wenzel, Isabelle/HOL A Proof Assistant for Higher-Order Logic, ser. Lecture Notes in Computer Science. Springer, 2002, vol. 2283.

[15] S. Owre, J. M. Rushby, , and N. Shankar, "PVS: A prototype verification system," in 11th International Conference on Automated Deduction (CADE), ser. Lecture Notes in Artificial Intelligence, D. Kapur, Ed., vol. 607. Saratoga, NY: Springer-Verlag, jun 1992, pp. 748–752. [Online]. Available: http://www.csl.sri.com/papers/cade92-pvs/

- [16] A. Chlipala, Certified Programming with Dependent Types. MIT Press, 2011, http://adam.chlipala.net/cpdt/. [Online]. Available: http://adam.chlipala.net/cpdt/
- [17] X. Leroy, "Formal certification of a compiler back-end, or: programming a compiler with a proof assistant," in 33rd ACM symposium on Principles of Programming Languages. ACM Press, 2006, pp. 42–54. [Online]. Available: http://gallium.inria.fr/~xleroy/publi/compiler-certif.pdf
- [18] B. C. Pierce, C. Casinghino, M. Gaboardi, M. Greenberg, C. Hriţcu, V. Sjoberg, and B. Yorgey, Software Foundations. Electronic textbook, 2014.
- [19] Y. Bertot, "Coq in a hurry," CoRR, vol. abs/cs/0603118, 2006.
- [20] N. Gaspar, L. Henrio, and E. Madelaine, "Formally Reasoning on a Reconfigurable Component-Based System A Case Study for the Industrial World," in *International Symposium on Formal Aspects of Component Software (FACS 2013)*, Oct. 2013.
- [21] T. Bolognesi and E. Brinksma, "Introduction to the iso specification language lotos," Comput. Netw. ISDN Syst., vol. 14, no. 1, pp. 25–59, Mar. 1987.
 [Online]. Available: http://dx.doi.org/10.1016/0169-7552(87)90085-7
- [22] H. Garavel, F. Lang, R. Mateescu, and W. Serwe, "CADP 2010: A Toolbox for the Construction and Analysis of Distributed Processes," in *Tools and Algorithms for the Construction and Analysis of Systems - TACAS 2011*. [Online]. Available: http://hal.inria.fr/inria-00583776
- [23] R. Mateescu and D. Thivolle, "A model checking language for concurrent value-passing systems," in *Proceedings of the 15th international symposium on Formal Methods*, ser. FM '08. Berlin, Heidelberg: Springer-Verlag, 2008, pp.

148–164. [Online]. Available: http://dx.doi.org/10.1007/978-3-540-68237-0_ 12

- [24] G. Winskel, "A note on model-checking the modal mu-calculus," *Theoretical Computer Science*, vol. 83, no. 1, pp. 157 167, 1991.
- [25] O. Kulankhina, "A graphical specification environment for GCM component-based applications," INRIA, Ubinet Master internship report, 2013. [Online]. Available: http://www-sop.inria.fr/oasis/index.php?page=vercors
- [26] J.-P. Queille and J. Sifakis, "Fairness and related properties in transition systems a temporal logic to deal with fairness." *Acta Inf.*, vol. 19, pp. 195–220, 1983. [Online]. Available: http://dblp.uni-trier.de/db/journals/acta/acta19.html#QueilleS83
- [27] R. Ameur-Boulifa, R. Halalai, L. Henrio, and E. Madelaine, "Verifying safety of fault-tolerant distributed components," in *Formal Aspects of Component Software*, ser. Lecture Notes in Computer Science, F. Arbab and P. Ölveczky, Eds., vol. 7253. Springer Berlin Heidelberg, 2012, pp. 278–295. [Online]. Available: http://dx.doi.org/10.1007/978-3-642-35743-5_17
- [28] N. Gaspar and E. Madelaine, "Fractal à la Coq," in *Conférence en IngénieriE du Logiciel*, Rennes, France, Jun. 2012. [Online]. Available: http://hal.inria.fr/hal-00725291
- [29] N. Gaspar, L. Henrio, and E. Madelaine, "Bringing Coq into the World of GCM Distributed Applications," *International Journal of Parallel Programming*, pp. 1–20, 2013. [Online]. Available: http://dx.doi.org/10.1007/s10766-013-0264-7
- [30] C. Tankink, H. Geuvers, J. McKinna, and F. Wiedijk, "Proviola: A tool for proof re-animation." ser. Lecture Notes in Computer Science, S. Autexier, J. Calmet, D. Delahaye, P. D. F. Ion, L. Rideau, R. Rioboo, and A. P. Sexton, Eds., vol. 6167. Springer, 2010, pp. 440–454. [Online]. Available: http://dblp.uni-trier.de/db/conf/aisc/aisc2010.html#TankinkGMW10

[31] P. Merle and J.-B. Stefani, "A formal specification of the Fractal component model in Alloy," INRIA, Rapport de recherche RR-6721, 2008.

- [32] D. Jackson, "Alloy: A lightweight object modelling notation," *ACM Trans. Softw. Eng. Methodol.*, vol. 11, no. 2, pp. 256–290, Apr. 2002. [Online]. Available: http://doi.acm.org/10.1145/505145.505149
- [33] P.-N. Tollitte, D. Delahaye, and C. Dubois, "Producing certified functional code from inductive specifications," in *Certified Programs and Proofs*, ser. Lecture Notes in Computer Science, C. Hawblitzel and D. Miller, Eds. Springer Berlin Heidelberg, 2012, vol. 7679, pp. 76–91. [Online]. Available: http://dx.doi.org/10.1007/978-3-642-35308-6_9
- [34] F. Baude, L. Henrio, and P. Naoumenko, "Structural reconfiguration: An autonomic strategy for gcm components." in *ICAS*, R. Calinescu, F. Liberal, M. Marín, L. P. Herrero, C. Turro, and M. Popescu, Eds. IEEE Computer Society, 2009, pp. 123–128.
- [35] L. Lamport, R. Shostak, and M. Pease, "The byzantine generals problem," *ACM Trans. Program. Lang. Syst.*, vol. 4, no. 3, pp. 382–401, Jul. 1982. [Online]. Available: http://doi.acm.org/10.1145/357172.357176
- [36] N. Gaspar, L. Henrio, and E. Madelaine, "Painless support for static and runtime verification of component-based applications," in 6th IPM International Conference on Fundamentals of Software Engineering, 2015.
- [37] X. Clerc, "OCaml-Java: OCaml on the JVM." in Trends in Functional Programming, ser. Lecture Notes in Computer Science, H.-W. Loidl and R. Peña, Eds., vol. 7829. Springer, 2012, pp. 167–181.
- [38] N. Coste, H. Hermanns, E. Lantreibecq, and W. Serwe, "Towards performance prediction of compositional models in industrial gals designs." in CAV, ser. Lecture Notes in Computer Science. Springer, 2009, pp. 204–218.
- [39] M. A. Cornejo, H. Garavel, R. Mateescu, and N. D. Palma, "Specification and verification of a dynamic reconfiguration protocol for agent-based appli-

cations." in *DAIS*, ser. IFIP Conference Proceedings, K. Zielinski, K. Geihs, and A. Laurentowski, Eds., vol. 198. Kluwer, 2001, pp. 229–244.

- [40] A. Basu, S. Bensalem, M. Bozga, J. Combaz, M. Jaber, T.-H. Nguyen, and J. Sifakis, "Rigorous component-based system design using the bip framework," *IEEE Software*, vol. 28, no. 3, pp. 41–48, 2011.
- [41] S. Bensalem, M. Bozga, T.-H. Nguyen, and J. Sifakis, "Compositional verification for component-based systems and application," *IET Software*, vol. 4, no. 3, pp. 181–193, June 2010.
- [42] A. Schmitt and J.-B. Stefani, "The kell calculus: A family of higher-order distributed process calculi," in *Global Computing*, ser. Lecture Notes in Computer Science, C. Priami and P. Quaglia, Eds. Springer Berlin Heidelberg, 2005, vol. 3267, pp. 146–178. [Online]. Available: http://dx.doi.org/10.1007/978-3-540-31794-4_9
- [43] P. Inverardi, H. Muccini, and P. Pelliccione, "Charmy: An extensible tool for architectural analysis," in ESEC-FSE'05, ACM SIGSOFT Symposium on the Foundations of Software Engineering. Research Tool Demos, September 5-9, 2005.
- [44] F. Boyer, O. Gruber, and D. Pous, "Robust reconfigurations of component assemblies," in *Proceedings of the 2013 International Conference on Software Engineering*, ser. ICSE '13. IEEE Press, 2013. [Online]. Available: http://dl.acm.org/citation.cfm?id=2486788.2486791
- [45] L. Henrio, F. Kammüller, and M. U. Khan, "A framework for reasoning on component composition," in FMCO 2009, ser. Lecture Notes in Computer Science. Springer, 2010.
- [46] E. B. Johnsen, O. Owe, and I. C. Yu, "Creol: A type-safe object-oriented model for distributed concurrent systems," *Theoretical Computer Science*, vol. 365, no. 1–2, pp. 23–66, Nov. 2006.
- [47] M. Clavel, F. Durán, S. Eker, P. Lincoln, N. Martí-Oliet, J. Meseguer, and C. Talcott, "The maude 2.0 system," in Rewriting Techniques and Applica-

tions (RTA 2003), ser. Lecture Notes in Computer Science, R. Nieuwenhuis, Ed., no. 2706. Springer-Verlag, June 2003, pp. 76–87.

- [48] D. Cousineau, D. Doligez, L. Lamport, S. Merz, D. Ricketts, and H. Vanzetto, "TLA+ proofs," CoRR, vol. abs/1208.5933, 2012. [Online]. Available: http://arxiv.org/abs/1208.5933
- [49] R. Bonichon, D. Delahaye, and D. Doligez, "Zenon: An extensible automated theorem prover producing checkable proofs," in Logic for Programming, Artificial Intelligence, and Reasoning, 14th International Conference, LPAR 2007, Yerevan, Armenia, October 15-19, 2007, Proceedings, 2007, pp. 151–165.
- [50] J. Fortin and F. Gava, "Bsp-why: An intermediate language for deductive verification of bsp programs," in *Proceedings of the Fourth International Workshop on High-level Parallel Programming and Applications*, ser. HLPP '10. New York, NY, USA: ACM, 2010, pp. 35–44. [Online]. Available: http://doi.acm.org/10.1145/1863482.1863491
- [51] L. G. Valiant, "A bridging model for parallel computation," Commun. ACM, vol. 33, no. 8, pp. 103–111, Aug. 1990. [Online]. Available: http://doi.acm.org/10.1145/79173.79181
- [52] J. C. Filliâtre and C. Marché, "The why/krakatoa/caduceus platform for deductive program verification," in Proceedings of the 19th International Conference on Computer Aided Verification, ser. CAV'07. Berlin, Heidelberg: Springer-Verlag, 2007, pp. 173–177. [Online]. Available: http://dl.acm.org/citation.cfm?id=1770351.1770379
- [53] T. Barros, A. Cansado, E. Madelaine, and M. Rivera, "Model-checking distributed components: The vercors platform," *Electronic Notes in Theoretical Computer Science*, vol. 182, no. 0, pp. 3 16, 2007, proceedings of the Third International Workshop on Formal Aspects of Component Software (FACS 2006). [Online]. Available: http://www.sciencedirect.com/science/article/pii/S1571066107003829
- [54] M. Abi-antoun and J. Aldrich, "Static conformance checking of runtime architectural structure," 2008.

[55] R. Morrison, G. N. C. Kirby, D. Balasubramaniam, K. Mickan, F. Oquendo, S. Cîmpan, B. Warboys, B. Snowdon, and R. M. Greenwood, "Constructing active architectures in the archware adl," CoRR, vol. abs/1006.4829, 2010. [Online]. Available: http://dblp.uni-trier.de/db/journals/corr/corr1006.html#abs-1006-4829

- [56] A. Sanchez, L. S. Barbosa, and D. Riesco, "Bigraphical modelling of architectural patterns." in *FACS*, ser. Lecture Notes in Computer Science, F. Arbab and P. C. Ölveczky, Eds., vol. 7253. Springer, 2011, pp. 313–330.
- [57] Programming generic dynamic reconfigurations for distributed applications, 1992. [Online]. Available: http://ieeexplore.ieee.org/xpls/abs_all.jsp? arnumber=152129
- [58] C. A. R. Hoare, "An axiomatic basis for computer programming," COMMU-NICATIONS OF THE ACM, vol. 12, no. 10, pp. 576–580, 1969.
- [59] R. Bruni, A. Bucchiarone, S. Gnesi, D. Hirsch, and A. Lluch Lafuente, "Concurrency, graphs and models," P. Degano, R. Nicola, and J. Meseguer, Eds. Berlin, Heidelberg: Springer-Verlag, 2008, ch. Graph-Based Design and Analysis of Dynamic Software Architectures, pp. 37–56. [Online]. Available: http://dx.doi.org/10.1007/978-3-540-68679-8_4
- [60] M. Clavel, F. Durán, S. Eker, P. Lincoln, N. Martí-Oliet, J. Meseguer, and J. F. Quesada, "Maude: Specification and programming in rewriting logic," *Theor. Comput. Sci.*, vol. 285, no. 2, pp. 187–243, Aug. 2002. [Online]. Available: http://dx.doi.org/10.1016/S0304-3975(01)00359-0
- [61] P.-C. David, T. Ledoux, T. Coupaye, and M. Léger, "FPath and FScript: Language support for navigation and reliable reconfiguration of Fractal architectures," Annales des Télécommunications - Annals of Telecommunications, vol. Volume 64, no. Numbers 1-2 / février 2009, pp. 45–63, Dec. 2008. [Online]. Available: http://hal.archives-ouvertes.fr/ hal-00468474
- [62] J. S. Bradbury, J. R. Cordy, J. Dingel, and M. Wermelinger, "A survey of self-management in dynamic software architecture specifications," in

Proceedings of the 1st ACM SIGSOFT Workshop on Self-managed Systems, ser. WOSS '04. New York, NY, USA: ACM, 2004, pp. 28–33. [Online]. Available: http://doi.acm.org/10.1145/1075405.1075411

- [63] P.-C. David, T. Ledoux, M. Léger, and T. Coupaye, "Fpath and fscript: Language support for navigation and reliable reconfiguration of fractal architectures." *Annales des Télécommunications*, vol. 64, no. 1-2, pp. 45–63, 2009.
- [64] P. Merle and J.-B. Stefani, "A formal specification of the Fractal component model in Alloy," INRIA, Rapport de recherche RR-6721, 2008. [Online]. Available: http://hal.inria.fr/inria-00338987
- [65] E. Giménez and P. Castéran, "A tutorial on [co-]inductive types in coq," 1998.

List of Acronyms

ADL	Architecture Description Language	4
GCM	Grid Component Model	3
API	Application Programming Interface	10
FIFO	First In, First Out	21
ECW	E-Connectware	40
LTS	Labelled Transition System	47
LTL	Linear Temporal Logic	151
MCL	Model Checking Language	47
RFID	Radio-Frequency Identification	3
JMX	Java Management Extensions	42