



HAL
open science

Using diffusion MRI information in the Maximum Entropy on Mean framework to solve MEG/EEG inverse problem

Brahim Belaoucha, Jean-Marc Lina, Maureen Clerc, Anne-Charlotte Philippe, Christophe Grova, Théodore Papadopoulo

► To cite this version:

Brahim Belaoucha, Jean-Marc Lina, Maureen Clerc, Anne-Charlotte Philippe, Christophe Grova, et al.. Using diffusion MRI information in the Maximum Entropy on Mean framework to solve MEG/EEG inverse problem. The 19th International Conference on Biomagnetism, Aug 2014, Halifax, Canada. hal-01095785

HAL Id: hal-01095785

<https://inria.hal.science/hal-01095785>

Submitted on 16 Dec 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

Magnetoencephalography (MEG) and Electroencephalography (EEG) inverse problem is well-known to require regularization to avoid ill-posedness. Usually, regularization is based on mathematical criteria (minim norm, ...). Physiologically, the brain is organized in functional parcels and imposing a certain homogeneity of the activity within these parcels was proven to be an efficient way to analyze the MEG/EEG data [1][6]. The parcels information can be computed from diffusion Magnetic Resonances Imaging (dMRI) by grouping together source positions shared the same connectivity profile (computed as tractograms from diffusion images). In this work, three parcel-based inverse problem approaches have been tested. The first two approaches are based on minimum norm with added regularization terms to account for the parcel information. They differ by the use of a hard/soft constraint in the way they impose that the activity is constant within each parcel [4]. The third approach is based on the Maximum Entropy on Mean (MEM) framework [2]. The dMRI-base and random cortex parcellation, we test also the use of Multivariate Source Pre-localization (MSP) [5] in the source reconstruction.

1 Methods

Let the magnetic field, b , be the measured by the MEG sensors during a large number of repetitions of a given task, and m be the sample statistics of the mean value of the instantaneous magnetic field on the sensors with additive noise ϵ , and G is the leadfield matrix.

$$m = E[b] \quad m = GE[R] + \epsilon$$

The source space of size N is parcellized into K regions. R is the multidimensional continuous random variable that describes the intensities of the distributed sources. We denote by $d\mu$ the reference probability distribution and can be computed as:

$$d\mu(r) = \sum_S \prod_{k=1}^K d\mu(r_k|S_k)\pi(S_k)$$

where $\pi(S_k)$ is the probability that the patch k is active or not, and S is the set of state variable.

1/ MEM framework:[2]

R has the following probability law: $dp(r) = f(r)d\mu(r)$

The μ -entropy is defined as:

$$S_\mu(dp) = - \int \log \frac{dp}{d\mu} dp$$

The source intensities are obtained by minimizing the following functional:

$$L(p, \lambda, \lambda_0) = -S_\mu(dp) + \lambda^t(m - Gr) + \lambda_0(1 - \int dp(r))$$

The solution is:

$$dp(r) = \exp(\lambda^t Gr - F^*(G^t \lambda)) d\mu(r)$$

$$F^*(\zeta) = \log \int \exp(\zeta^t r) d\mu(r)$$

Assuming K uncorrelated cortical regions, the reference probability distribution and the source intensity in every patch P_l can be computed as:

$$d\mu(r) = \sum_S \prod_{k=1}^K \pi(S_k) d\mu(r_k|S_k)$$

$$r_{i,l} = \sum_S \tilde{\pi}(S) \nabla_i F_{S_l}^*(\xi) |_{\xi=G^t \lambda^l} \quad i \in P_l, l = 1, \dots, K$$

where:

$$\tilde{\pi}(S) = \frac{\prod_{k=1}^K \pi(S) F_{S_k}^*(A^t \lambda_k)}{\sum_S \prod_{k=1}^K \pi(S) F_{S_k}^*(A^t \lambda_k)} \quad F_{S_k}^*(\xi_k) = \log \int \exp(\xi_k^t r_k) d\mu(r_k|S_k)$$

We used the *CMEM* implementation [5].

2/ Hard constraint (PSS):[4]

In this approach we assume a constant amplitude in each cortical region, which allows us to reduce the source space from N to K ($K \leq N$). The intensities is obtained by minimizing the following:

$$U(r) = \|m - G_k r_K\|_2^2 + \lambda \|r_K\|_2^2$$

G_k is the reduced leadfield matrix.

3/ Soft constraint (PC):[4]



Some variation in each patch is allowed by introducing the Laplacian regularization inside each patch. The solution is obtained by minimizing the following:

$$U(r) = \|m - Gr\|_2^2 + \lambda \|r\|_2^2 + \mu \|Wr\|_2^2$$

$$W(i, j) = \begin{cases} 1 - \frac{1}{|P|} & \text{if } i = j \\ \frac{-1}{|P|} & \text{if } r(i) \in P \\ 0 & \text{if } r(i) \notin P \end{cases}$$



2 Results

2.1 Synthetic data

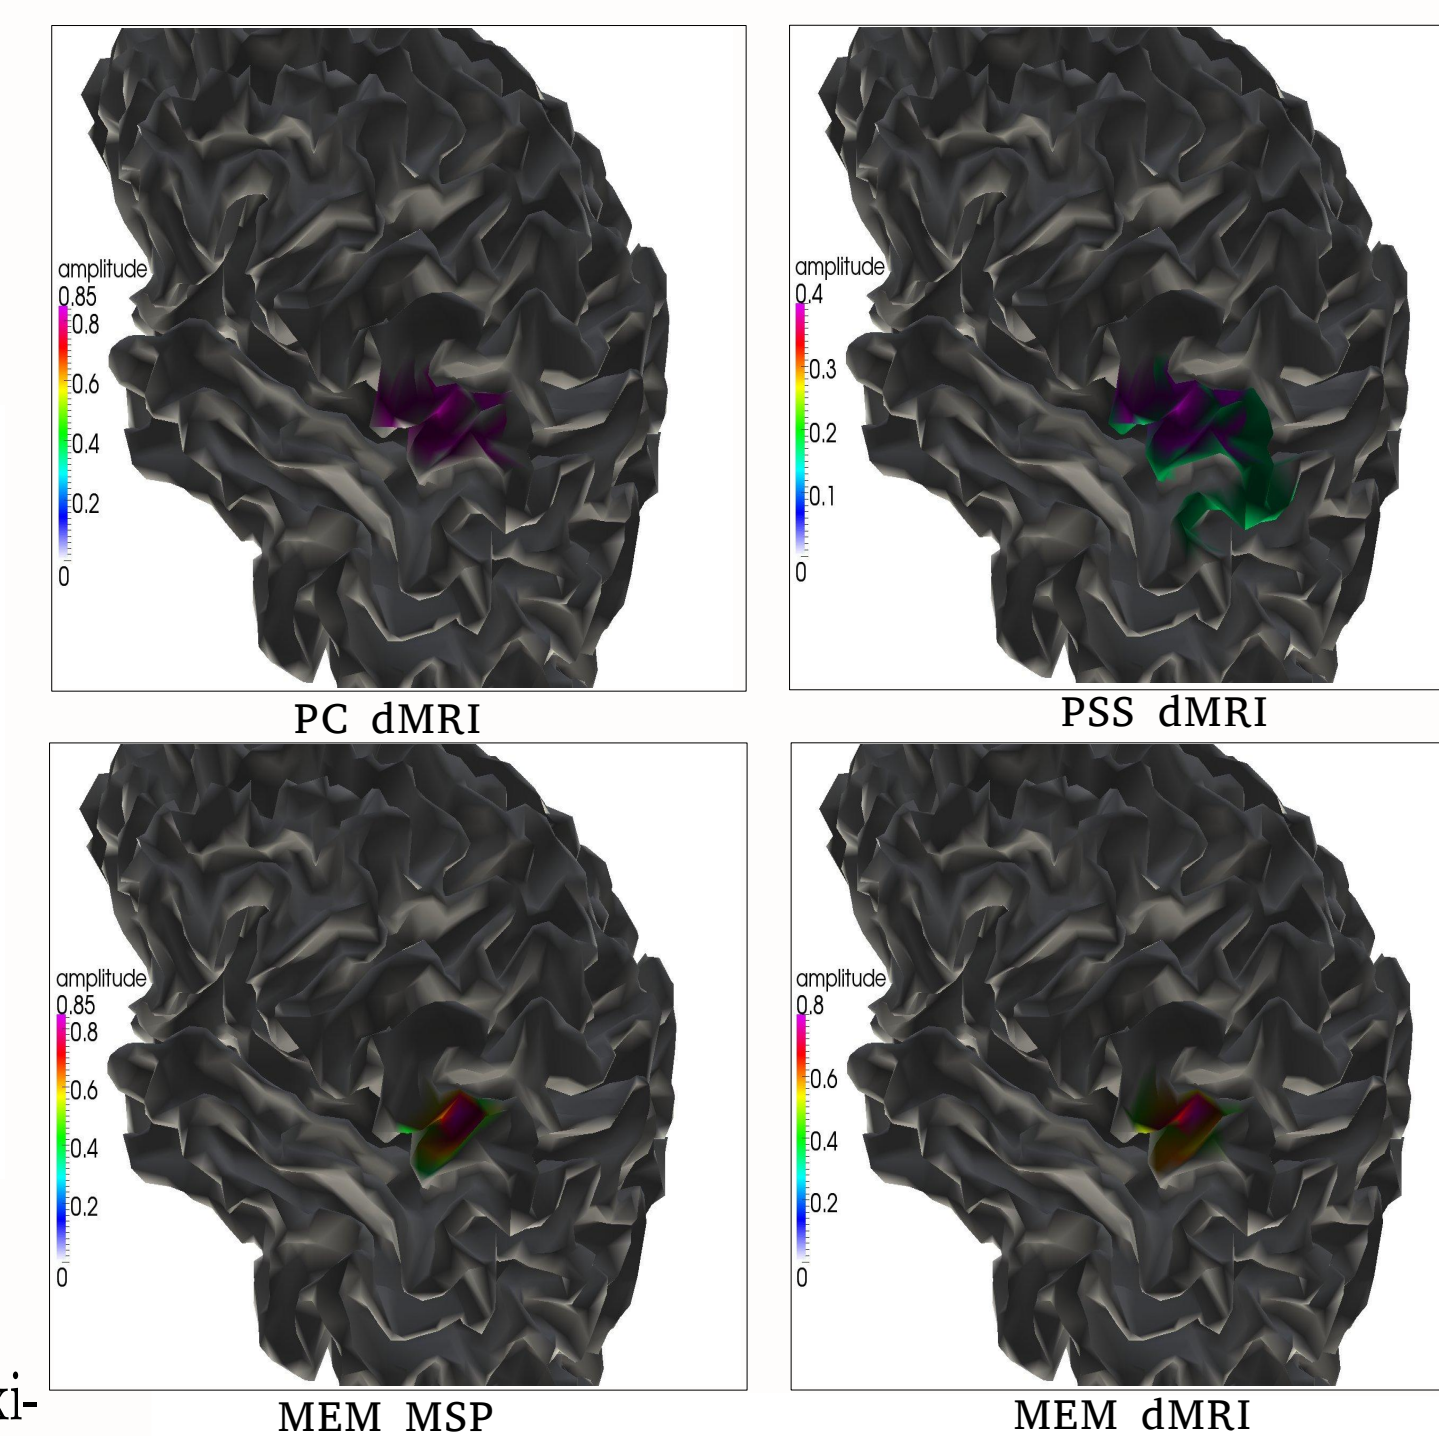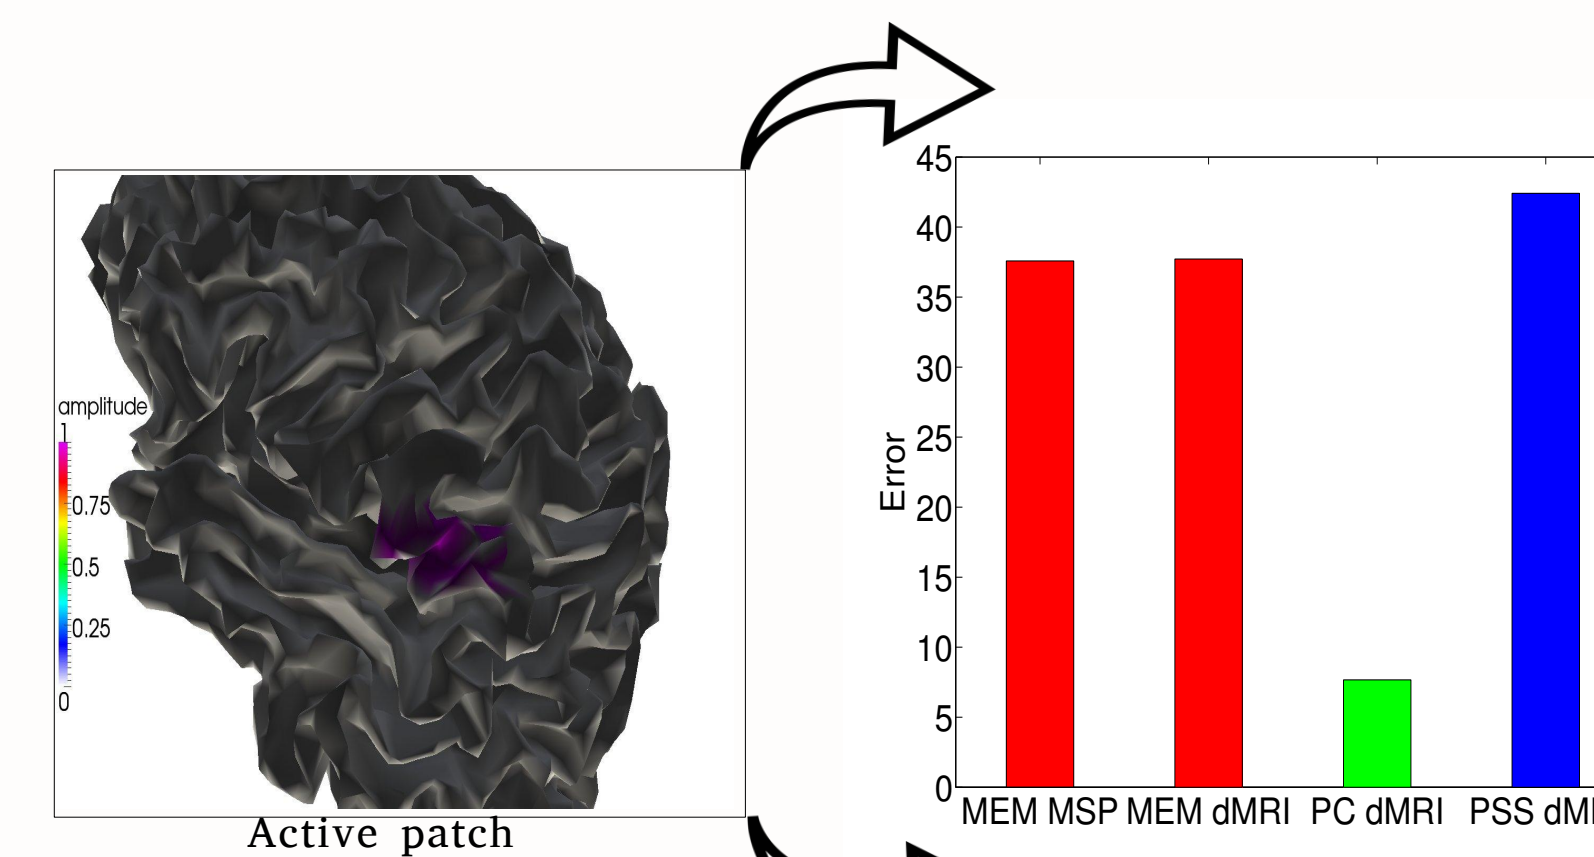

In all the results, we neglected the sources that are less than 40% of the maximum intensity. The error was computed as follows:

$$Error(r_{orig}, r_{method}) = \sum_{i=1}^N |r_{orig}(i) - r_{method}(i)|$$

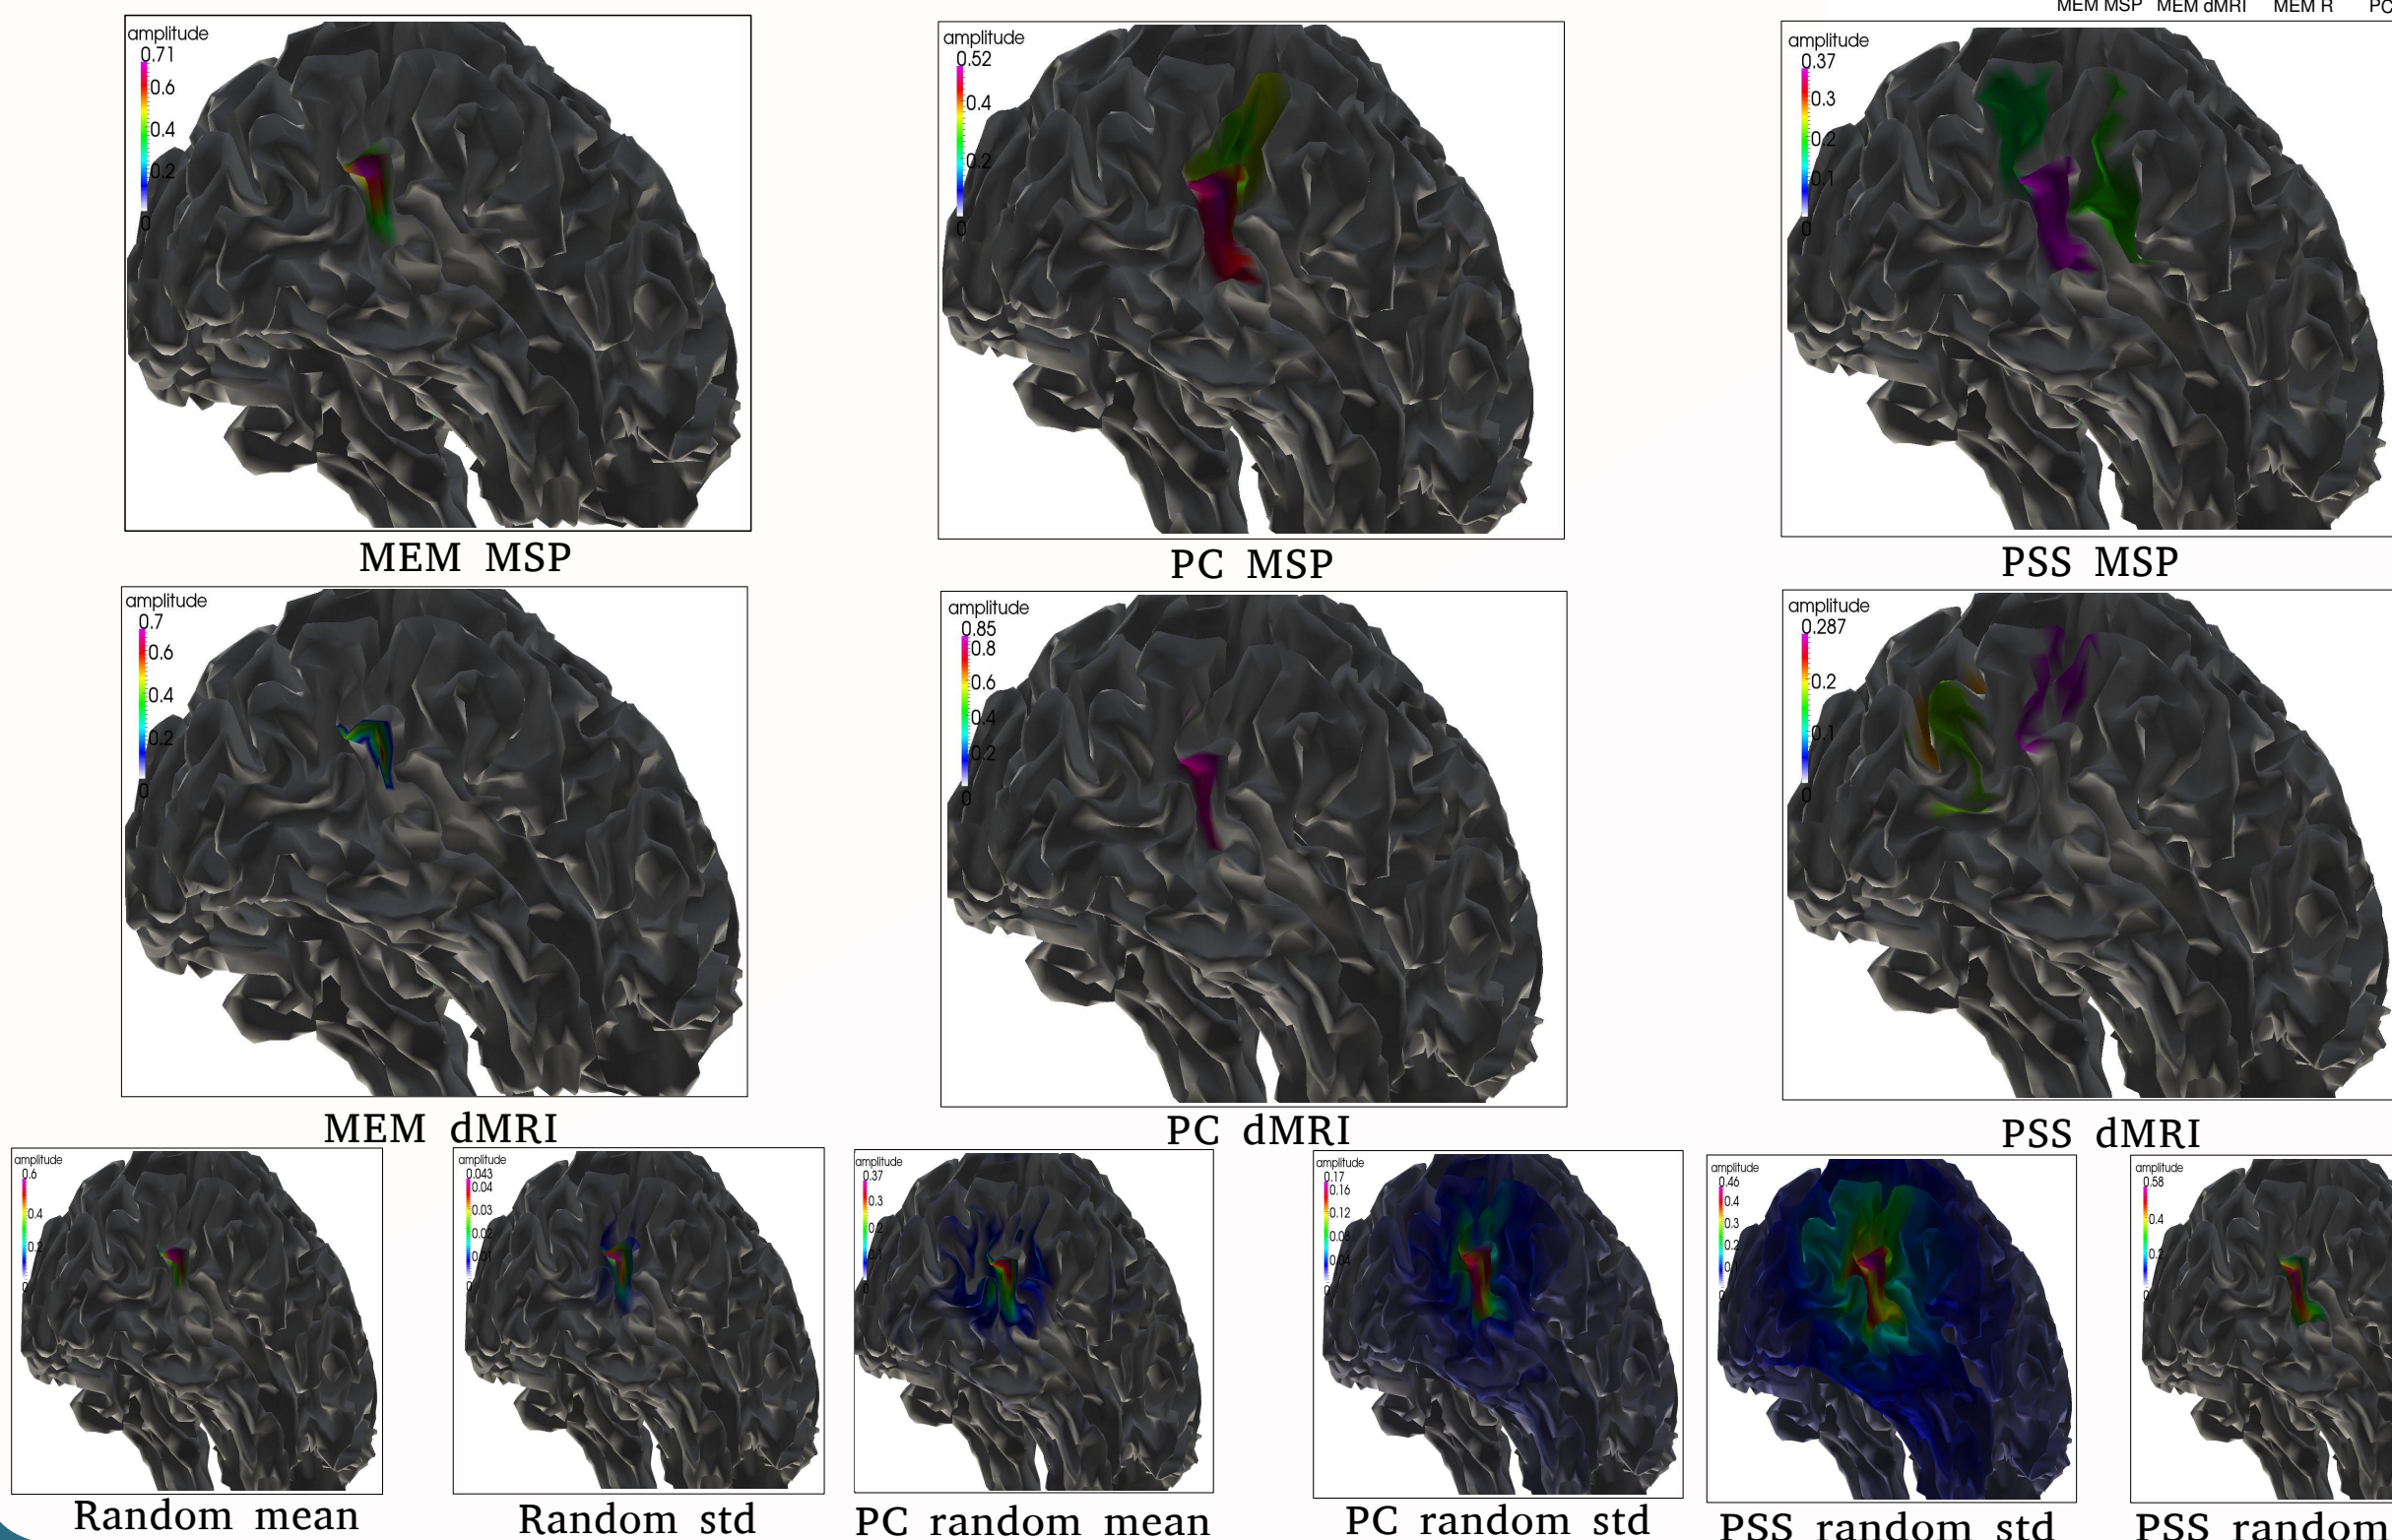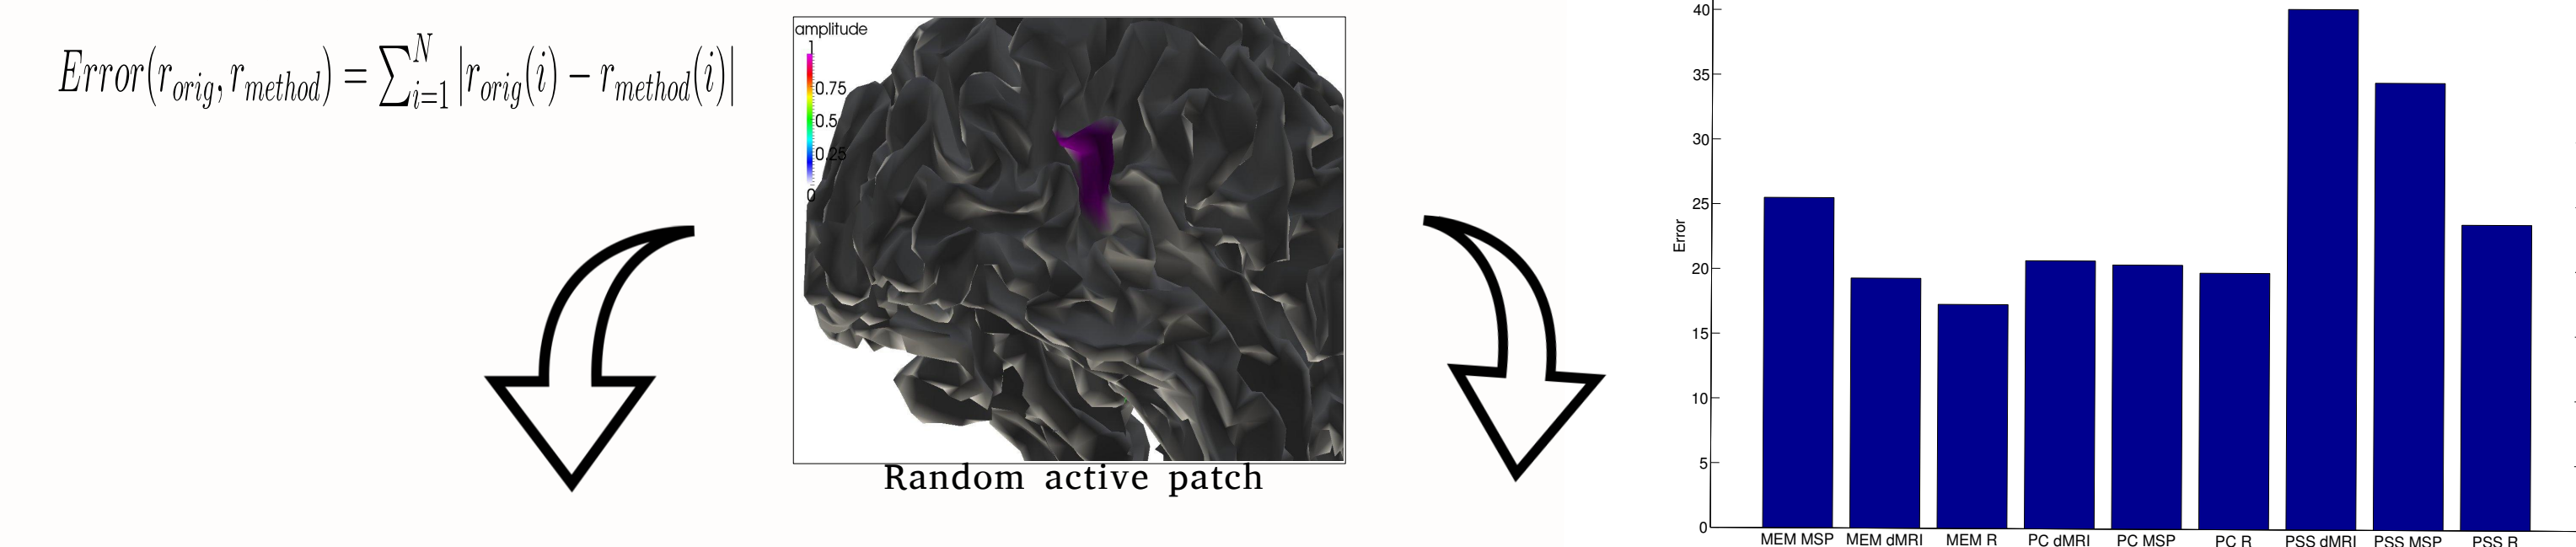

PSS tends to activate neighbor regions, this yields to high variance when using random parcellation. MEM solution is more focal and less affected by noise.


Execution Time
PSS: 0.5s
MEM: 19.4s
PS: 20min
Random: 100 parcellation

Similarly to [6], 100 random parcellation were generated with fixed region size. It uses the connected vertices to grow the regions till it reach a fixed size. There was no constraint in the contrary to the dMRI parcellation which was obtained via Destrieux atlas.

(See poster P3-036)


2.2 Real data

In this part of the work, the three reconstruction algorithms were used to find the activation map on the cortex from a real MEG data[3]. The data [3] includes also the T1 and DWI information. The MEG/EEG was recorded from a visual stimulus (3 class pictures). The average trials for one subject and one class (famous face) was used.

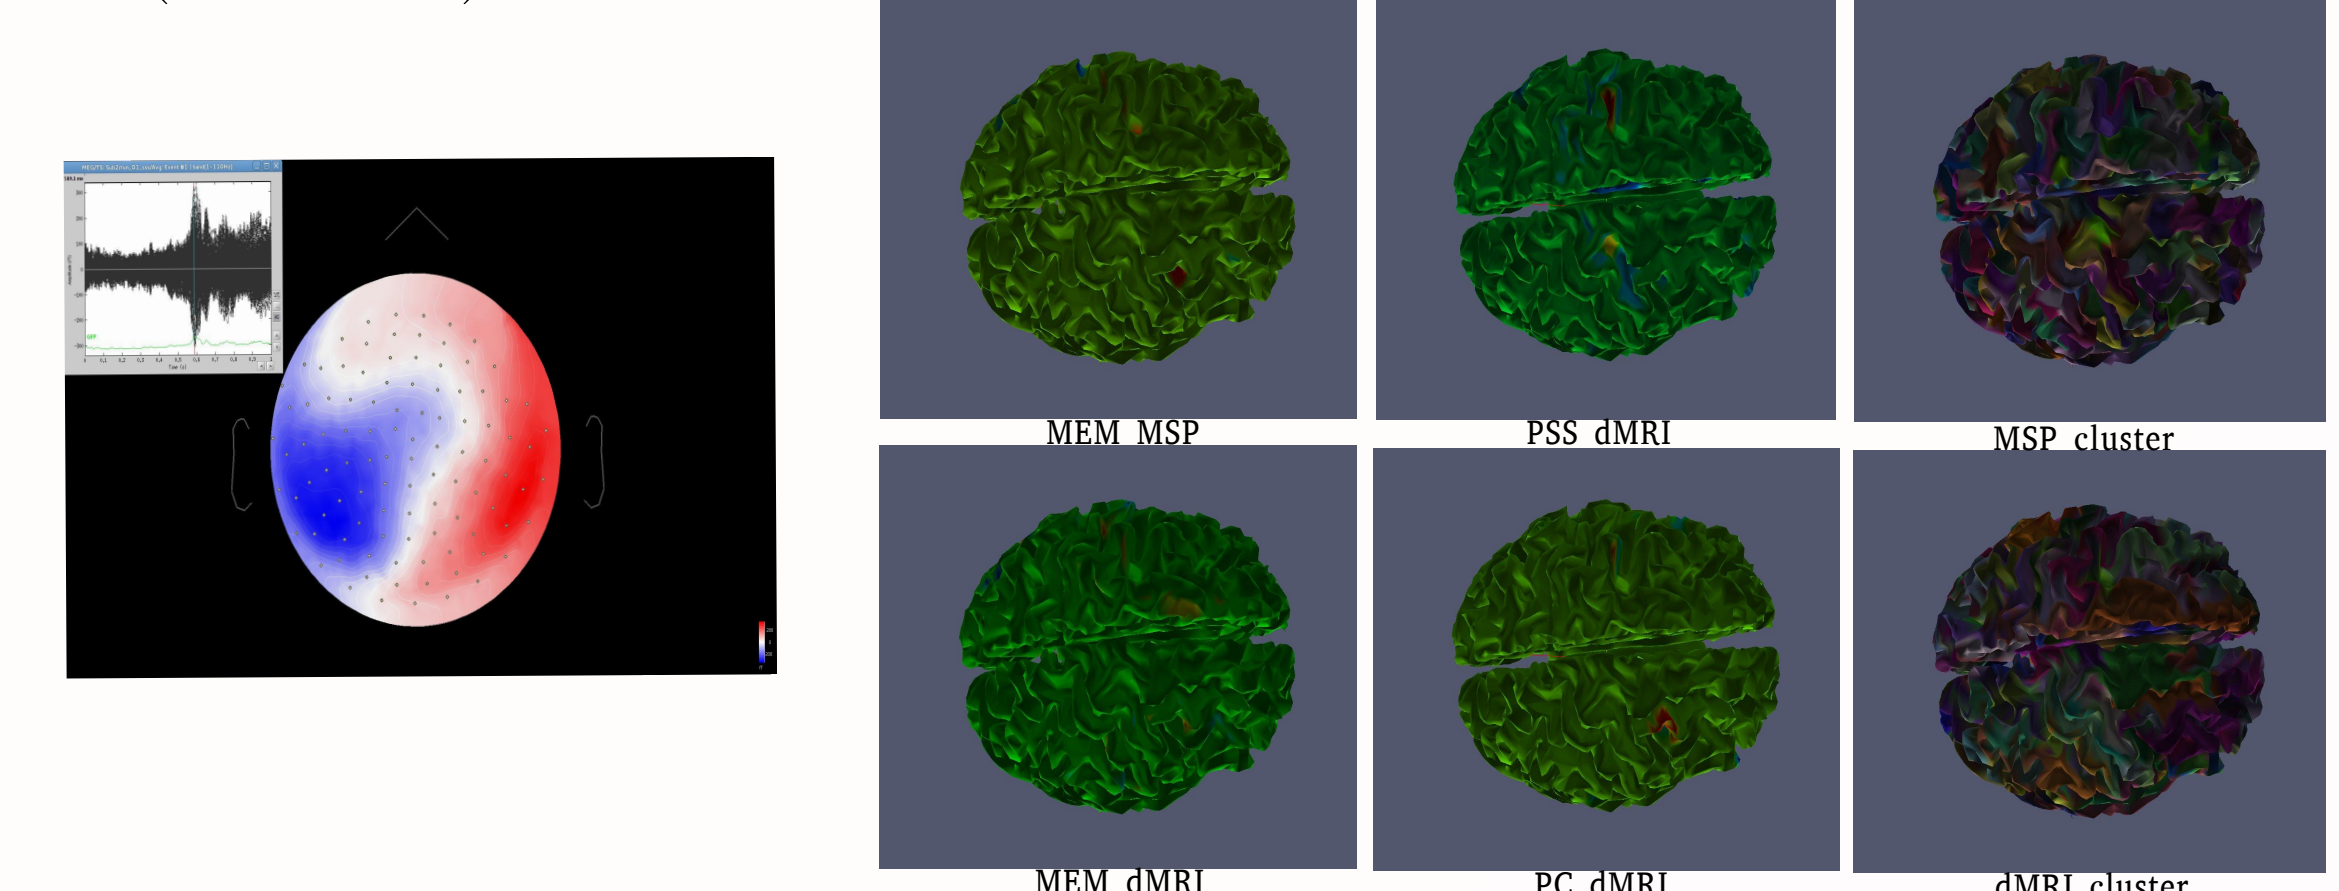

3 Conclusion

MEM solution was enhanced by using the dMRI parcellation. PC is quite insensitive to parcellation but is very computationally intensive. Contrary to MEM and PC, PSS while being very fast is quite sensitive to the choice of parcellation. Interestingly, the best results are obtained by averaging solutions over multiple random clustering (at the cost of computational time), which might be interesting if no dMRI information is available. This is maybe due to the constrained dMRI pre-parcellation. A post clustering of the boundaries on the dMRI parcellation can be done to reduce the effect of the geometrical constraint. Future work will look at generalizing these results to EEG. Another direction is to use the reduced leadfield in the MEM framework (CP-MEM) by using G_K and r_K instead of G and r . First results are:

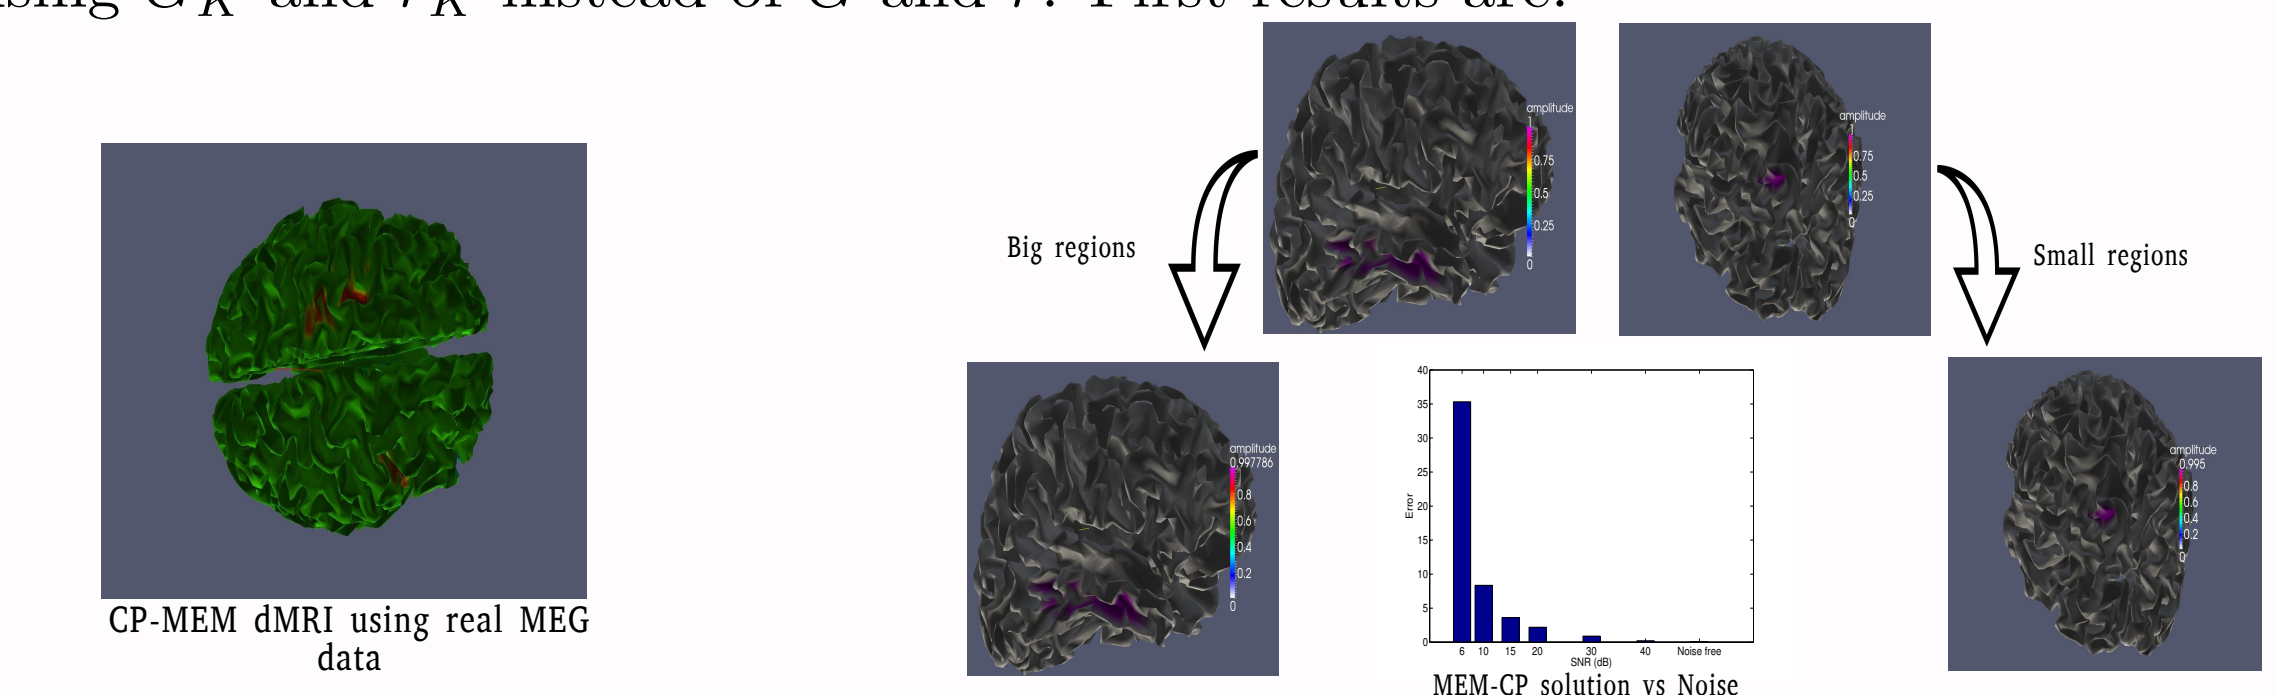

References

- [1] Grova, et al. Evaluation of EEG localization methods using realistic simulations of interictal spikes. *NeuroImage*, 29(3):734, 2006.
- [2] Amblard, et al. Biomagnetic source detection by maximum entropy and graphical models. *IEEE Transactions on Biomedical Engineering*, 51(3):427, 2004.
- [3] Henson, et al. A Parametric Empirical Bayesian Framework for the EEG/MEG Inverse Problem: Generative Models for Multi-Subject and Multi-Modal Integration. *Frontiers in human neuroscience*, 5, 2011.
- [4] Philippe, et al. Cortex parcellation via diffusion data as prior knowledge for the meg inverse problem. In *International Symposium on Biomedical Imaging*, 2013.
- [5] Chowdhury, et al. MEG source localization of spatially extended generators of epileptic activity: comparing entropic and hierarchical bayesian approaches. *PLoS One*. 2013;8(2).
- [6] Cottereau, et al. Multiresolution imaging of MEG cortical sources using an explicit piecewise model. *NeuroImage*, vol. 38, n 3.